


three inches = one foot  
one and one half inches = one foot  
one inch = one foot  
three quarters inch = one foot  
one half inch = one foot  
one quarter inch = one foot  
three eighths inch = one foot  
one eighth inch = one foot

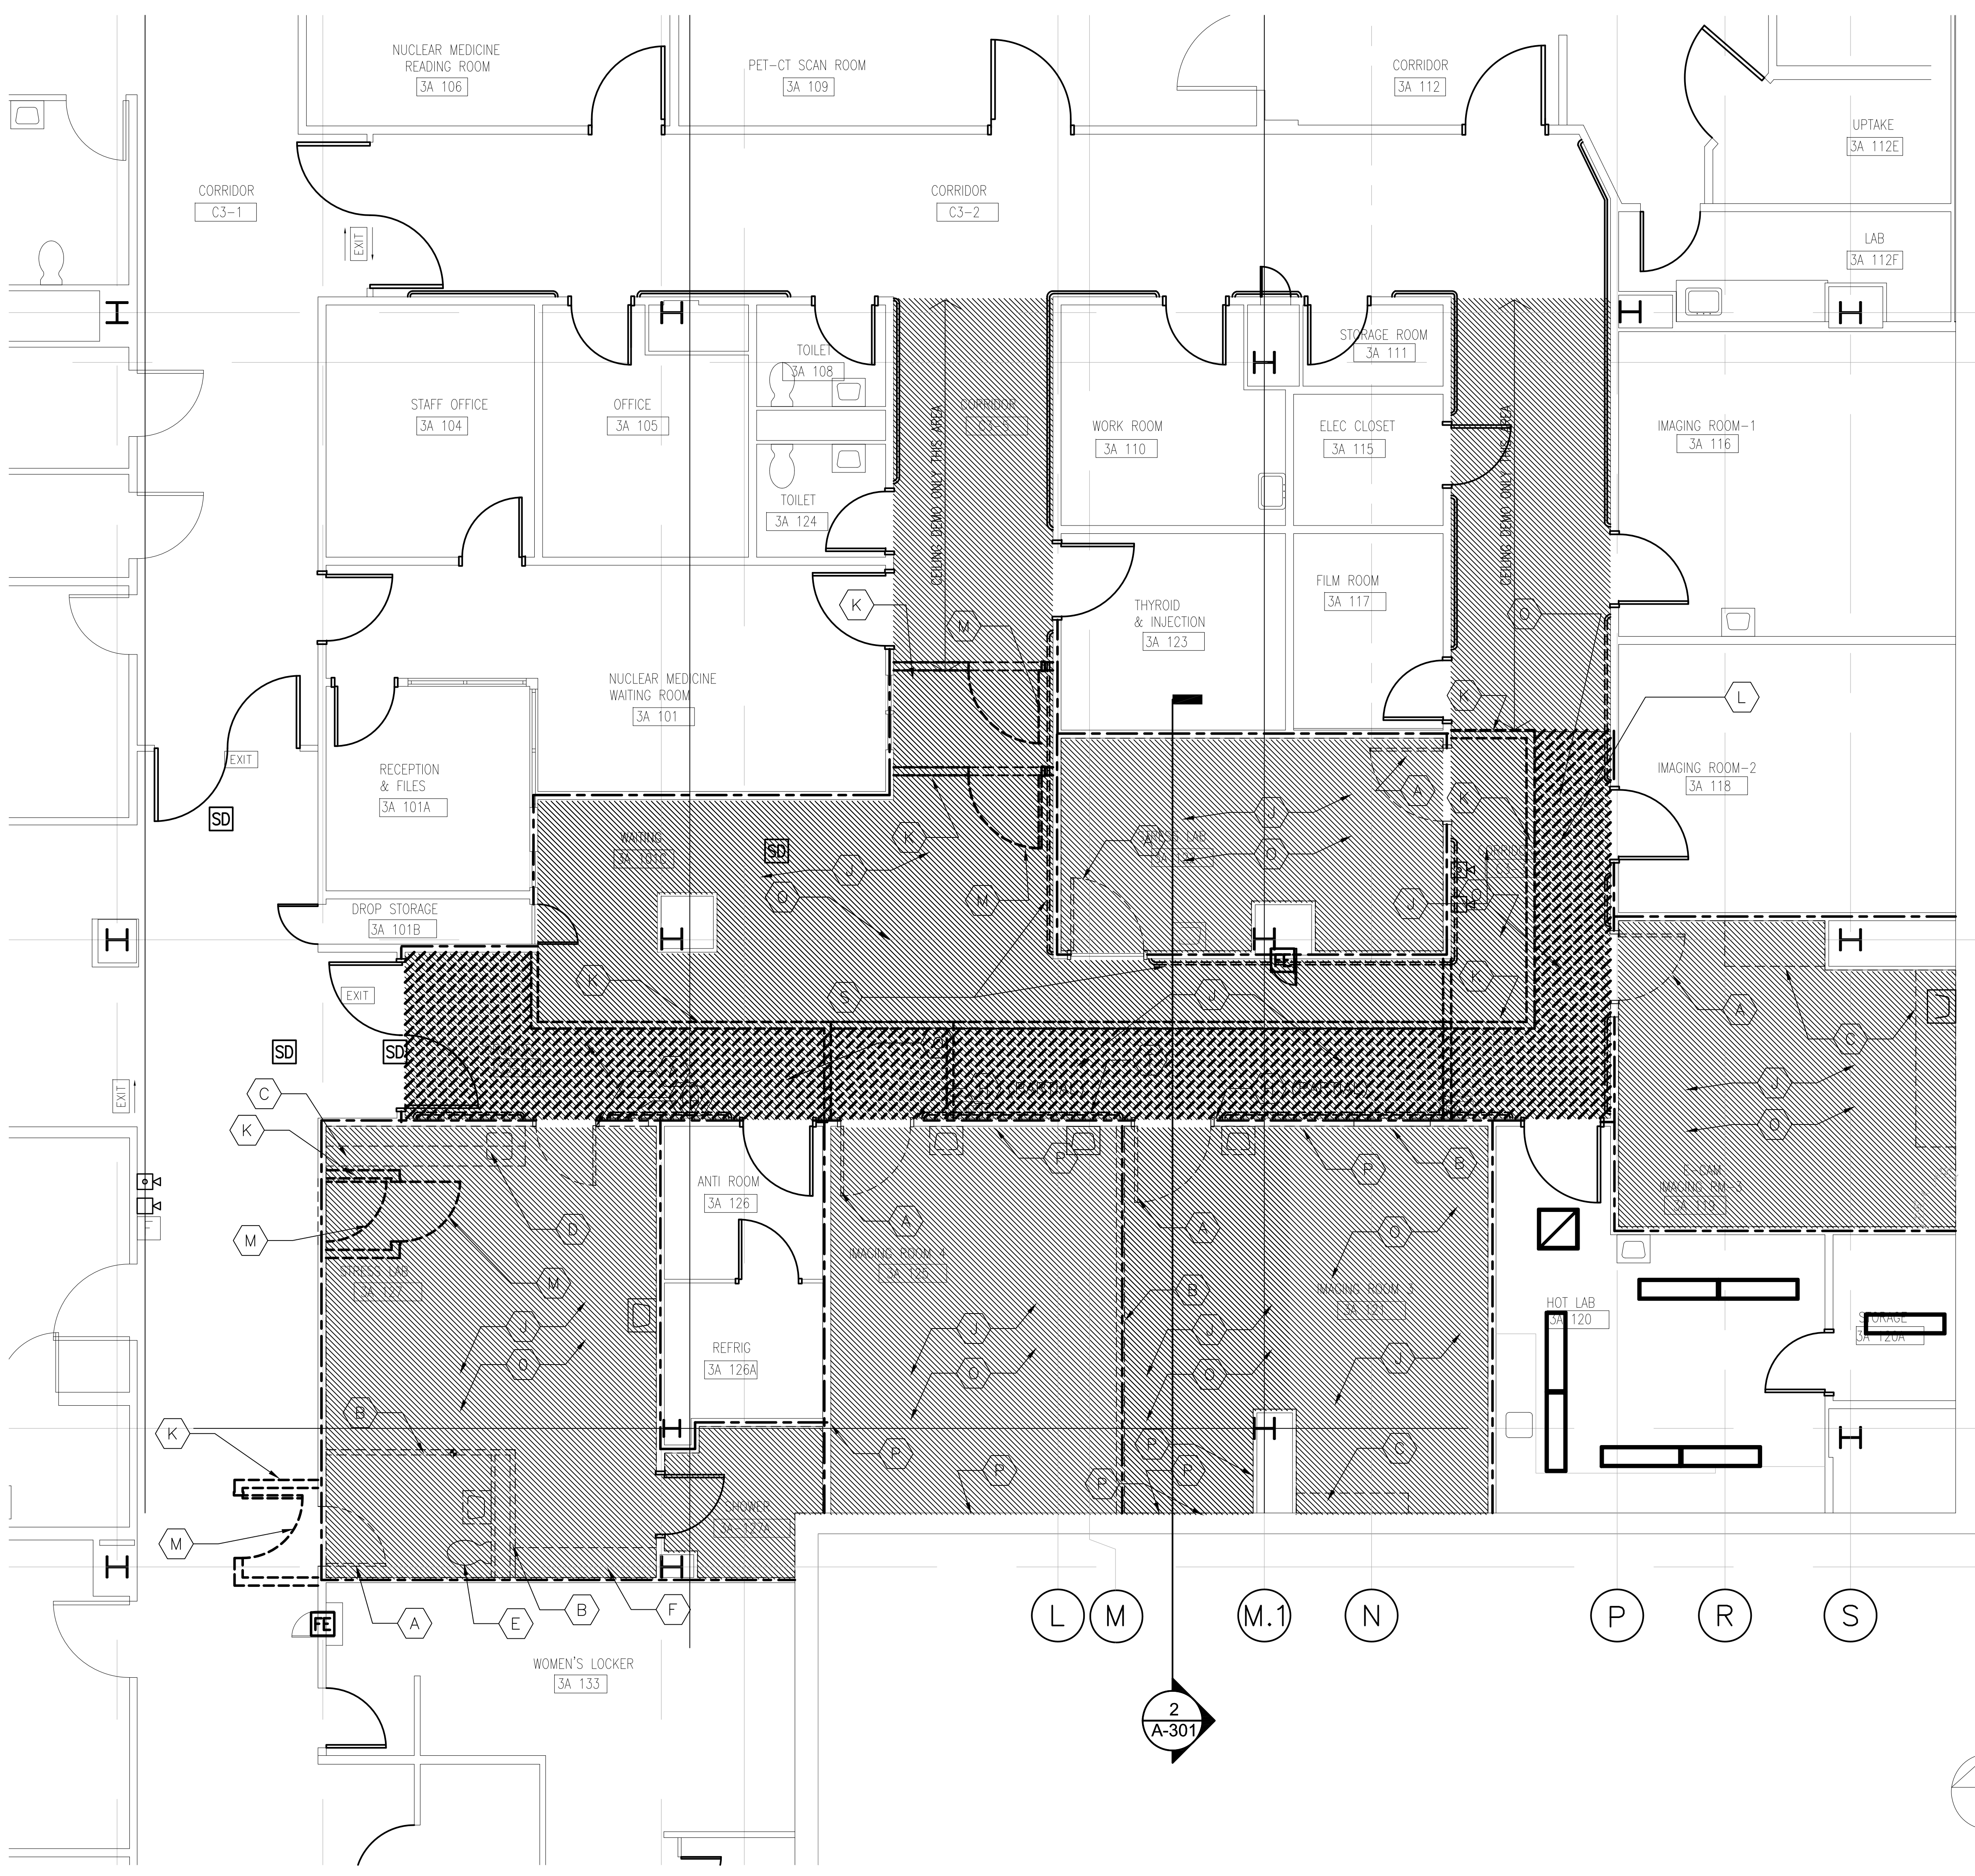


GENERAL DEMOLITION NOTES

- DEMOLITION DRAWINGS INDICATE IN GENERAL, THE EXTENT OF DEMOLITION. REMOVE ALL ASSOCIATED APPURTENANCES NOT REQUIRED IN THE NEW WORK. ALL ABANDONED ITEMS, AND ALL ITEMS REQUIRED FOR THE INSTALLATION OF NEW WORK, TO PROVIDE FOR A COMPLETE PROJECT. ITEMS NOT SPECIFICALLY INDICATED THAT ARE QUESTIONABLE FOR REMOVAL SHALL BE BROUGHT TO THE ATTENTION OF THE COR FOR A DECISION.
- THE CONTRACTOR SHALL VISIT THE SITE AND BECOME FAMILIAR WITH ALL EXISTING CONDITIONS PRIOR TO THE START OF CONSTRUCTION.
- THE CONTRACTOR SHALL PATCH ALL EXISTING SURFACES TO MATCH EXISTING WHERE AFFECTED BY CONSTRUCTION OPERATIONS, INCLUDING BUT NOT LIMITED TO PLUMBING, MECHANICAL, AND ELECTRICAL WORK.
- THE CONTRACTOR SHALL PATCH AND REMOVE MISCELLANEOUS APPURTENANCES ON EXISTING WALLS TO BE PAINTED OR COVERED WITH WALL COVERINGS.
- ALL NEW WORK SHALL ALIGN WITH EXISTING WHERE THEY INTERSECT UNLESS OTHERWISE NOTED.
- THE CONTRACTOR SHALL PATCH AND REPAIR ALL EXISTING SURFACES WHICH WERE PREVIOUSLY DAMAGED PRIOR TO CONSTRUCTION OPERATIONS IF VISIBLE AFTER NEW WORK IS COMPLETE, REGARDLESS IF THE ITEM WAS SPECIFICALLY NOTED OR NOT.
- IF ANY ASBESTOS CONTAINING MATERIAL IS ENCOUNTERED DURING THE COURSE OF CONSTRUCTION OPERATIONS WHICH IS NOT INDICATED ON THE CONTRACT DOCUMENTS THE CONTRACTOR SHALL NOTIFY THE ARCHITECT IMMEDIATELY.
- WHERE EXISTING CERAMIC TILE IS DAMAGED DURING DEMOLITION THE CONTRACTOR SHALL PATCH AND REPAIR WALL AS REQUIRED TO PROVIDE A LEVEL AND TRUE SURFACES ON WHICH TO INSTALL NEW FINISHES.
- ALL SIGNAGE WHICH OCCURS ON WALL OR ON DOORS TO BE REMOVED SHALL BE REMOVED BY THE CONTRACTOR AND STORED BY THE CONTRACTOR FOR REINSTALLATION AT END OF PHASE.
- ALL NOTES, REMARKS AND/OR SCHEDULES ON THIS SHEET ARE FOR THIS SHEET ONLY UNLESS OTHERWISE NOTED.
- EXISTING WALL FINISHES TO BE VERIFIED AND PREPPED ACCORDINGLY FOR NEW FINISHES SCHEDULES - BY CONTRACTOR.
- ALL EXISTING HANDRAILS LOCATED IN CORRIDORS WITH NEW WORK SHALL BE REMOVED AND STORED AT THE DIRECTION OF THE COR.

DEMO NOTES

- REMOVE EXISTING DOOR AND METAL FRAMING.
- REMOVE EXISTING WALL CABINET.
- REMOVE EXISTING FLOOR CABINET.
- REMOVE EXISTING COUNTERTOP SINK. SEE PLUMBING.
- REMOVE EXISTING PLUMBING FIXTURE. SEE PLUMBING.
- REMOVE EXISTING SEAT IN 3A-127.
- REMOVE WALL FOR NEW DOOR.
- REMOVE LAY-IN ACOUSTICAL TILE SYSTEM.
- REMOVE ICRA WALL.
- REMOVE ICRA CEILING.
- REMOVE ICRA DOOR.
- REMOVE EXISTING PATIENT LIFT AND CEILING MOUNTED RAILS. PROTECT FROM DAMAGE AND STORE FOR INSTALLATION IN ROOM 3A-127.
- REMOVE EXISTING 2 LAYERS OF FLOORING DOWN TO THE CONC. SLAB.
- REMOVE EXISTING GWB - ENTIRE WALL - THIS SIDE.
- REMOVE EXISTING HAND RAIL. PROTECT FROM DAMAGE AND STORE FOR REINSTALLATION AT SAME LOCATION.
- REMOVE EXISTING HAND RAIL. PROTECT FROM DAMAGE AND STORE FOR REINSTALLATION AT SAME LOCATION.

LEGEND

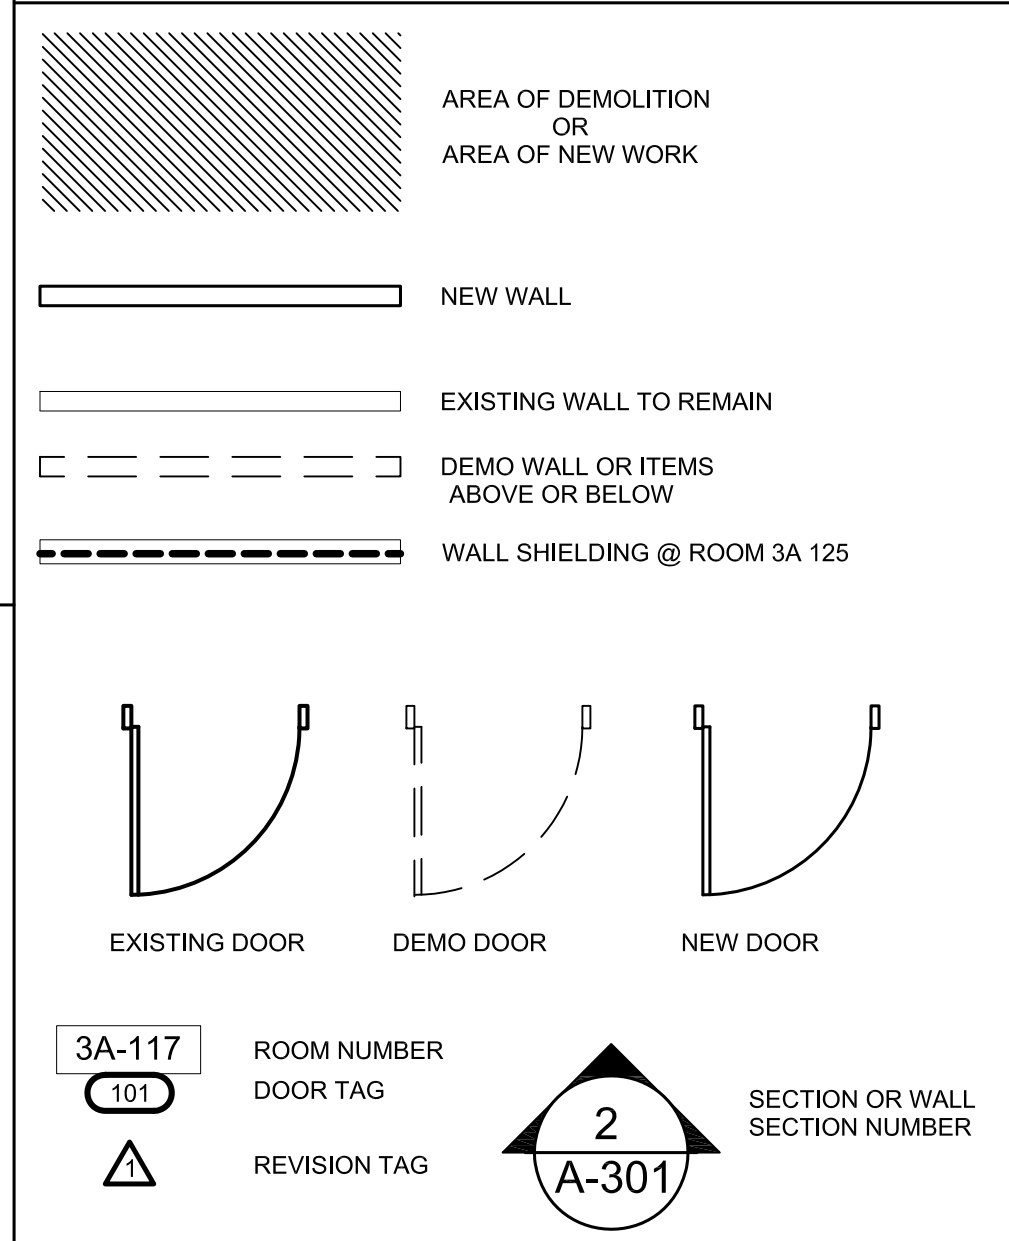

13

13.1

14

15

16

17

18

19

20

21


22

23


24

25



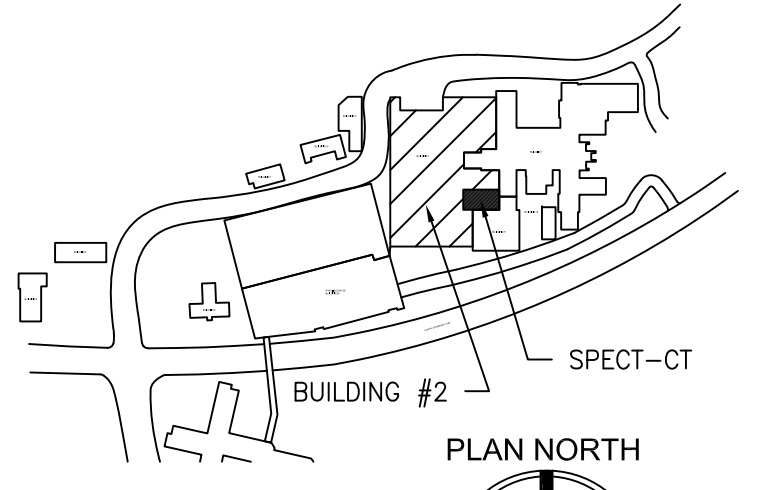


3RD FLOOR DEMOLITION PLAN - COMPLETE  
1/4" = 1'-0"

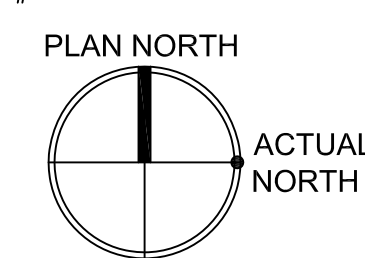

KEY PLAN  
N.T.S.



CONSTRUCTION BID DOCUMENTS - BIDDER QUESTION RESPONSES  
FULLY SPRINKLERED

			CONSULTANTS:			ARCHITECT/ENGINEERS:			SKETCH Title <b>3RD FLOOR DEMOLITION PLAN - PHASE 1</b>			Project Title <b>NEW SPECT-CT INSTALLATION</b>			Project Number <b>642-13-120</b>			Office of Construction and Facilities Management   <b>Department of Veterans Affairs</b>		
 PF&A DESIGN ARCHITECTURE, PLANNING, INTERIORS World Trade Center 101 West Main Street, Suite 7000 Norfolk, VA 23510 Phone: 757-471-4637 Fax: 757-471-4205 www.pfa-architect.com • Project No: 2194.14A			 <b>JOSEPH H. TROST</b> NO. 7843 ARCHITECT			 <b>Miller-Remick LLC</b> M.E.P. & Structural Engineering A Service Disabled Veteran Owned Small Business 1010 KINGS HIGHWAY SOUTH CHERRY HILL, NEW JERSEY 08034 PHONE: (856)420-4000 FAX: (856)420-5052 M-R PROJECT NO: 0489-0030			 SVOSB U.S. VETERANS OF FOREIGN BORN OF AMERICAN BIRTH OF THE UNITED STATES OF AMERICA OF											