

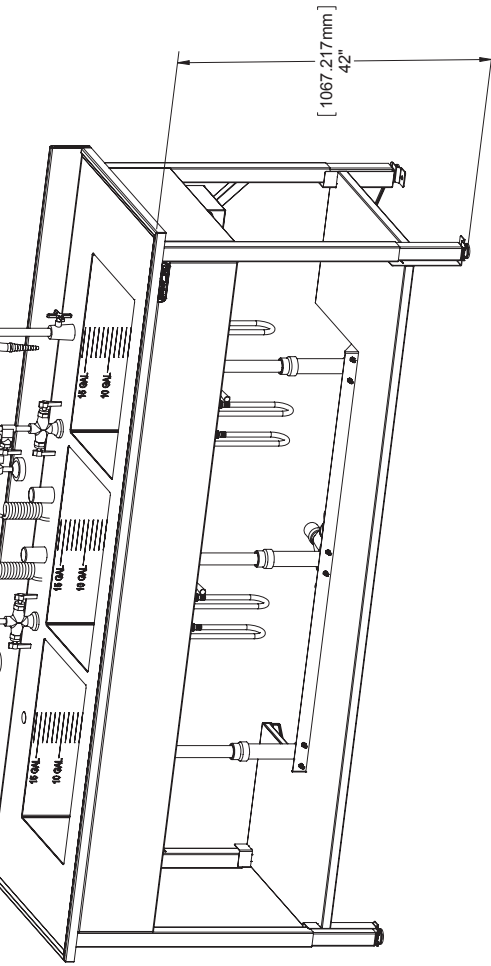
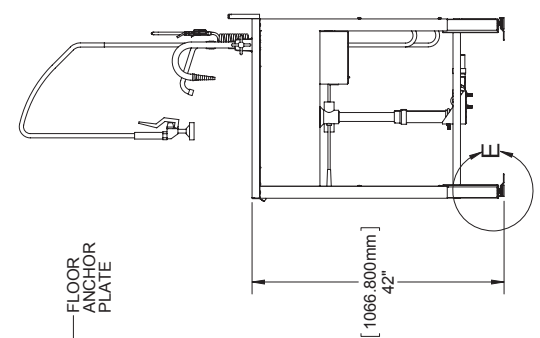
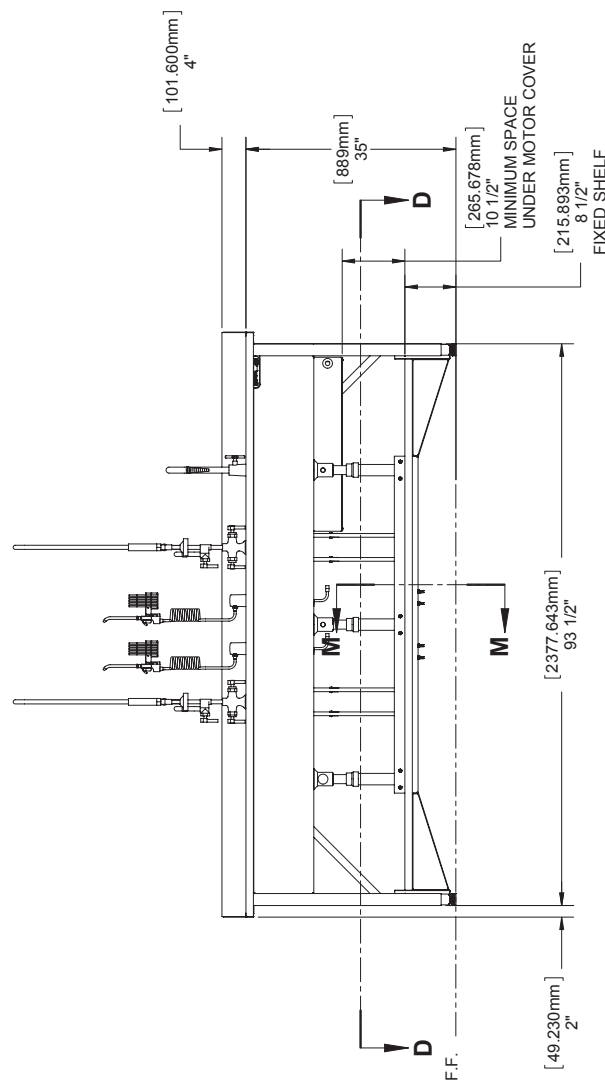



<u>Print Name and</u>	<u>Title</u>
(Signature, Date, Printed Name & Title are all required)	

(Signature, Date, Printed Name & Title are all required)

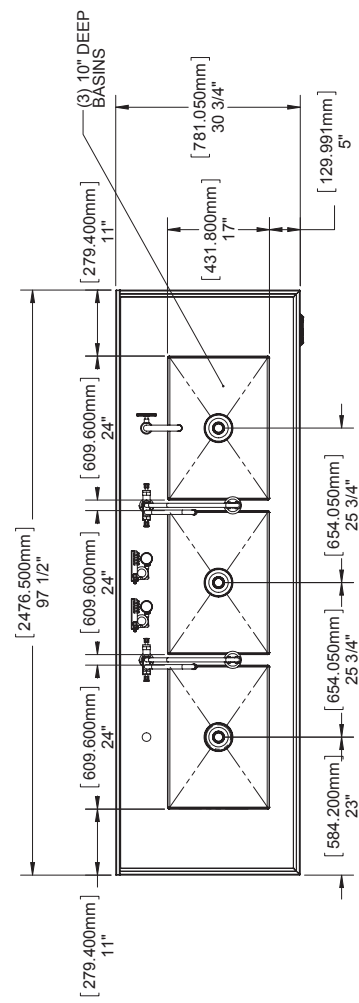



PS-319735-3B-AH-PG3

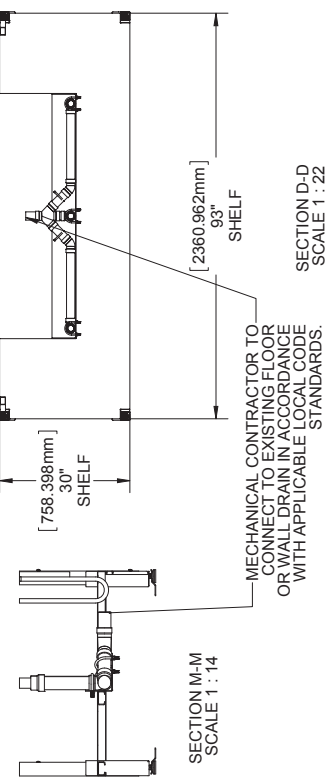

ANY PHYSICAL, DIMENSIONAL OR PERFORMANCE SPECIFICATIONS SHALL NOT BE REVISED WITHOUT WRITTEN AUTHORIZATION FROM LOGIQUIP	
THIRD ANGLE PROJECTION	INCHES
CRITICAL TO QUALITY	Weight (pounds) 466.11
TITLE ADJ. HEIGHT PROCESSING TRIPLE SINK 30.75" X 97.5" X 35-42"	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
ANGLES: ±1°	DECIMALS
FRACTIONS: ± 1/64	XXX = ± .015
	XXXX = ± .005
DRAWN BY LADKISSON	DATE 09/25/2013
CHECKED BY	DATE
SCALE 1:16	SHEET 2 OF 3
DRAWING NUMBER PS-319735-3B-AH-PG3	

- NOTES:
- 1) PRE-RINSE FAUCET: (KN50-1000-AF-2)
  - 2) GOOSE NECK WITH BUILT IN PRE-RINSE INLET - 1/2" NPSM MALE WITH COMPRESSION FITTINGS
  - 3) OPERATING PRESSURE 20-125 PSI
  - 4) OPERATING TEMP RANGE 40-180 DEG. F
  - 5) UTILITY REQUIREMENT: 115V 50 PSIG 70 DEG. F MAX. HOT WATER: 20 TO 50 PSIG 120 DEG. F TO 140 DEG. F
  - 6) SINK DRAIN: SINK OPENING DIA.: 3-1/2" NPS: 1-1/2" FACE FLANGE DIA.: 4-1/2"
  - 7) AIR GUN WITH STANDARD 5 TIP GUN & HOSE
  - 8) AIR INLET: WATER SAVER B151 WITH B1136-02-08R
  - 9) 300 SERIES STAINLESS STEEL
  - 10) LINEAR UNIT, CONSISTING OF CYLINDER AND A LINEAR GUIDE. LOAD MAX. 1,500 N PER CYLINDER. LIFT LENGTH UP TO 300 MM (11.82")
  - 11) MAX LOAD: 1,000 KG
  - 12) MAX. LIFT SPEED WITH ELECTRIC MOTOR 30 MM/S (1.18"/S)
  - 13) SYSTEM VOLTAGE: 230/110 VAC
  - 14) ENGINE VOLTAGE: 28 VDC
  - 15) NOMINAL RATING APPROX: 140VA
  - 16) OVERLOAD PROTECTION

REV.	DESCRIPTION	CHANGED BY:	DATE
-	See Sheet 03		

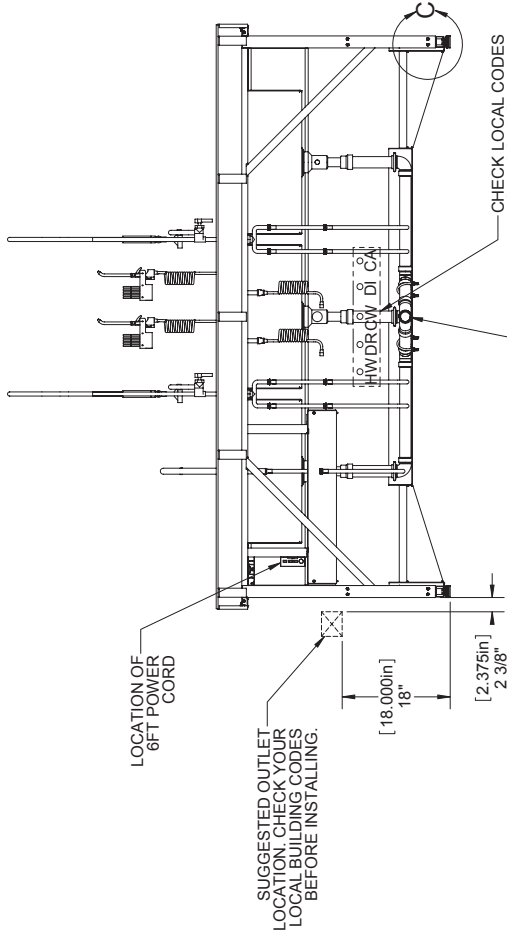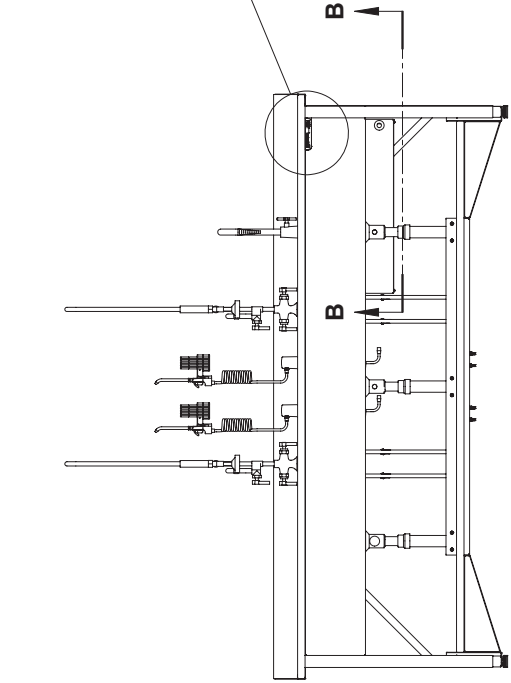


MECHANICAL CONTRACTOR TO  
CONNECT TO EXISTING FLOOR  
OR WALL DRAIN IN ACCORDANCE  
WITH APPLICABLE LOCAL CODE  
STANDARDS.

CHECK LOCAL CODES  
FOR LOCATION

SUGGESTED OUTLET  
LOCATION. CHECK YOUR  
LOCAL BUILDING CODES  
BEFORE INSTALLING.


[18.000in]  
18"

[2.375in]  
2 3/8"

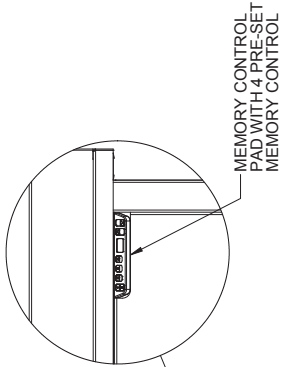

MEMORY CONTROL  
PAD WITH 4 PRE-SET  
MEMORY CONTROL

DETAIL A  
SCALE 1 : 6

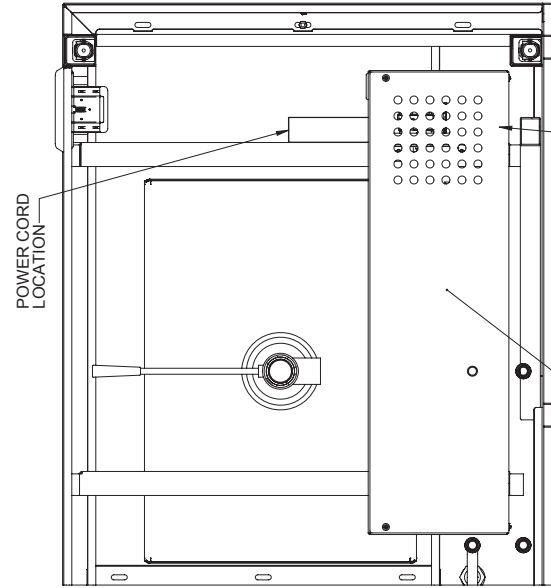


ELECTRIC MOTOR

SECTION B-B  
SCALE 1 : 6

PUMP WITH  
COVER

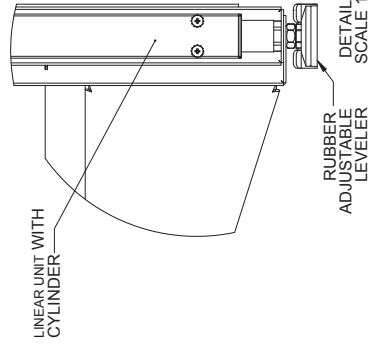

POWER CORD  
LOCATION



DETAIL C  
SCALE 1 : 3

RUBBER  
ADJUSTABLE  
LEVELER

LINEAR UNIT WITH  
CYLINDER

ANY PHYSICAL, DIMENSIONAL OR PERFORMANCE SPECIFICATIONS SHALL NOT BE REVISED WITHOUT WRITTEN AUTHORIZATION FROM MAC MEDICAL ENGINEERING			
THIRD ANGLE PROJECTION		INCHES	
			
CRITICAL TO QUALITY		Weight (pounds) 466.11	
TITLE			
ADJ. HEIGHT PROCESSING TRIPLE SINK 30.75" X 97.5" X 35-42"			
TOLERANCES UNLESS OTHERWISE SPECIFIED			
ANGLES: ±1°		DECIMALS	
FRACTIONS: ± 1/64		.XX ± .030 XXX ± .015 XXXX ± .005	
DRAWN BY LADKISSON	DATE		09/25/2013
	CHECKED BY		DATE
	SCALE		SHEET
1:16			3 OF 3
DRAWING NUMBER			PS-319735-3B-AH-PG3

RECOMMENDATIONS:

- UTILITY CONNECTIONS: BRADED HOSES ARE USED. THEY NEED TO HAVE 12 TO 13" OF PLAY IN ORDER TO ALLOW SINK TO RAISE AND LOWER.
- CHECK ALL LOCAL CODES

See Sheet1		REVISIONS	
REV.	DESCRIPTION	CHANGED BY:	DATE