
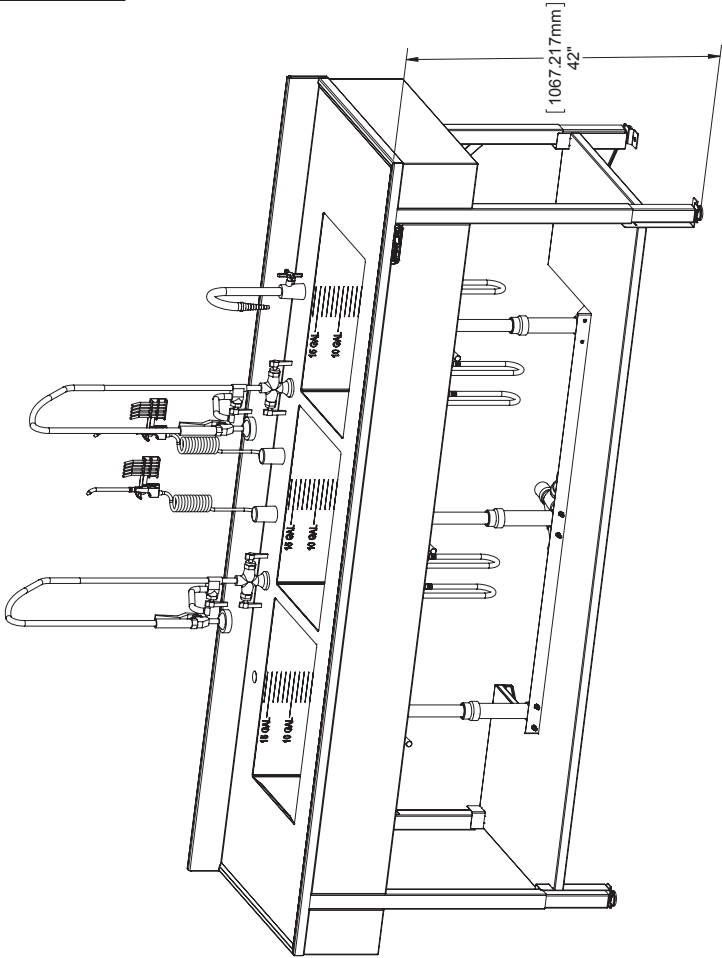


Design Approval- **ALL CUSTOM DESIGNS ARE NON-CANCELLABLE AND NON-REFUNDABLE.** This endorsed approval drawing must be signed by the Designer and the Buyer for production. By signing, you certify your approval in the following areas:

- Overall Dimensions
- Material
- Construction and Design
- Delivery Access (will it fit through doors)
- Facility Integration (rough in alignment, etc)

Approval Signature _____ Date: _____
Print Name and Title _____
(Signature, Date, Printed Name & Title are all required)

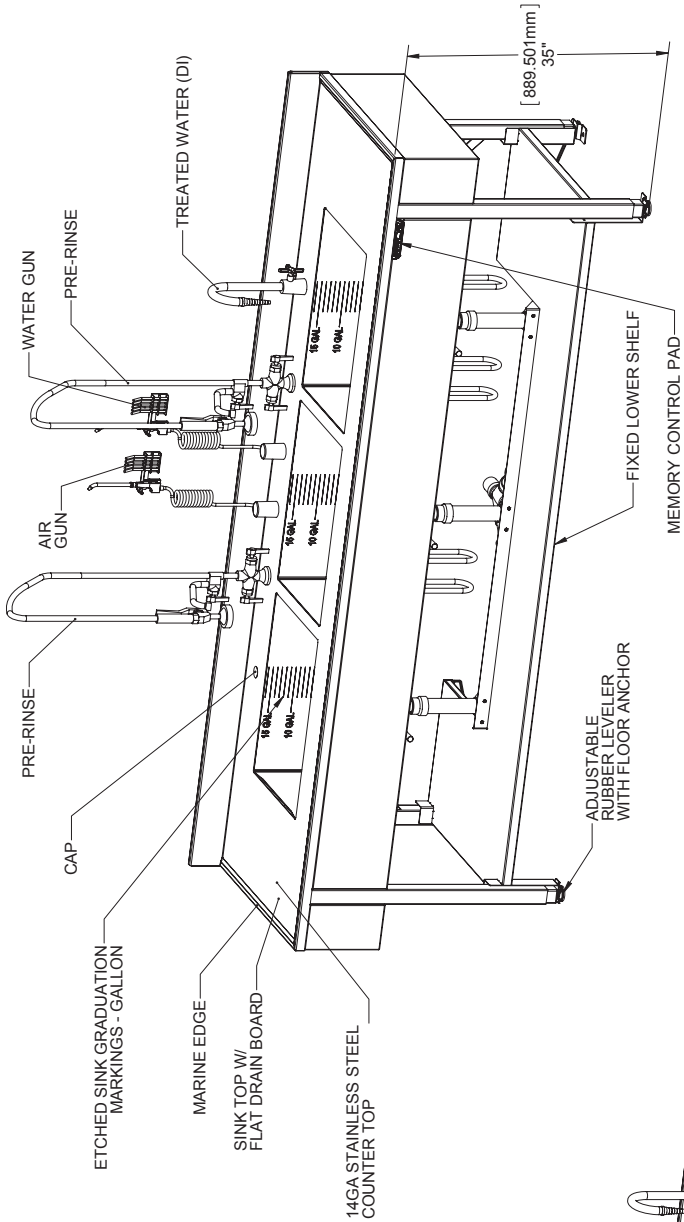

ANY PHYSICAL, DIMENSIONAL OR PERFORMANCE SPECIFICATIONS SHALL NOT BE REVISED WITHOUT WRITTEN AUTHORIZATION FROM LOGICUP

THIRD ANGLE PROJECTION INCHES
CRITICAL TO QUALITY  Weight (pounds) 492.92

TITLE
ADJ. HEIGHT PROCESSING TRIPLE SINK 30.75" X 106" X 35-42"

TOLERANCES UNLESS OTHERWISE SPECIFIED
ANGLES: ±1°
FRACTIONS: ± 1/64

300 SERIES STAINLESS STEEL
LINEAR UNIT: CONSISTING OF CYLINDER AND A LINEAR GUIDE.
LOAD MAX 1,500 N PER CYLINDER
LIFT LENGTH UP TO 300 MM (11.82")


MAX. LOAD: 1,000 KG
MAXIMUM LIFT SPEED WITH ELECTRIC MOTOR 30 MM/S (1.18"/S)

SYSTEM VOLTAGE: 230/110 VAC
ENGINE VOLTAGE: 29 VDC
NOMINAL RATING APPROX: 140VA
OVERLOAD PROTECTION




DRAWING NUMBER
PS-31 10635-AH-PG3

- NOTES:
- 1) PRE-RINSE FAUCET: (KN60-1000-AF2)
GOOSE NECK WITH BUILT IN PRE-RINSE
INLET - 1/2" NPSM MALE WITH COMPRESSION FITTINGS
OPERATING PRESSURE 20-125 PSI
OPERATING TEMP RANGE 40-180 DEG. F
 - 2) UTILITY REQUIREMENT
COLD WATER- 20 TO 50 PSIG 70 DEG. F MAX
HOT WATER- 20 TO 50 PSIG 120 DEG. F TO 140 DEG. F
NPS: 1-1/2"
 - 3) SINK DRAIN: SINK OPENING DIA: 3-1/2"
FACE FLANGE DIA: 4-1/2"
 - 4) AIR GUN WITH STANDARD 5 TPI GUN & HOSE
 - 5) AIR INLET: WATER SAVER B131 WITH B136-02-08R


REVISIONS		
REV.	DESCRIPTION	CHANGED BY: DATE

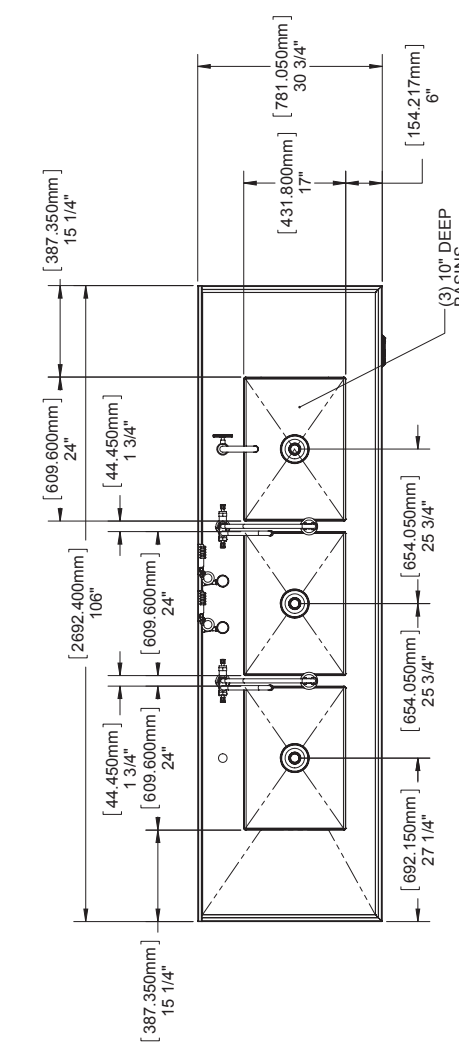

RECOMMENDED TO HAVE 7/8" CLEARANCE
SPACE AROUND SINK (SIDES AND BACK)

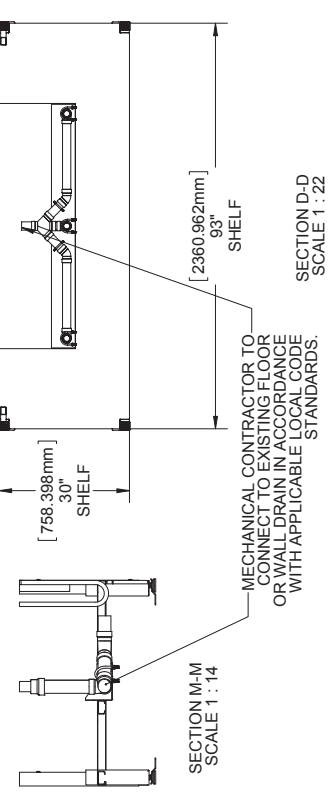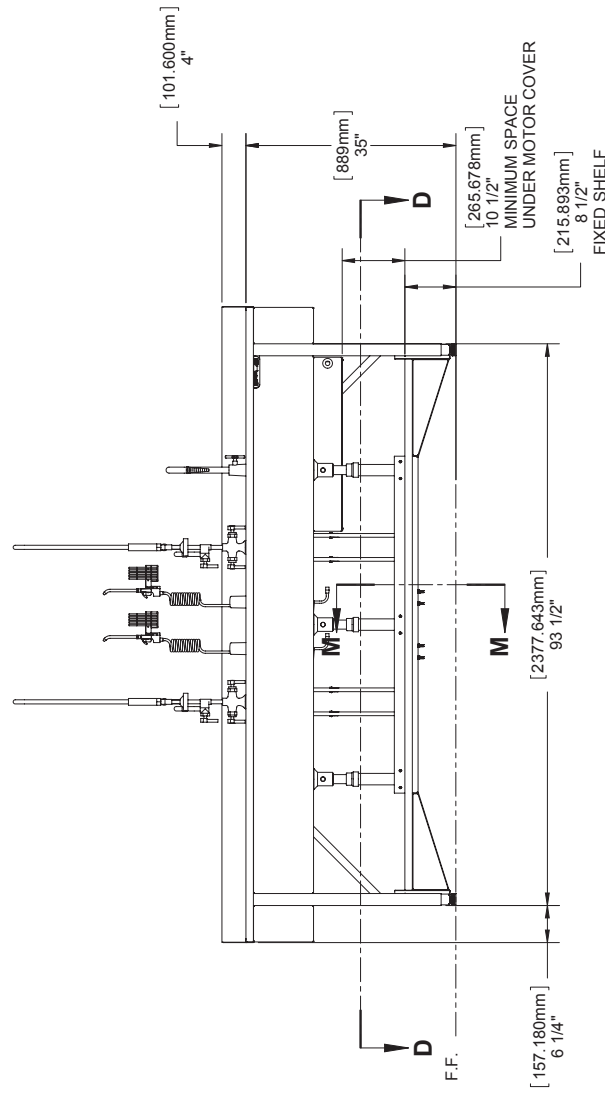

DETAIL E
SCALE 1 : 6






ANY PHYSICAL, DIMENSIONAL OR PERFORMANCE SPECIFICATIONS SHALL NOT BE REVISED WITHOUT WRITTEN AUTHORIZATION FROM LOGICUP	
THIRD ANGLE PROJECTION	INCHES
CRITICAL TO QUALITY	Weight (pounds) 492.92
TITLE ADJ. HEIGHT PROCESSING TRIPLE SINK 30.75" X 106" X 35-42"	
TOLERANCES UNLESS OTHERWISE SPECIFIED	
ANGLES: ±1"	DECIMALS XXX = ±.015 XXXX = ±.005
FRACTIONS: ± 1/64	
DRAWN BY	DATE
CHECKED BY	DATE
SCALE NTS	SHEET 2 OF 3
DRAWING NUMBER PS-3110635-AH-PG3	

- NOTES:
- 1) PRE-RINSE FAUCET: (KN90-1000-AF2)
 - 2) GOOSE NECK WITH BUILT IN PRE-RINSE
 - 3) INLET - 1/2" NPSM MALE WITH COMPRESSION FITTINGS
 - 4) OPERATING PRESSURE 20-125 PSI
 - 5) OPERATING TEMP RANGE 40-180 DEG. F
 - 6) UTILITY REQUIREMENT
 - 7) COLD WATER: 20 TO 50 PSIG 70 DEG. F MAX
 - 8) HOT WATER: 20 TO 50 PSIG 120 DEG. F TO 140 DEG. F
 - 9) SINK DRAIN: SINK OPENING DIA.: 3-1/2"
 - 10) NPS: 1-1/2"
 - 11) FACE FLANGE DIA.: 4-1/2"
 - 12) AIR GUN WITH STANDARD 5 TIP GUN & HOSE
 - 13) AIR GUN WITH 3500 PSI AIR GUN
 - 14) INLET: WATER SAVER B131 WITH B1136-02-08R
- 9) 300 SERIES STAINLESS STEEL
- 7) LINEAR UNIT, CONSISTING OF CYLINDER AND A LINEAR GUIDE.
- 8) LINEAR UNIT, CONSISTING OF CYLINDER AND A LINEAR GUIDE.
- LOAD MAX 1,500 N PER CYLINDER
- LIFT LENGTH UP TO 300 MM (11.82")
- 9) PUMP:
- MAX LOAD: 1,000 KG
- MAX LIFT SPEED WITH ELECTRIC MOTOR 30
- MM/S (1.18"/S)
- SYSTEM VOLTAGE: 230/110 VAC
- ENGINE VOLTAGE: 28 VDC
- NOMINAL RATING APPROX: 140VA
- OVERLOAD PROTECTION

REV.	DESCRIPTION	CHANGED BY:	DATE

See Sheet 03


REVISIONS

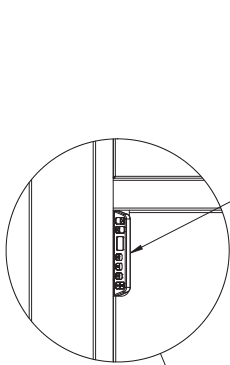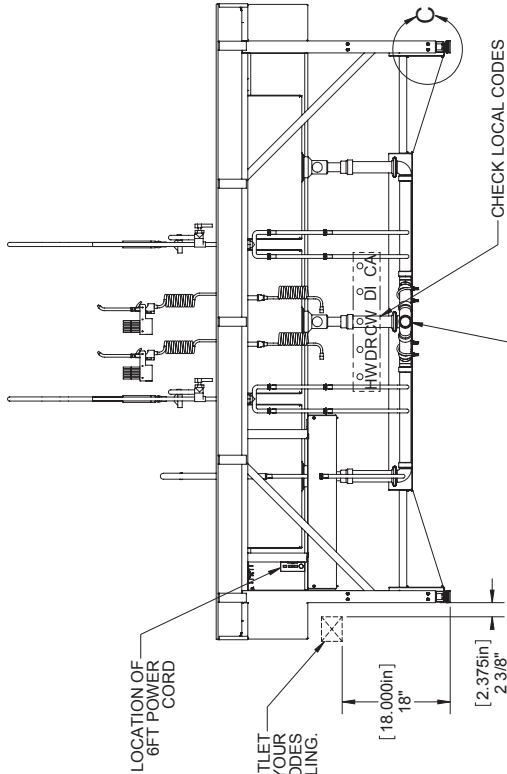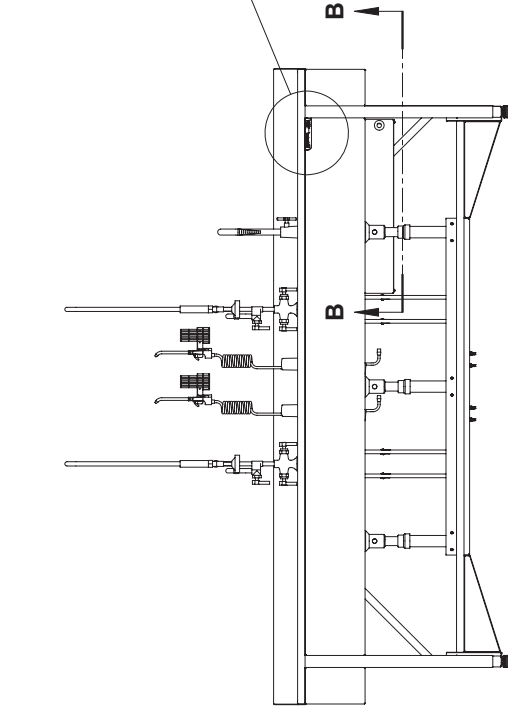

MEMORY CONTROL
PAD WITH 4 PRE-SET
MEMORY CONTROL

DETAIL A
SCALE 1 : 6


POWER CORD
LOCATION

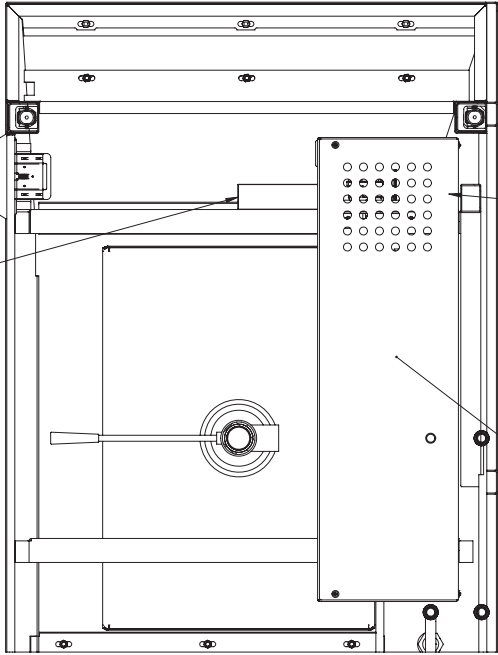

PUMP WITH
COVER

ELECTRIC MOTOR

SECTION B-B
SCALE 1 : 6



LINEAR UNIT WITH
CYLINDER

RUBBER
ADJUSTABLE
LEVELER

DETAIL C
SCALE 1 : 3

ANY PHYSICAL, DIMENSIONAL OR PERFORMANCE
SPECIFICATIONS SHALL NOT BE REVISED WITHOUT
WRITTEN AUTHORIZATION FROM LOGICUP

THIRD ANGLE PROJECTION	INCHES
	Weight (pounds) 492.92

CRITICAL TO QUALITY	
TITLE	ADJ. HEIGHT PROCESSING TRIPLE SINK 30.75" X 106" X 35-42"

TOLERANCES UNLESS OTHERWISE SPECIFIED
ANGLES: ±1°
FRACTIONS: ± 1/64

DECIMALS
XX = ± .030
XXX = ± .015
XXXX = ± .005

DRAWN BY	DATE
CHECKED BY	DATE
SCALE	SHEET
NTS	3 OF 3

- RECOMMENDATIONS:
- UTILITY CONNECTIONS: BRAIDED HOSES ARE USED. THEY NEED TO HAVE 12 TO 13" OF PLAY IN ORDER TO ALLOW SINK TO RAISE AND LOWER.
 - CHECK ALL LOCAL CODES

REV.	DESCRIPTION	CHANGED BY:	DATE

REVISIONS

DRAWING NUMBER
PS-3110635-AH-PG3