


- GENERAL SHEET NOTES**
1. CONTRACTOR SHALL INSTALL SIX (6) STRANDS OF 62.5 MICRON MULTI-MODE FIBER OPTIC OUTSIDE PLANT CABLE TO EACH EMERGENCY CALL STATION AND INTERCOM/CARD READER LOCATION. REFER TO SPECIFICATIONS FOR OPTICAL CABLE REQUIREMENTS.
  2. ALL UNDERGROUND CONDUITS SHALL BE ROUTED AROUND BIO-DETECTION AREAS AND AROUND AREAS DESIGNATED FOR TREES.

- KEYED NOTES**
1. CAMERA OUTLET, INTERCOM STATION AND CARD READER TO BE INSTALLED AT GATE ENTRANCE. PROVIDE TWO (2) OF EACH DEVICE, ONE AT CAR HEIGHT AND ONE AT TRUCK HEIGHT. INTERCOM SHALL COMMUNICATE WITH THE SECURITY OFFICE IN BUILDING 1. REFER TO 6/TN301 FOR CARD READER PEDESTAL DETAIL AND 7/TN301 FOR PEDESTAL INTERFACE PANEL DETAIL. REFER TO 4/TN400 FOR RISER DIAGRAM. OWNER WILL FURNISH AND INSTALL CAMERA AT A FUTURE DATE.
  2. PROVIDE ONE (1) 2" CONDUIT FROM HAND HOLE TO SECURITY GATE CONTROL FOR SECURITY CABLE CONNECTIONS.
  3. PROVIDE TWO (2) 2" CONDUITS FROM HAND HOLE TO SECURITY BOLLARD. PROVIDE SIX (6) STRANDS 62.5 MICRON MULTIMODE FIBER OPTIC OUTSIDE PLANT CABLE, INTERCOM AND SECURITY CABLE.
  4. REFER TO 2/TN301 FOR EMERGENCY CALL STATION DETAIL. REFER TO 4/TN400 FOR RISER DIAGRAM AND 1/TNS300 FOR FIBER TERMINATION ROOM ENLARGEMENT. CONTRACTOR SHALL PROVIDE IP INTERCOM, FIBER OPTIC TRANSCEIVERS, MOUNTING BASE, EMERGENCY HOUSING AND ALL ASSOCIATED EQUIPMENT. OWNER WILL FURNISH AND INSTALL CAMERA AT A FUTURE DATE.
  5. TRANSITION CONDUIT INTO ROOM BA105. STUB CONDUITS 4" ABOVE FINISHED FLOOR BUSH AND TAG. PROVIDE PULL STRINGS IN CONDUIT. REFER TO 1/TN201 FOR STUB LOCATION.
  6. REFER TO 4/TN401 FOR EXTERIOR HAND HOLE DETAIL.
  7. DATA OUTLET FOR OWNER PROVIDED CAMERA. REFER TO 4/TN400 FOR SITE ACCESS CONTROL/EMERGENCY CALL STATION/INTERCOM RISER DIAGRAM.
  8. REFER TO GATE CONTROL SCHEDULE ON SHEET TN500.


FOR ALL WORK OF THE PROJECT ASSOCIATED WITH EXISTING STEAM AND CHILLED WATER PIPING UNDERGROUND, OR IN SHALLOW TRENCHES, CONTRACTOR SHALL ASSUME SUCH EXISTING UTILITIES HAVE HAZARDOUS MATERIALS IN THE FORM OF ASBESTOS CONTAINING INSULATION OR OTHER MATERIAL. CONTRACTOR'S PROPOSAL SHALL INCLUDE ALL COST AND TIME FOR ABATEMENT AND LEGAL DISPOSAL OF SUCH HAZARDOUS MATERIALS TO THE EXTENT REQUIRED FOR PERFORMANCE OF THE WORK OF THE PROJECT.

1"=20' SCALE



No.	Date	Revisions
#1	April 4, 2013	Amendment 4

CONSULTANTS:			
STRUCTURAL ENGINEER: KPFF CONSULTING ENGINEERS 1630 DES PERES ROAD, SUITE 100 ST. LOUIS, MO 63131 PHONE: (314) 635-0524	CODE CONSULTANT/FIRE PROTECTION: LERCH BATES INC. 2043 WOODLAND PARKWAY, SUITE 300 ST. LOUIS, MO 63146 PHONE: (314) 991-2633	AUTOMATIC TRANSPORT: 8088 S LINCOLN STREET, SUITE 207 LITTLETON, CO 80122 PHONE: (720) 283-8182	HAZARDOUS MATERIALS: ALTEC ENVIRONMENTAL CONSULTING, LLC P.O. BOX 17867 SHREVEPORT, LA 71138-0867 PHONE: (318) 687-3771
MECHANICAL/ELECTRICAL/PLUMBING: KIWY ENGINEERING CONSULTANTS 415 SUMNER DRIVE, SUITE 104 ST. LOUIS, MO 63143 PHONE: (314) 645-1132	CIVIL ENGINEER: STOCK & ASSOCIATES CONSULTING ENGINEERS, INC. 257 CHESTERFIELD BUSINESS PARKWAY CHESTERFIELD, MO 63005 PHONE: (636) 530-9100	ESTIMATION: KIWAME BUILDING GROUP, INC. 9902 BANNON TREE ST. LOUIS, MO 63103 PHONE: (314) 962-5344	IRRIGATION CONSULTANTS: IRM 9902 BANNON TREE ST. LOUIS, MO 63103 PHONE: (318) 843-1461

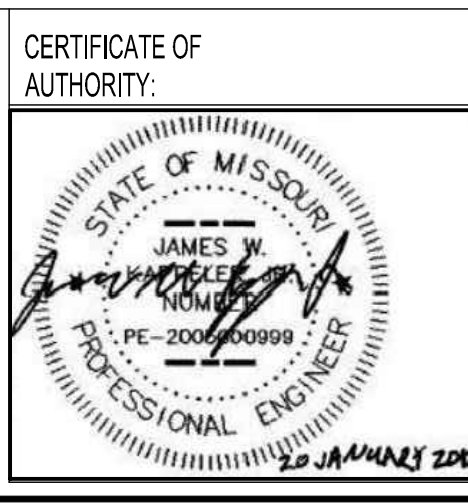

**ARCHITECT/ENGINEERS:**

**CHRISTNER**

ARCHITECTS | DESIGNERS | PLANNERS | LANDSCAPE ARCHITECTS

168 N. MERAMEC AVENUE | ST. LOUIS, MISSOURI 63105  
TEL 314 725 2927 | FAX 314 725 2928 | CHRISTNERINC.COM

THE SEAL (S) AND SIGNATURE(S) APPLY ONLY TO THE DOCUMENT TO WHICH THEY ARE AFFIXED, AND WE EXPRESSLY DISCLAIM ANY RESPONSIBILITY FOR ALL OTHER PLANS, SPECIFICATIONS, ESTIMATES, REPORTS, OR OTHER DOCUMENTS OR INSTRUMENTS RELATING TO OR INTENDED TO BE USED FOR ANY PART OF PARTS OF THE PROJECT.  
© COPYRIGHT 2012 CHRISTNER INC.

Drawing Title  
**TECHNOLOGY SITE PLAN**

Approved: Project Director  
*John Sanders*

Project Title <b>TENANT BUILDING</b>		Project Number <b>657-313D</b>	
Location <b>JEFFERSON BARRACKS DIVISION</b>		Building Number <b>56</b>	
Date <b>29 OCTOBER 2012</b>	Checked <b>DARHAR</b>	Drawn <b>KEIEVE</b>	Drawing Number <b>TNS101</b>
			Dwg. 111 of 153

**Office of Construction and Facilities Management**

Department of Veterans Affairs