



PARTIAL FLOOR PLAN - 7TH FLOOR

SCALE: 1/4" = 1'-0"


KEYNOTES

- 24"x8" OSA DUCT UP THRU ROOF TO ERY-1. SEE M500 FOR CONTINUATION.
- 24"x4" EA DUCT UP THRU ROOF TO ERY-1. SEE M500 FOR CONTINUATION.
- NOT USED
- DOOR TO BE UNDER-CUT AND SHALL MAINTAIN 3/4" MIN CLEARANCE. REFER TO ARCH.
- IDU MOUNTED TO WALL WITH MOUNTING BRACKET PER DETAIL 12M601. REFER TO DETAIL 12M601 FOR UNIT CLEARANCES.
- SUSPENDED FC MOUNTED PER DETAIL 14M601.
- INDOOR SUSPENDED CEILING CASSETTE MOUNTED PER DETAIL 12M601.
- OUTLINE OF CRITICAL LON BEAM WITH LIMITED SPACE DUE TO CEILING HEIGHT. CONTRACTOR TO COORDINATE WITH (B) BEAM LOCATIONS AND (N) CONDITIONS. BEAM EXTENDS ALONG STATION LINE "B" BETWEEN STATION LINES "10" AND "10".
- PROVIDE DUCT DETECTOR (DUCT SMOKE DETECTOR) IN OSA DUCT. PROVIDE FOR AUTOMATIC SHUT-DOWN OF ERY-1 UPON DETECTION OF SMOKE.

GENERAL NOTES

- COORDINATION OF WORK: LAYOUT OF MATERIALS, EQUIPMENT AND SYSTEMS IS GENERALLY DIAGRAMMATIC UNLESS SPECIFICALLY DIMENSIONED. SOME WORK MAY BE SHOWN OFFSET FOR CLARITY.
- THE ACTUAL LOCATION OF ALL MATERIALS, PIPING, DUCTWORK, FIXTURES, EQUIPMENT, SUPPORTS, ETC. SHALL BE CAREFULLY PLANNED, PRIOR TO INSTALLATION OF ANY WORK TO AVOID ALL INTERFERENCES WITH EACH OTHER OR WITH STRUCTURAL, ELECTRICAL, ARCHITECTURAL OR OTHER ELEMENTS.
- VERIFY THE PROPER VOLTAGE AND PHASE OF ALL EQUIPMENT WITH THE ELECTRICAL PLANS. ALL CONFLICTS SHALL BE CALLED TO THE ATTENTION OF THE ARCHITECT AND THE ENGINEER PRIOR TO THE INSTALLATION OF ANY WORK OR THE ORDERING OF ANY EQUIPMENT.
- ALL DRAWINGS AND SPECIFICATIONS ARE TO BE CONSIDERED PART OF THE CONTRACT DOCUMENTS. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE REVIEW AND COORDINATION OF ALL DRAWINGS PRIOR TO ANY CONSTRUCTION, INCLUDING ARCHITECTURAL, STRUCTURAL, MECHANICAL, PLUMBING, AND ELECTRICAL. ANY WORK PERFORMED IN CONFLICT WITH THE CONTRACT DOCUMENTS OR ANY CODE REQUIREMENT SHALL BE CORRECTED BY THE CONTRACTOR AT HIS OWN EXPENSE AND AT NO EXPENSE TO THE OWNER OR THE OWNER REPRESENTATIVE.
- EXISTING PIPING IS SHOWN IN THEIR APPROXIMATE LOCATIONS ONLY. INFORMATION OF (E) UTILITIES IS BASED UPON EXISTING DRAWINGS AND OWNER'S BEST KNOWLEDGE. EXISTING INFORMATION SHOWN MAY NOT BE TAKEN AS COMPREHENSIVE, AND NO GUARANTEE IS MADE AS TO THE ACCURACY OR COMPLETENESS OF THE EXISTING INFORMATION SHOWN.
- PROVIDE ALL DUCT TRANSITION PIECES AND FITTINGS REQUIRED TO ACCOMMODATE MECHANICAL EQUIPMENT CONNECTIONS, STRUCTURE, ARCHITECTURAL ELEMENTS, AND CHANGES IN DUCT SIZES.

KEY PLAN

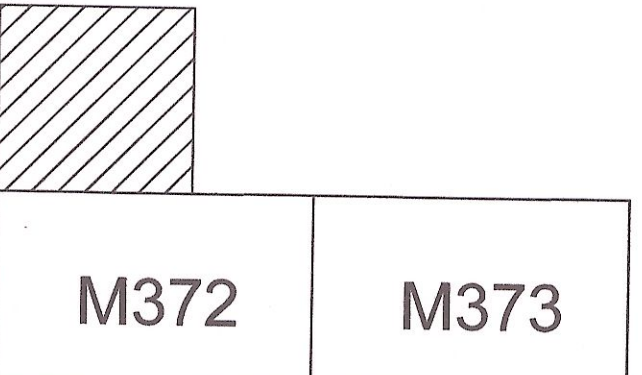

CONSULTANTS:

ARCHITECT/ENGINEERS:



TETER, LLP
7535 N. PALM AVE. 201 | FRESNO, CA 93711 | 559.437.0887
125 S. BRIDGE ST. 150 | VISALIA, CA 93291 | 559.625.5246
ARCHITECTS ENGINEERS CONNECTED

Drawing Title
7TH FLOOR PARTIAL FLOOR PLAN

Approved: Project Director

Project Title
RENOVATE 7TH FLOOR BUILDING 1

Location
FRESNO, CA
Date
8-27-14

Project Number
5710-19-2022

Building Number
1

Drawing Number
M371

Dwg. 30 of 52

Office of
Construction
and Facilities
Management



3:59:13 PM, 7th Floor Partial Floor Plan.dwg, 12/05/14 04:09:50 PM, Daniel Kaimink