


ConCore® : CC1000 Panel-24"

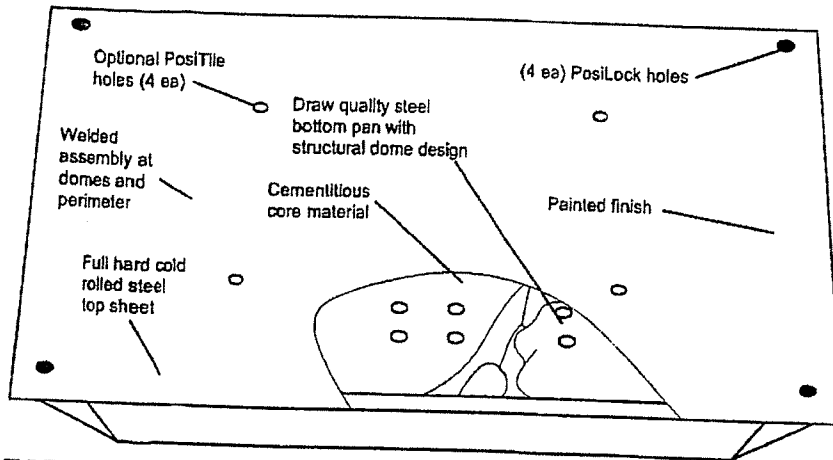

SPECIFICATIONS

General information

- Panel weight : 7.5 lbs./ft² bare.
- 1-3/8 inches deep with no covering.
- All steel welded construction filled internally with a cementitious core material.
- Protected from corrosion by an epoxy paint finish.
- Class A flame spread rating.
- Non-combustible material.

UNDERSTRUCTURE OPTIONS

- ☐ Freestanding ☐ Posilock
☐ 2' Bolted Stringer ☐ 4' Bolted Stringer

COVERING OPTIONS


Tile factory laminated with top set trim edge

- ☒ 1/16" HPL _____ (Color) *Match Exist.*
☐ 1/16" Conductive HPL _____ (Color)
☐ 1/8" HPL _____ (Color)
☐ 1/8" Conductive HPL _____ (Color)
☐ 1/8" VCT _____ (Color)
☐ 1/8" Conductive Vinyl _____ (Color)
☐ 1/8" Static Dissipative Vinyl _____ (Color)


Tile factory laminated with integral trim edge

- ☐ 1/8" HPL _____ (Color)
☐ 1/16" HPL _____ (Color)
☐ 1/8" Conductive HPL _____ (Color)
☐ 1/16" Conductive HPL _____ (Color)

TOP VIEW

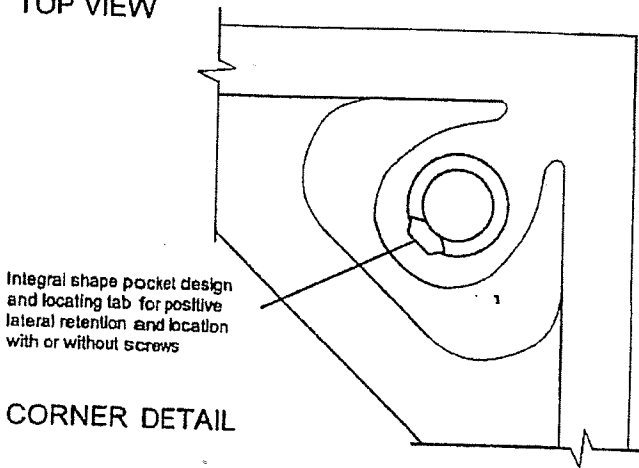

CORNER DETAIL

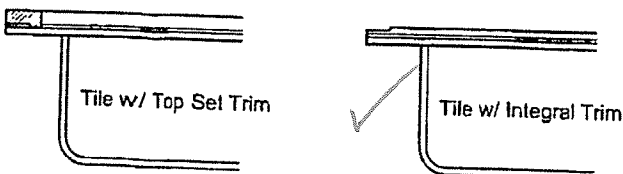

Bare Painted Panel Options

- ☐ Bare Painted Finish to accept carpet tile application
☐ Bare Painted Finish to accept PosiTile application

Performance Selection Chart

System Type	Understructure	SYSTEM WEIGHT	STATIC LOADS				ROLLING LOADS		IMPACT LOADS
			Concentrated Loads	Top Surface Deflection	Uniform Loads	Ultimate Loads	10 Passes	10,000 Passes	
ConCore CC1000-24"	Posilock	7.5 lbs / ft² 37 kg / m²	1000 lbs 454 kg	0.100" 2.54 mm	250 lbs / ft² 11.9 kPa	3250 lbs	800 lbs 363 kg	600 lbs 272 kg	150 lbs 68 kg
	Bolted Stringer	9.0 lbs / ft² 37 kg / m²	1000 lbs 454 kg	0.100" 2.54 mm	250 lbs / ft² 11.9 kPa	3000 lbs	800 lbs 363 kg	600 lbs 272 kg	150 lbs 68 kg

Concentrated, ultimate, and impact load capacities are tested by imposing loads on a one square inch area. Results indicate weakest point of panel. Permanent set after application of concentrated load shall be <0.010". Local and overall deformation after application of rolling loads shall be <0.040"