


PERF 800 Air Flow Panel-24"

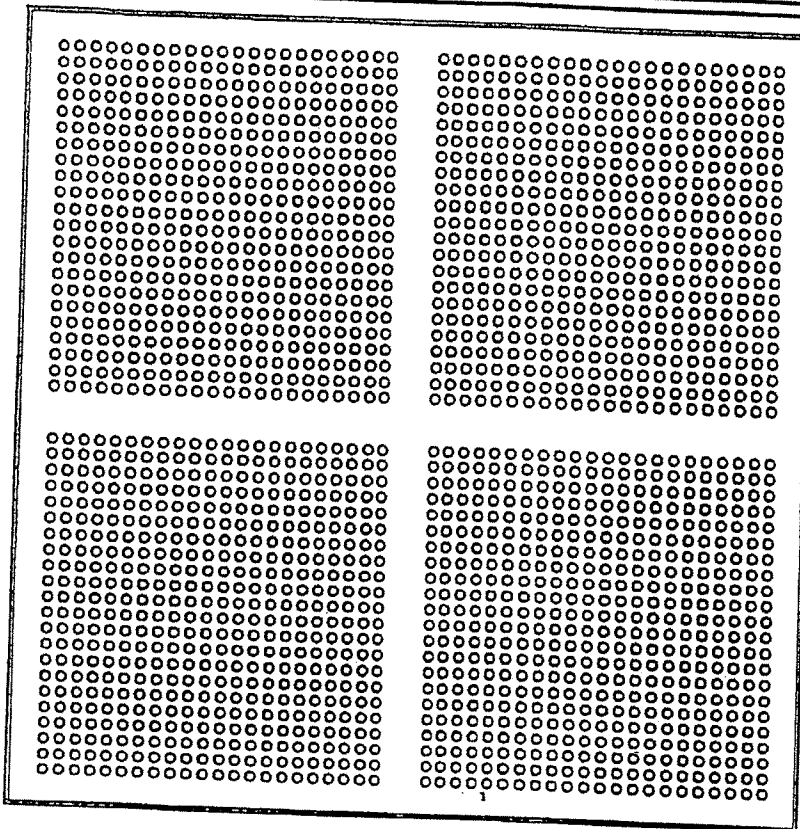

SPECIFICATIONS

General information

- 25% open area.
- 24 inches square all steel construction.
- Concentrated load rating up to 800 lbs.
- Available with or without galvanized slide damper.
- Protected from corrosion by an epoxy paint finish.
- Class A flame spread rating.
- Non-combustible material.



UNDERSTRUCTURE OPTIONS

- ☐ 2' Bolted Stringer ☐ 4' Bolted Stringer


COVERING OPTIONS

Tile factory laminated with top set trim edge

- ☒ 1/16" HPL _____ (Color) *Match Exist.*
- ☐ 1/16" Conductive HPL _____ (Color)
- ☐ 1/8" HPL _____ (Color)
- ☐ 1/8" Conductive Vinyl _____ (Color)
- ☐ 1/8" Static Dissipative Vinyl _____ (Color)

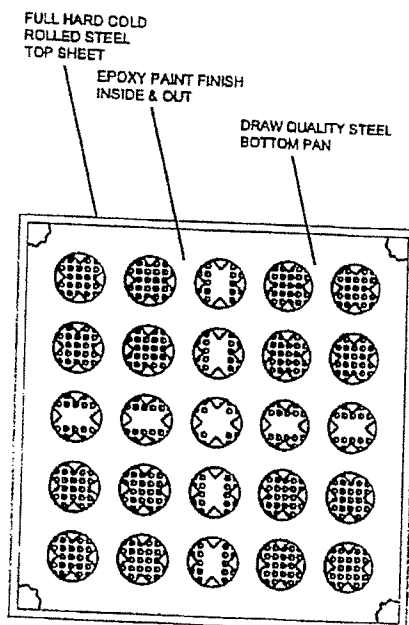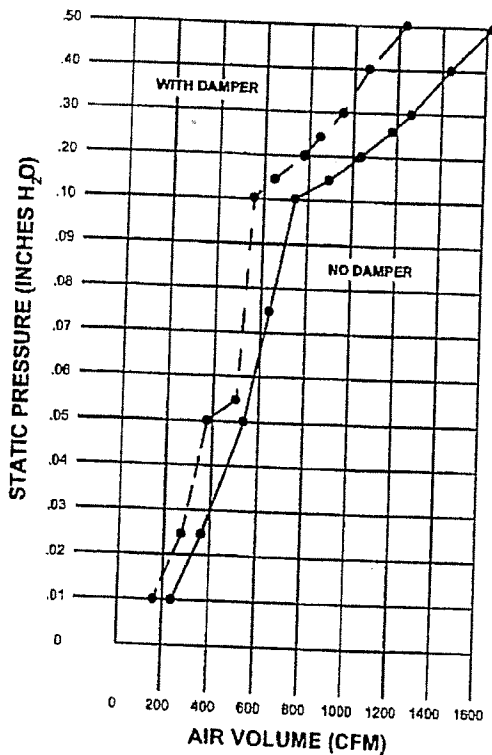

BOTTOM VIEW

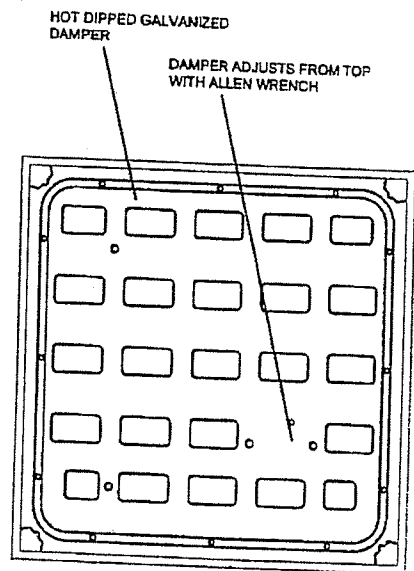

BOTTOM VIEW WITH DAMPER