

**DEPARTMENT OF VETERANS AFFAIRS
COMMUNITY-BASED OUTPATIENT CLINIC
JOHNSON COUNTY, KANSAS**



22,910 NET USABLE SQUARE FEET

NAICS CODE: 531190

SIZE STANDARD - \$38.5 MILLION

NAME: ANNTWINETTE DUPREE-HART
TITLE: Contracting Officer

NAME: RADONYA PINKNEY
TITLE: Project Manager

Offers are solicited under Section 40 U.S.C. 490(H)(1), AS AMENDED, AND Section 1 of the Reorganization Plan of 1950 (40 U.S.C. 490 Note).

The information collection requirements contained in this Solicitation/Contract that are not required by regulation, have been approved by the Office of Management and Budget pursuant to the Paperwork Reduction Act and assigned the OMB Control No. 3090-0163.

Lessor _____ Gov't. _____ of _____ Pages

TABLE OF CONTENTS

PART I. BASIC SOLICITATION REQUIREMENTS

SECTION 1	SUMMARY	2
1.1	AMOUNT AND TYPE OF SPACE	2
1.2	SITE LOCATION.....	2
1.3	QUALITY OF SPACE	3
1.3.1	QUALITY OF SITE DEVELOPMENT	4
1.3.2	QUALITY OF BUILDING	4
1.3.3	SPECIAL REQUIREMENTS.....	4
1.4	TERM.....	5
1.5	OFFER DUE	5
1.6	OCCUPANCY DATE	5
1.7	HOW TO OFFER.....	5
1.7.1	DOCUMENTS TO SUBMIT WITH OFFER.....	6
1.7.2	INSTRUCTIONS AND ADDITIONAL INFORMATION	9
1.7.3	OPENING OF OFFERS.....	10
1.8	PROPOSALS.....	10
1.8.1	RENTABLE SQUARE FEET.....	10
1.8.2	SPECIAL EQUIPMENT.....	10
1.8.3	NET USABLE SQUARE FEET RATES	10
1.9	BONDS	11
1.9.1	BID BOND.....	11
1.9.2	PERFORMANCEAND PAYMENT BOND.....	11
1.10	DAVIS BACON WAGES.....	13
1.11	LEASE ACQUISITION FEE	13
1.12	SITE CRITERIA	14
1.13	OFF SITE-IMPROVEMENTS	15
1.14	DUE DILIGENCE	16
1.15	APPLICABLE LAW	16
1.16	WAIVER OF RESTORATION.....	16
1.17	BUDGET, SCOREKEEPING; OPERATING LEASE TREATMENT	16
SECTION 2	COMMUNICATIONS AND AWARD.....	18
2.1	ORAL PRESENTATIONS.....	18
2.2	EVALUATION OF OFFERS.....	18
2.2.1	PRICE EVALUATION	19
2.2.2	TECHNICAL EVALUATION	20
2.2.3	REPRESENTATIONS, CERTIFICATIONS, AND OTHER STATEMENTS OF OFFEROROS OR RESPONDENTS	29
2.2.4	SMALL BUSINESS CLAFFIFICATION CODE	29
2.2.5	ZONING REQUIREMENTS	32
2.2.6	CONTROL OF PROPERTY.....	32
2.3	EVIDENCE OF CAPABILITY TO PERFORM AFTER AWARD	32
2.4	INITIAL OFFERS; COMMUNICATIONS WITH OFFERORS	33
2.5	COMPETITIVE RANGE.....	33
2.6	NEGOTIATIONS.....	33
2.7	AWARD.....	34
2.7.1	BEST VALUE	34
2.7.2	LEASE COMPONENTS.....	34
2.7.3	AWARD.....	35

SECTION 3 MISCELLANEOUS 36

- 3.1 SUBSTITUTIONS FOR SPECIFIC BRAND NAMES 36
- 3.2 UNIT COSTS FOR ADJUSTMENTS 36
- 3.3 UNIT PRICES FOR ALTERATIONS OF \$100,000 OR LESS 36
- 3.4 SPECIAL WORK (INSTALLATIONS AND ALTERATIONS) 37
- 3.5 TAX ADJUSTMENTS 37
 - 3.5.1 PURPOSE 37
 - 3.5.2 DEFINITIONS 37
 - 3.5.3 ADJUSTMENT FOR CHANGES IN REAL ESTATE TAXES 39
 - 3.5.4 TAX APPEALS 40
- 3.6 INSURANCE ADJUSTMENTS 41
- 3.7 OPERATING COSTS 41
- 3.8 CONTRACT CHANGES 42
 - 3.8.1 APPLICABLE TO CHANGES COSTING OVER \$500,000 42
 - 3.8.2 APPLICABLE TO CHANGES COSTING \$500,000 OR LESS 43
- 3.9 WAIVER OF CLAIMS FOR WASTE OR DAMAGES 45
- 3.10 LIQUIDATED DAMAGES 45
- 3.11 RECORDATION REQUIREMENTS 46
- 3.12 ADJUSTMENT FOR VACATED PREMISES 46
- 3.13 RELOCATION ASSISTANCE ACT 46
- 3.14 RENTABLE AND NET USABLE SQUARE FEET 46
 - 3.14.1 RENTABLE SPACE 46
 - 3.14.2 NET USABLE SPACE 47
- 3.15 APPURTENANT AREAS 47
- 3.16 RANDOLPH-SHEPARD ACT: VENDING AND CANTEEN FACILITIES 47
- 3.17 DESIGN AND CONSTRUCTION DOCUMENTS AFTER AWARD 48
 - 3.17.1 RESPONSIBILITIES OF LESSOR'S DESIGN TEAM 48
 - 3.17.2 INDEPENDENT TECHNICAL REVIEW 49
- 3.18 DESIGN DEVELOPMENT 50
- 3.19 CONSTRUCTION DOCUMENTS 50
- 3.20 SUBMITTAL REQUIREMENTS FOR DD AND CD REVIEWS 51
 - 3.20.1 GENERAL REQUIREMENTS 51
 - 3.20.2 FIRST DESIGN DEVELOPMENT SUBMITTAL 52
 - 3.20.3 SECOND DESIGN DEVELOPMENT SUBMITTAL 55
 - 3.20.4 95% CONSTRUCTION DOCUMENTS 58
 - 3.20.5 100% CONSTRUCTION DOCUMENTS 61
 - 3.20.6 APPROVED PLANS AND PERMITS 62
- 3.21 PROJECT SCHEDULE 62
 - 3.21.1 NAS SCHEDULE 62
 - 3.21.2 SCHEDULE UPDATES 62
 - 3.21.3 DATES 62
 - 3.21.4 ACTIVITIES 63
 - 3.21.5 GOVERNMENT REVIEW 63
- 3.22 PROGRESS REPORTS 63
 - 3.22.1 REMEDIAL ACTION 64
 - 3.22.2 REVISIONS TO SCHEDULE 64
 - 3.22.3 APPROVAL OF SCHEDULE 64
 - 3.22.4 COSTS OF REVISIONS 65
- 3.23 CONSTRUCTION OBSERVATION 65
 - 3.23.1 RESIDENT ENGINEER'S OFFICE SPACE 65
- 3.24 COST OF RESIDENT ENGINEER'S OFFICE 68
- 3.25 SAMPLES AND SHOP DRAWINGS 68

Table of Contents – iii

3.26 CONSTRUCTION WASTE MANAGEMENT 68

3.27 USE OF FACILITY PRIOR TO DATE OF POSSESSION 68

3.28 PLANS: AFTER OCCUPANCY 69

3.29 PARTNERING 69

3.30 ACCEPTANCE OF SPACE AND CERTIFICATE OF OCCUPANCY 69

3.31 SUBCONTRACTING COMMITMENTS-MONITORING AND COMPLIANCE 70

SECTION 4 GENERAL DESIGN CRITERIA 72

4.1 CODES 72

4.2 CRITERIA FOR VA FACILITIES 72

4.2.1 VA ADOPTED CODES, STANDARDS, AND EXECUTIVE ORDERS 72

4.2.2 SPECIAL BUILDING REQUIREMENTS 76

4.2.3 EXCLUSIONS FROM NET USABLE SPACE 76

4.2.4 PHYSICAL SECURITY AND NATURAL DISASTERS RESISTIVE DESIGN 77

4.3 FIRE PROTECTION 86

4.3.1 SITE CONSIDERATIONS 86

4.3.2 BUILDING CONSTRUCTION 87

4.3.3 OCCUPANCY TYPE 87

4.3.4 MEANS OF EGRESS 87

4.3.5 FIRE PROTECTION IN HAZARDOUS AND HIGH HAZARD AREAS 87

4.4 ENVIRONMENTAL 88

4.4.1 INDOOR AIR QUALITY 88

4.4.2 ASBESTOS 89

4.4.3 RADON MEASUREMENT AND CORRECTIVE ACTION 89

4.4.4 RADON IN WATER 90

4.4.5 POTABLE WATER QUALITY 90

4.5 SPECIAL ENVIRONMENTAL REQUIREMENTS 91

4.6 ACCESSIBILITY STANDARDS 91

4.7 OSHA REQUIREMENTS 93

4.8 SUSTAINABLE DESIGN AND ENERGY EFFICIENCY 93

4.8.1 LEED® SILVER FOR HEALTHCARE CERTIFICATION 93

4.8.2 STRATEGIES 94

SECTION 5 SITE DESIGN CRITERIA 98

5.1 GENERAL 98

5.2 SITE DEVELOPMENT 99

5.2.1 STORM WATER 99

5.2.2 CIRCULATION 99

5.2.3 LOCATION OF BUILDING AND EQUIPMENT 99

5.2.4 PATIENT USE AREAS 99

5.2.5 GRADING DESIGN 100

5.2.6 DESIGN OF VEHICULAR AND PEDESTRIAN PAVEMENT 101

5.2.7 ENTRANCES TO BUILDING 102

5.2.8 TRUCK DOCK 102

5.2.9 PARKING FACILITIES 102

5.2.10 EQUIPMENT PADS 103

5.3 LANDSCAPING DESIGN 104

5.4 SITE AMENITIES 105

5.4.1 FLAGPOLE 105

5.4.2 SMOKING SHELTERS – INTENTIONALLY DELETED 105

5.4.3 CANOPIES AND COVERED WALKWAYS 105

5.4.4 EXTERIOR ACTIVITY AREAS AND YARDS 105

5.5 UTILITIES 106

Table of Contents – iv

5.5.1 WATER DISTRIBUTION SYSTEM 106

5.5.2 WATER SUPPLY FOR FIRE PROTECTION 106

5.5.3 LAWN IRRIGATION SYSTEM 106

5.5.4 SANITARY SEWERAGE SYSTEM 107

5.5.5 STORM DRAINAGE SYSTEM..... 107

5.5.6 GAS DISTRIBUTION SYSTEM 108

5.5.7 ELECTRICAL SERVICE 108

5.5.8 TELECOMMUNICATIONS SERVICES 108

5.6 EXTERIOR SIGNAGE 109

5.7 FENCING 109

SECTION 6 BUILDING DESIGN CRITERIA 110

6.1 STRUCTURAL 110

6.1.1 FOUNDATIONS 110

6.1.2 FLOOR LOADS..... 110

6.1.3 ROOF LOAD 110

6.1.4 LATERAL FORCES 111

6.1.5 SPECIAL INSPECTIONS..... 111

6.1.6 BLAST LOADS..... 111

6.1.7 MISCELLANEOUS SUPPORT SYSTEMS 111

6.2 ARCHITECTURAL 111

6.2.1 FOUNDATION DRAINAGE..... 111

6.2.2 PATIENT ENTRANCES..... 111

6.2.3 LOADING DOCKS 111

6.2.4 CANOPIES OR COVERED WALKS..... 112

6.2.5 ENCLOSURE SYSTEMS..... 112

6.3 EQUIPMENT..... 115

6.3.1 GENERAL 115

6.3.2 LESSOR FURNISHED SPECIAL EQUIPMENT..... 116

6.3.3 PROVISIONS FOR VA-FURNISHED/VA-INSTALLED EQUIPMENT..... 116

6.4 MECHANICAL 117

6.4.1 INTRODUCTION..... 117

6.4.2 MANDATORY PROVISIONS..... 117

6.4.3 APPLICABLE CODES AND CRITERIA..... 118

6.4.4 HVAC DESIGN CALCULATIONS..... 118

6.4.5 HVAC SYSTEM SELECTION CRITERIA – AIR SIDE 120

6.4.6 ALL-AIR SYSTEMS 120

6.4.7 FAN COIL UNITS..... 123

6.4.8 CLOSED-LOOP – GROUND SOURCE HEAT PUMPS (GSHP) 124

6.4.9 REFRIGERATION SYSTEMS – CHILLED WATER AND DIRECT-EXPANSION (DX) SYSTEMS..... 125

6.4.10 CHILLED WATER SYSTEMS..... 125

6.4.11 DIRECT-EXPANSION (DX) SYSTEMS..... 126

6.4.12 HEATING SYSTEMS..... 126

6.4.13 PIPING SYSTEMS – BASIC REQUIREMENTS..... 127

6.4.14 AIR DISTRIBUTION SYSTEM..... 129

6.4.15 INSULATION..... 129

6.4.16 APPLICATIONS 130

6.5 FIRE PROTECTION 131

6.5.1 FIRE EXTINGUISHERS..... 131

6.5.2 FIXED FIRE EXTINGUISHING SYSTEMS..... 131

6.5.3 AUTOMATIC SPRINKLER SYSTEMS 132

6.6 PLUMBING 133

Table of Contents – v

6.6.1	GENERAL	133
6.6.2	MANDATORY PROVISIONS.....	133
6.6.3	APPLICABLE CODES AND CRITERIA.....	133
6.6.4	PLUMBING DESIGN SCOPE.....	133
6.6.5	PLUMBING FIXTURES, TRIM AND EQUIPMENT	139
6.7	ELECTRICAL.....	140
6.7.1	GENERAL	140
6.7.2	CALCULATIONS.....	140
6.7.3	LIGHTING CALCULATIONS.....	140
6.7.4	FIRE ALARM SYSTEMS	140
6.7.5	RACEWAYS AND WIRING.....	141
6.7.6	LIGHTNING PROTECTION SYSTEM	141
6.7.7	RECEPTACLE CIRCUITS	141
6.7.8	ESSENTIAL ELECTRICAL SYSTEMS FOR CLINICS	141
6.7.9	POWER MONITORING AND METERING	142
6.7.10	ELECTRICAL ROOMS AND CLOSETS:.....	143
6.7.11	ELECTRICAL EQUIPMENT.....	143
6.7.12	LIGHTING FIXTURES	143
6.7.13	BALLASTS	144
6.7.14	LIGHTING CONTROL.....	144
6.8	TELECOMMUNICATIONS	145
6.8.1	TELECOMMUNICATIONS: CABLE PATHWAYS, WIRING, CABLES, AND INFRASTRUCTURE PLANT; AND SPECIAL TELECOMMUNICATIONS SYSTEMS	145
6.8.2	TELECOMMUNICATIONS/SPECIAL SYSTEMS ROOMS AND SPACE REQUIREMENTS	150
6.9	ELEVATORS – INTENTIONALLY DELETED	157
SECTION 7	INTERIOR CONSTRUCTION, FINISHES, AND INTERIOR DESIGN	158
7.1	GENERAL.....	158
7.1.1	SPACE PLANNING AND FUNCTIONAL LAYOUT	158
7.1.2	ROOM NUMBERING.....	158
7.1.3	CIRCULATION SYSTEMS.....	158
7.1.4	FLOOR-TO-FLOOR HEIGHTS.....	158
7.1.5	MATERIALS AND PRODUCTS FOR INTERIOR CONSTRUCTION AND FINISHES.....	159
7.1.6	SEISMIC DESIGN.....	160
7.2	PARTITIONS.....	160
7.3	INTERIOR DOORS.....	161
7.3.1	GENERAL	161
7.3.2	WOOD DOORS	161
7.3.3	HOLLOW METAL DOORS	161
7.3.4	HOLLOW METAL DOOR FRAMES.....	162
7.3.5	VAULT DOOR – INTENTIONALLY DELETED.....	162
7.3.6	AUTOMATIC DOORS.....	162
7.3.7	FINISH HARDWARE	163
7.3.8	DOOR IDENTIFICATION.....	163
7.4	NOISE TRANSMISSION CONTROL.....	163
7.4.1	GENERAL	163
7.4.2	SOUND TRANSMISSION CLASS (STC) 45	164
7.4.3	SOUND TRANSMISSION CLASS (STC) 40	164
7.5	X-RAY RADIATION SHIELDING and RADIOGRAPHIC ROOMS	164
7.5.1	X-RAY RADIATION SHIELDING	164

Table of Contents – vi

7.5.2	DESIGN FOR RADIOGRAPHIC EQUIPMENT	165
7.5.3	SPECIAL X-RAY CONTROL ROOM REQUIREMENTS	166
7.6	INTERIOR FINISHES	166
7.6.1	GENERAL	166
7.6.2	INTERIOR DESIGN CRITERIA	166
7.7	CEILING'S	167
7.7.1	ACOUSTICAL CEILING'S	167
7.7.2	CUBICLE CURTAIN TRACKS	167
7.8	FLOORING	168
7.8.1	MEMBRANE WATERPROOFING AT INTERIOR FLOOR DRAINS	168
7.8.2	FLOOR SLAB DEPRESSIONS.....	168
7.8.3	FLOORING, PORCELAIN TILE	169
7.8.4	FLOORING, VINYL TILE AND SHEET VINYL	169
7.8.5	FLOORING, RUBBER	170
7.8.6	FLOORING, CARPET	170
7.8.7	FLOORING, LATEX MASTIC	172
7.8.8	COMPUTER ROOM FLOORING – INTENTIONALLY DELETED	172
7.9	WALL COVERINGS.....	172
7.9.1	PORCELAIN WALL TILE	172
7.9.2	MAINTENANCE AND REPLACEMENT	173
7.10	PAINTING	173
7.11	HANDRAILS, WALL GUARDS AND CORNER GUARDS	175
7.11.1	HANDRAILS AND WALL GUARDS.....	175
7.11.2	CORNER GUARDS	176
7.12	INTERIOR SIGNAGE	177
7.13	BUILT-IN WORK.....	177
7.13.1	CASEWORK AND COUNTERTOPS.....	177
7.13.2	COMPUTER WORKSTATIONS AND KEYBOARD TRAYS	180
7.13.3	LOCKERS AND SHELVING	180
7.14	PLUMBING FIXTURES, TOILETS AND BATHS.....	181
7.14.1	TOILETS	181
7.14.2	SHOWERS.....	181
7.14.3	TOILET AND SHOWER ACCESSORIES.....	181
7.15	WINDOW TREATMENTS.....	182
SECTION 8	SERVICES, UTILITIES AND MAINTENANCE.....	183
8.1	UTILITIES	183
8.2	BUILDING MAINTENANCE AND CLEANING BY LESSOR	183
8.2.1	BUILDING MAINTENANCE BY LESSOR	183
8.2.2	EXTERIOR CLEANING BY LESSOR.....	185
8.2.3	INTERIOR CLEANING BY LESSOR	186
8.3	NORMAL HOURS.....	186
8.4	BUILDING OPERATING PLAN	186
8.5	OVERTIME USAGE.....	187
8.6	FLAG DISPLAY	187
8.7	SECURITY	187
8.8	VA CLEANING RESPONSIBILITY	187
SECTION 9	SAFETY, FIRE PROTECTION, AND ENVIRONMENTAL MANAGEMENT	188
9.1	GENERAL.....	188
9.1.1	PERMITS	188
9.1.2	INSPECTIONS BY LESSOR	188
9.1.3	INSPECTIONS BY GOVERNMENT	188

Table of Contents – vii

9.2 CODE VIOLATIONS 189

9.3 SPECIAL ENVIRONMENTAL REQUIREMENTS..... 189

 9.3.1 INDOOR ENVIRONMENT 189

 9.3.2 SPECIAL BUILDING EQUIPMENT 189

SECTION 10 INSTRUCTIONS AND PREPARATION 190

 10.1 NOTICE TO OFFERORS 190

 10.2 DEVIATIONS 190

 10.3 ERASURES OR CHANGES 190

 10.4 COMPLETION OF GSA FORM 3518..... 190

 10.5 PREPARATION OF GSA FORM 1217 190

 10.6 PREPARATION OF GSA FORM 1364A (Revised 5/98)..... 191

 10.7 DRAWINGS AND SPECIFICATIONS – SUBMISSION WITH OFFER 192

 10.7.1 SITE PLAN(S)..... 193

 10.7.2 FLOOR PLAN(S)..... 193

 10.7.3 ELEVATIONS..... 193

 10.7.4 COLOR RENDERINGS 194

 10.7.5 SPECIFICATIONS 194

 10.8 DESIGN CONCEPT: SUBMISSION WITH OFFER 194

 10.8.1 ARCHITECTURE/STRUCTURAL..... 194

 10.8.2 SUSTAINABLE DESIGN AND ENERGY EFFICIENCY 194

 10.8.3 FIRE PROTECTION 195

 10.8.4 MECHANICAL..... 195

 10.8.5 ELECTRICAL 195

 10.8.6 STRUCTURED CABLING..... 195

 10.8.7 SECURITY 195

 10.8.8 AUDIO VISUAL 195

 10.8.9 SPECIAL SYSTEMS..... 195

 10.8.10 PHYSICAL SECURITY MEASURES..... 196

 10.8.11 WATER DISTRIBUTION..... 196

 10.8.12 SANITARY SEWERAGE SYSTEM 196

 10.9 CALCULATIONS: SUBMISSION WITH OFFER 196

 10.9.1 AREA COMPUTATIONS 197

 10.9.2 HVAC CALCULATIONS..... 197

 10.9.3 ELECTRICAL CALCULATIONS 197

PART II. SCHEDULE A

PART III. SCHEDULE B—SPECIAL REQUIREMENTS

PART IV. SCHEDULE C—UNIT COSTS & PRICES

PART V. SCHEDULE D—BID SUMMARY FORM

PART VI. SCHEDULE E—ROOM FINISH, DOOR & HARDWARE

PART VII. LABOR STANDARDS PROVISION

PART VIII. FORMS

Table of Contents – viii

FORM 1364A PROPOSAL TO LEASE SPACE
FORM 1217 LESSOR'S ANNUAL COST STATEMENT
FORM 3516A SOLICITATION PROVISIONS
FORM 3517B GENERAL CLAUSES
FORM 3517B GENERAL CLAUSES ATTACHMENT #1
FORM 3517B GENERAL CLAUSES ADDENDUM #1
FORM 3518 REPRESENTATIONS AND CERTIFICATIONS
FORM 3518 REPRESENTATIONS AND CERTIFICATIONS SAM ADDENDUM
FORM 330 ARCHITECT-ENGINEER QUALIFICATIONS
FORM 527 CONTRACTOR'S QUALIFICATIONS AND FINANCIAL INFORMATION
CERTIFICATE OF CURRENT COST OR PRICING DATA
PAST PERFORMANCE REFERENCE FORM INSTRUCTIONS
PAST PERFORMANCE REFERENCE FORM
FORM 24 BID BOND
FORM 25 PERFORMANCE BOND
FORM 25A PAYMENT BOND
CERTIFICATE OF BUILDING ENERGY PERFORMANCE
SEISMIC OFFER
SUBCONTRACTING PLAN MODEL
VA NATIONAL RULES OF BEHAVIOR
FAR 52.204-10 REPORTING EXECUTIVE COMPENSATION

PART IX. CONCEPTUAL PLANS

PART X. SITE SPECIFIC INFORMATION
(No site specific information provided)

PART XI. SCHEDULE F EQUIPMENT GUIDE LIST

PART I

BASIC SOLICITATION REQUIREMENTS

PART I. BASIC SOLICITATION REQUIREMENTS

SECTION 1 SUMMARY

1.1 AMOUNT AND TYPE OF SPACE

The Department of Veterans Affairs (VA) is soliciting up to a 20 year lease for **22,910 Net Usable Square Feet (NUSF)** of space for use by VA for personnel, furnishings, and equipment. Space shall be located in a quality new building, constructed of sound and substantial construction, and shall be in compliance with all of the Government's minimum requirements set forth in this Solicitation for Offers (Solicitation or SFO). Space must be adjoining and be located on one (1) contiguous floor.

Detailed definition of Net Usable Square Feet can be found in Paragraph 3.14 RENTABLE AND NET USABLE SQUARE FEET of this Solicitation. Unless otherwise noted, all references in this SFO to square feet shall mean Net Usable Square Feet.

1.2 SITE LOCATION


VA has conducted a market survey of sites within the following delineated area, which are already approved for consideration under this procurement. The delineated area is as follows:

North: From the intersection of KS-7 and Shawnee Mission Parkway east on Shawnee Mission Parkway to the intersection of Shawnee Mission Parkway and Interstate 35.

East: From the intersection of Shawnee Mission Parkway and Interstate 35 south on Interstate 35 to the intersection of Interstate 35 and KS-10.

South: From the intersection of Interstate 35 and KS-10, west on KS-10 to the intersection of KS-10 and KS-7.

West: From the intersection of KS-10 and KS-7, north on KS-7 to the intersection of KS-7 and Shawnee Mission Parkway.

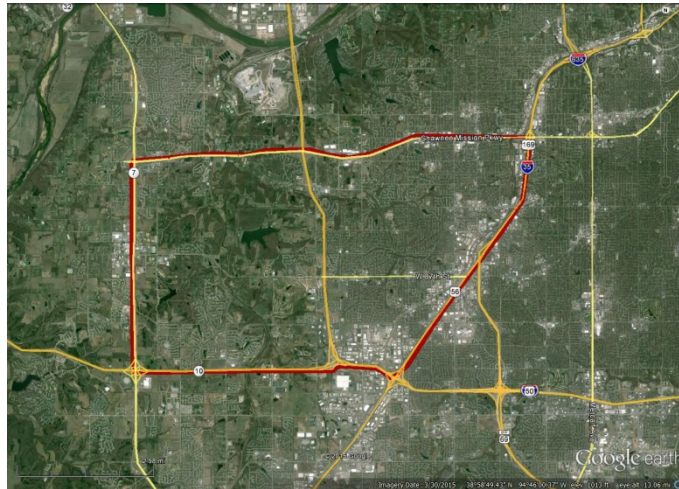

The Offeror must propose on a site that was previously approved by VA. See: <https://www.fbo.gov/spg/VA/vacoofmae/vacoofmae/VA10115N0098/listing.htm>

Offeror must submit written evidence that Offeror either 1) has fee simple ownership of the property or 2) is authorized by the legal owner of the property to develop the site in accordance with the requirements of this solicitation.

Offeror must provide evidence of the right to ownership or control of the site during the term of the lease and all option terms for the lease. Evidence of control includes, but is not limited to the following fully executed documents:

- An Option To Purchase
- A Purchase and Sale Contract
- A Fee Simple Deed
- An Option To Lease Property For Longer Than the Duration of the Lease Term Including All Renewal Options

1.3 QUALITY OF SPACE

The Offeror shall design and construct a building to suit the Government's requirements. The site, site improvements, building, interior spaces and finishes, and Lessor-furnished equipment and special construction shall be provided in accordance with this SFO, all applicable Federal requirements, local Building Codes and ordinances, and applicable utility company requirements.

Site, site improvements, building, interior construction, and equipment shall comply with General Design Criteria as enumerated in SECTION 4, including Codes and Standards, criteria unique to VA, Fire, and Life Safety requirements, Environmental requirements, Accessibility Standards, OSHA requirements, and Energy Efficiency and Sustainable Design.

1.3.1 QUALITY OF SITE DEVELOPMENT

Site development including landscaping, site amenities, utility systems, and exterior signage shall comply with the requirements enumerated in SECTION 5 of this SFO.

On-site vehicle parking spaces, paved and striped, must be provided for use by patients, staff and official Government vehicles, and must be included as part of the rental consideration. The Lessor must provide the greater of the following: the number of parking spaces required by local building or zoning regulations, or the number of parking spaces indicated in SECTION 5.

Pedestrian circulation and site amenities shall be provided as required by SECTION 5 of this SFO.

1.3.2 QUALITY OF BUILDING

The space offered shall be of shape and dimensions that will accommodate the space program and interior functional requirements of VA Outpatient Clinic.

The space offered shall be in a building of sound and substantial construction in accordance with the technical requirements of this solicitation.

The space offered shall be located in a new building with facade of stone, brick, aluminum curtain wall, or other permanent materials. The exterior building materials shall be subject to technical and aesthetic review and approval of the Contracting Officer. The building shall be compatible with its surroundings. Overall, the building must project a professional and aesthetically pleasing appearance. Building systems, interior spaces and finishes, and Lessor furnished equipment and special construction shall comply with the requirements enumerated in SECTION 6 and SECTION 7; and Schedule B and Schedule E of this SFO.

1.3.3 SPECIAL REQUIREMENTS

- Physical security features shall comply with requirements for "Life Safety Protected" as described in the Physical Security Design Manual for VA Facilities, and Security and Law Enforcement VA Handbook 0730/2".
- Natural disasters resistive features shall comply with the requirements enumerated in this SFO.
- Sustainability and energy efficiency features shall comply with the requirements enumerated in this SFO.
- Comply with code requirements for Ambulatory Health Care occupancy
- Comply with Centers for Disease Control (CDC) requirements for Tuberculosis.
- Comply with US Pharmacopeia Chapter <797> for sterile preparation areas as enumerated in this SFO.

- Lessor is responsible for all LEED® Silver for Healthcare Certification submissions and all associated costs for obtaining that certification.

1.4 TERM

All Offerors must submit proposals based on the following:

- Alternate A) 15-year firm term;
- Alternate B) 15-year firm term, with five 1-year options; and
- Alternate C) 20-year term

The Contracting Officer reserves the right to award on any available alternate listed above based on what is considered to be the best interest to the Government.

All the terms and conditions contained herein shall prevail throughout the term of the lease, including all renewal options. Offerors are advised that they must submit pricing for all Alternates listed above in order to be considered responsive. Offerors submitting different or fewer pricing alternates may be rejected as non-responsive by the Contracting Officer.

1.5 OFFER DUE

Offers are due by May 31, 2016 4:00PM Eastern Time (ET). VA currently anticipates award on or before the Spring of 2017. Offers must remain open, and pricing must remain valid 60 calendar days from the date of award.

1.6 OCCUPANCY DATE

Occupancy is required twenty-six (26) months from lease award.

1.7 HOW TO OFFER

All original offers, including all required documents, must be submitted to VA's authorized real estate representative, with a copy to VA, at the addresses below. Documents must be properly executed and submitted no later than 4:00 PM, ET on the date specified in Paragraph 1.5 above:

Express Mail or Hand Delivered:

Savills Studley, Inc.

Julie K. Rayfield, Executive Vice President
Tim Mazzucca, Assistant Director
1201 F Street, NW Suite 500
Washington, DC 20004
Email: Jrayfield@savills-studley.com

Tmazzucca@savills-studley.com

Telephone: (202) 628-6000 (main)

US Department of Veterans Affairs

Anntwinette Dupree-Hart, Contracting Officer
Department of Veterans Affairs
Real Property Service (003C1E)
425 Eye Street, NW, 6th Floor
Washington, DC 20001

Email: Anntwinette.Dupree-Hart@va.gov

Telephone: (202) 382-2733

1.7.1 DOCUMENTS TO SUBMIT WITH OFFER

Offers shall be submitted to Savills Studley, Inc and VA at the above referenced locations.

Each offer must be compiled into two (2) separate volumes: Volume 1 Technical Proposal and Volume 2 Price Proposal. Each volume of the offer must be submitted on a separate compact disc (CD), in the following quantities:

- Volume 1 Technical Proposal: ten (10) CDs
- Volume 2 Price Proposal: two (2) CDs

One (1) Volume 1-Technical Proposal CD one (1) Volume 2-Price Proposal CD shall be delivered to VA's Contracting Officer. The balance of the CD's shall be delivered to Savills Studley, Inc. In addition to the Volume-1 Technical Proposal CDs, **Offerors are required to submit one (1) hard copy of the architectural plans and drawings defined in SECTION 10.7 DRAWINGS AND SPECIFICATIONS – SUBMISSION WITH OFFER.**

Offers shall be properly signed, initialed, converted to a PDF file, saved to CD and indexed with bookmarks. **Check each PDF file to ensure that bookmarks are working properly.** Each CD cover/sleeve/holder as well as the actual CD shall be marked appropriately with the following information in type size and color that is clearly readable:

- Name of Offering Entity
- Offering Entity's DUNS number
- SFO VA 101-15-N-0098 Johnson County KS CBOC
- Initial Offer Volume 1-Technical Proposal or Initial Offer Volume 2-Price Proposal
- Date of Submission

VA's technical reviewers cannot properly review or evaluate offers in which components are not clearly indexed or identified.

NOTE: The only proposal materials that are required to be submitted in hard copy are the architectural plans and drawings defined in SECTION 10.7 DRAWINGS AND SPECIFICATIONS – SUBMISSION WITH OFFER.

Offers shall consist of the following documents which shall be organized on the CDs in the order below:

Volume 1-Technical Proposal

- Information that addresses award factors which are listed in Paragraph 2.2 of the Solicitation **INCLUDING** Offeror's financial information (do NOT send this financial information separately);
- Plans, written narratives, design concept, calculations, mechanical and electrical systems, and energy efficiency of the proposed building as described in Paragraphs 10.7, 10.8, and 10.9 of the Solicitation;
- A Phase1 Environmental Assessment;
- Evidence of compliance with local zoning laws or evidence of variance, if any, approved by the proper local authority
- Proof of Site Ownership or Control in accordance with Paragraph 1.2
- Building Operating Plan as described in Paragraph 8.4 of the Solicitation;
- Detailed Operations and Maintenance Plan narrative and Schedule A narrative;
- GSA Form 527, Contractor's Qualifications and Financial Information;
- GSA Form 330, Architect-Engineer Qualifications;
- Teaming Arrangements: A firm commitment of teaming arrangements with both the general contractor and the architect firm(s) on each companies letter head addressed to the Contracting Officer from the principal(s) of each of the respective firms.
- Past Performance Reference Forms;
- Basic Solicitation, Amendments and Clarifications;
- PART VII Labor Standard Provisions;
- GSA Form 3516A, Solicitation Provisions;
- 3517B, General Clauses;
- General Clauses Addendum and Attachment

Part I: Basic Solicitation Requirements – Page 7 of 197

- System for Award Management (SAM) electronic printout demonstrating applicable size standard and associated North American Industry Classification Systems (NAICS) code

The North American Industry Classification System (NAICS) code for this acquisition is in the below table. In accordance with that table, the small business size standard is \$38.5 Million.

Functional Category	NAICS Code	Description	Size Standard
Sector 53 – Real Estate and Rental and Leasing	531190	Leasing of Building Space to Federal Government by Owners	\$38.5 Million

The small business size standard for a concern which submits an offer in its own name, other than on a construction or service contract, but which proposes to furnish a product which it did not itself manufacture, is 500 employees.

If the provision at 52.204-7, System for Award Management, is included in this solicitation, paragraph (d) of this provision applies.

The Offeror has completed the annual representations and certifications electronically via the SAM website accessed through <https://www.acquisition.gov>. After reviewing the SAM database information, the Offeror verifies by submission of the offer that the representations and certifications currently posted electronically that apply to this solicitation as indicated in paragraph (c) of this provision have been entered or updated within the last 12 months, are current, accurate, complete, and applicable to this solicitation (including the business size standard applicable to the NAICS code referenced for this solicitation), as of the date of this offer and are incorporated in this offer by reference (see FAR 4.1201); except for the changes identified below [Offeror to insert changes, identifying change by clause number, title, date].

- 3518, Representations and Certifications;
- Certification of Building Energy Performance
- Certificate of Current Cost and Pricing Data
- Schedule E
- Schedule F
- Reporting Executive Compensation Form

Part I: Basic Solicitation Requirements – Page 8 of 197

- A proposed sustainable checklist identifying targeted solutions to meet LEED® Silver for Healthcare Certification. Along with the proposed checklist, the Offeror shall submit a brief statement outlining how each of the LEED® credits proposed will be achieved.
- Small Business Subcontracting Plan (requirement for large business Offerors identified for the competitive range. **NOTE: Submission of the plan is required at the time of Final Proposal Revision and is not required with Initial Offers**)

Volume 1 – Technical Proposal Renderings, Plans, Calculations and Specifications (Hard copy)

Provide the following prepared in accordance with SFO Section 10.7:

- One (1) set of drawings, plans, and elevations
- One (1) set of specifications

Volume 2-Price Proposal (2 CDs)

- GSA Form 1364A, Proposal to Lease Space for each alternative term listed in SFO Section 1.4;
- An attachment to GSA Form 1364A identifying all line item costs specified to be paid lump sum by VA;
- GSA Form 1217, Lessor's Annual Cost Statement;
- An itemized cost for all individual items in Schedule B, including Parts III, IV, and V;
- A list of Unit Costs for Adjustments (Part IV Schedule C Exhibit A), and a list of Unit Prices for Alterations (Part IV Schedule C Exhibit B). Refer to SFO Sections 3.2 and 3.3; and Certificate of Current Cost.
- Bid Summary Form (Part V Schedule D).
- Bid Bond
- Schedule A FMA Cost Worksheet (**Schedule A narrative should be included in the Technical proposal**)

1.7.2 INSTRUCTIONS AND ADDITIONAL INFORMATION

Instructions for preparation of the offer can be found in SECTION 10 INSTRUCTIONS AND PREPARATION of this part of the Solicitation and GSA Form 3516A, Solicitation Provisions (located in PART VII). If additional information is needed, the Offeror should contact VA's

authorized real estate representative identified below, who will coordinate directly with VA's Project Manager and Contracting Officer on any responses:

Julie K. Rayfield, Executive Vice President
Savills Studley, Inc.
1201 F Street, NW Suite 500
Email: jrayfield@savills-studley.com
Telephone: (202) 624-8532 (direct)

1.7.3 OPENING OF OFFERS

There will be no public opening of the offer, and all information will be confidential until the lease has been awarded. However, the Government may release the proposal outside the Government to a Government support contractor to assist in the evaluation of the proposal. Such Government contractors shall be required to protect the data from unauthorized disclosure. If you desire to maximize protection of information in your offer, you may apply the restriction notice to your offer as prescribed in the provision entitled "552.270-1(d)(1) & (2), Instructions to Offerors" (see GSA Form 3516A, Solicitation Provisions, page 3).

1.8 PROPOSALS

1.8.1 RENTABLE SQUARE FEET

Offerors shall submit the total rentable square feet (RSF) of the building and a cost per rentable square foot. The submission of a rentable square foot cost is required for scoring purposes to determine if the proposed lease is a capital or operating lease.

NOTE: Definitions for rentable and net usable square feet are located in Paragraph 3.14 RENTABLE AND NET USABLE SQUARE FEET of this solicitation.

1.8.2 SPECIAL EQUIPMENT

Offerors shall submit cost proposals for all special equipment requirements set forth in Schedule B.

1.8.3 NET USABLE SQUARE FEET RATES

For evaluation and negotiation purposes, the offer shall state the following on GSA Form 1364A, Proposal to Lease Space:

A NUSF rental rate that excludes the following costs:

- All special equipment and other requirements described in Schedule B
- Sustainable Design and Energy Efficiency (line IV.A. of Schedule D)
- Physical Security (except systems in Schedule B)(line IV.B. of Schedule D)
- All other items identified in the SFO Part 1 to be paid lump sum by VA

Offerors shall provide cost for all methods of evaluation in order to be considered for award. VA may elect the option it deems most advantageous to the Government.

NOTE: WHEN PRICING SCHEDULE B, THE OFFEROR MUST PROVIDE A SEPARATE COST FOR EACH LINE ITEM OF THE SPECIAL EQUIPMENT AND REQUIREMENTS DESCRIBED. ALSO, REPRESENTATIONAL PRICING OF EACH PROGRAM AREA MUST BE PROVIDED ON THE SCHEDULE B "SUMMARY PRICE SHEET." THE SUMMARY PRICE SHEET ALSO INCLUDES A SEPARATE AREA FOR PROFIT AND OVERHEAD TO ARRIVE AT A TOTAL SCHEDULE B COST. DO NOT FILL OUT THIS AREA. INSTEAD, OVERHEAD AND PROFIT SHALL BE INCLUDED IN EACH INDIVIDUAL LINE ITEM TO ARRIVE AT A TOTAL SCHEDULE B COST. SUMMARY COST SHEET MUST BE SIGNED BY THE OFFEROR.

Offerors who do not offer cost proposals as stated in Paragraphs 1.8.2 and 1.8.3 above will be rejected as unacceptable.

1.9 BONDS

All sureties must be listed in the Department of Treasury Circular 570 Approved Surety List. Standard Form 24 (Bid Bond) and Standard Form 25 (Performance Bond) must be used in accordance with FAR 28.106-1. Copies of the forms are included in PART VII of this Solicitation or forms may be acquired by visiting the GSA Forms Library Website at <http://www.gsa.gov/portal/forms/type/ALL>. The Government shall have the right to approve or reject any and all terms and conditions of any and all bonds obtained by the Offeror pursuant to this Solicitation. In addition, the terms and conditions of the Bond(s) shall be subject to the prior approval of the Government.

1.9.1 BID BOND

To assure the faithful execution of the terms and conditions of the agreement, each Offeror shall submit a Bid Bond with their initial offer. Offers without Bid Bonds will not be considered. The Bond shall remain in effect until a Performance Bond becomes effective should the Offeror be successful, or until VA has notified the Offeror that his proposal is no longer under consideration by VA. A surety company holding a certificate of authority from the Secretary of the Treasury as acceptable surety will execute the Bond. A verifax or other facsimile copy of the agent's authority to sign bonds for the Surety Company shall accompany the Bond. The Offeror shall furnish a proposal guarantee in the form of a Bid Bond supported by good and sufficient surety acceptable to the Government. The amount of the Bid Bond guarantee shall be in the amount of \$100,000. Acceptable alternate bonding protection will be in accordance with FAR 28.204-1 United States Bonds or Notes, or FAR 28.204-3 Irrevocable Letter of Credit (ILC). Invalid bonds may be grounds to render your proposal non-responsive and will not be eligible for an award. Once an award has been made all original Bid Bonds will be returned, except for the successful Offeror whose Bid Bond will be required to remain in full force until such time as a Performance Bond has been received and accepted by the Government.

1.9.2 PERFORMANCE AND PAYMENT BOND

(a) Definitions. As used in this clause—

"Original contract price" means the award price of the contract; or, for requirements contracts, the price payable for the estimated total quantity; or, for indefinite-quantity contracts, the price payable for the specified minimum quantity. Original contract price does not include the price of any options, except those options exercised at the time of contract award.

(b) Amount of required bonds. Unless the resulting contract price is \$100,000 or less, the successful offeror shall furnish performance and payment bonds to the Contracting Officer as follows:

(1) Payment Bonds (Standard Form 25A). To assure faithful payment to subcontractors and material suppliers, a surety bond is required by the Offeror to guaranty that his subcontractors and material suppliers on the project will be paid. The penal amount of payment bonds at the time of contract award shall be 100 percent of the original contract (construction) price no later than 60 days from VA's final review and written approval of the completed construction documents. The Payment Bond shall remain in effect until the Government accepts the space for occupancy. The United States of America, acting through the Secretary of the Department of Veterans Affairs, shall be named as co-beneficiary on the Bond obtained by the Offeror.

(2) Performance Bonds (Standard Form 25). To assure faithful execution of the contract, the successful Offeror shall provide a Performance Bond for 100% of the Total Project Cost as shown in the Offeror's Schedule D no later than thirty (30) days after the date of lease award. The Performance Bond shall remain in effect until it is amended or replaced as set forth in Paragraph (3) below. The United States of America, acting through the Secretary of the Department of Veterans Affairs, shall be named as co-beneficiary on the Bond obtained by the Offeror.

(3) Performance Bonds after 100% Construction Drawings. The successful Offeror shall provide an amended or replacement Performance Bond for 100% of the actual construction cost, based on the completed construction documents, no later than 60 days of VA's final review and written approval of the completed construction documents. The amended or replacement Performance Bond shall remain in effect until the Government accepts the space for occupancy. The United States of America, acting through the Secretary of the Department of Veterans Affairs, shall be named as co-beneficiary on the Bond obtained by the Offeror.

(4) Additional bond protection.

(i) The Government may require additional performance and payment bond protection if the contract price is increased. The increase in protection generally will equal 100 percent of the increase in contract price.

(ii) The Government may secure the additional protection by **directing the Contractor to obtain an additional bond for the increased amount.**

(c) Furnishing executed bonds. The Contractor shall furnish all executed bonds, including any necessary reinsurance agreements, to the Contracting Officer, within the time period specified in the Bid Guarantee provision of the solicitation, or otherwise specified by the Contracting Officer, but in any event, before starting work.

(d) Surety or other security for bonds. The bonds shall be in the form of firm commitment, supported by corporate sureties whose names appear on the list contained in Treasury Department Circular 570, individual sureties, or by other acceptable security such as postal money order, certified check, cashier's check, irrevocable letter of credit, or, in accordance with Treasury Department regulations, certain bonds or notes of the United States. Treasury Circular 570 is published in the Federal Register or may be obtained from the:

U.S. Department of the Treasury
Financial Management Service
Surety Bond Branch
3700 East West Highway, Room 6F01
Hyattsville, MD 20782.

Or via the internet at <http://www.fms.treas.gov/c570/>.

(e) Notice of subcontractor waiver of protection (40 U.S.C. 3133(c)). Any waiver of the right to sue on the payment bond is void unless it is in writing, signed by the person whose right is waived, and executed after such person has first furnished labor or material for use in the performance of the contract. To assure the faithful execution of the terms and conditions of the agreement, each Offeror shall submit a Bid Bond with their initial offer. Offers submitted without Bid Bonds will not be considered. The Bond shall remain in effect until a Performance Bond becomes effective should the Offeror be successful, or until VA has notified the Offeror that his proposal is no longer under consideration by VA. A surety company holding a certificate of authority from the Secretary of the Treasury as acceptable surety will execute the Bond. A verifax or other facsimile copy of the agent's authority to sign bonds for the Surety Company shall accompany the Bond. The Offeror shall furnish a proposal guarantee in the form of a Bid Bond supported by good and sufficient surety acceptable to the Government. The amount of the Bid Bond guarantee shall be in the amount of \$100,000. Acceptable alternate bonding protection will be in accordance with FAR 28.204-1 United States Bonds or Notes, or FAR 28.204-3 Irrevocable Letter of Credit (ILC). Invalid bonds may be grounds to render your proposal non-responsive and will not be eligible for an award. Once an award has been made all original Bid Bonds will be returned, except for the successful Offeror whose Bid Bond will be required to remain in full force until such time as a Performance Bond has been received and accepted by the Government.

1.10 DAVIS BACON WAGES

The wages to be paid during performance under this lease contract must conform to the Department of Labor's General Wage Decision No. **KS160057**, dated **2/26/2016**, or the date of the amended request for offers and as may be amended during the period of construction of the leased premises. A copy of the standards is provided in PART VI of this Solicitation. It is the Lessor's responsibility to obtain and maintain the most current rates.

1.11 LEASE ACQUISITION FEE

The Lessor shall be responsible for paying a Lease Acquisition Fee (LAF) due in connection with the consummation of this Lease.

For purposes of this Solicitation, the real estate firm of Savills Studley, Inc. (Savills Studley), is the authorized representative of the U.S. Department of Veterans Affairs (VA) and is providing Lease Acquisition Services to VA in connection with this transaction. It is understood between Lessor and VA that Savills Studley has provided Lease Acquisition Services on behalf of VA to assist in the completion of this transaction.

In connection with the provisions of such Lease Acquisition Services and in the event of consummation of a lease agreement between Lessor and VA, Lessor will pay a LAF to Savills Studley in the amount of a percentage equal to two and one half percent (2.5%) of the total contract value of the lease term to include, but not be limited to, base rent (including fixed rental increases or as annualized), other rental income, operating expenses (base year), real estate taxes (base year), and tenant improvement allowance (or applicable amortization). The total commission is not to exceed \$1,000,000. The total contract value that will be used to determine the two and one half percent (2.5%) LAF will be established based on the final lease documents upon lease execution or as amended thereof. Such LAF shall be due and payable, as follows:

Seventy-five percent (75%) of the LAF shall be paid to Savills Studley within thirty (30) calendar days following lease execution between Lessor and VA; and

The remaining twenty-five percent (25%) of the LAF shall be paid to Savills Studley within thirty (30) calendar days following the earlier to occur of VA's acceptance of space or commencement of rent payments

The Lessor's responsibilities to pay the LAF is independent of any other Lessor financial responsibilities of this Lease and shall not be used to negotiate or offset any credits owed VA by the Lessor. However, in the event Lessor shall fail to pay the LAF amount owed to Savills Studley pursuant to the compensation schedule outlined herein, VA, at VA's sole option, shall pay the LAF on behalf of Lessor to Savills Studley out of rent payments and/or any lump-sum payments owed or to be owed to Lessor for reimbursement(s) of tenant improvement costs or payment(s) for services/work provided by Lessor.

1.12 SITE CRITERIA

Only those sites that have been approved by VA can receive consideration under this procurement. Ownership of those approved sites must have received an acceptance letter from VA stating the offered site can be submitted.

- Be able to accommodate the proposed building and provide the required amount of appropriately located parking.
- Topography shall be without steep grades and shall not be affected by the 100-year flood plain as mapped by FEMA.
- ***Provide proof of ownership and chain of title through a current title report. Provide proof that all encumbrances have been addressed or identified in a current title report; current within 90 days.***
- Be free of environmental hazards or restrictions. A Phase1 Environmental Assessment must be included with initial each offer.
- Provide prominent visibility of the facility from major public thoroughfares.

- Main ingress/egress for on-site pedestrian and vehicular circulation shall be easily accessible from major public thoroughfares.

1.13 OFF SITE-IMPROVEMENTS

The cost of off-site improvements will be borne by the Lessor. The Lessor is responsible for determining the cost of off-site improvements prior to lease award, and including the costs of off-site improvements in the proposed rent.

The Lessor, at its own cost, shall perform and complete all off-site work and improvements which may consist of, but are not limited to, streets, street name signs, traffic signs, sewers, water systems, fire hydrants, curbs, gutters, sidewalks, street lighting, driveways, drainage facilities, accesses, survey monuments, etc., hereinafter referred to as off-site improvements, and said off-site improvements shall be constructed in accordance with applicable Federal, State, and local laws, regulations, standards, and specifications. Lessor is responsible for obtaining all permits and required approvals of the off-site improvement plan. Lessor is required to obtain all permits and approvals, prior to commencing work. Lessor is solely responsible for initiating and completing any related hazardous material abatement, remediation, removal, or other environmental cleanup actions related to the off-site work and improvements that may be necessary or required pursuant to Federal, State and local laws, regulations, ordinances, codes or other requirements.

"Hazardous materials" shall mean any substance which is or contains: (i) any "hazardous substance" as now or hereafter defined in Section 101(14) of the Comprehensive Environmental Response, Compensation and Liability Act of 1980, as amended (42 U.S.C. Section 9601 et seq.) ("CERCLA") or any regulations promulgated under CERCLA; (ii) any "hazardous waste" as now or hereafter defined the Resource Conservation and Recovery Act (42 U.S.C. Section 6901 et seq.) ("RCRA") or regulations promulgated under RCRA; (iii) any substance regulated by the Toxic Substances Control Act (15 U.S.C. Section 2601 et. seq.); (iv) gasoline, diesel fuel or other petroleum hydrocarbons; (v) asbestos and asbestos containing materials, in any form, whether friable or non-friable; (vi) polychlorinated biphenyls; and (vii) any additional substances or materials which are now or hereafter classified or considered to be hazardous or toxic under any laws, ordinances, statutes, codes, rules, regulations, agreements, judgments, orders and decrees now or hereafter enacted, promulgated, or amended, of the United States, the state, the county, the city or any other political subdivision in which the Property is located and any other political subdivision, agency or instrumentality exercising jurisdiction over Lessor.

The Lessor is responsible for proper construction, maintenance, and compliance with all federal, state, and local laws and regulations of all required off-site improvements through the duration of the lease. At completion or termination of the lease, the Lessor, and not the Government, is responsible for any restoration or removal of the off-site improvements, including, but not limited to, the removal of any environmental, safety, and hazardous materials.

1.14 DUE DILIGENCE

The Lessor acknowledges its duty to conduct reasonable site inspections for the proposed site. The Lessor warrants that it has considered all factors which a prudent, experienced bidder customarily uses in making judgments about site conditions, quantity, quality and methods of performing the particular work. The Lessor acknowledges that it has taken steps reasonably necessary to ascertain the nature and location of the work, and that it has investigated and satisfied itself as to the general and local conditions which can affect the work or its cost, including but not limited to the conformation and conditions of the ground. The Lessor also acknowledges that it has satisfied itself as to the character, quality and quantity of surface and subsurface materials or obstacles to be encountered insofar as this information is reasonably ascertainable from inspection of the site.

1.15 APPLICABLE LAW

Any provision in this Lease that purports to assign liability or require expenditure of funds to the Lessor shall be governed by the provisions of the Contract Disputes Act of 1978, 41 USC 601-613, Anti-Deficiency Act, 31 USC 1341, and the Federal Tort Claims Act, 28 USC 2671 et seq.

1.16 WAIVER OF RESTORATION

The Lessor shall have no right to require the Government to restore the Premises upon termination of the Lease, and waives all claims against the Government for waste, damages, or restoration arising from or related to (a) the Government's normal and customary use of the Premises during the term of the Lease (including any extensions thereof), as well as (b) any initial or subsequent alteration to the Premises regardless of whether such alterations are performed by the Lessor or by the Government. At its sole option, the Government may abandon property in the Space following expiration of the Lease, in which case the property will become the property of the Lessor and the Government will be relieved of any liability in connection therewith.

1.17 BUDGET, SCOREKEEPING; OPERATING LEASE TREATMENT

The Government will award a Lease pursuant to this SFO only if the Lease will score as an operating lease under Office of Management and Budget Circular A-11, Appendix B. Only offers that are compliant with operating lease limitations will be eligible for award. Offerors are obligated to provide supporting documentation at the request of the Lease Contracting Officer (LCO) to facilitate the Government's determination in this regard. The Government will not award a Capital Lease for this procurement. A Capital Lease is defined as a lease that fits anyone of the following criteria: (a) if the lease life exceeds 75% of the life of the asset (b) if there is a transfer of ownership to the lessee at the end of the lease term

- (c) if there is an option to purchase the asset at a "bargain price" at the end of the lease term.
- (d) if the present value of the lease payments, discounted at an appropriate discount rate, exceeds 90% of the fair market value of the asset
- (e) The leased space cannot be used for any non-Governmental purpose at the end of the term of the lease.

SECTION 2 COMMUNICATIONS AND AWARD

2.1 ORAL PRESENTATIONS

Oral presentations may be made to augment written information. Oral presentations will not be required unless specifically requested by the Government in writing. Oral presentations may occur at any time during the acquisition process and are subject to the same restrictions as written information with regard to timing and content. Information pertaining to areas such as an Offeror's capability to perform, past performance, key personnel resources, work plan approaches, etc., may be suitable for oral presentations. Should the Government require an oral presentation, the Offeror will be provided with (1) sufficient information to prepare them, including the types of information to be presented and the associated evaluation factors that will be used; (2) the qualifications for personnel that will conduct the oral presentation; (3) the requirement for, and any limitations and/or prohibitions on, the use of written material or other media to supplement the oral presentation; (4) the location, date, and time for the oral presentation; (5) the restrictions governing the time permitted for each oral presentation; and (6) the scope and content of exchanges that may occur between the Government and the Offeror as part of the oral presentation.

2.2 EVALUATION OF OFFERS

The Contracting Officer will evaluate all proposals to assess the Offeror's ability to perform the contract successfully. The evaluation of offers and subsequent award will be conducted solely on the factors, and sub-factors, and sub-subfactors specified in this Solicitation.

Technical Evaluation Factor 1: Technical Quality

Technical Evaluation Factor 2: Evidence of Capability to Perform Prior to Award

Technical Evaluation Factor 3: Operations and Maintenance Plan

Technical Evaluation Factor 1: Technical Quality and Technical Evaluation Factor 2: Evidence of Capability to Perform Prior to Award are of equal importance and are individually of greater importance than Technical Evaluation Factor 3: Operations and Maintenance Plan.

The importance of the subfactors for each of the Technical Evaluation factors is identified below.

Technical Evaluation Factor 1: Technical Quality

Subfactors A. Building and B. Site Plan are of equal importance.

- A. Building
 - (1) Interior
 - (2) Exterior
 - (3) Systems

Subfactors (1) Interior and (2) Exterior are of equal importance and are of greater importance than (3) Systems.

- B. Site Plan
 - (1) Plan Elements
 - (2) Ingress and Egress
 - (3) Physical Security

Subfactor (1) Plan Elements and (2) Ingress and Egress are of equal importance and are individually of greater importance than (3) Physical Security..

Technical Evaluation Factor 2: Evidence of Capability to Perform Prior to Award

Subfactor A. Offeror’s Qualifications is individually of greater importance than B. Design Team Qualifications and C. General Contractor Qualifications, which are of equal importance.

- A. Offeror’s Qualifications
 - (1) Experience
 - (2) Past Performance
 - (3) Socio Economic Status
 - (4) Financial Resources

Subfactors (1) Experience, (2) Past Performance and (3) Socio Economic Status and (4) Financial Resources are of equal importance.

- B. Design Team Qualifications

No subfactors

- C. General Contractor Qualifications

No subfactors

Technical Evaluation Factor 3: Operations and Maintenance Plan

- A. Interior and Exterior Maintenance
- B. Routine and Emergency Calls
- C. Staffing Plan, Administrative Procedures and Quality Control Plan

Subfactors A. Interior and Exterior Maintenance, B. Routine and Emergency Calls and C. Staffing Plan, Administrative Procedures and Quality Control Plan are of equal importance.

2.2.1 PRICE EVALUATION

- A. The basic price offered will be the rate per Net Usable Square Foot (NUSF). Refer to Paragraph 3.14 of this Solicitation for a definition of NUSF. This price shall be used to determine the total annual rental to be paid, adjusted for any discrepancies in the quantity of space delivered against the amount offered and accepted, as described elsewhere in this Solicitation.

Annual Consumer Price Index (CPI) adjustments in operating expenses will be made if the Offeror so indicates on GSA Form 1364A. The Offeror shall be required to submit the offer with the total "gross" annual price per NUSF and a breakout of the "base" price per NUSF for services and utilities (operating expenses) to be provided by the Lessor. The net and base prices combined are the total "gross" annual per square foot price offered. The base price from which adjustments are made will be the base price for the term of the lease, including any option periods. The "gross" price shall include the "base" price.

Present Value Price Evaluation

Evaluation of offered prices will be on the basis of the annual price per NUSF, including any option periods. The Government will perform present value price evaluation by reducing the prices per NUSF to a composite annual square foot price, as follows:

Parking and wareyard areas will be excluded from the total square footage, but not from the price.

The following Discount Rates will be utilized:

20-year term: 3.2%

15-year term: 3.1%

The following Interest Rate will be utilized for 20 and 15-year terms:

2.0%.

The annual per square foot price minus the base cost of operating expenses (line 27 of GSA Form 1217) will be discounted annually to yield a net present value cost (PVC) per square foot. The operating expenses will be both escalated at 2.0% compounded annually and discounted annually then added to the net PVC to yield the gross PVC.

To the gross PVC will be added:

- The cost of Government-provided services not included in the rental escalated at 2.0% compounded annually and discounted annually.
- The annualized cost per NUSF, over the full term of the lease, including the renewal option(s), for all Schedule B and other items which will be reimbursed to the Lessor by lump sum payment. (The cost of these items is present value; therefore, it will not be discounted.)
- The cost of relocation of furniture and telecommunications, if applicable.
- The sum of the above will be the per NUSF present value of the offer for price evaluation purposes.

2.2.2 TECHNICAL EVALUATION

A. Technical Evaluation Factor 1: Technical Quality

This factor evaluates the offer with respect to the quality of the building and site design concepts.

(1) Building

a. Interior

This subfactor evaluates the quality of the Offeror's floor plan and interior design concepts. VA will evaluate the interior functional and spatial relationships, shape and dimensions and how the floor plan accommodates VA's programmatic requirements. To the extent that the floor plan varies from the conceptual plan included in the solicitation, VA will evaluate whether the changes enhance the floor plan or detract from the floor plan. VA will also evaluate how well the Offeror's proposed building grid integrates with and supports VA's program. Floor plans that reflect effective integration of building massing and structural grid with VA's floor plan will be more highly rated. To the extent that the floor plan submitted varies from VA's conceptual plan, concepts that enhance the plan will be more highly rated. The Contracting Officer will reject buildings that are unsuitable in configuration for VA clinic space.

This subfactor also evaluates the quality of the Offeror's interior design concepts and how appropriate they are for a VA clinic setting including interior elevations, type and quality of interior finishes, wayfinding, and concepts of sustainability, including but not limited to, the use of materials, use of natural light, and use of interior plantscaping. Interior concepts that promote a healing environment are welcoming to patients and visitors and, in VA's sole discretion, support VA's aesthetic and functional requirements will be more highly rated.

b. Exterior

This subfactor evaluates the quality of the Offeror's exterior design concepts and whether they appropriately reflect the building's intended use as a medical outpatient clinic for Veterans in the geographic location in which the project is located as well as the how effectively the concepts create a healing environment for VA patients. This subfactor will consider the building massing, exterior elevations and use of materials and exterior finishes. VA will also evaluate the quality and durability of proposed construction materials and finishes as well as the sustainable features of the concepts and materials.

Building designs that, in VA's sole discretion, better reflect VA's aesthetic and functional requirements will be more highly rated.

c. Systems

The building systems include, but are not limited to structural, mechanical and electrical systems. Building system design that demonstrates capacity, flexibility, efficiency, sustainability and energy efficiency beyond the stated technical minimums will be more highly rated.

(2) Site Plan

a. Plan Elements

This subfactor evaluates the overall quality of the Offeror's site planning concepts. It considers the Offeror's development of the site to accommodate VA's conceptual building footprint including the required setbacks; the ingresses and egresses within the site to and from the main (public), emergency, and staff entrances; and loading dock and service entrances; accessible parking lots and walkways; and how the

landscaping design fits the surrounding areas, adheres to local landscaping codes, and provides an aesthetically pleasing atmosphere.

Site plans that provide for effective building placement, clear and safe site circulation, efficient parking layout and strong site landscaping and hardscaping concepts will be more highly rated.

b. Ingress and Egress

This subfactor evaluates the location of access at each point of ingress/egress to the site, such as whether access can be achieved from both directions, the type of traffic control at those points, acceleration and deceleration lanes and traffic patterns to maximize the flow of vehicles to and from the main thoroughfare;

Site plans that provide for greater ease and safety with which patients, visitors, staff and service/emergency vehicles can access the site will be more highly rated.

c. Physical Security

This subfactor evaluates the quality of the Offeror's site physical security conceptual plan.

A physical security plan that provides summary information used to describe safeguard and security programs and vulnerability and risk assessments to the facility will be evaluated under this subfactor. The plan's intent is to assist with management of facility program elements and resources related to threats and risks. Provide detailed information of facility security program, equipment, and strategies. Plan should include at a minimum:

- Definition of assumed threat against which the system is providing protection
- Risk and VA assessment
- Conclusions and assumptions
- Protection strategy
- Graded postures for increased threat conditions
- Implementing requirements and evidence files.

This plan should be reviewed and modified as necessary every 12 months and submitted for management review.

Site plans that provide for more effective physical security will be more highly rated.

B. Technical Evaluation Factor 2: Evidence of Capability to Perform

This factor evaluates the Offeror's capability to perform as well as the qualifications of the Offeror's design team and general contractor.

(1) Offeror's Qualifications

a. Experience

Offeror shall submit experience, occurring within the past three years, developing, managing, and operating medical facility projects in accordance with SFO 1.7 Experience with medical facility projects that are comparable in size and complexity or

exceed the size and complexity of this project will be considered more relevant than those that are smaller in size and less complex than this project. In the context of the above, VA projects are more relevant than non-VA federal government projects, which are more relevant than non-federal government projects. Experience with non-medical facility projects will be considered the least relevant.

b. Past Performance

The Offeror (inclusive of the offering entity, personnel, and predecessor companies) must provide examples of and references for past performance as a prime contractor during the past three (3) years, as well as those contracts and subcontracts currently in progress. The comparability of the projects for which Past Performance is provided will be evaluated. Medical facility projects that are comparable in size and complexity or exceed the size and complexity of this project will be considered more comparable than those that are smaller in size and less complex than this project. In the context of the above, VA projects are more comparable than non-VA federal government projects, which are more comparable than non-federal government projects. Non-medical facility projects will be considered the least comparable.

In conjunction with comparability, the Offeror's past performance will be evaluated based upon the following:

- Timeliness of Performance
- Cost Control
- Effective Management
- Customer Satisfaction
- Quality Awards
- The Technical Success of the Project

Offeror shall submit Past Performance Reference Check Forms for each Past Performance Reference. The Past Performance Reference Check Form is located in SFO PART VIII. FORMS.

The Government reserves the right to consider all information available when evaluating a lessor's past performance.

c. Socio Economic Status

This subfactor evaluates the socio-economic status of the Offering entity.

Small Business Classification Code

This subfactor evaluates the socio-economic status of the Offering entity. Socio economic status as a Service Disabled Veteran-Owned Small Business will be rated more highly than status as a Veteran-Owned Small Business, which will be rated more highly than a Small Business. No other socio-economic status will receive evaluation credit under this procurement.

Small Business Classification Code

For the purposes of this solicitation and resultant contract (lease), North American Industry Classification System (NAICS) codes is 531190. The small business size standard is \$38.5

million. Under this classification, a concern is considered a small business if its average annual receipts for its preceding three (3) fiscal years do not exceed the size standard reflected. Prime and Joint Ventures submitting a proposal in response to this solicitation must meet the small business size standard. Eligible Service-Disabled Veteran-Owned Small Businesses, Veteran-Owned Small Businesses, or Small Businesses shall receive credit for their status. Service-Disabled Veteran-Owned Small Businesses will receive full credit for this evaluation criteria, Veteran-Owned Small Businesses will receive partial credit greater than, all other Small Businesses, which will receive partial credit.

Service Disabled Veteran Owned Small Business (SDVOSB), Veteran Owned Small Business (VOSB) Status.

To receive credit as SDVOSB or VOSB, an offeror must be registered and verified in Vendor Information Pages (VIP) database, available at <http://www.VetBiz.gov>, at the time of initial offer submission. See Department of Veterans Affairs Acquisition Regulation 852.215-70.

Small Business Status.

In order to receive credit for the small business evaluation criteria, small businesses must have an active registration in the System for Award Management (SAM) System, available at www.sam.gov, at the time of initial offer submission. Small business verification will be conducted through SAM. The offeror shall submit a web print out of the vendor's SAM Record with the technical proposal.

In addition, the small business must be registered with the SBA and provide acknowledgement from WWW.SBA.GOV that you have applied and are being processed within their database to received full credit as a small business. Must provide SBA web print out, a copy of the automatically generated email from WWW.SBA.GOV showing registration or a signed acknowledgement of application from the Small Business Administration.

Small Business Subcontracting Plan.

If the contractor is offering as a Large Business and subcontracting opportunities exist, the offer must include with the **initial offer** a Small Business Plan as defined in FAR 52.219-8, FAR 52.219-9, and VAAR 852.219-9 which are included by reference in this solicitation. An acceptable template can be found on the following website: <http://www.va.gov/oal/business/fss/sbsp.asp>. This is a suggested format only. Other formats are acceptable; however, all identified elements must be included for your plan to be processed and approved. Additional guidance is included in FAR 52.219-9. The subcontracting plan will be evaluated and rated on the demonstrated plan of meeting or exceeding VA’s small business goals outlined in the table below and the following:

- Reflects a valid corporate commitment between all parties in providing subcontracting opportunities for small business, small disadvantaged business, women-owned small business, HUBZone small business, veteran-owned small business, and service-disabled veteran-owned concerns. Includes the strength and specificity of each corporate commitment (i.e., what type of commitment, how binding is the commitment, how specific is the commitment to this proposed effort, and what types of tasks are included in these subcontracting opportunities).
- Reflects a one year history demonstrating your corporate commitment to meet your subcontracting goals/targets by providing Individual Subcontracting Report (ISR), for those contracts/projects in which you are submitting under Past Performance. If goals were not met on the ISR, provide an explanation as to why the goals/targets were not met.
- Demonstrates realistic targets expressed in dollars and in percentages of the total proposed subcontracting dollars for each small business category listed above.
- Reflects compliance, at a minimum, with VA goals listed below.

<i>Category</i>	<i>Goal</i>
<i>Small Business</i>	<i>17.5%</i>
<i>Veteran-Owned Small Business</i>	<i>5%</i>
<i>Service-Disabled Veteran-Owned Small Business</i>	<i>3%</i>
<i>Small Disadvantaged Business (including Section 8(a))</i>	<i>5%</i>
<i>Women-Owned Small Business</i>	<i>5%</i>
<i>Historically Underutilized Business Zone (HUBZone) Small Business</i>	<i>3%</i>

For Small Businesses: If the Offeror is a small business concern, the Offeror is not required to submit a small business plan.

The subcontracting plan submitted with the offer will be evaluated on the extent to which the proposal provides Small Business Subcontracting targets that meet the Department of Veteran Affairs Small Business goals for this project and the extent to which the offeror's Small Business Subcontracting Plan establishes reasonable efforts demonstrating the subcontracting targets can be met during the performance of the contract. **Failure to submit subcontracting plan at the time of initial offer may result in the offeror being considered nonresponsive, and potentially ineligible for award of the contract.**

d. Financial Resources

Offeror's shall submit a financial plan to reduce risk and meet contractual deliverables on time and on budget. VA will evaluate the Offeror's plan for funding the project including design, construction and operation of the facility. Consideration is given to the reliability of funding mechanisms, the risk associated with the Offeror's plan and the Offeror's financial resources to meet short and long-term funding needs of the project.

Offeror must clearly and specifically identify how it will meet the near-term funding requirements for the project including, but not limited to land acquisition, payment of commissions and professional fees and equity related to securing any debt funding anticipated for the project. The plan must specifically identify the amount of those costs, the timing of the costs and the sources of funding those costs.

Additionally, the Offeror must provide satisfactory evidence of two (2) conditional commitments of funds in an amount necessary to prepare and/or construct the space. Each commitment must be signed by an authorized bank officer or other financial institution and must state that the officer has reviewed the Offeror's project and terms of Offeror's cost proposal to VA. At a minimum, each conditional commitment of funds must state the following:

- Amount of Loan;
- Loan Term in Years;
- Annual Percentage Rate;
- Length of Loan Commitment;
- Loan to Project Cost Ratio;
- Name of the Principal(s) Involved;
- Type of Debt Funding – Bond vs. Traditional Amortizing Loan;
- Contact Information for Lender; and
- The Purpose of the Loan.

Offeror must also provide evidence of financial resources sufficient to prosecute the work. Such evidence must include:

- A Statement of Financial Condition;
- Equity Source(s) for this project;
- Back-up Equity Source for this project;
- Personal or Business Financial Statements, Including Balance Sheets, and Profit and Loss Statements; these statements MUST be audited or reviewed by a CPA.
- A List of Outstanding Notes Payable;
- Previous Year's Annual Report.

Part I: Basic Solicitation Requirements – Page 26 of 197

If personal financial information is being provided as evidence, the following is required:

- Audited or CPA reviewed personal financial statements,
- Individual tax returns for the prior year,
- Statements from banks or other financial institutions that provide an independent verification of the liquid assets

This information MUST be included in the Offeror's technical proposal. All financial information is confidential and will not be shared. If requested, additional or updated information must be provided.

Financial Resources Plans ("Plans") that present less risk of successful implementation will be rated more highly. Plans of Offerors who demonstrate greater financial strength, credit and assets will be rated more highly. Plans will be rated more highly to the extent that they propose more equity and less debt. Plans that propose Offeror's own equity resources will be rated more highly than plans that propose the use of third-party equity. Plans that provide more alternative sources of financing and more certain and reliable sources of financing will be rated more highly.

(2) Design Team Qualifications

This subfactor evaluates the quality of the Offeror's design team and its relevant experience. Lessor shall maintain the same design team for the duration of the design development and construction process. Design team firm and key personnel shall not be changed without prior approval by the Contracting Officer.

Offeror shall submit the following information:

a. GSA FORM 330: Provide a completed SF 330, "Architect-Engineer Qualifications" for each individual or firm on the Lessor's design team. Identify key personnel that are to be committed to the project. In Part I, Section H of SF 330, provide a description of outstanding commitments for each firm and key personnel. As a minimum, the design team shall include entities providing the following services: Architecture, Civil Engineering, Mechanical Engineering, Fire Protection, Electrical Engineering, Interior Design, and appropriate Low Voltage Engineering (Structured Telecommunications Cabling, Security, Audio Visual, and Special Systems).

b. Evidence of License in the state in which the project is located: Provide a copy of the license or certification for the firm as well as the individual license of each design team discipline lead proving their ability to practice in the state where the facility is located. Low-voltage designers shall be BICSI-certified for structural cabling, and shall have OEM credentials for the Special Systems listed in 6.8.1.G, Special Systems Specific Requirements.

The Offeror must submit the name and qualifications of the proposed Commissioning Provider. Include relevant experience and references. The Commissioning Provider must be approved by the Contracting Officer.

Design teams that demonstrate greater expertise and experience in successful, comparable projects will be more highly rated.

Provide references for each discipline lead.

In the initial offer and prior to award, the Offeror shall provide evidence of a firm commitment of teaming arrangements with the architect firm(s) that are presented in the Lessor's proposal in the form of a letter on each company's letterhead addressed to the Contracting Officer from the principal(s) of each of the respective firms.

(3) Contractor Qualifications

This subfactor evaluates the qualifications and financial capacity of the Offeror's general contractor, mechanical contractor, and electrical contractor.

Offeror shall submit the following information:

a. GSA Form 527: Provide a completed GSA Form 527, "Contractor's Qualifications and Financial Information" for the following:

- General Contractor,
- Mechanical Contractor, and
- Electrical Contractor; except Section V need not be completed.

In Section VII of Form 527, provide a description of outstanding commitments, names and qualifications of key personnel, and any other information related to experience, competency, and performance capabilities with construction projects similar in scope to that which is required herein.

b. Provide a copy of the firm's license in the state in which the project is located for the individual(s) and/or firm(s) proposed as contractors. If a license is not required for the contractor to perform work in that state, please provide a statement to that effect.

If the Lessor is also the general contractor, information provided in response to paragraphs Past Performance and Financial Resources above need not be duplicated.

Contractors that demonstrate greater expertise and experience in successful, comparable projects and that demonstrate the financial resources to successfully execute this project will be more highly rated.

C. Technical Factor 3: Operations and Maintenance Plan

The factor evaluates the quality, thoroughness and level of detail associated with the Offeror's plan to operate and maintain the facility including standards of cleanliness, orderliness and repair. Offeror shall submit a detailed narrative that addresses the following at a minimum:

- (1) Interior and Exterior Maintenance of Building and Grounds
- (2) Routine and Emergency Calls - Procedures and Response Times

(3) Staffing Plan, Administrative Procedures, and Quality Control Plan

Operations and Maintenance Plans that provide for a clear and detailed plan specific to this project as well as a commitment to exceed any minimums stated in the SFO will be more highly rated.

2.2.3 REPRESENTATIONS, CERTIFICATIONS, AND OTHER STATEMENTS OF OFFEROROS OR RESPONDENTS

1. FAR 52.204-8 Annual Representations and Certifications. (May 2014)

(a)(1) The North American Industry Classification System (NAICS) code for this acquisition is in the below table.

(2) The small business size standard is:

Functional Category	NAICS Code	Description	Size Standard
Sector 53 – Real Estate and Rental and Leasing	531190	Leasing of Building Space to Federal Government by Owners	\$38.5 Million

(3) The small business size standard for a concern which submits an offer in its own name, other than on a construction or service contract, but which proposes to furnish a product which it did not itself manufacture, is 500 employees.

(b)(1) If the provision at 52.204-7, System for Award Management, is included in this solicitation, paragraph (d) of this provision applies.

(d) The Offeror has completed the annual representations and certifications electronically via the SAM website accessed through <https://www.acquisition.gov>. After reviewing the SAM database information, the Offeror verifies by submission of the offer that the representations and certifications currently posted electronically that apply to this solicitation as indicated in paragraph (c) of this provision have been entered or updated within the last 12 months, are current, accurate, complete, and applicable to this solicitation (including the business size standard applicable to the NAICS code referenced for this solicitation), as of the date of this offer and are incorporated in this offer by reference (see FAR 4.1201); except for the changes identified below [Offeror to insert changes, identifying change by clause number, title, date].

2.2.4 SMALL BUSINESS CLAFFIFICATION CODE

For the purposes of this solicitation and resultant contract (lease), North American Industry Classification System (NAICS) codes is 531190. The small business size standard is \$38.5 million. Under this classification, a concern is considered a small business if its average annual receipts for its preceding three (3) fiscal years do not exceed the size standard reflected. Prime and Joint Ventures submitting a proposal in response to this solicitation must meet the small business size standard.

Eligible Service-Disabled Veteran-Owned Small Businesses, Veteran-Owned Small Businesses, or Small Businesses shall receive credit for their status. Service-Disabled Veteran-Owned Small Businesses will receive full credit for this evaluation criteria, Veteran-Owned Small Businesses will receive partial credit greater than, all other Small Businesses, which will receive partial credit.

SMALL BUSINESS

In order to receive credit for any small business classification, as a component of these evaluation criteria, small businesses must:

Register and provide a DUNS Number validated in SAM.GOV

Completed Representations and Certifications in SAM.GOV that have been entered or updated within the last 12 months, are current, accurate, complete, and applicable to this solicitation (including the business size standard applicable to the NAICS code referenced for this solicitation)

Provide the SAM.GOV print out verifying offering entity's status for NAICS 531190

Provide SBA web print out showing registration or a signed acknowledgement of application from the Small Business Administration

SDVOSB and VOSB

Status as a Service-Disabled Veteran-Owned Small Business is determined in accordance with 13 CFR Parts 125.8 through 125.13. Additionally, the SDVOSB or VOSB evaluation criteria, the offeror MUST be registered and have an active status in the Vendor Information Pages (VIP) database at www.vetbiz.gov. Offerors must provide a copy of the Center for Veterans Enterprises (CVE) Verification letter at initial offer and with final revised proposals. The Offeror's DUNS must correspond to the DUNS in SAM.GOV.

The core requirements for a company to become verified are:

- The Veteran owner(s) have direct, unconditional ownership of at least 51% of the company (38 CFR 74.3) and have full decision making authority (38 CFR 74.4 (g));
- The Veteran manages the company on both a strategic policy and a day-to-day basis (38 CFR 74.4);
- The Veteran holds the highest officer position (38 CFR 74.4(c)(2));
- The Veteran should be the highest compensated employee unless there is a logical explanation otherwise submitted by the Veteran as to how taking a lower salary than other employee(s) helps the business (38 CFR 74.4 (g) (3)); and
- The Veteran has the managerial experience of the extent and complexity needed to run the company.

JOINT VENTURES

For purposes of this solicitation a Joint Venture (JV) is a Partnership. An Offeror may submit a proposal in the form of a Joint Venture only if the existing Joint Venture has a corresponding DUNS Number in <https://www.SAM.gov> and all the proposal submission documents are in the

name of the existing Joint Venture, not the individual partners of the Joint Venture. These include, but are not limited to:

- GSA Form 3518
- GSA Form 1364A
- GSA Form 1217
- Financial Resource Commitment Letters

Offerors who are an existing Joint Venture may submit a proposal under this solicitation subject to the following conditions:

1. The Joint Venture is registered in SAM.GOV and has a corresponding DUNS Number;
2. The Joint Venture meets the definition of a Joint Venture for size determination purposes (FAR 19.101(7)(i));
3. The Joint Venture must meet the requirements of 13 CFR 125.15(b);
4. The Joint Venture fills out and submits the Representations and Certifications in Section K; and,
5. The Offeror must submit a complete copy of the Joint Venture agreement that established the relationship, disclosing the legal identity of each partner of the Joint Venture, the relationship between the partners, the form of ownership of each team member, any limitations on liability or authority for each partner, and a specific statement of what resources each partner provides the teaming arrangement. In addition, the existing Joint Venture must:
 - a. Clearly identify the entities which make up the Joint Venture relationship, including disclosure of the primary point of contact for each of the partners;
 - b. Disclose the member of the Joint Venture that is designated as the "team lead," and clearly explain the specific duties/responsibilities of the "team lead" relative to the other members of the team and to the Government;
 - c. Describe the specific duties/responsibilities of each partner of the team as they relate to each other and explain the specific duties/responsibilities that each team member will have for purposes of contract performance under this contract; and,
 - d. Address the duration of the Joint Venture, including when it became effective, when it expires, and the basis for determination.
6. If the Joint Venture meets the small business size determination (FAR19.101(7)(i)), each Joint Venture partner must be registered in SAM.GOV, have a corresponding DUNS Number, and provide the SAM.GOV print out verifying each entities status for NAICS 531190.
7. A joint venture may be considered a Service-Disabled Veteran-Owned Small Business if:
 - a. The Joint Venture is registered and verified in the Vendor Information Pages (VIP) database at www.vetbiz.gov. Offerors must provide a copy of the Center for Veterans Enterprises (CVE) Verification letter. The Offeror's DUNS must correspond to the DUNS in SAM.GOV.

b. Each other concern is small under the size standard corresponding to the NAICS code assigned to the procurement

c. The Joint Venture meets the requirements of paragraph 7 of the explanation of Affiliates in 19.101; and

The Joint Venture meets the requirements of 13 CFR 125.15(b)

2.2.5 ZONING REQUIREMENTS

Provide evidence of compliance with local zoning laws or evidence of variance, if any, approved by the proper local authority. Provide evidence of compliance with any specific zoning conditions that may be required in order to develop the property. At the discretion of the Contracting Officer, other forms of documentation demonstrating the probability of receiving such variances may be acceptable.

2.2.6 CONTROL OF PROPERTY

Provide documentation proving evidence of ownership or control of the site as identified in Section 1.2. Ownership or control must, at a minimum, be until the Government vacates the premises. Documentation that constitutes evidence of control includes, but is not limited to:

- An Option To Purchase
- A Sales Contract
- A Fee Simple Deed
- An Option To Lease Property For Longer Than the Duration of the Lease Term Including All Renewal Options

2.3 EVIDENCE OF CAPABILITY TO PERFORM AFTER AWARD

Within 90 calendar days after award, the successful Offeror/Lessor shall provide the Contracting Officer with evidence of the following:

A firm commitment of funds in an amount sufficient to perform the work.

Satisfactory title showing fee simple ownership of the property, or an option to lease property for longer than the duration of the lease term, including all renewal options. Fee simple title or option to lease must be free of any encumbrances that may limit the rights, responsibilities or liabilities of the parties to the VA lease.

FAILURE TO MEET ANY OR ALL OF THE REQUIREMENTS AS SET FORTH IN PARAGRAPHS 2.2.2B AND 2.3 INCLUDING SUB-PARAGRAPHS, WITHIN THE SPECIFIED TIMEFRAMES SHALL BE A BASIS FOR DETERMINATION OF NON-RESPONSIBILITY OR FOR TERMINATION OF THE CONTRACT FOR DEFAULT.

FAILURE ON THE PART OF THE GOVERNMENT TO ENFORCE ITS RIGHTS TO DECLARE A DEFAULT WILL NOT BE DEEMED A WAIVER OF ANY OF THE GOVERNMENT'S RIGHTS UNDER THIS SOLICITATION.

2.4 INITIAL OFFERS; COMMUNICATIONS WITH OFFERORS

VA may initiate action to award a contract at any point after review of the initial offers. Therefore, offers should reflect the Offeror's best terms both from a technical and cost standpoint.

After receipt and evaluation of initial proposals, the Contracting Officer may communicate with Offerors to establish the competitive range. Communications shall be limited to Offerors:

- Whose past performance information is the determining factor preventing them from being placed within the competitive range
- Whose exclusion from, or inclusion in, the competitive range is uncertain

2.5 COMPETITIVE RANGE

In accordance with 15.306(c), after evaluating all proposals in accordance with Paragraph 2.2 above based on the ratings of each proposal against all evaluation criteria, if the Contracting Officer cannot make an award, a competitive range comprised of all the most highly rated proposals will be established. If the Contracting Officer determines that the number of proposals that would otherwise be in the competitive range exceeds the number at which an efficient competition can be conducted, the Contracting Officer may limit the number of proposals in the competitive range to the greatest number that will permit an efficient competition among the most highly rated proposals.

The Contracting Officer will conduct discussions with each Offeror in the competitive range following procedures within FAR 15.306. After discussions, each Offeror in the competitive range will be given an opportunity to submit a revised proposal through an amendment to this solicitation, which will be published on FBO.gov. Offerors may be eliminated from the competitive range any time after receipt of initial offer until lease award. After, the conclusion of discussions and a review of final proposal revisions are completed; the Contracting Officer may award the lease.

2.6 NEGOTIATIONS

VA will negotiate only with those Offerors who have been placed in the competitive range as established under procedures at Paragraph 2.5 above. VA Contracting Officer will conduct negotiations on behalf of the Government in order to obtain the best value to the Government. Other VA personnel, including the Contracting Officer's Representative named on the cover of this Solicitation, may assist the Contracting Officer.

If an award is not made based on the initial proposals, the following process will occur:

Part I: Basic Solicitation Requirements – Page 33 of 197

Each Offeror in the competitive range will be given an opportunity to submit a "final proposal revision" to clarify and document understandings reached during negotiations. Once final proposal revisions are received, all discussions will cease.

After the conclusion of negotiations and a review of final proposal revisions are completed, the Contracting Officer may award the lease.

2.7 AWARD

2.7.1 BEST VALUE

The lease will be awarded to the Offeror whose offer represents the best value to the Government, price and technical factors considered. For this procurement, price is approximately equal to technical factors. An award will be made based on a comparative assessment of proposals against all selection criteria in the Solicitation.

To be considered for award, an Offeror must agree to provide a complete facility that meets all technical requirements and specifications set out in this Solicitation. The requirements and specifications contained in this Solicitation are mandatory.

2.7.2 LEASE COMPONENTS

Lease shall consist of:

- Standard Form 2 - U.S. Government Lease for Real Property
- Proposal To Lease Space - Form 1364A & Summary
- Lessor's Annual cost Statement - Form 1217
- Solicitation Provisions - Form 3516A
- General Clauses – Form 3517B
- Modified General Clauses_ Lease Language
- Representations and Certifications – Form 3518
- Architect-Engineer Qualifications – Form 330
- Contractor's Qualifications & Financial Information – Form 527
- Reference Forms
- Standard Form 24 - Bid Bond
- Standard Form 25 - Performance Bond
- Standard Form 25A – Payment Bond
- Certificate of Building Energy Performance
- Certificate of Current Cost or Pricing Date
- GSA Seismic Certification Form
- Labor Standards Provisions
- Small Business Subcontracting Plan (if applicable)
- Past Performance Reference Forms

- Form 3881 – Vendorizing Form, including evidence that such form has been submitted via facsimile to VA’s Financial Service Center
- Reporting Executive Compensation Form
- IT Security Requirements
- VA National Rules of Behavior

NOTE: For purposes of release of information under the Freedom of Information Act (FOIA) or other applicable statutes or regulations, the individual itemized costs as set forth in Schedule B and other proprietary information are considered procurement-sensitive information and **are not** subject to release.

2.7.3 AWARD

Competitive negotiated best value trade off source selection procedures will be used to evaluate proposals and award will be made to responsible firm(s) offering the best value to the Government after evaluation of both the total evaluated contract price and non-priced technical factors.

The award by the Government occurs upon execution of the lease by VA Contracting Officer and issuance of a letter by VA Contracting Officer indicating that the Government accepts the Offeror’s proposal.

The awarded Lessor and VA (Broker) shall initial and renumber (continuous numbering) each and every page of the SFO with VA Broker assistance. Upon award of the lease, the Lessor’s best and final offer and narrative shall be considered and numbered as part of the solicitation for offer. The Lessor’s narrative cannot weaken the SFO requirements but can only enhance the SFO.

SECTION 3 MISCELLANEOUS

3.1 SUBSTITUTIONS FOR SPECIFIC BRAND NAMES

When specific equipment is cited using the brand name, model number, etc., a comparable or equal product may be provided in lieu of cited equipment in accordance with the Brand Name clause provided in Schedule B of the Solicitation. Any substitutions need to be approved by the Contracting Officer or his/her designee.

3.2 UNIT COSTS FOR ADJUSTMENTS

Schedule E of this Solicitation indicates various types of materials anticipated for floors, walls, and ceilings. Additionally, several paragraphs in this Solicitation specify means for determining quantities of materials not specified in Schedule E. Government projections of these various materials have been made to assist the Offeror in cost estimating and have been included on Section 1 of Schedule C. Actual quantities may not be determined until after the lease is awarded and the space layout completed. To enable an equitable settlement if the final Government layout departs from the projection, the quantities specified on Section 1 of Schedule C are to be included in the per square foot rate being proposed. A unit cost for each of these materials is required. VA will use each unit cost to make a lump sum payment at time of acceptance of the building or to negotiate a rental increase if the amount of material required by the layout is more than specified. If the amount of material is less than specified, VA will take credit from the initial rental payment.

3.3 UNIT PRICES FOR ALTERATIONS OF \$100,000 OR LESS

The Offeror is required to submit a list of "Unit Prices for Alterations" for any alterations required during the first year. This list will be used, after acceptance by VA, for contracts for alterations costing \$100,000 or less. These prices may be indexed or re-negotiated to apply to subsequent years of the lease upon mutual agreement of the Lessor and Government. (Use Schedule C for this purpose.)

Prices for changes in quantities of the types or styles of finish materials requested by the Government shall be computed using the unit costs for the materials in question from Section 1 of Schedule C.

Where unit prices for alterations are not available, the Lessor may be requested to provide a price proposal for the alterations. Orders will be placed by issuance of a GSA Form 276, Supplemental Lease Agreement. The clauses entitled "GSAR 552.232-75, Prompt Payment (SEP 1999)," "GSAR 552.232-70, Invoice Requirements (Variation) (SEP 1999)," and "GSAR 552.232-76, Electronic Funds Transfer Payment (MAR 2000) (Variation)" apply to orders for alterations (See GSA Form 3517B). All orders are subject to the terms and conditions of the lease.

Orders may be placed by the Contracting Officer or other authorized representatives when specifically authorized to do so by the Contracting Officer. The Contracting Officer will provide

the Lessor with a list of agency officials authorized to place orders and will specify any limitations on the authority delegated to agency officials. The agency officials are not authorized to deal with the Lessor on any other matters.

3.4 SPECIAL WORK (INSTALLATIONS AND ALTERATIONS)

The Government may require special installations in the space, such as computer rooms, vaults, or laboratories containing special air conditioning and heating controls, flooring and various electrical, plumbing, and mechanical facilities, and equipment not otherwise specified in this Solicitation. The Government reserves the right to contract separately for such facilities, equipment and/or installations; or it may require the Offeror to perform such work. In the event the Government requires the Offeror to complete such installations, the Offeror will be required to submit a cost estimate to the Contracting Officer within 30 days after receipt of complete specifications for the special installation.

If the Government contracts with the Offeror to effect such installations, payment will be made on a lump-sum basis or through increased rental payments at the Government's option. (Increased rental payments will recognize residual values to the Owner and will include interest, if any, at a rate not in excess of the first mortgage.) In connection therewith, the successful Offeror will be required to accomplish such work on an actual cost basis, and the Government payment, therefore, will be computed on the basis of such.

The successful Offeror will be required to submit, not later than 30 days prior to the date of delivery and occupancy of the space and every year thereafter during the term of the lease, unit prices for such repetitive alteration work items such as (1) installation of electrical outlets, (2) installation of telephone/data outlets, (3) erection and/or relocation of movable partitions, (4) lighting changes, and (5) special painting.

3.5 TAX ADJUSTMENTS

3.5.1 PURPOSE

This paragraph provides for adjustment in the rent ("Tax Adjustment") to account for increases or decreases in Real Estate Taxes for the Property after the establishment of the Real Estate Tax Base, as those terms are defined herein. Tax Adjustments shall be calculated in accordance with this Clause.

3.5.2 DEFINITIONS

The following definitions apply to the use of capitalized terms within this paragraph:

"Property" is the land, buildings and other improvements of which the premises (as fully described in the U.S. Government Lease for Real Property, SF2) form all or a part.

"Real Estate Taxes" are those taxes that are levied upon the owners of real property by a Taxing Authority (as hereinafter defined) of a State or Local Government on an ad valorem basis to raise general revenue for funding the provision of government services. The term

excludes, without limitation, special assessments for specific purposes, assessments for business improvement districts, and/or community development assessments.

"Taxing Authority" is a State, Commonwealth, Territory, County, City, Parish, or political subdivision thereof, authorized by law to levy, assess, and collect Real Estate Taxes.

"Tax Year" refers to the 12-month period adopted by a Taxing Authority as its fiscal year for the purpose of assessing Real Estate Taxes on an annual basis.

"Tax Abatement" is an authorized reduction in the Lessor's liability for Real Estate Taxes below that determined by applying the generally applicable Real Estate Tax rate to the Fully Assessed (as hereinafter defined) valuation of the Property.

"Unadjusted Real Estate Taxes" are the full amount of Real Estate Taxes that would be assessed for the Property for one full Tax Year without regard to the Lessor's entitlement to any Tax Abatements (except if such Tax Abatement came into effect after the date of award of the Lease), and not including any late charges, interest, or penalties. If a Tax Abatement comes into effect after the date of award of the Lease, "Unadjusted Real Estate Taxes" are the full amount of Real Estate Taxes assessed for the Property for one full Tax Year, less the amount of such Tax Abatement, and not including any late charges, interest, or penalties.

"Real Estate Tax Base" is the Unadjusted Real Estate Taxes for the first full Tax Year following the commencement of the Lease term. If the Real Estate Taxes for that Tax Year are not based upon a Full Assessment of the Property, then the Real Estate Tax Base shall be the Unadjusted Real Estate Taxes for the Property for the first full Tax Year for which the Real Estate Taxes are based upon a Full Assessment. Such first full Tax Year may be hereinafter referred to as the "Tax Base Year." Alternatively, the Real Estate Tax Base may be an amount negotiated by the parties that reflects an agreed-upon base for a Fully Assessed value of the property.

The Property is deemed to be "Fully Assessed" (and Real Estate Taxes are deemed to be based on a "Full Assessment") only when a Taxing Authority has, for the purpose of determining the Lessor's liability for Real Estate Taxes, determined a value for the Property, taking into account the value of all improvements contemplated for the Property pursuant to the Lease, and issued to the Lessor a tax bill or other notice of levy wherein the Real Estate Taxes for the full Tax Year are based upon such Full Assessment. At no time prior to the issuance of such a bill or notice shall the Property be deemed Fully Assessed.

"Percentage of Occupancy" refers to that portion of the Property exclusively occupied or used by the Government pursuant to the Lease. For buildings, the Percentage of Occupancy is determined by calculating the ratio of the rentable square feet occupied by the Government pursuant to the Lease to the total rentable square feet in the building or buildings so occupied, and shall not take into account the Government's ancillary rights including, but not limited to, parking or roof space for antennas (unless facilities for such ancillary rights are separately assessed). This percentage shall be subject to adjustment to take into account increases or decreases in the amount of space leased by the Government or in the amount of rentable space on the Property.

3.5.3 ADJUSTMENT FOR CHANGES IN REAL ESTATE TAXES

After the Property is Fully Assessed, the Government shall pay its share of any increases and shall receive its share of any decreases in the Real Estate Taxes for the Property, such share of increases or decreases to be referred to herein as "Tax Adjustment." The amount of the Tax Adjustment shall be determined by multiplying the Government's Percentage of Occupancy by the difference between the current year Unadjusted Real Estate Taxes and the Real Estate Tax Base, less the portion of such difference not paid due to a Tax Abatement (except if a Tax Abatement comes into effect after the date of award of the Lease). If a Tax Abatement comes into effect after the date of award of the Lease, the amount of the Tax Adjustment shall be determined by multiplying the Government's Percentage of Occupancy by the difference between the current year Unadjusted Real Estate Taxes and the Real Estate Tax Base. The Government shall pay the Tax Adjustment in a single annual lump sum payment to the Lessor. In the event that this Tax Adjustment results in a credit owed to the Government, the Government may elect to receive payment in the form of a rental credit or lump sum payment.

If the Property contains more than one separately assessed parcel, then more than one Tax Adjustment shall be determined based upon the Percentage of Occupancy, Real Estate Tax Base, and Real Estate Taxes for each respective parcel.

After commencement of the Lease term, the Lessor shall provide to the Contracting Officer copies of all Real Estate Tax Bills for the Property, all documentation of Tax Abatements, credits, or refunds, if any, and all notices which may affect the assessed valuation of the Property, for the Tax Year prior to the commencement of the Lease Term, and all such documentation for every year following. Lessor acknowledges that the Contracting Officer shall rely on the completeness and accuracy of these submissions in order to establish the Real Estate Tax Base and to determine Tax Adjustments. The Contracting Officer may memorialize the establishment of the Real Estate Tax Base by issuing a unilateral administrative Supplemental Lease Agreement indicating the Base Year, the amount of the Real Estate Tax Base, and the Government's Percentage of Occupancy.

The Real Estate Tax Base is subject to adjustment when increases or decreases to Real Estate Taxes in any Tax Year are attributable to a) improvements or renovations to the Property not required by this Lease, or b) changes in net operating income for the Property not derived from this Lease. If either condition results in a change to the Real Estate Taxes, the Contracting Officer may re-establish the Real Estate Tax Base as the Unadjusted Real Estate Taxes for the Tax Year the Property is reassessed under such condition, less the amount by which the Unadjusted Real Estate Taxes for the Tax Year prior to reassessment exceeds the prior Real Estate Tax Base.

If this Lease includes any options to renew the term of the Lease, or be otherwise extended, the Real Estate Tax Base for the purpose of determining Tax Adjustments during the renewal term or extension shall be the last Real Estate Tax Base established during the base term of the Lease.

If any Real Estate Taxes for the Property are retroactively reduced by a Taxing Authority during the term of the Lease, the Government shall be entitled to a proportional share of any tax refunds to which the Lessor is entitled, calculated in accordance with this Clause.

Lessor acknowledges that it has an affirmative duty to disclose to the Government any decreases in the Real Estate Taxes paid for the Property during the term of the Lease. Lessor shall annually provide to the Contracting Officer all relevant tax records for determining whether a Tax Adjustment is due, irrespective of whether it seeks an adjustment in any Tax Year.

If the Lease terminates before the end of a Tax Year, or if rent has been suspended, payment for the Real Estate Tax increase due as a result of this section for the Tax Year will be prorated based on the number of days that the Lease and the rent were in effect. Any credit due the Government after the expiration or earlier termination of the Lease shall be made by a lump sum payment to the Government or as a rental credit to any succeeding lease, as determined in the Contracting Officer's sole discretion. Lessor shall remit any lump sum payment to the Government within 15 calendar days of payment or credit by the Taxing Authority to Lessor or Lessor's designee. If the credit due to the Government is not paid by the due date, interest shall accrue on the late payment at the rate established by the Secretary of the Treasury under Section 12 of the Contract Disputes Act of 1978, as amended (41 USC § 611), that is in effect on the day after the due date. The interest penalty shall accrue daily on the amount of the credit and shall be compounded in 30-day increments inclusive from the first day after the due date through the payment date. The Government shall have the right to pursue the outstanding balance of any tax credit using all such collection methods as are available to the United States to collect debts. Such collection rights shall survive the expiration of this Lease.

In order to obtain a Tax Adjustment, the Lessor shall furnish the Contracting Officer with copies of all paid tax receipts, or other similar evidence of payment acceptable to the Contracting Officer, and a proper invoice (as described in GSA Form 3517, General Clauses, 552.232-75, Prompt Payment) for the requested Tax Adjustment, including the calculation thereof. All such documents must be received by the Contracting Officer within 60 calendar days after the last date the Real Estate Tax payment is due from the Lessor to the Taxing Authority without payment of penalty or interest. FAILURE TO SUBMIT THE PROPER INVOICE AND EVIDENCE OF PAYMENT WITHIN SUCH TIME FRAME SHALL CONSTITUTE A WAIVER OF THE LESSOR'S RIGHT TO RECEIVE A TAX ADJUSTMENT PURSUANT TO THIS CLAUSE FOR THE TAX YEAR AFFECTED.

3.5.4 TAX APPEALS

If the Government occupies more than 50% of the Building by virtue of this and any other Government lease(s), the Government may, upon reasonable notice, direct the Lessor to initiate a tax appeal, or the Government may elect to contest the assessed valuation on its own behalf or jointly on behalf of Government and the Lessor. If the Government elects to contest the assessed valuation on its own behalf or on behalf of the Government and the Lessor, the Lessor shall cooperate fully with this effort, including, without limitation, furnishing to the Government information necessary to contest the assessed valuation in accordance with the filing requirements of the Taxing Authority, executing documents, providing documentary and testimonial evidence, and verifying the accuracy and completeness of records. If the Lessor initiates an appeal at the direction of the Government, the Government shall have the right to approve the selection of counsel who shall represent the Lessor with regard to such appeal, which approval shall not be unreasonably withheld, conditioned or

delayed, and the Lessor shall be entitled to a credit in the amount of its reasonable expenses in pursuing the appeal.

3.6 INSURANCE ADJUSTMENTS

The Government shall 1) make a single annual lump sum payment to the Lessor for its share based on the percentage of occupancy of any increase in hazard and liability insurance premiums during the lease term over the amount established as the base year premium, or 2) receive a lump sum payment for its share of any annual decreases for the duration of the lease in the insurance premium established as the base year premium.

The amount of lump sum payment shall be based upon evidence of insurance policy and payment submitted by the Lessor to the Contracting Officer. The Government shall be responsible for payment of any insurance premium increase over the base year only if the proper invoice and evidence of payment is submitted by the Lessor within 90 calendar days after the date the insurance premium is due from the Lessor to the insurance company. Base year insurance premium as referred to in this paragraph is the insurance premium for the first 12-month period coincident with Government occupancy of leased space in its entirety.

The Government will not pay for any portion of "terrorism insurance" (Terrorism Risk Insurance Act of 2002) obtained by the Lessor.

3.7 OPERATING COSTS

Beginning with the second year of the lease and each year thereafter, the Government shall pay adjusted rent for changes in costs for supplies, materials, trash removal, landscaping, water, sewer charges, heating, electricity, and certain administrative expenses attributable to occupancy. Applicable costs listed on GSA Form 1217, Lessor's Annual Cost Statement, when negotiated and agreed upon, will be used to determine the base rate for operating costs adjustment.

The amount of adjustment will be determined by multiplying the base rate by the annual percent of change in the Cost of Living Index. The percent change will be computed by comparing the index figure published for the month prior to the lease commencement date with the index figure published for the month prior which begins each successive 12-month period. For example, a lease which commences in June 2005 would use the index published for May 2005, and that figure would be compared with the index published for May 2006, May 2007, and so on, to determine the percent change. The Cost of Living Index will be measured by the Department of Labor revised Consumer Price Index for urban wage earners and clerical workers, U.S. city average, all items figure, (1982 to 1984 = 100) published by the Bureau of Labor Statistics. Payment will be made with the monthly installment of fixed rent. Rental adjustments will be effective on the anniversary date of the lease; however, payment of the adjusted rental rate will become due on the first workday of the second month following the publication of the Cost of Living Index for the month prior to the commencement of each 12-month period.

If the Government exercises an option to extend the lease term at the same rate as that of the original term, the option price will be based on the adjustment during the original term. Annual adjustments will continue.

In the event of any decreases in the Cost of Living Index occurring during the term of the occupancy under the lease, the rental amount will be reduced accordingly. The amount of such reductions will be determined in the same manner as increases in rent provided under this paragraph.

The offer shall clearly state whether the rental is firm throughout the term of the lease or if it is subject to annual adjustment of operating costs as indicated above. If operating costs will be subject to adjustment, those costs shall be specified on GSA Form 1364A, Proposal to Lease Space, contained elsewhere in this SFO.

The base for the operating cost adjustments will be established during negotiations based upon the Offeror's Final Cost Proposal, Line 27, of GSA Form 1217, Lessor's Annual Cost Statement.

3.8 CONTRACT CHANGES

At any time, the Contracting Officer may make changes within the scope of the lease by a written order pursuant to the Changes Clause set forth in Paragraph 33 of GSA Form 3517B, attached hereto and made a part hereof, and provisions as set forth below. Changes in the design or the work initiated by the Lessor or the Lessor's Design Team or Contractor do not constitute a change for cost. Any such changes must be approved by the Contracting Officer. See design and construction documents afterward.

The clauses entitled "Changes" in FAR 52.243-4, "Differing Site Conditions" in FAR 52.236-2 and 52.249-14, Excusable Delays, will be supplemented with the following two clauses. The clause in Paragraph 3.8.1 below will apply to negotiated changes exceeding \$500,000 and does not provide ceiling rates for indirect expenses. Such expenses will be included as part of the submission of certified cost and pricing data, and will be negotiated by the Contracting Officer and audited in accordance with Department of Veterans Affairs Acquisition Regulation (VAAR) 815.805-5. (A copy of this provision is available upon request.) When the negotiated change will be less than \$500,000, the clause specified in Paragraph 3.8.2 below will apply. Certificates of current cost and pricing data shall accompany proposals over \$100,000 and not exceeding \$500,000. If cost and pricing data are required by FAR for proposals of \$100,000 or less, the Contracting Officer may require that it be certified in accordance with FAR 15.403-4(a)(2). It must be emphasized that the indirect cost rates are ceiling rates only, and the Contracting Officer will negotiate the indirect expense rates within the ceiling limitations. The clauses are a result of an approved FAR deviation pursuant to Subpart 801.4.

3.8.1 APPLICABLE TO CHANGES COSTING OVER \$500,000

A. Proposals for Changes

When requested by the Contracting Officer, the contractor shall submit proposals for changes in work to the Contracting Officer or the Contracting Officer's designee. Proposals, to be submitted within 30 calendar days after receipt of request, shall be in legible form, original and

two copies. The contractor shall provide cost or pricing data in accordance with the instructions in Table 15-2 of FAR 15-403-5 in the format indicated for "Modifications" or other format acceptable to the Contracting Officer. Proposals shall consist of an itemized breakdown that includes material quantities, unit prices, labor costs (separated into trades), construction equipment, etc. (Labor costs are to be identified with specific material placed or operation performed.) The contractor shall execute a Certificate of Current Cost or Pricing Data in accordance with FAR 15-406-2. The contractor must obtain and furnish with each proposal an itemized breakdown and certificate as described above, signed by each subcontractor participating in the change regardless to tier.

B. Tentative Pricing

When the necessity to proceed with a change does not allow sufficient time to negotiate a modification, or because of failure to reach an agreement, the Contracting Officer may issue a change order instructing the contractor to proceed on the basis of a tentative price based on the best estimate available at the time, with the firm price to be determined later. Furthermore, when the change order is issued, the contractor shall submit a proposal for cost of changes in work within 30 calendar days.

C. Settlement By Determination

The Contracting Officer will consider issuing a settlement by determination to the contract, if the contractor's proposal required by Paragraphs (A.) and (B.) of this clause is not received within 30 calendar days or if agreement has not been reached.

3.8.2 APPLICABLE TO CHANGES COSTING \$500,000 OR LESS

A. Proposals for Changes

When requested by the Contracting Officer, the contractor shall submit proposals for changes in work to the Contracting Officer or designee. Proposals, to be submitted within 30 calendar days after receipt of request, shall be in legible form, original and two copies, with an itemized breakdown that will include material, quantities, unit prices, labor costs (separated into trades), construction equipment, etc. (Labor costs are to be identified with specific material placed or operation performed.) The contractor must obtain and furnish with a proposal an itemized breakdown as described above, signed by each subcontractor participating in the change, regardless of tier. When requested by the Contracting Officer, the contractor and each subcontractor participating in the change, regardless of tier, shall execute a Certificate of Current Cost or Pricing Data in accordance with FAR 15-406-2. For proposals over \$100,000, the cost or pricing data shall be submitted in accordance with the instructions in Table 15-2 of FAR 15-403-5 in the format indicated for "Modifications" //or other format acceptable to the Contracting Officer//. No itemized breakdown will be required for proposals amounting to less than \$1,000.

B. Tentative Pricing

When the necessity to proceed with a change does not allow sufficient time to negotiate a modification or if there is a failure to reach an agreement, the Contracting Officer may issue a change order instructing the contractor to proceed on the basis of a tentative price based on the best estimate available at the time, with the firm price to be determined later. Furthermore, when the change order is issued, the contractor shall submit a proposal for cost of changes in work within 30 calendar days.

C. Settlement By Determination

The Contracting Officer will consider issuing a settlement by determination to the contract, if the contractor's proposal required by paragraphs (A.) and (B.) of this clause is not received within 30 calendar days, or if agreement has not been reached.

D. Allowances for Overhead and Profit

Allowances not to exceed 10% each for overhead and profit for the party performing the work will be based on the value of labor, material, and use of construction equipment required to accomplish the change. As the value of the change increases, a declining scale will be used in negotiating the percentage of overhead and profit. Allowable percentages on changes will not exceed the following:

- 10% overhead and 10% profit on the first \$20,000
- 7-1/2% overhead and 7-1/2% profit on the next \$30,000
- 5% overhead and 5% profit on balance over \$50,000

Profit shall be computed by multiplying the profit percentage by the sum of the direct costs and computed overhead costs.

E. Allowable Fee On Changes

The prime contractor's or upper-tier subcontractor's fee on work performed by lower-tier subcontractors will be based on the net increased cost to the prime contractor or upper-tier subcontractor, as applicable. Allowable fee on changes will not exceed the following:

- 10% fee on the first \$20,000
- 7-1/2% fee on the next \$30,000
- 5% fee on balance over \$50,000

F. Multiple Tiers

Not more than four percentages, none of which exceed the percentages shown above, will be allowed regardless of the number of tiers of subcontractors.

G. Credit Items

Where the contractor's or subcontractor's portion of change involves credit terms, such items must be deducted prior to adding overhead and profit for the party performing the work. The contractor's fee is limited to the net increase to contractor of subcontractors' portions of cost computed in accordance herewith.

Where a change involves credit items only, a proper measure of the amount of downward adjustment in the contract price is the reasonable cost to the contractor if he/she performed the deleted work. A reasonable allowance for overhead and profit are properly includable as part of the downward adjustment for a deductive change. The amount of such allowance is subject to negotiation.

H. Tax and Insurance

Cost of Federal Old Age Benefit (Social Security) tax and of Workmen's Compensation and Public Liability insurance appertaining to change are allowable. While no percentage will be allowed thereon for overhead or profit, prime contractor's fee will be allowed on such items in subcontractors' proposals.

I. Items Included In Overhead and Fee

Overhead and contractors fee percentages shall be considered to include insurance, other than mentioned herein; field and office supervisors and assistants; security police; use of small tools, incidental job burdens, and general home office expenses; and no separate allowance will be made therefore. Assistants to office supervisors include all clerical, stenographic, and general office help. Incidental job burdens include, but are not necessarily limited to, office equipment and supplies, temporary toilets, telephone, and conformance to OSHA requirements. Items such as, but not necessarily limited to, review and coordination, estimating, and expediting relative to contract changes, are associated with field and office supervision and are considered to be included in the contractor's overhead and/or fee percentage.

J. Bond Premium Adjustment

Bond premium adjustment, consequent upon changes ordered, will be made as elsewhere specified at the time of final settlement under the contract and will not be included in the individual change.

K. Implementation of Changes

Upon receipt of a written order from the Contracting Officer for a change(s), the Lessor shall immediately begin to implement such a change(s). Any dispute involving entitlement to additional compensation or additional time for the work performed will be resolved pursuant to the terms of the Disputes Clause, if not otherwise resolved by the parties. However, nothing in that clause shall excuse the Lessor from proceeding with the contract as changed.

Lump sum payment for changes shall be made upon completion, acceptance, and beneficial occupancy of the building.

3.9 WAIVER OF CLAIMS FOR WASTE OR DAMAGES

The Lessor will be required to waive the right to claim for waste or damages arising from the making or removing of alterations or special work (Paragraph 3.4).

The Lessor will be required to waive the right to claim for delay, waste, or damages arising from the acts, errors, or omissions of Lessor or the Lessor's Design Team or Contractor.

All property placed in, upon, or attached to the premises to be leased that is provided by the Government or for which the Government pays by means of lump-sum (Schedule B items), shall be and remain the property of the Government, and may be removed or otherwise disposed of by the Government at its sole discretion. The Lessor will be required to waive the right to claims arising from the removal or disposal of any Government property that remains in, upon, or attached to the premises at the termination of the lease.

3.10 LIQUIDATED DAMAGES

In case of failure on the part of the Lessor to complete the work within the time fixed in the lease contract or letter of award, the Lessor shall pay the Government as fixed and agreed liquidated damages, pursuant to this clause, the sum of One Thousand Five Hundred Dollars

(\$1,500.00) for each and every calendar day that the delivery is delayed beyond the date specified for delivery of all the space ready for acceptance and beneficial occupancy by the Government.

3.11 RECORDATION REQUIREMENTS

The Lessor will be required to execute all documents necessary to record a Memorandum of Lease in the land records of the county or political subdivision in which the facility is located. Preparation of the Memorandum of Lease recordation and all expenses associated with this action are the responsibility of the Lessor. This action must be accomplished within 30 calendar days after award. Acceptable evidence of recordation is a copy of the Memorandum of Lease bearing a recordation stamp, or other evidence of recordation as may be customary for the particular recordation office. Evidence of such must be provided to the Contracting Officer.

3.12 ADJUSTMENT FOR VACATED PREMISES

In accordance with 552.270-16 Adjustment for Vacant Premises, if the Government fails to occupy any portion of the leased premises or vacates the premises in whole or in part prior to expiration of the firm term of the lease, the rental rate shall be reduced as follows: the rate shall be reduced by that portion of the cost per square foot of operating expenses not required to maintain the space. Said reduction shall occur after the Government gives 30 days prior notice to the Lessor, and shall continue in effect until the Government occupies the premises or the lease expires or is terminated.

3.13 RELOCATION ASSISTANCE ACT

If an improved site is offered and new construction will result in the displacement of individuals or businesses, the successful Offeror shall be responsible for payment of relocation costs for displaced persons in accordance with the Uniform Relocation Assistance and Real Property Acquisition Policies Act of 1970 as amended and 49 CFR Part 24.

3.14 RENTABLE AND NET USABLE SQUARE FEET

3.14.1 RENTABLE SPACE

Rentable Space is determined by the building owner and may vary by city or by building within the same city. The rentable space may include a share of building support/common areas such as elevator lobbies, building corridors, and floor service areas. Floor service areas typically include restrooms, janitor rooms, telecommunications rooms, special systems rooms, fire alarm rooms, water system rooms, nurse call rooms, electrical closets, and mechanical rooms. The rentable space does not include vertical building penetrations and their enclosing walls, such as stairs, elevator shafts, and vertical ducts.

3.14.2 NET USABLE SPACE

Net usable space is that portion of rentable space that is available for a tenant's personnel, furnishings, and equipment. Net usable space is the area for which VA will pay a square foot rate. It is determined as follows:

If the space is on a single tenancy floor, compute the inside gross area by measuring between the inside finish of the permanent exterior building walls or from the face of the convectors (pipes or other wall-hung fixtures) if the convector occupies at least 50 percent of the length of exterior walls.

If the space is on a multiple tenancy floor, measure from the exterior building walls as above and to the room side finish of the fixed corridor and shaft walls and/or the center of tenant-separating partitions.

In all measurements, make no deductions for columns and projections enclosing the structural elements of the building.

Refer to SECTION 4.2.3 EXCLUSIONS FROM NET USABLE SPACE for spaces not included in NUSF.

Conceptual drawings shall show all spaces shaded except for net usable. Offerors shall indicate on GSA Form 1364A, Proposal to Lease Space, Section II (Space Offered and Rates, the amount of rentable space offered (8a. (2)) and the cost per rentable square footage (8a.(4)).

3.15 APPURTENANT AREAS

The right to use appurtenant areas and facilities is included. The Government reserves the right to post Government rules and regulations where the Government leases space.

3.16 RANDOLPH-SHEPARD ACT: VENDING AND CANTEEN FACILITIES

VA is required to comply with the provisions of the Randolph-Sheppard Act pertaining to Vending Facility Programs for the Blind, 34 CFR 395, on properties owned, leased, or occupied by the Government. If the lease contemplated under this Solicitation is subject to the Randolph-Sheppard Act, prior to lease award, VA will have notified the appropriate State licensing agency of intent to occupy space under this lease. The State licensing agency shall be afforded the opportunity to determine whether the building includes a satisfactory site for a vending facility and, subject to the approval by VA, shall be offered the opportunity to select the location and type of vending facility to be operated by a blind vendor prior to the completion of the final Design Documents..

The Lessor will have no right to control or receive income from automatic vending machines located in the vending facility of the leased premises provided pursuant to the Randolph-Sheppard Act or provided by VA..

Canteen equipment requirements will be obtained from Canteen Services during design phase or Lessor shall designed to meet worst case requirements of hood and duct, stove/range electrical support, display refrigerator counters connections, larger commercial coffee and tea pots electrical, double to triple bowl sinks, microwave, security, wall supports for upper cabinets, and etc.

3.17 DESIGN AND CONSTRUCTION DOCUMENTS AFTER AWARD

Design development after award shall be in accordance with the requirements of this Solicitation, and shall be a direct extension of the submitted design concept. The design development shall retain all the functional and basic physical characteristics of that concept. The Contracting Officer shall have the right to reject any aspect of subsequent design that varies from the concept and would adversely affect the Government's use and occupancy of the space or the Government's other interests in the building as set forth or implied in this Solicitation. Nonetheless, the Offeror may propose for the Contracting Officer's acceptance, or the Contracting Officer may propose for the Offeror's acceptance, evolutionary adaptations or changes to the concept, that improve the design. Neither party will unreasonably withhold such acceptance of demonstrated beneficial design adaptations of the concept which would not measurably increase the costs of construction, operation, or occupancy of the space or building and which would not decrease the utility of the space or building to either party. Changes to planned design layout do not constitute a change for cost. During design development, changes to the planned design layout PRIOR TO APPROVED PERMITTED DRAWINGS, do not constitute a change for cost or incur any design fees. Changes to APPROVED PERMIT DRAWINGS that result from corrections provided by VA prior to that approval, but missed by the Lessor also do not constitute a change for cost or incur any design fees. A VA change that requires already-installed walls or utilities to be removed and/or relocated may incur a change for cost or incur hourly design fees. Other changes by VA after APPROVED PERMIT DRAWINGS may also incur an hourly design fee. Changes to planned design layout during design and construction development do not constitute a change for cost.

3.17.1 RESPONSIBILITIES OF LESSOR'S DESIGN TEAM

The Lessor's design team (A/E) shall be responsible for producing a complete set of drawings, design narrative/analysis, calculations, sample boards, and specifications in accordance with professional standard practices and the criteria contained in this SFO. Drawings and related data shall be prepared in accordance with the National CAD Standard (NCS) published by the National Institute of Building Sciences (NIBS) as amended by the VHA *National CAD Standard Application Guide* with regard to conventions in layer names, drawing organization, and plotting. Each A/E discipline shall receive a copy of VHA National CAD Standard Application Guide. The Lessor and Lessor's A/E are responsible for obtaining the NCS (<http://www.cfm.va.gov/til/projReq.asp>).

The Lessor's A/E shall develop and execute a Quality Assurance/Quality Control (QA/QC) program; and shall demonstrate that the project plans and specifications have gone through a rigorous review and coordination effort with each required submittal. The Lessor's A/E shall conduct coordination meetings between A/E technical disciplines before submitting material for each VA review and provide minutes of the meetings to VA.

The Lessor and Lessor's A/E shall utilize the software program, "Docunet" or approved equivalent for communication with all parties regarding posting of, for example, drawings, requests for information (RFI's), posting of reports, etc. The Lessor shall provide access to Docunet for VA personnel (SRE, RE's, VAMC coordinator and Associate Director, VACO PM and CO.) Lessor is responsible for all costs associated with the use of Docunet or an approved equivalent, and keeping all information loaded and up-to-date.

3.17.2 INDEPENDENT TECHNICAL REVIEW

The Lessor shall be responsible for paying for three independent technical and life safety reviews at the Second Design Development submittal, at the 95% Construction Document submission, and independent back check of the Final (100%) Construction Documents. The reviews shall encompass all disciplines. The reviews shall be accomplished by independent professional entities selected by VA that are registered in the appropriate fields of expertise.

NOTE: The Lessor shall allow approximately 15 working days for review and comment by the Government at each review stage.

The independent reviews are limited to checking for general compliance with the SFO and VA requirements. The independent reviews do not take the place of the Lessor's QA/QC program, nor the code review by the Authority Having Jurisdiction (AHJ). The Lessor shall have the responsibility of ensuring that the documents go through the review and permitting process of the local AHJ. If the independent technical review conflicts with the review by the AHJ, the more stringent requirement shall apply. If there is any question as to which requirement shall apply, the Lessor shall request a determination from the Contracting Officer.

For purposes of this SFO, the firm of CannonDesign is the authorized representative of VA and shall provide technical review services to VA in connection with this Lease. It is understood between the Lessor and VA that CannonDesign shall provide independent technical services on behalf of VA to assist in reviewing drawings.

In connection with the provisions of such independent technical services, the Lessor shall provide in the base rental rate a sum of Seventy-Five Thousand Three Hundred Forty-Three Dollars (\$75,343) to be paid to CannonDesign. Such fee shall be due and payable, as follows:

Approximately forty (40)% of the fee shall be paid to CannonDesign within thirty (30) calendar days following receipt by the Lessor of an invoice certified and approved by VA; following review of the Second Design Development package, and:

Approximately fifty (50)% of the fee shall be paid to CannonDesign within thirty (30) calendar days following receipt by the Lessor of a invoice certified and approved by VA; following review of the 95% Construction Document package.

The balance of the fee shall be paid to CannonDesign thirty (30) calendar days following receipt by the Lessor of a final invoice certified and approved by VA, following back check of the final Construction Document package.

The Lessor's responsibilities to pay the fee(s) to CannonDesign is independent of any other Lessor financial responsibilities of this Lease and shall not be used to negotiate or offset any

credits owed VA by the Lessor. However, in the event Lessor shall fail to pay the fee(s) owed to CannonDesign pursuant to the compensation schedule outlined herein, VA, at VA's sole option, shall pay the fee owed on behalf of Lessor to CannonDesign out of rent payments and/or any lump-sum payments owed or to-be-owed to Lessor for reimbursement(s) for services/work provided by the Lessor.

3.18 DESIGN DEVELOPMENT

The Design Development phase involves the production of drawings, specifications, calculations, narratives, reports, and other materials as listed in Paragraph "SUBMITTAL REQUIREMENTS FOR DD AND CD REVIEWS." Two Design Development submissions shall be required for review by the government. The submittals shall fully describe the architectural and engineering design approach used, and the systems, materials, and layout for the site and building. The submittals shall be reviewed by VA and the independent technical reviewers to determine that the design proposed by the Lessor conforms to the space / functional and technical requirements of this SFO.

Utilizing the conceptual layout diagram provided by VA at time of award and working in conjunction with the Contracting Officer or designee, the Lessor shall produce the First Design Development Submittal within 45 calendar days of award.

After VA review and comment on the First Design Development Submittal, the Lessor shall complete and submit the Second Design Development Submittal within 30 calendar days:

3.19 CONSTRUCTION DOCUMENTS

The Construction Document phase involves the production of complete drawings, specifications, and other documents necessary for the bidding and construction of the project. Construction documents shall be prepared from the approved design development documents. It is the Lessor's responsibility to provide a quality set of documents. Documents shall be complete and fully coordinated. Prior to reproduction for issue for construction bids, make any changes to the documents identified as necessary by the Contracting Officer during reviews. 100% Construction Documents shall contain the seal (or stamp) of a professional engineer or architect, registered in the discipline represented by the drawing. Final calculations shall contain the seal (or stamp) of a registered professional engineer. Persons sealing the construction documents or calculations shall be the entities identified by the Lessor under Paragraph Design Team Qualifications above. Two construction document period submissions shall be required: the first at 95% complete and the second at 100% complete.

Within 45 calendar days of receipt of written VA approval of the Second Design Development Submittal, the Lessor shall produce a complete set of 95% construction documents and specifications for review.

Within 30 calendar days of receiving written notification of VA's 95% construction document review comments, the Lessor shall submit a complete set of 100% working drawings and specifications for review. The Lessor shall incorporate all VA comments of the 95% contract document submittal.

NOTE: The Lessor shall allow approximately 20 working days from date of receipt for review and comment by the Government at each review stage.

3.20 SUBMITTAL REQUIREMENTS FOR DD AND CD REVIEWS

3.20.1 GENERAL REQUIREMENTS

Provide a design narrative/analysis for each technical discipline (e.g., architectural, mechanical, fire protection, etc.) which describes the intent of each discipline with each design development submission.

Provide computations and sizing calculations for electrical, mechanical (HVAC, plumbing, and steam), sanitary, structural, and fire protection designs. For computerized calculations, submit complete and clear documentation of computer programs, interpretation of input/output, and description of program procedures.

Provide individually packaged drawings for each submission to each unit specified in Paragraph "Distribution of A/E Materials."

At each submission, the A/E shall date and appropriately label all materials. In each submission, the A/E shall incorporate the corrections, adjustments, and changes made by VA at the previous review.

A. Format

(1) Drawings

Hard copies shall be black line prints on bond paper, full size (30" x 42") and half size (15" x 21"). Each set shall contain all sheets for all disciplines (partial sets are not allowed). Electronic submissions may be plots or scans in Adobe® PDF format; except floor (space layout) plans shall be provided in both PDF format and as AutoCAD® release 2010 drawing files to facilitate verification of net and rentable areas. Quantities shall be as indicated below.

(2) Specifications

Hard copies shall be printed double-sided on 8½" x 11" bond paper. Electronic submissions may be in Microsoft® Word® 2010 or Adobe® PDF format. Electronic files containing two or more specification sections shall be indexed or bookmarked.

(3) Narratives

Hard copies shall be printed on 8½" x 11" bond paper. Electronic submissions may be in Microsoft® Word® 2010 or Adobe® PDF format. Bookmark or index all electronic files.

(4) Calculations

Hard copies shall be printed on 8½" x 11" bond paper. Electronic submissions may be Adobe® PDF format. Bookmark or index all electronic files.

B. Distribution of A/E Materials

Electronic materials shall be submitted on CD-ROM or DVD. Each set of paper (hard) copies shall be bound or may be assembled in three-ring binders. Label each disk and paper set to identify the project, location, contract number, and submittal type and date. Required number of copies is designated in the following table.

Submittal	Medical Center	Resident Engineer	Ind Tech Reviewer
First Design Development			
Narratives	1 each hard and electronic	1 each hard and electronic	-
Drawings	1 each hard and electronic	1 each hard and electronic	-
Specifications	1 each hard and electronic	1 each hard and electronic	-
Calculations	1 each hard and electronic	1 each hard and electronic	-
Second Design Development			
Narratives	1 each hard and electronic	1 each hard and electronic	6 hard copies and 2 electronic
Drawings	1 each hard and electronic	1 each hard and electronic	6 hard copies and 2 electronic
Specifications	1 each hard and electronic	1 each hard and electronic	6 hard copies and 2 electronic
Calculations	1 each hard and electronic	1 each hard and electronic	1 hard copy and 2 electronic
95% Construction Documents			
Drawings	1 each hard and electronic	1 each hard and electronic	6 hard copies 2 and electronic
Specifications	1 each hard and electronic	1 each hard and electronic	6 hard copies 2 and electronic
Calculations	1 each hard and electronic	1 each hard and electronic	1 hard copy 2 and electronic
100% Construction Documents			
Drawings	1 each hard and electronic	1 each hard and electronic	6 hard copies 2 and electronic
Specifications	1 each hard and electronic	1 each hard and electronic	6 hard copies 2 and electronic
Calculations	1 each hard and electronic	1 each hard and electronic	1 hard copy 2 and electronic

3.20.2 FIRST DESIGN DEVELOPMENT SUBMITTAL

A. Site

Submit preliminary drawings showing the development concept. Submit copies of topographic, utility, and landscape surveys.

Include layout plan(s) showing location of: building and structures, roads, fire access, parking, mechanical, electrical, and telecommunications equipment on grade, service area(s), entrances and exits, and walks; Grading plan, showing existing and proposed contours; and Planting plan, showing plant groupings.

Submit preliminary narrative for site design concept with analysis of site, circulation study, phasing analysis, and parking analysis.

B. Structural

Submit preliminary structural plans and sections. Show bay sizes, locations and sizes of columns, bearing walls, and foundations. Show locations and depths of floor and roof framing members. Show locations and sizes of lateral force resisting elements. Indicate locations of major mechanical, electrical, and other special equipment items.

Submit preliminary design narrative, including basis for selection of proposed structural system, and preliminary supporting calculations.

C. Architectural

Submit final layout drawings (floor plans) for all floors at 1/8-inch scale. Drawings shall be of sufficient precision and/or adequately dimensioned so that the Government may accurately compute rentable and useable areas to verify compliance with solicitation requirements.

Submit preliminary equipment plans (at 1/4-inch scale) and preliminary equipment schedules that reflect the requirements in this Basic Solicitation as well as Schedule B "Special Equipment Requirements." Identify all equipment for each clinical or laboratory room listed in Schedule B. Equipment plans are not required for offices, consultation rooms, classrooms, conference rooms, and waiting rooms.

Submit building elevations, showing all significant materials, including their colors, roof top mechanical equipment, and any architectural screens. Elevations shall show massing, proposed fenestration, and the building's relationship to adjacent structures and the finish grade.

D. Interior Design

No requirements at this submittal.

E. Sustainable Design & Energy Efficiency

Submit preliminary LEED® Silver for Healthcare Certification checklist. Submit preliminary narrative addressing how the design will meet Federal Mandates for sustainability and energy efficiency, including site base conditions analysis, preliminary base case energy and water analysis, and integrated strategies.

F. Fire Protection/Life Safety

Submit preliminary design narrative. The fire protection narrative shall discuss: fire and smoke separations, fire sprinkler/standpipe system, size of fire pumps, water supply available/max. demand, water flow testing results, fire alarm systems, size of air handling units, exit paths from each zone, distances to stairs, occupancy of each area, exit calculations for each floor, and smoke control features.

Submit preliminary fire protection plans plans/drawings (minimum 1/8-inch scale) illustrating: sprinkler zones, fire alarm zones, smoke zones, building water supply, interior sprinkler supply risers, standpipes, fire extinguisher cabinets, and fireproofing of structural members.

G. Mechanical

Submit preliminary design narrative addressing description of HVAC systems, equipment for each functional space, and life-cycle cost analysis. Submit preliminary engineering calculations. Provide specific design recommendations and full back-up data. Include the heating and cooling capacities of each functional area and the block cooling and heating loads for the building.

Submit preliminary drawings (minimum 1/8-inch scale) indicating: tentative location/sizes for mechanical equipment room(s), principal vertical shafts, and block layout of equipment. Indicate preliminary sizes and locations of louvers required for outside, exhaust, and relief air.

H. Plumbing

Submit preliminary design narrative addressing plumbing systems including supply, waste, and medical or laboratory gas systems.

Submit preliminary drawings (minimum 1/8-inch scale) including: room names and numbers, plumbing fixtures w/VA numbering system, equipment, medical gas outlets, laboratory gas outlets, and routing for plumbing piping.

I. Electrical

Submit preliminary design narrative for electrical systems and preliminary load calculations for normal and emergency power. Include basic assumptions, and projected load of new construction.

Contact the electrical utility that will supply electrical power. Submit a written summary of any conversations with the electrical utility. Submit a full set of preliminary electrical site, lighting, and power floor plans, showing equipment, lighting, and receptacle locations. Submit proposed one-line and riser diagrams of the normal electrical power distribution system and the emergency power system. Final equipment ratings may vary, but locate all equipment and identify and size dimensionally for adequate capacity. Provide preliminary fault current, generator sizing, load, feeder and equipment sizing, voltage drop, lightning protection risk analysis, and lighting and energy calculations.

J. Telecommunications and Special Systems

Submit preliminary design narrative addressing Telecommunications and Special Systems.

Submit preliminary Telecommunications and Special Systems drawings including site plan and floor plans (minimum 1/8-inch scale). Show locations of and sizes of computer rooms and equipment and distribution rooms for telecommunications and special systems. Identify low-voltage outlet connections and major equipment items. Include basic cable tray routing. Provide legend of symbols.

3.20.3 SECOND DESIGN DEVELOPMENT SUBMITTAL

A. Site

Submit design narrative and calculations for site development. Include a Geotechnical Report that addresses at a minimum, soil bearing pressures, slab design, existing soil conditions, percolation rates, slope stability and recommended mitigation, pavement design, etc.

Include a Hydrology and Hydraulic analysis and report in support of the proposed design which complies with local, state, and federal flood plain management standards and methodologies. It is not acceptable to connect storm drain systems to the sanitary system.

Submit completed design development drawings for all site work and utility systems. Include layout plan(s) showing location of: building and structures, roads, fire access, parking, accessible spaces, van spaces, mechanical and electrical equipment on grade, off-site roads, off-site utilities, service area(s), entrances and exits, walks, inlets, vertical and horizontal road alignment, and paving joint patterns.

Submit grading plan showing: existing contours, proposed contours, spot elevations at structure corners, entrances, equipment pads, etc., first floor elevations, rim and invert elevations on storm drainage fixtures, and erosion and sediment control.

Include conceptual drawings that reflect the alignment of the water distribution system, including location of fire hydrants and points of connection to the public water system.

Include conceptual drawings that reflect the alignment of the sanitary sewer system, including manhole locations and points of connection to the downstream sewer system.

Include conceptual storm drain drawings based on the Hydrology and Hydraulic report. The drawings should reflect the alignment of the storm sewer system, including location of detention/retention basins, junction structures, channels, pipe structures and catch basins, connections to the existing storm system (if one exists) or flow arrows indicating the direction of surface flow.

Submit landscape drawings including planting plan showing: list of plant material and limits of irrigation.

Submit signage plan and schedule.

Submit site and landscape details.

Submit completed design narrative and calculations.

Submit draft specifications for earthwork, utility systems, and site improvements.

B. Structural

Submit completed design development drawings including structural plans, sections, and details. Show bay sizes, locations and sizes of columns, bearing walls, and foundations. Show locations and depths of floor and roof framing members. Indicate floor and roof slab thickness. Coordinate floor or roof depressions and penetrations with architectural,

mechanical, plumbing, and electrical work. Indicate major mechanical, electrical, and other special equipment items; and show chases or shafts. Show framing and support required at those locations. Show locations and sizes of lateral force resisting elements.

Submit final design narrative including basis for selection of proposed structural system. Submit calculations for gravity and lateral design.

Submit draft specifications for structural materials.

C. Architectural

Submit completed design development floor plans (minimum 1/8-inch scale) for each floor showing all rooms, room names, room numbers, door locations and swings, smoke and fire rated partitions, and fire extinguisher cabinets. Label departments or services. Show all rooms and chases for mechanical, electrical, and low-voltage (communications) equipment. Show wall thickness and chase walls. Show plumbing fixtures and equipment occupying floor space. Indicate handrails and corner guards. Show column grid with columns indicated and expansion and seismic joints.

Submit completed equipment plans, elevations (minimum ¼-inch scale), and schedules. List any changes or deviations from Schedule B for review and approval by the Contracting Officer or designee.

Submit completed design development roof plan, exterior elevations, building and wall sections, and key details. Submit room finish, door, and window schedules. Submit general notes, symbol legends, and abbreviations.

Submit final design narrative.

Submit draft specification sections.

VA will provide space plan for building which lists each room and net square foot of each room. When any room or room size change is made, Lessor shall revise the space plan and submit. Also, indicate in each room on the architectural drawings the square footage indicated in the space program under the heading "Program" and the actual square footage of the room as shown on the drawings. The square footage under the heading "Program" shall be listed above the actual square footage of the room shown on the floor plan. Indicate on the drawings in each room the seven digit space # shown for each room in the space program..

D. Interior Design

Submit interior design narrative. Discuss information gathered during interior design programming with the VAMC project coordinator and interior designer including, but not limited to the following: interior and exterior design and materials, light, safety, patient profile, customer's "vision" or desired image, public vs. private spaces, signage, regional influences, etc.

Present the preliminary design solution for the primary areas of the project. Use broad categories of materials, finishes, color palettes, patterns, textures, and scales. Include primary and secondary corridors, lobbies, waiting rooms, offices, exam and treatment rooms, and toilet

rooms. Discuss the relationship among departments and functions, and between public and private spaces.

E. Sustainable Design & Energy Efficiency

Submit LEED® Silver for Healthcare Certification checklist. Submit narrative addressing how the design will meet Federal Mandates for sustainability and energy efficiency. Submit refined ASHRAE 90.1-2010 base-case energy model and as-designed energy model, including all assumptions used, targeting compliance with the 30% energy reduction goal, or exceeding the goal. Submit refined water use analysis and daylighting calculations. Submit preliminary commissioning specifications.

F. Fire Protection/Life Safety

Submit completed fire protection narrative. Indicate NFPA 220 and UBC fire resistive rating of the building, NFPA 101 occupancy type, and fire protection code analysis to assess compliance with NFPA 101. Provide information to meet JCAHO requirements, e.g., location of all fire rated barriers, smoke barriers, exit signs, fire extinguishers, manual pull stations, smoke detectors, and sprinkler flow switches.

Submit completed design development fire protection plans/drawings illustrating: sprinkler zones, fire alarm zones, smoke zones, building water supply, sprinkler/standpipe riser supply piping, termination of sprinkler main and inspector test drains, sprinkler alarm valves, waterflow and tamper switches, sprinkler system fire department connections, sprinkler design hazards per NFPA 13, exit signs and emergency lighting, fire sprinklers, fire hydrants, fire pumps, post indicator valves, sectional valves, fire extinguisher cabinets, electromagnetic door hold open devices, wall sections indicating fire resistive ratings, and evacuation plan signage.

Submit draft specifications for fire alarm and suppression systems.

G. Mechanical

Submit completed design narrative and calculations for HVAC systems. Include room-by-room, peak zone-by-zone, and building block heating and cooling loads. Discuss selection of HVAC equipment and provide catalog cuts of equipment. Provide room-by-room heating and cooling loads, zone-by-zone heating and cooling loads; and building block heating and cooling loads. Include Psychometric chart for air handling unit, coil entering and leaving conditions, fan motor heat gains, consumption of humidification loads, sound/acoustic analysis. Provide room-by-room air balance charts. Show supply, return, exhaust, make-up, and transfer quantities with intended pressure relationships, i.e., positive, negative, or zero with respect to adjoining spaces.

Submit completed design development drawings indicating: main supply, return and exhaust ductwork, volume dampers, fire and smoke partitions, fire and smoke dampers, smoke detectors, automatic control dampers, air quantities for each room, air inlets/outlets, rises and drops in ductwork, and interconnection of HVAC equipment with fire protection equipment (see fire protection). Provide plan and section of mechanical equipment rooms and building corridors (show routing of main ductwork, plumbing, fire protection, major conduit or cable tray runs). Provide schematic flow and riser diagrams, schematic control diagrams, and equipment schedules. Indicate required seismic bracing. Provide legends, symbols, and abbreviations.

Submit draft specifications for mechanical systems and equipment.

H. Plumbing

Submit completed design narrative addressing plumbing systems including supply, waste, and medical or laboratory gas systems. Submit calculations for piping systems and equipment.

Submit completed design development drawing. In addition to the requirements of the first design development submittal, show the following: size of pipe, equipment schedule, fire and smoke partitions, riser diagrams, legend, notes, and details; location and size of sprinkler riser, standpipes, and fire pumps (see fire protection); and location of emergency eyewash and shower equipment.

Submit draft specifications for plumbing systems and equipment.

I. Electrical

Show all new services to building, utility transformers, location, exterior lighting, and the utility service point and meter location on the electrical site plan. Submit a written summary of any conversations with the electrical utility.

Provide legend of symbols and abbreviations. Submit a full set of electrical lighting, power, and lightning protection plans for building and site. Submit one-line diagrams of the normal electrical power distribution system and the emergency power system.

Provide prefinal fault current, generator sizing, load, feeder, and equipment sizing, voltage drop, lightning protection risk analysis, and lighting and energy calculations.

Submit draft specifications for electrical equipment.

J. Telecommunications and Special Systems

Submit completed design narrative.

Submit Telecommunications and Special Systems site and building drawings. Identify low-voltage outlet connections and major equipment items. Include basic cable tray routing and floor penetration location for routing of low-voltage cabling.

Submit ¼-inch scale enlarged Telecommunication Rooms plans. Identify equipment rack location, overhead ladder rack, and wall field equipment with proper clearances. Submit 1-inch scale enlarged plans of the rack details including termination areas of copper and fiber cabling and equipment layout.

Submit draft specifications for Telecommunications and Special Systems.

3.20.4 95% CONSTRUCTION DOCUMENTS

A. Site

The Site drawings shall indicate all site features required by the lease documents, e.g., topography (1 foot contours), building location by legal description, site setbacks, grading, parking, roadways, access ways, pedestrian routes, landscaping, irrigation system, mobile technology pad, plaza areas, sidewalks, conformance with local design standards, etc. The

site drawing shall be at a minimum scale of 1" = 40'. Provide specifications for site improvements.

The site drawings shall reference the Geotechnical Report for drainage design, pavement design recommendations, and slope stability, etc.

Include a Hydrology and Hydraulic analysis and report in support of the proposed design which complies with local, state, and federal flood plain management standards and methodologies. It is not acceptable to connect storm drain systems to the sanitary system.

The Site drawings shall include details for connecting to the public water distribution system. Include points of connection, zone boundaries, fire hydrants (spaced per local codes), domestic and irrigation meter size and location, and all other water distribution components as required by the local water utility.

The Site drawings shall include details for connecting to the public wastewater system. Include the downstream point of connection, manholes, and cleanouts, etc., per the standards and specifications of the local wastewater jurisdiction. The proposed wastewater system cannot be designed to be integrated with the storm drain system.

Include detailed drainage plans based on the Hydrology and Hydraulics Report that identify location and depth of basins, storm sewer, catch basins, channels, connection points, pipe structures and all other drainage related items, as proposed in the report or required by the local jurisdiction.

B. Structural

Submit 95% complete structural drawings including foundation plans, floor and roof framing plans, sections, elevations, general notes, schedules, and details. Coordinate floor or roof depressions and penetrations with architectural, mechanical, plumbing, and electrical work. Indicate major mechanical, electrical, and other special equipment items, and show chases or shafts. Show framing and support required at those locations.

Submit calculations for gravity and lateral (wind/seismic) load requirements. Submit structural specifications.

C. Architectural

Submit 95% complete architectural drawings including fully dimensioned floor plans showing all revisions required by comments from the design development phase. Submit interior details, elevations, and sections. Submit complete and coordinated finish, door, hardware, and window schedules. Submit roof plans, building sections, wall sections, and exterior elevations that show finish floor elevations and indicate all building systems and materials. Submit completed, coordinated reflected ceiling plans for entire building, indicating all ceiling mounted equipment, lighting fixtures, air diffusers, registers, tracks, etc. Submit 1/4-inch scale equipment plans, elevations, schedules, and details. Submit general notes, symbol legends, abbreviations, and all necessary and coordinated interior and exterior details. Submit fully edited specifications.

D. Interior Design

(1) Fabrication of Sample Boards

Provide 2 complete sets of sample boards. Distribution will be Contracting Officer-1 set, VAMC-1 set. Sample boards are not returnable. Designer should fabricate an extra copy of each submission for their records.

Identify each sample board with project and location information.

(2) Product Samples

Organize the finish and material samples on the boards to clearly convey the design intent. Apply an actual sample of all interior and exterior materials, finishes and paints specified on the project. Securely adhere all samples with a strong adhesive and/or double sided foam tape. Place exterior materials on a separate board. Assign a color and material code to all samples.

(3) Sample Boards

Use mat board, foam core or any other suitable lightweight material. Board size should not exceed 30" x 40". Use a white board. Backer boards of other colors may be used for bordering. Do not use frames.

(4) Signage and Wayfinding

Submit drawing(s), specifications, and narrative to illustrate the wayfinding concept and signage systems proposed for the project. Include all graphics and signage that are to be provided as part of the solicitation.

E. Sustainable Design and Energy Efficiency

Submit final documentation demonstrating LEED® Silver for Healthcare Certification. Where proposed Credits will not achieve all federally-mandated strategies for sustainability and energy efficiency, submit documentation showing compliance with federally-mandated strategies. Submit final ASHRAE 90.1-2010 base-case energy model and as-designed energy model based on the Construction Documents, including all assumptions used, demonstrating compliance with the 30% energy reduction goal. Submit final models for all other systems. Submit final commissioning specifications.

F. Fire Protection/Life Safety

Submit 95% complete fire protection drawings. In addition to the drawing requirements of the Second Design Development submission, include the following:

Door and window schedule indicating fire rating and whether fire rated glazing will be provided;

Height and configuration of storage racks and shelving in relation to fire sprinkler heads;

Reference note to HVAC drawings that indicates interconnection of HVAC system components (dampers, fans) with duct smoke detectors and/or fire alarm system;

When fire pump is required, submit details of the fire pump system, including elevation and isometric detail of fire pump, and interconnection of the fire pump system to the fire alarm system;

Show zoning of each fire alarm initiating device, single line riser diagram for the fire alarm system, and detail of annunciator panel;

Provide final calculations.

Submit fire protection specifications.

G. Mechanical

Provide complete and final engineering calculations of all systems. In addition to specifications, provide complete selection data, including catalog cuts and calculations, for all HVAC equipment and drawings showing all equipment schedules. Complete the coordination requirements with fire protection, electrical, plumbing, architectural (louvers, ceiling access panels, reflected ceiling plans, etc.), and structural work (operating weights of ceiling and floor mounted equipment, concrete and steel supports, roof and floor openings, etc.). Submit 95% complete HVAC floor plans for all areas, showing all ductwork and piping at 1/8-inch scale. Submit 95% complete HVAC floor plans for all mechanical equipment rooms with at least two cross-sections taken at right angles to each other at 1/4-inch scale. Show all equipment located on roof and/or grade.

H. Plumbing

Submit 95% complete and coordinated drawings to include riser diagrams, legend, notes and details. Submit specifications and final calculations.

I. Electrical

Complete the site and building electrical lighting, power, and lightning protection plans. Provide normal and emergency one-line riser diagrams including all conduit and cable quantities and sizes, complete ground system, and electrical equipment amperage/voltage/phase/poles/AIC ratings. Show transformers, switchboards, panelboards, and feeders in relative positions. Tabulate all panelboard schedules. Provide specifications and final calculations. Provide written approval by the utility company of the design of the electrical incoming service.

J. Telecommunications and Special Systems

Show all new services to building from service providers and/or inter-connections. Complete a site plan and a one-line riser diagram including all conduit, backbone cable. Provide telephone, data, security, and special systems risers. Identify all devices and locations. Complete the building low-voltage floor plans. Provide complete specifications for all low-voltage systems and final device locations.

3.20.5 100% CONSTRUCTION DOCUMENTS

All disciplines: complete and coordinate all drawings, specifications, and schedules for 100% construction document submittal. Incorporate all VA and technical review comments. Provide seal (stamp) and signature of the responsible charged A/E on all construction documents and final calculations. Submit design team responses to review comments and QA/QC documentation with 100% document package for back check.

The documents submitted to the Authorities Having Jurisdiction for plan review and permitting shall be the 100% construction documents with VA review comments incorporated.

Also, indicate in each room on the architectural drawings the square footage indicated in the space program under the heading "Program" and the actual square footage of the room as shown on the drawings. The square footage under the heading "Program" shall be listed above the actual square footage of the room shown on the floor plan. Indicate on the drawings in each room the seven digit space # shown for each room in the space program.

3.20.6 APPROVED PLANS AND PERMITS

Prior to the start of construction, submit to VA copies of all permits and two complete sets of construction documents as approved by the Authorities Having Jurisdiction.

3.21 PROJECT SCHEDULE

3.21.1 NAS SCHEDULE

The Lessor shall develop a Network Analysis System (NAS) plan and schedule demonstrating fulfillment of the contract requirements, shall keep the network up-to-date in accordance with the requirements of this paragraph, and shall utilize the plan for scheduling, coordinating, and monitoring work under this lease contract (including all activities of subcontractors, equipment vendors, and suppliers). Conventional scheduling techniques shall be utilized to satisfy time applications. All schedule data and reports required under this paragraph shall be based upon regular total float schedules. The Lessor shall designate an authorized representative in the firm who will be responsible for the preparation of the network diagram and will review and report progress of the project with and to the Contracting Officer or designee. The Lessor's designated representative shall have direct project control and complete authority to act on behalf of the Lessor in fulfilling the requirements of this paragraph, and such authority shall not be interrupted throughout the duration of the project.

3.21.2 SCHEDULE UPDATES

The Lessor shall provide to VA **monthly** compute-generated schedule report updates. The Lessor is responsible for the timely submission and correctness of the monthly reports provided to the Contracting Officer or designee. VA shall report errors in the reports to the Lessor's representative within seven (7) calendar days from receipt of reports. The Lessor shall reprocess the reports when requested by the Contracting Officer or designee, to correct errors that affect the schedule for the project.

3.21.3 DATES

The successful Lessor shall provide a combined project schedule for design and construction. Within 45 calendar days after award, the Lessor shall submit to the Contracting Officer or designee a project schedule giving the dates on which the various phases of design and construction will be completed to coincide with the Government's required occupancy date (refer to Paragraph 1.6 of this Solicitation). The schedule shall clearly indicate the completion of significant activities/events, including but not limited to:

- Submittal of completed First Design Development Package

- Submittal of completed Second Design Development Package
- Submittal of 95% Construction Documents
- Submittal of 100% Construction Documents
- Issuance of a Building Permit
- Submittal to VA of copies of Permits and Approved Construction Documents
- Start of construction
- Completion of principal categories of work
- Testing and balancing
- Building Systems Certification
- Final inspection
- Final completion of construction
- Occupancy permit

3.21.4 ACTIVITIES

The schedule shall contain approximately 1,000 activities/events and shall break up the work into activities/events of duration no longer than 20 work days each, except as to non-construction activities/events (i.e., submittal of shop drawings, submittal review, fabrication, procurement of materials and equipment, delivery of materials and equipment, concrete and asphalt curing, testing and balancing, etc.) and any other activities/events for which the Contracting Officer or designee may approve the showing of a longer duration. The duration for VA approval of any required submittal, shop drawing, or other submittals shall not be less than 15 calendar days.

The schedule shall describe work activities/events clearly, so the work is readily identifiable for assessment of completion. Activities/events labeled "start," "continue," or "completion," are not specific and will not be allowed. Lead and lag time activities will not be acceptable.

3.21.5 GOVERNMENT REVIEW

To the extent that the network diagram or any revised network diagram shows anything not jointly agreed upon, it shall not be deemed to have been approved by the Contracting Officer or designee. Failure to include any element of work required for the performance of this contract shall not excuse the Lessor from completing all work required within any applicable completion date of each phase regardless of the Contracting Officer or designee approval of the network diagram.

3.22 PROGRESS REPORTS

After receipt of VA approved Second Design Development Submittal, the successful Lessor shall submit to the Contracting Officer or designee written progress reports every 30-calendar days, based upon the monthly updated NAS. The report shall include information as to percentage of the work completed by phase and trade, a statement as to expected completion

and occupancy dates, changes introduced into the work, and general remarks on such items as material shortages, strikes, weather, or the like.

3.22.1 REMEDIAL ACTION

Whenever it becomes apparent from the current monthly updated schedule that phasing or contract completion dates will not be met, the Lessor shall execute some or all of the following remedial actions:

- Increase construction manpower in such quantities and crafts as necessary to eliminate the backlog of work.
- Increase the number of working hours per shift, shifts per working day, working days per week, the amount of construction equipment, or any combination of the foregoing to eliminate the backlog of work.
- Reschedule the work in conformance with the solicitation requirements.

The Lessor shall notify the Contracting Officer or designee as to what actions are being taken to mitigate the proposed schedule changes. The project schedule revisions shall be incorporated by the Lessor into the network diagram before the next update, at no additional cost to the Government.

3.22.2 REVISIONS TO SCHEDULE

Within 10 calendar days after any project progress schedule update, the Lessor shall submit a revised project schedule for any of the following reasons:

Delay in completion of any activity/event or group of activities/events that indicates an extension of the project completion by 20 working days or 10% of the remaining project duration, whichever is less. Such delays, which may be involved with contract changes, strikes, unusual weather, and other delays, will not relieve the Lessor from the requirements specified unless the conditions are shown on the schedule as the direct cause for delaying the project beyond the acceptable limits.

Delays in submittals, or deliveries, or work stoppage are encountered which make rescheduling of the work necessary.

The schedule does not represent the actual execution and progress of the project.

Project schedule revisions made under this paragraph which affect the previously approved computer-produced schedules for Government furnished equipment, contract phase(s) and sub-phase(s) or any other previously contracted item, must be furnished in writing to the Contracting Officer or designee for approval.

3.22.3 APPROVAL OF SCHEDULE

The Contracting Officer or designee approval for the revised network diagram and all relevant data is contingent upon compliance with all other paragraphs of this section and any other previous agreements by the Contracting Officer or designee.

3.22.4 COSTS OF REVISIONS

The cost of revisions to the network diagram resulting from contract changes will be included in the proposal for changes in work as specified in Paragraph 3.8, Contract Changes, of this Solicitation, and will be based on the complexity of the revision or contract change, man hours expended in analyzing the change, and the total cost of the change.

The cost of revisions to the network diagram not resulting from contract changes is the responsibility of the Lessor.

3.23 CONSTRUCTION OBSERVATION

Observations of the work during construction will be made periodically by the Contracting Officer and/or the designated Contracting Officer's Technical Representative (COTR) to review compliance with the Solicitation requirements and the final working drawings.

Periodic reviews, tests, and other field observation by the Government are not to be interpreted as superintendence nor as resulting in any approval of the Lessor's apparent progress toward meeting the Government's objectives; but are intended to discover any information that the Contracting Officer may be able to call the Lessor's attention to prevent costly misdirection of effort. The Lessor will remain completely responsible for designing, constructing, operating, and maintaining the building in full accordance with the requirements of this Solicitation.

The Lessor shall provide VA with a copy of all inspection reports for inspections conducted by local, regional, and state code authorities from the start of construction through issuance of the certificate of occupancy.

3.23.1 RESIDENT ENGINEER'S OFFICE SPACE

The Lessor shall provide a temporary field office, furniture, and two-inch deep gravel-surfaced parking area for use of the Resident Engineer. Office and furniture shall be new or in "like new" condition.

A. Temporary Field Office

The field office shall provide not less than 720 gross square feet of floor area in one unit. Installation of the office shall meet all local codes.

Provide office with two 3-foot wide exterior doors, including hardware and OSHA approved platform and stairs leading to grade. A stainless steel lock guard shall be provided over deadbolts on exterior at each door.

Enclose the entire perimeter of the office from the floor to the ground and finish to match exterior. Provide R7 insulation and seal tight to ground with a painted 3/4-inch exterior grade plywood skirt.

Exterior finishes shall be manufacturer's standards.

Provide floor, wall, and roof with not less than R5 insulation.

Interior finishes shall consist of resilient flooring, plywood paneling or painted wallboard on walls, and acoustical tile ceilings. Interior doors may be either painted or stained.

Interior shall be subdivided with full height partitions to provide one office, one sample room, one conference room, one toilet with exhaust. Provide each space with three-foot wide door with master keyed locks. Section off an area with a low partition and counter for the administrative assistant's desk.

Provide 2-1/2 ft wide x 3 ft high operable windows; two in each room (none required in sample room), except provide only one 2-foot high window with frosted glass in toilet room. Provide steel mesh over all glass in doors and windows. The windows shall have mini-blinds.

Provide sufficient fluorescent lighting in each room to deliver 30-foot candles of light at desktop height without the aid of daylight. Provide one light switch in each room. Provide one cord-connected, portable 24-inch fluorescent task light at each secretarial workstation and office desk.

Provide telephones with speakerphone capability, adjustable volume, voice mail service and visible notification of new voicemails.

Provide one quadraplex receptacle in each wall of each room. If a wall is 10 feet long or more, provide two quadraplex receptacles for each 10 feet, or portion thereof, of wall. Provide two quadraplex receptacles in low partition at administrative assistant's desk.

B. Utilities and Services

The Lessor shall provide the following:

Electricity, hot and cold water, and necessary utility services including telephone.

All necessary piping, power circuits, electrical fixtures, lighting, and other items necessary to provide a habitable structure for the purpose intended.

Thermostatically controlled, centralized heating and air conditioning system designed to maintain the temperature between 70 and 80 degrees F with 50% relative humidity. The relative humidity shall be uncontrolled.

One water closet, lavatory, mirror, toilet paper dispenser, paper towel dispenser, soap dispenser, towel bar, and two-prong coat hooks for each toilet room.

Telephone and Internet connections: Provide two (2) telephone lines and one (1) Internet cable service. Minimum speed for internet service shall be 15MB download, 5MB upload. Hard-line connection from trailer to internet service provider required. Other connections allowed only if approved by resident engineer.

Lessor shall, for the duration of the Resident Engineer's occupancy, provide the following:

- Shall be responsible for cost of utilities.

- Secure, safe, and sanitary conditions in and around the field office and parking area.
- Maintenance of gravel surfaced area, including the area for parking, in an acceptable condition for vehicle and foot traffic at all times.
- Maintenance of utility services.
- Daily janitorial services and supplies (toilet paper, soap, etc.).
- Potable water, fuel, and electric power for normal office uses, including lights, heating, and air conditioning.
- Lessor shall be responsible for all maintenance for field office and equipment including replacement of burned out light bulbs or tubes and changing of A/C filters.

C. Furnishings and Equipment

The Lessor shall provide the following new or "like" new reconditioned items:

QUANTITY REQUIRED

- 1 Administrative assistant workstation with adjustable keying desk or drawer size 29-1/2" H x 60" W x 30" D
- 1 Printer stand, size 26-1/2" H x 60" W x 30" D
- 3 Office desks, double pedestal
- 1 Conference table, size 3' x 6'
- 1 Plan table 4' x 7'
- 3 Work tables, folding 30" x 72"
- 1 Secretary chair
- 4 Swivel chairs with arms
- 6 Conference chairs (armless and folding)
- 2 Arm chairs
- 4 5 drawer file cabinets, letter size
- 1 Drawing rack, with 12-30 inch "Plan Hold" drawing holders, freestanding
- 1 Shelves for sample room, 7 adjustable shelves, 12" W x 3' L
- 3 Bookcases
- 1 Electric water cooler
- 1 Metal storage cabinet, 36" x 18" x 72" with six shelves

D. Disposition of Field Office at Completion of Construction

At the completion of all work, including the punch list, the Resident Engineer's field office and facilities, except 5 drawer file cabinets shall become the property of the Lessor, and Lessor shall remove same, including utility connections, from the site. The site shall be restored to original condition and finished in accordance with contract requirements.

E. Submittal of Plans for Field Office

The Lessor shall furnish floor plans for approval by the Resident Engineer prior to furnishing the field office.

3.24 COST OF RESIDENT ENGINEER'S OFFICE

All costs associated with the Resident Engineer's office including, but not limited to, construction, demolition, hook-ups to utilities, furniture, fixtures, and equipment (RE Office Costs) shall be paid by the Lessor. Upon acceptance of the space, VA shall reimburse the Lessor for all RE Office Costs as part of the lump sum payment VA will make upon acceptance of the space. The Offeror shall state this lump sum payment amount as a separate line item on the attachment to GSA Form 1364.

3.25 SAMPLES AND SHOP DRAWINGS

The Lessor shall provide submittals to the Government for approval of all materials and equipment in accordance with this solicitation. The Government accepts no responsibility for checking schedules or layout drawings for exact sizes, exact numbers, or detailed positioning of items. Approval by the Government does not relieve the Lessor of the responsibility of complying with the requirements of the specifications and lease.

3.26 CONSTRUCTION WASTE MANAGEMENT

Recycling construction waste is mandatory for initial space alterations for tenant improvements and subsequent alterations under the lease. Recycling construction waste means providing all services necessary to furnish construction materials or wastes to organizations which will employ these materials or wastes in the production of new materials. Recycling includes required labor and equipment necessary to separate individual materials from the assemblies of which they form a part. Refer to Paragraph 4.8 SUSTAINABLE DESIGN AND ENERGY EFFICIENCY.

3.27 USE OF FACILITY PRIOR TO DATE OF POSSESSION

Space shall be delivered ready for occupancy by the date specified in Paragraph 1.6 of the Solicitation provided; however, subject to mutually satisfactory arrangements between the Lessor and the Contracting Officer, the Government may enter the premises at any time subsequent to award of the contract to conduct such ceremonies as ground-breaking, cornerstone laying, and dedication, and may occupy such portions of the property as may be

necessary for such purposes. Further, the Lessor agrees to prohibit the conducting of such ceremonies in the leased premises or on the site thereof arranged by parties other than representatives of VA unless written approval is obtained from the Contracting Officer.

3.28 PLANS: AFTER OCCUPANCY

Within 30 days after occupancy, the following as-built plans for the building under lease shall be provided to the Contracting Officer or designee. If the plans are not provided, VA will have the plans prepared at the Lessor's expense.

One set of mylar reproducible architectural floor plans, scaled at 1/8" = 1'-0".
One set of mylar reproducible equipment plans, scaled at 1/4" = 1'-0".

Purged computer files of architectural floor plans, and equipment plans in AutoCAD 2010/ format, shall be submitted on CD-ROM or DVD, properly labeled and indexed. Submission shall be accompanied with a written matrix, indicating the layering standards to ensure that all information is recoverable. All architectural features of the spaces shall be accurately shown.

3.29 PARTNERING

In order to accomplish this contract effectively, the Government proposes to form a cohesive partnership with the successful Offeror and its subcontractors. This partnership would strive to draw on the strengths of each organization in an effort to achieve a quality project, executed correctly the first time, within the budget, and on schedule. This partnership will be totally voluntary. The focus of partnering is to build a cooperative relationship with the private sector and avoid or minimize disputes, and to nurture a more collaborative ethic characterized by trust, cooperation, and teamwork. Partnering is defined as the creation of a relationship between the Government and the successful Offeror that promotes mutual and beneficial goals. It is a non-contractual, but formally structured, agreement formation of a "we" mentality for the benefit of the project. Any cost associated with developing this partnership will be agreed to by both parties after contract award, and will be shared equally with no change in contract price.

3.30 ACCEPTANCE OF SPACE AND CERTIFICATE OF OCCUPANCY

Twenty (20) working days prior to the completion of interior construction, the Lessor shall issue written notice to the Government to inspect the space. The Government shall have ten (10) working days to inspect and to either accept or reject the subject space. Substantially completed space is defined as space which can be fully used for its intended purposes (with the exception of the completion of minor punch list items), and is habitable as verified by local code and required inspections (including, but not limited to: receiving PERMANENT Certificate of Occupancy, security system properly functioning, passed life safety inspection, and Government receiving final commissioning report), and completely operational for its intended tenants, clients, and visitors (see the Acceptance of Space and Certificate of Occupancy paragraph of GSA Form 3517, General Clauses.) Punch list items include minor cosmetic defects such as paint touch-up, chipped ceiling tiles, and other minor corrective items which in

no way compromise the use or function of the space under lease. Space which is not substantially complete will not be accepted by the Government. Should the Government reject the Lessor's space as not substantially complete as defined herein, the Lessor shall immediately undertake remedial action and when ready shall issue a subsequent notice to inspect to the Government.

MINOR PUNCH ITEMS ARE DEFINED AS BOTH MAGNITUDE AND QUANTITY, WITH NO MORE THAN 100 ITEMS FOR THE INTERIOR OF THE BUILDING AND NO MORE THAN 100 EXTERIOR ITEMS TO INCLUDE ALL PARKING AREAS, ROOFS. RETAINAGE FOR OUTSTANDING PUNCH WORK SHALL BE HELD BY THE GOVERNMENT IN THE AMOUNT OF THE CONTRACTING OFFICER'S REPRESENTATIVE ESTIMATE OF UNIT COSTS X 2.

PRIOR TO THE GOVERNMENT'S ACCEPTANCE, THE LESSOR SHALL PROVIDE A VALID PERMANENT CERTIFICATE OF OCCUPANCY, ISSUED BY THE LOCAL JURISDICTION, FOR THE INTENDED USE OF THE GOVERNMENT AND SHALL MAINTAIN AND OPERATE THE BUILDING IN CONFORMANCE WITH CURRENT LOCAL CODES AND ORDINANCES. IF THE LOCAL JURISDICTION DOES NOT ISSUE CERTIFICATES OF OCCUPANCY, THE LESSOR SHALL OBTAIN THE SERVICES OF A LICENSED FIRE PROTECTION ENGINEER TO VERIFY THE OFFERED SPACE MEETS ALL APPLICABLE LOCAL CODES AND ORDINANCES TO ENSURE AN ACCEPTABLE LEVEL OF SAFETY IS PROVIDED AND A SIGNED CERTIFICATION FROM THE COMMISSIONING ENGINEER THAT ALL BUILDING EQUIPMENT FALLING UNDER THE RESPONSIBILITY OF THE COMMISSIONING ENGINEER IS FULLY AND SAFELY FUNCTIONAL.

ADDITIONALLY, AN APPROVED AND PASSING AIR BALANCING REPORT MUST BE PROVIDED PRIOR TO REQUEST OF ACCEPTANCE.

3.31 SUBCONTRACTING COMMITMENTS-MONITORING AND COMPLIANCE

This solicitation includes VAAR 852.215-70, Service-Disabled Veteran-Owned and Veteran-Owned Small Business Evaluation Factors, and VAAR 852.215-71, Evaluation Factor Commitments. Accordingly, any contract resulting from this solicitation will include these clauses. The contractor is advised in performing contract administration functions, the CO may use the services of a support contractor(s) to assist in assessing contractor compliance with the subcontracting commitments incorporated into the contract. To that end, the support contractor(s) may require access to the contractor's business records or other proprietary data to review such business records regarding contract compliance with this requirement. All support contractors conducting this review on behalf of VA will be required to sign an "Information Protection and Non-Disclosure and Disclosure of Conflicts of Interest Agreement" to ensure the contractor's business records or other proprietary data reviewed or obtained in the course of assisting the CO in assessing the contractor for compliance are protected to ensure information or data is not improperly disclosed or other impropriety occurs.

Furthermore, if VA determines any services the support contractor(s) will perform in assessing compliance are advisory and assistance services as defined in FAR 2.101, Definitions, the

support contractor(s) must also enter into an agreement with the contractor to protect proprietary information as required by FAR 9.505-4, obtaining access to proprietary information, paragraph (b). The contractor is required to cooperate fully and make available any records as may be required to enable the CO to assess the contractor compliance with the subcontracting commitments.

SECTION 4 GENERAL DESIGN CRITERIA

4.1 CODES

The Lessor shall design and construct the building and site work in accordance with this solicitation, all applicable Federal regulations, local Building and Zoning Codes and ordinances, and applicable utility company requirements. The term "local building and zoning codes and ordinances," or similar text, shall be understood to mean the current codes and regulations as approved and administered by Authorities Having Jurisdiction (AHJ) at the project location at the time of permitting. Where there is a conflict between the various codes or standards, the most stringent shall apply.

4.2 CRITERIA FOR VA FACILITIES

4.2.1 VA ADOPTED CODES, STANDARDS, AND EXECUTIVE ORDERS

The Public Buildings Amendment Act of 1988, Public Law (Pub. L.) 100-678 requires Federal agencies to follow national recognized "model" building codes. The Federal Participation in the Development and Use of Voluntary Standards, Office of Management and Budget (OMB) Circular A-119, requires all executive agencies to rely on voluntary standards, both domestic and international, whenever feasible, and to participate in voluntary standard bodies. As a Federal agency, VA is required to comply with Executive Orders.

VA has adopted the following codes and standards as a minimum for all projects performed in the modernization, alteration, addition, or improvement of its real property and the construction of new structures. Applicable requirements have been incorporated in this Solicitation for Offers.

CODES / STANDARDS	EDITION
AIA/FGI (American Institute of Architects/Facility Guidelines Institute): Guidelines for Design and Construction of Healthcare Facilities	2010
ANSI/ASHRAE Standard 62.1 – Ventilation for Acceptable Indoor Air Quality	2013
ANSI/ASHRAE Standard 90.1 – Energy Standard for Buildings except Low-Rise Residential Buildings (Use ASHRAE Standard 90.1 – 2004 for computing energy benchmark.)	2010
ANSI/ASHRAE Standard 15 – Safety Standard for Refrigeration Systems	2013
ANSI/ASHRAE Standard 170 – Ventilation of Healthcare Facilities	2013
Architectural Barriers Act Accessibility Standards (ABAAS, 36 CFR Part 1191)	2004
ASHRAE Handbook of Fundamentals	2013

CODES / STANDARDS	EDITION
ASHRAE Handbook of Refrigeration	2014
ASHRAE Handbook of Applications	2012
ASHRAE Handbook of Systems and Equipment	2012
ASME Boiler and Pressure Vessel Code	2015
ASME Code for Pressure Piping	Latest Edition
ASPE Data Book, Volume 1: Fundamentals of Plumbing Engineering	2013-2014
ASPE Data Book, Volume 2: Plumbing Systems	2014
ASPE Data Book, Volume 3: Special Plumbing Systems	2011-2012
Building Code Requirements for Reinforced Concrete, American Concrete Institute and Commentary (ACI 318)	Latest Edition
International Building Code (IBC), with the exception of Chapter 10, unless locally adopted	Latest Edition
International Energy Conservation Code (IECC)	2012
International Fuel Gas Code (IFGC)	2012
International Mechanical Code (IMC)	2012
International Plumbing Code (IPC)	2009
NFPA 70 – National Electrical Code	Latest Edition
Manual of Steel Construction, Load and Resistance Factor Design Specifications for Structural Steel Buildings, American Institute of Steel Construction (AISC)	Latest Edition
NFPA 101 – Life Safety Code	2014
All Remaining NFPA National Fire Codes with the exception of NFPA 5000 and NFPA 900	Latest Edition
Occupational Safety & Health Administration (OSHA) Standards (Healthcare)	Latest Edition
Safety Code for Elevators and Escalators, American Society of Mechanical Engineers (ASME) A 17.1	Latest Edition
SMACNA – HVAC Duct Construction Standards: Metal & Flexible	2005, 3 rd Edition
SMACNA – HVAC Air Duct Leakage Test Manual	2012
VA HVAC Design Manual for New, Replacement, Addition, and Renovation of Existing Facilities	2011
VA Barrier Free Design Guide, PG-18-13	2011
US Pharmacopeia (USP) Revised General Chapter <797> Pharmaceutical Compounding-Sterile Preparations	2008
VA Physical Security Design Manual – Life-Safety Protected	2015
VA BIM Guide	2010

The lessor is required to follow local seismic codes. The Lessor shall be responsible for the professional quality, technical accuracy, and the coordination of all designs, drawings, specifications, and other services furnished by the Lessor under this contract. The Lessor shall, without additional compensation, correct or revise any errors or deficiencies in its designs, drawings, specifications, or other services.

A. Life Safety

NFPA 101 primarily addresses life safety and fire protection features, while the IBC addresses a wide range of considerations, including, but not limited to, structural strength, seismic stability, sanitation, adequate light and ventilation, and energy conservation. VA buildings must meet the requirements of NFPA 101 and documents referenced by NFPA 101 in order to comply with the accreditation requirements of the Joint Commission. Therefore, designs shall comply with the requirements of NFPA 101 and documents referenced therein. Design features not addressed by NFPA 101 or documents referenced therein shall comply with the requirements of the IBC.

B. Mandatory Provisions for Energy Conservation

Federally mandated statutory requirements for energy conservation are also applicable to the leased facilities. These requirements include:

(1) Federal Leadership in High Performance and Sustainable Buildings: MOU (Memorandum of Understanding) Dated November 2006

This document was signed by 21 Federal Agencies under the Federal Leadership in High Performance and Sustainable Buildings. The stated goals and objectives of the MOU are:

New Construction: Reduction in the Energy Cost Budget by 30% over the Baseline performance rating of ASHRAE Standard 90.1 – 2007.

Reduction in the energy cost budget shall be implemented as the reduction in energy consumption measured as BTU (British Thermal Units) or Joules (J).

For major renovations, reduce the energy cost budget by 20% below pre-renovations 2003 baseline. In the event pre-renovation 2003 baseline data is not available, the A/E shall calculate the energy consumption before renovation, compare it with the energy consumption after renovation, and document the mandated saving. It is assumed that the use of the facility shall remain similar before and after the renovation. The term "major renovation" shall meet the following two guidelines:

- Area of renovation is greater than 50% of the total area.
- A project is planned that significantly extends the building's useful life through alterations or repairs and totals more than 30% of the replacement value of the facility.

Additional issues addressed by MOU are:

Commissioning: The Lessor shall incorporate commissioning requirements to verify that the installation and performance of energy consuming systems meet the Government's project requirements. The commissioning shall cover at a minimum: heating, ventilating, air

conditioning and refrigeration (HVAC&R) systems and associated controls, lighting controls, and domestic hot water systems.

Measurements and Verification: Per DOE Guidelines issued under section 103 of the Energy Policy Act of 2005 (EPAcT), install building level utility meters in new major construction and renovation projects to track and continuously optimize performance. MOU mandates that the actual performance data from the first year of operation should be compared with the energy design target. After one year of occupancy, measure all new major installations using the Energy Star® Benchmarking Tool for building and space types covered by ENERGY STAR® or FEMP-designated equipment. Minimum Energy Star rating for the facility shall be 75.

(2) Energy Policy Act (2005):
DOE issued mandatory energy conservation guidelines as the final rule for implementing provisions of EPAcT 2005.

(3) Executive Order 13423: Strengthening Federal Environmental, Energy, and Transportation Management
Mandatory energy conservation guidelines are also reiterated in the above Executive Order
DOE has mandated that a new Federal building must be designed to achieve an energy consumption level that is at least 30% below the level achieved under Standard 90.1-2010, if life-cycle cost-effective.

C. Life-Cycle Cost (LCC) Analysis (Requirements)

If additional 30% reduction in energy consumption were not life-cycle cost-effective, the A/E must evaluate alternate designs at successive decrements (25%, 20%, or lower) in order to identify the most energy efficient design that is life-cycle cost-effective. And in so doing, all readily available energy conservation measures, with which the industry is generally familiar, should be considered and evaluated.

DOE further stipulates that the "agencies must estimate the life-cycle costs and energy consumption of the planned building as designed and an otherwise identical building just meeting the minimum criteria set forth in the applicable baseline ASHRAE or IECC standard." This measure is meant to demonstrate and record the mandated compliance and the extent of it.

D. Life-Cycle Cost Analysis (Methodology)

LCC shall be performed in accordance with the procedure outlined by the Department of Energy (DOE) in the National Institute of Standards and Technology (NIST) Handbook 135 dated February 1996 (or the latest version) – Life-Cycle Costing Manual for the Federal Energy Management.

E. Conflicts

Should a conflict exist between VA requirements and VA-adopted nationally recognized codes and standards, the conflict shall be brought to the attention of VA. The resolution of the conflict shall be made by the authority having jurisdiction for VA to ensure system-wide consistency.

4.2.2 SPECIAL BUILDING REQUIREMENTS

A. Water Coolers

The Lessor shall provide electric water coolers in the main lobby, each major waiting area, and in other areas as designated by the Contracting Officer. Lessor shall provide greater quantity of water coolers if required by Code. Water coolers shall be wall mounted, bi-level, accessible electric water coolers with water bottle filler.

B. Telecommunications/Special Systems Rooms

Design, size and construction of telecommunications, data, and special systems rooms and spaces shall comply with requirements in Paragraph 6.8.2 TELECOMMUNICATIONS/SPECIAL SYSTEMS ROOMS AND SPACE REQUIREMENTS.

4.2.3 EXCLUSIONS FROM NET USABLE SPACE

A. Housekeeping Closets

Housekeeping aides closets (HAC) shall be provided as shown on concept plan. Each HAC shall contain a service sink with hot and cold water, ample space for storage of cleaning equipment, and shelving for cleaning materials and supplies. Lessor shall provide the supplies in accordance with SECTION 8 of this SFO. VA will pay no rent for this space.

Provide additional housekeeping aides closets in leased spaces as required by VA Space Program (PART VI Schedule E). VA will pay rental for HACs required by Schedule E.

B. Public Restrooms and Lounges

Space for public toilets must be provided in addition to the net usable square footage requirement contained in Schedule E of this Solicitation. VA will pay no rent for this space.

All public and common use toilet rooms shall be accessible to the handicapped. Accessible toilet facilities shall be located along an accessible path of travel and have accessible fixtures, accessories, doors with automatic door openers, and adequate maneuvering clearances. Accessible toilet rooms shall be identified with the international symbol of accessibility. Water closets and urinals shall not be visible when the exterior room door is open.

Separate toilet facilities for men and women shall be provided on each floor occupied by the Government in the building. The facilities must be located so that employees will not be required to travel more than 150 feet on one floor to reach the toilets.

Each toilet room shall have sufficient water closets enclosed with stall partitions and doors as specified in Paragraph 7.14 of this Solicitation, urinals (in men's rooms), and lavatories with hot (set at 105 °F [41 °C], if practical) and cold water in the number required by local Building Code and ordinances.

Public restrooms that have three or more stalls shall be provided with one lighting fixture on an emergency circuit or one emergency battery lighting unit with dual head.

Public Restrooms Fixture Schedule

Public restrooms and associated fixtures shall be provided in accordance with local code.

C. Building Equipment and Service Areas

Lessor shall provide adequate space for the installation, operation, and maintenance of building service equipment. Lessor shall provide office, shop, and storage space necessary for operation and maintenance of the building and grounds. VA will pay no rent for this space.

- Space for mechanical systems equipment.
- Space for plumbing systems equipment.
- Space for fire protection systems equipment.
- Space for electrical systems equipment.
- Space for telecommunications and special systems equipment (including telephone, data, alarm, security, and other systems).
- Space for building engineering control center.
- Office, shop, and storage space for building management services.
- Space for grounds maintenance.
- Space for nurse call equipment

D. Public Corridors and Entrance Lobbies

Lessor shall provide building entrance lobby as shown on conceptual plans. Lessor shall provide public corridors as necessary to common areas. VA will pay no rent for this space.

E. Vertical Circulation

Space for vertical circulation includes stairs (and stair enclosures or vestibules), elevator lobbies, elevator hoistways, and elevator machine rooms. VA will pay no rent for this space.

F. Shafts and Risers

Provide shafts, chases, and risers necessary for distribution of building services or utilities. VA will pay no rent for this space.

4.2.4 PHYSICAL SECURITY AND NATURAL DISASTERS RESISTIVE DESIGN

The requirements for "Life Safety Protected Facilities" (LSP) contained in the VA Physical Security Design Manual apply to all VA constructed or leased Outpatient Clinics. Lessor shall include the following provisions for Site Considerations, Building Entrances and Exits, Building Envelope, Structural System, Utilities and Building Service, Building Systems, Security Systems, and Special Areas in the design and construction.

A. Site Considerations

(1) Site Access and Roads

Separate entrances to the site shall be provided for patients and visitors, employees and staff, emergency and service and delivery vehicles. Access roads for all vehicles shall allow for separate driveways to the building entrance, service yard or parking areas. Access roads from the entrances to parking for each vehicle type shall be separated, but may be connected for maintenance and emergency vehicles through gates controlled by access cards.

Access roads shall be configured to prevent vehicles from attaining speeds in excess of 25 mph. Avoid any straight-line vehicular approaches to the facility.

(2) Vehicle Barriers

Provide passive barriers adjacent to vulnerable perimeter fences, protection for site utility equipment, at building entrance, and other areas requiring additional protection from vehicles. Passive vehicle barrier shall be selected on the appropriateness of the architecture of the facility and specifics of the site and natural environment. Natural or man-made barriers may be used.

- Landscaping examples include berms, gullies, boulders, trees and other terrain.
- Hardscaping examples include benches and planters.
- Structural examples include walls, bollards and cables.

(3) Parking

No vehicle shall be parked or be permitted to travel close than 25 feet [7.62 m] to any life-safety protected VA Facility.

Parking and access for patients, visitors, and the persons transporting them to and from the VA facility shall be as convenient as possible to the main entrance, subject to the requirements above. Where vehicles are unscreened, make site provisions to accommodate a shuttle service for persons needing assistance. Parking and facility access shall comply with accessibility requirements.

Ambulances shall be permitted to approach the building directly and not be subjected to the distance requirements.

Vendors shall use the delivery vehicle entrance and service yard at the loading dock. Parking shall be provided for vendors in the service yard.

Where employees share access with patients and visitors, the entrance to the employee parking shall be controlled by a card-actuated gate. Employee parking areas shall be monitored by SSTV. Emergency alert systems, such as blue phones, shall be provided at the discretion of the VA Police.

When separation of types of traffic is not feasible, card-controlled access gates and other traffic separation measures shall be used.

B. Building Entrances and Exits

Public access to the facility should be restricted to a single entrance. The public entrance is to the main lobby of the facility. Staff entrances shall be located independently of main entrance lobbies and be convenient to staff parking. Design access from drop-off to lobby to prevent a straight line of travel. Provide sufficient size to accommodate several people with mobility aids.

Public access shall include a screening vestibule with sufficient space and power, telecommunications, and data connections for installation of access control and screening equipment. When screening devices are not permanently installed, provide secure storage in close proximity to their installation location.

Entrance doors to the lobby shall be visible to or monitored by security personnel. Access from the lobby to corridors shall be controlled. Separate the public lobby from adjacent areas with partitions that extend to the underside of the floor above. Glazing in the lobby area shall be laminated glass.

Public doors shall be capable of being remotely locked and unlocked from the reception desk in the main lobby. Secondary public entrance doors shall prevent unauthorized access. Staff entrance door hardware shall include either mechanical or electronic locks.

Means of egress doors that do not also function as entrances shall be provided with delayed action and alarmed emergency egress hardware. Delayed egress and alarmed exits shall comply with applicable codes and regulations. Means of egress shall not be obstructed by installation of security devices such as guard stations, screening equipment, or other security devices.

Access for Emergency Responders: The Fire Command Center (FCC) will be located in the Police Office near the building entrance, and the secure house key box for emergency responders shall be located near an entrance door. The entrance shall be controlled and monitored by Security Surveillance Television (SSTV).

SSTV cameras shall be provided to monitor activities in the lobbies of new and existing life-safety protected facilities and shall be located to provide views of approaching pedestrian and vehicular traffic, drop-off areas, building entrances, and departing pedestrian and vehicular traffic. Provide SSTV cameras at locations with alarmed exits, at loading docks, and other areas subject to pilferage. Install door status monitors at doors intended to be used only for emergency egress.

C. Building Envelope

Non-load bearing walls shall be designed to withstand the design level vehicle threat. Walls shall be able to accept the tributary loads transferred from glazed fenestration in addition to the design level pressures applied directly to their surface.

Façade fenestration shall be designed and constructed using debris mitigating materials such as laminated glass. The glass shall be restrained within the mullions and the mullions shall be designed to accept the design level pressures. Curtain wall framing members shall span from slab to slab and shall not be attached directly to gravity load bearing elements (such as columns and shear walls) unless an advanced analysis of the load bearing element demonstrates it can accept the maximum forces of the members framing into it without compromising its load bearing capacity.

Roof structure shall be designed to withstand the design level vehicle threat taking into account the presence of parapets, the diffusion of blast waves, and the spatial extent of the roof surface.

Skylights and clerestories shall be designed in response to the calculated peak pressures and impulses resulting from the design level vehicle threat. Skylight and clerestory glass shall be restrained within the mullions and the mullions shall be designed to accept the design level pressures.

Penthouses enclosing mission-critical equipment shall be designed to resist the design level vehicle threat and to be consistent with the hardened intakes and exhausts.

D. Structural System

Structural systems shall be constructed to withstand the actual pressures and corresponding impulses produced by the design level vehicle threat and the design level satchel threat that may be delivered to loading docks, mailrooms, below grade parking garages, and lobbies prior to screening. The design shall provide a level of protection for which progressive collapse will not occur; the building damage will be economically repairable and the space in and around damaged area can be used and will be fully functional after cleanup and repairs.

E. Building Systems

HVAC systems: locate major mechanical equipment above the ground floor in an area not subject to flooding. All air intakes shall be located so that they are protected from external sources of contamination. Locate the intakes away from publicly accessible areas, minimize obstructions near the intakes that might conceal a device, and use intrusion alarm sensors to monitor the intake areas.

- Locate all outdoor air intakes a minimum of 100 feet [30.48 m] from areas where vehicles may be stopped with their engines running.
- Locate all outdoor air intakes a minimum of 30 feet [9.14 m] above finish grade or on roof away from the roof line.

Design air intakes and exhausts to minimize the blast over pressure admitted into critical spaces and to deny a direct line of sight from a vehicle threat located at the stand-off distance to the critical infrastructure within.

Maintain positive pressure in lobbies and entrance areas.

Fire protection systems: fire department hose connections located on the exterior of a building shall be secured in suitable enclosure that limits access to authorized personnel. Coordinate with the serving fire department.

F. Security Systems

SSTV system shall be provided to monitor building entrances, restricted areas, mission critical asset areas, and alarm conditions. SSTV system shall be used for surveillance and observations of defined exterior areas, such as site and roadway access points, parking lots, and building perimeter, and interior areas from a centralized police operations room or security control center. The design, installation, and use of SSTV cameras shall support the visual identification and surveillance of persons, vehicles, assets, incidents, and defined locations.

The **Intrusion Detection System (IDS)** shall include motion detection, glass break, and door contact sensors, among other devices. These devices provide alternative methods to detect actual or attempted intrusion into protected areas through the use of alarm components, monitoring, and reporting systems. The IDS shall have the capability of being integrated with DSPI, PACS, and SSTV systems. All IDS shall meet UL 639 Intrusion Detection Standard.

IDS shall be used to monitor the site perimeter, building envelope and entrances, and interior building areas where access is restricted or controlled.

The **Physical Access Control System (PACS)** shall include, but not be limited to: card readers, keypads, biometrics, electromagnetic locks and strikes, and electronic security management system (SMS). PACS devices shall be used for the purpose of controlling access and monitoring building entrances, sensitive areas, mission critical asset areas, and alarm conditions from an access control perspective. This includes maintaining control over defined areas such as site access points, parking lot areas, building perimeter, and interior areas that are monitored from a centralized SCC. PACS shall be able to be fully integrated with other security subsystems using direct hardwire or computer interface.

Electronic Security Management System (SMS): The SMS shall allow the configuration of an enrollment and badging, alarm monitoring, administrative, asset management, digital video management, intrusion detection, visitor enrollment, remote access level management, and integrated security workstations or any combination thereof. Entry control software shall allow for programming of the PACS via a CPU. All software shall be updated per manufacturer's instructions. Network interface devices shall consist of all hardware and software required to allow for full interface with other security subsystems via a CPU.

Duress, Security Phones, and Intercom System (DSPI): The DSPI system is used to provide security intercommunications for access control, emergency assistance, and identification of locations where persons under duress request a security response. All components of the DSPI shall be fully compatible and shall not require the addition of interface equipment or software upgrades to ensure a fully operational system. DSPI shall be fully integrated with other security subsystems.

G. Special Areas

(1) General Design Criteria

Apply the following considerations in the layout and design of special areas within the outpatient clinic.

Telephone Equipment Room: The Telephone Equipment Room shall be located not closer than 50 feet [15.24 m] in any direction to main entrance lobbies, loading docks, and mailrooms, and in no case directly above or below such spaces.

Emergency and/or Stand-By Generators: The emergency and stand-by generators and related switchgear may be located in a separate structure from the main building or within the main building. The generator room shall not be located at an elevation subject to flooding at any time. The generator room shall not be located closer than 50 feet [15.24 m] of a loading dock/receiving area or mailroom, and shall not be located beneath such facilities. Areaways and louver openings serving the generator shall not open to the service yard for the loading dock. Entrances from the exterior shall not open to the loading dock service yard.

Police Office: Police office shall be located on the first floor of the building adjacent to the highest potential trouble area, such as the lobby, and shall be located to allow appropriate response and deployment to respond to a security related event. When the police office is adjacent to or opens onto areas occupied by unscreened public, such a lobbies, and public corridors, construction, including partitions from slab to slab, doors, windows, and other

openings separating the unit from such spaces, shall be 1-hour fire resistive, UL level 3 ballistic-resistant. SSTV surveillance shall be provided of the entire room through an opening glazed with transparent polycarbonate in a steel frame firmly anchored to the wall.

(2) Additional Security Requirements

Lessor shall provide the following physical security measures or features for the spaces or areas listed below.

SECURITY REQUIREMENTS for SPECIAL AREAS														
LOCATION	APPLICABLE REQUIREMENTS (X)													
	(See list below table)													
	1	2	3	4	5	6	7	8	9	10	11	12	13	14
Canteen / Coffee Shop														
Canteen Storage														
Acquisition & Materiel Management (A&MM) (Supply Warehouse)	O	X	X	X	X						X			
Dental Precious Metal Storage	O		X	O	X						X			
Main Telephone Equipment Room; Computer Room; Telecom; MEP	X		X	X	X					X	X			
Extended Care Team Work Areas									X	X	X	X	X	X
Exam and Procedure Rooms												X	X	X

1: Windows

Windows with sills less than 40 feet [12.19 m] from the ground or the roof of a lower abutment, less than 25 feet from windows of an adjoining building, and accessible by a building ledge leading to windows of other floor rooms require security mesh screening. Stainless steel security mesh screening shall be equivalent to woven mesh 0.028" wire diameter alloy #304 stainless steel, and have a tensile strength of 800 pounds per lineal inch. Mesh shall be equivalent to 12 x 12 per inch with main and sub frames of 12 gauge carbon steel with baked enamel finish and internal key locking slide bolts. Security mesh screens are to be installed on inside of windows.

2: Walls

All walls or partitions for the designated room shall be constructed to resist forced entry.

Exterior walls of brick or masonry construction shall be acceptable. Metal stud walls shall be reinforced with security mesh to provide equivalent protection.

Interior partitions may be solid 4-inch CMU or metal stud with security mesh.

Metal lath or plaster base is unacceptable as security mesh. Security mesh shall be flattened, expanded metal manufactured from high strength, low alloy steel and shall conform to ASTM F 1267, Type 11, Class 1, Mill finish. Mesh designation: 3/4 #13F; Mesh Design Size 0.923 x 2.10 inch; Mesh Opening Size 0.688 x 1.781 inch; 13 meshes per foot, 74% open area; Mesh Strand Width 0.106 inch; Mesh Strand Thickness 0.078 inch; Weight 0.75 pounds per square foot. Provide manufacturer's attachment clips and use recommended fasteners to secure mesh to wall framing.

3: Doors And Locks

Solid core wood or hollow steel door construction shall be 1-3/4" thick. Dutch or half doors are unacceptable. Hinge pins on door exterior (unsecured side) shall be non-removable type. Doors shall be set in hollow metal (steel) frames and fitted with mortise lock. All locking arrangements shall comply with NFPA 101 and shall require no more than one operation from the inside (in direction of egress) to unlock/unlatch the door regardless of the number of locks or latches.

Mortise lock shall have latch bolt and independent dead bolt (min 3/4-inch throw). Latch bolt must be automatically locking on door closure; requiring re-entry to the room with key or lock combination and allowing egress from the room by use of an inside lever. Key outside or thumb turn inside shall retract or project the dead bolt. When dead bolt is projected, inside lever shall simultaneously retract latch bolt and dead bolt. Combinations or keys to locks will be restricted to service employees and combinations changed immediately on the termination or reassignment of an employee.

4: Other Room Access Means

Ceiling overhead areas which enable entry into a secure room from an unsecured room must be barricaded by the installation of a suitable partition or ceiling which deters "up and over" access. Ventilation grills on doors which exceed 96 square inches [620 cm²] in area must be reinforced to prevent their removal from outside the room. All vents, ducts, and similar openings in excess of 96 square inches [620 cm²] that enter or pass through the secure space shall be protected with either bars or grills. If one dimension of the duct measures less than six inches [150 mm] or duct is less than 96 square inches [620 cm²], bars are not required; however, all ducts must be treated to provide sufficient sound attenuation. If bars are used, they must be 1/2-inch [12.7 mm] diameter steel welded vertically and horizontally six (6) inches [150 mm] on center; if grills are used, they must be of 9-gauge expanded steel. Openings in construction above ceilings or below raised access floors shall be protected as above.

5: Motion Intrusion Detectors

An intrusion detection alarm system which detects entry into the room and which broadcasts a local alarm of sufficient volume to induce an illegal entrant to abandon a burglary attempt. Intrusion detectors must have the following essential features:

An internal, automatic charging DC standby power supply and a primary AC power operation.

A remote, key operated activation/deactivation switch installed outside the rooms and adjacent to the room entrance door frame.

An automatic reset capability following an intrusion detection.

A local alarm level of 80 dB (min) to 90 dB (max) up to 100 feet [30.48 m] from the protected room.

An integral capability for the attachment of wiring for remote alarm and intrusion indicator equipment (visual or audio).

A low nuisance alarm susceptibility.

Intrusion detector equipment which operates on the principle of narrow beam interception, microwave, or photo electric eye is unacceptable.

Installation Notes:

A locally sounding alarm should not be installed in a room which is close to a cardiac care or other special treatment area where a loud alarm would have an injurious effect on patients.

Intrusion detector alarms will be remotely monitored by a commercial security alarm monitoring firm, a local police department, or a security office charged with building security.

The remoted alarms will be in addition to locally broadcast alarms in the protected areas.

6: Bulk Drug Storage Cabinets

Steel cabinet with adjustable shelving and built in locking devices are required for the storage of bulk supplies of Schedule II to V controlled substances.

7: Refrigerators

VA furnished and installed. Lessor shall provide refrigerators as listed in Schedule B equipped with built in lock mechanism when used to store controlled substances (all schedules) and other potentially dangerous drugs and when located outside a locked or attended drug storage room.

8: Medicine Cabinets

VA furnished and installed. Provide secure narcotics locker(s) as listed in Schedule B.

H. Natural Disasters Resistive Design

Lessor shall include the following specific provisions for emergency utility services, emergency site access facilities, and resistive design of non-structural building elements. Where local Seismic Code is more stringent, comply with local code. Non-structural building elements include all components or systems that are not part of the building's structural system whether inside or outside, above or below grade. Non-structural elements of buildings include architectural, elevator and transport, mechanical, plumbing, and electrical elements.

I. Emergency Utilities

(1) Electric Power Services

Provide emergency electric power in accordance with the requirements of Paragraph **Error! Reference source not found.** Essential Electrical Systems for Clinics herein.

(2) Natural Gas Service

In addition to a manual shut-off valve, provide an earthquake-sensitive automatic safety shut-off valve in the on-site gas supply line serving the outpatient clinic.

J. Emergency Site Access Facilities

(1) Ground Transportation

Provide for emergency access to VA premises from two or more public roads.

Design on-site bridges, retaining walls, culverts, and other road structures, which conduct traffic, to comply with local seismic code requirements.

(2) Air Transportation

Provide a safe and reliable on-site space for ready access of emergency helicopters on a parking area, road, or lawn. Provide an appropriate access for transporting patients and supplies both ways between the helicopters and outpatient clinic building.

K. Seismic and Natural Disasters Resistive Design of Non-Structural Building Elements

(1) Definitions

Non-structural building elements include all components or systems that are not part of the building's structural system whether inside or outside, above or below grade. Non-structural elements of buildings include:

Architectural Elements: Facades that are not part of the structural system and its shear resistant elements; cornices, and other architectural projections and parapets that do not function structurally; glazing; nonbearing partitions; suspended ceilings; stairs isolated from the basic structure; cabinets; bookshelves; medical equipment; and storage racks.

Electrical Elements: Normal and emergency power and lighting systems; switchboards, panelboards, and transformers; emergency engine-generator sets and automatic transfer switches; motor controllers; elevator systems; fire alarm systems; and telecommunication systems.

Mechanical Elements: Heating, ventilating, and air-conditioning systems; medical gas systems; plumbing systems; sprinkler systems; pneumatic systems; and mechanical and structural elements for transport systems, i.e., elevators and dumbwaiters, including hoisting equipment and counterweights.

(2) Earthquake Resistive Design Requirements

Provide restraints, flexibility of service connections, and field reinforcements, or a combination of those provisions, for earthquake-resistive design provisions for non-structural elements of buildings. Design and detail restraint systems under supervision of a professional structural engineer registered in the state where the project is located. Clearly indicate all special seismic details for restraining non-structural elements on the construction drawings. Drawings shall be sealed by the structural engineer.

Restraints: Provide bolts, anchors, hangers, braces, and other restraining devices to limit earthquake-generated differential movements between non-structural elements and the building structure. Brace suspended items, including piping, conduit, ducts, and lighting fixtures in both directions to resist swaying and excessive movement.

Flexibility: Keep mechanical and electrical systems crossing building expansion or seismic joints to a minimum, and provide flexibility to allow for earthquake-generated differential movements. Where possible, restrict these crossings to lower stories. Where these systems must cross such joints, provide flexible joints, expansion loops, or other effective methods of incorporating flexibility. Allow for anticipated differential movement for sleeves and openings. Use flexible electrical raceways where connecting components would experience damaging relative movements.

Field Reinforcement: Reinforce all field fabricated non-structural elements of buildings and equipment to resist damage from earthquake-generated motions.

Architectural Items at Seismic Joints: At seismic joints, detail ceiling and wall construction to allow movement without damage. Do not cross seismic joints with suspended ceiling systems with lay-in tiles. Do not assume finishes in the vicinity of seismic joints to be sacrificial.

(3) Hurricane and Flood Resistive Design Requirements
Design and construct the outpatient clinic building and utilities to comply with local code requirements and to provide the following resistive features.

Automatic Transport Systems: Provide sump pump pit for portable storm water pump in elevator pit.

Air Conditioning Systems: If possible, avoid the installation of outdoor equipment such as cooling towers, roof mounted fans, ventilators, and air-conditioning units on the roof. If exterior installation is necessary, properly secure equipment to withstand wind forces that comply with local codes. If there are no local codes, use wind velocities indicated in ASCE 7-05 or later version if available.

4.3 FIRE PROTECTION

The Public Buildings Amendment Act (PL 100-678) requires all Federal agencies to follow the latest editions of nationally recognized fire and life safety codes. Lessor shall comply with applicable provisions of the local codes and VA adopted codes and standards Paragraph 4.2. Where conflicts exist between these standards and local codes, the designer shall satisfy the most stringent requirement. Strict compliance to codes and standards is mandatory for new construction.

4.3.1 SITE CONSIDERATIONS

Provide access for emergency vehicles to buildings and additions. Design roads, fire lanes, and turn-arounds for the weight and turning radius of fire apparatus. Consult local fire

department for fire apparatus requirements. At minimum, one of the long sides of every building shall be accessible to fire department equipment.

Barriers must be placed adjacent to vulnerable perimeter fences, protection for site utility equipment, at building entrance, and other areas requiring additional protection from vehicles.

Parking: Passenger vehicles shall not be parked or permitted to travel closer than 25 feet [7.62 m] to a life-safety-protected VA facility.

4.3.2 BUILDING CONSTRUCTION

Types of Construction: Base the design on the construction type necessary to comply with code requirements for the most restrictive occupancy in the building in accordance with NFPA 101 and locally adopted codes and standards. Should a conflict exist between NFPA 101 requirements and locally adopted codes and standards, the more stringent requirement shall apply.

Consider separation distances to adjoining structures or hazards. Protect exterior walls and openings from exposure as required by Code. Locate combustible structures or structures that have combustible roof assemblies a minimum of 25 feet [7.62 m] from the exposed building. Shelters or pavilions that are of masonry construction shall not be located within 10 feet [3 m] of any building opening.

Roof coverings shall be approved or listed by a nationally recognized testing laboratory for compliance with UL standard 790 and be Class B minimum. Roof deck assemblies shall be FM Class I approved, or UL listed as Fire-Classified.

4.3.3 OCCUPANCY TYPE

Occupancy classifications are defined in NFPA 101 and as follows: Ambulatory Healthcare.

4.3.4 MEANS OF EGRESS

All exits, stairs, corridors, aisles, and passageways that may be used by the Government shall comply with the latest edition of NFPA 101 ("Life Safety Code") and locally adopted codes and standards for the occupancy classification. Should a conflict exist between NFPA 101 requirements and locally adopted codes and standards, the more stringent requirement shall apply. Corridors shall comply as follows:

Major corridors shall have a minimum width of 8 feet [2.44 m] and departmental corridors shall have a minimum width of 6 feet [1.83 m]. Major and departmental corridors are defined in SECTION 7 below.

4.3.5 FIRE PROTECTION IN HAZARDOUS AND HIGH HAZARD AREAS

Hazardous and high hazard areas within the outpatient clinic shall be protected as prescribed in NFPA 101, Life Safety Code and local building codes and ordinances. Areas identified as high hazard shall be protected by not less than a minimum 1-hour fire enclosure with C-labeled doors and automatic sprinklers.

A. Storage Rooms

Storage rooms of 50 or more square feet [15.24 sq m] net area shall be considered hazardous areas and comply with appropriate occupancy chapter requirements of NFPA 101.

Rooms containing medical records storage or moveable-aisle/mobile shelving shall be provided with automatic sprinkler protection and enclosed with a barrier having a one-hour fire resistance rating.

B. Flammable and Combustible Storage

Flammable and Combustible Liquid Storage shall comply with NFPA 30. Do not locate laboratories in basements. Provide adequate space for flammable and combustible liquid storage cabinets.

C. Compressed Gas/Cryogenic Liquid Storage

Location, construction, and arrangement of compressed medical gas storage areas shall comply with NFPA 99.

Bulk oxygen supply systems or storage locations having a total capacity of more than 20,000 cu feet [566 cu m] of oxygen shall comply with NFPA 55.

D. Laboratories

Laboratories using flammable or combustible liquids in buildings with outpatients incapable of self-preservation shall comply with NFPA 99. These laboratories shall be enclosed with a barrier having a one-hour fire resistance rating.

Laboratories using flammable or combustible liquids shall comply with NFPA 45.

4.4 ENVIRONMENTAL

4.4.1 INDOOR AIR QUALITY

Apply requirements of the latest version of ANSI/ASHRAE Standard 62, Ventilation for Acceptable Indoor Air Quality. This standard affects the way ventilation systems are designed and operated. Provide certification to the Contracting Officer that the building is in compliance with this standard. This certification shall be submitted as part of the commissioning process. Refer also to 4.8, SUSTAINABLE DESIGN AND ENERGY EFFICIENCY for indoor air quality before occupancy, and for use of low-VOC-emitting materials.

Air contaminant levels (e.g., dust, vapor, fumes, and gases) shall not exceed those in 29 CFR 1910.1000 and 1910.1001. When actual concentration levels equal or exceed 50% of the levels in 29 CFR 1910, remedial actions shall be initiated. Use of evaporative cooling systems will not be allowed.

The Lessor shall control contaminants at the source so that in no instances during facility operation shall levels for carbon monoxide (CO), carbon dioxide (CO₂), and formaldehyde (HCHO) exceed indicator levels for office areas of: (1) CO – 9 parts per million (ppm) time weighted average (TWA – 8-hour sample); (2) CO₂ – 1000 ppm (TWA); and (3) HCHO – 0.1 ppm (TWA).

Materials that are used for interior design including wall and floor treatment shall emit low amounts of Volatile Organic Compounds. Refer to Paragraph 4.8.

The Lessor shall promptly investigate indoor air quality (IAQ) complaints submitted through the Contracting Officer or his designee, as appropriate. The Lessor shall implement necessary controls to bring facility into compliance with requirements contained in this document including alteration of building ventilating, heating and air conditioning systems, and operating procedures (e.g., adjusting air intakes, adjusting air distribution, cleaning and maintaining HVAC, etc.).

VA reserves the right to conduct independent IAQ assessments and detailed studies in space it occupies, as well as in space serving the VA leased space (e.g., common use areas, mechanical rooms, HVAC systems, etc.). The Lessor shall assist VA in its assessments and detailed studies by making available information on building operations and Lessor activities, providing access to space for assessment and testing, if required, and implementing corrective measures required by the Contracting Officer.

4.4.2 ASBESTOS

Materials containing asbestos shall not be used. It shall be the responsibility of the Lessor to certify that asbestos-containing materials have not been used in the construction of the building to be occupied by VA. Lessor acquisition process for materials used in construction, including, but not limited to, thermal insulation, surfacing material, floor tile, sheet vinyl, and fireproofing material shall include clauses to specifically exclude asbestos from the materials being used in the building. The foregoing applies to soil in crawl space containing asbestos in levels that are deemed excessive by State and Federal requirements. Lessor is to provide information in the form of an asbestos survey conducted in conformance to AHERA requirements on the location of all remaining friable and non-friable asbestos. This certification shall be submitted prior to occupancy by the government. The Contracting Officer shall review the certification provided by the Lessor. Lessor shall guarantee that all non-friable asbestos that becomes friable due to any reason shall be removed in accordance with applicable State and Federal requirements.

4.4.3 RADON MEASUREMENT AND CORRECTIVE ACTION

Radon levels in space leased to the Government shall not equal or exceed the Environmental Protection Agency (EPA) action level for homes of 4 picocuries per liter (pCi/L).

The space proposed for lease to the Government, which is in ground contact or closest to the ground, shall be measured by the Lessor for radon and the results certified in accordance to EPA procedures. For structures built on a slab (i.e., without a basement) radon levels shall be tested on the first floor of the structure. Radon detectors shall be placed throughout the required area to ensure coverage meets EPA and/or State recommended requirements. In any case, each detector shall cover no more than 2,000 square feet [609.6 sq m] of space. Radon shall be measured in accordance with EPA and manufacturer required procedures for a minimum of 90 days using either Alpha Track Detectors or Electret Ion Chambers. If 90 day testing period is not possible, Alpha Track Detectors may be used for a minimum period of 2 to 4 weeks or Charcoal Canisters or Electret Ion Chambers for a period of 2 to 3 days. If

measurements are made for fewer than 90 days, follow-up measurements for a minimum of 90 days, using either Alpha Track Detectors or Electret Ion Chambers, must be completed. A laboratory successfully participating in the EPA-sponsored radon measurement proficiency program shall perform laboratory detector analyses. Quality control/quality assurance procedures shall be developed in accordance with industry standards and applied to radon testing results. Provide VA with a copy of the lab analysis and actual radon measurements for each detector used in support of the certification.

If the space offered for lease to the Government is in a building under construction or proposed for construction, the Lessor shall construct the building to the maximum extent feasible in such a way to minimize radon intrusion into the building. Lessor shall perform the necessary radon testing and submit a certification to the Contracting Officer within 30 days after the test is completed, but not later than 150 days after VA occupies the space. If radon measurements at or above 4 pCi/L are detected, the Lessor shall promptly initiate corrective action to reduce the level to below 4 pCi/L. If the Lessor does not affect corrective action, this is sufficient reason by itself for VA to void or not enter into the lease agreement.

VA reserves the right to measure radon in the space it leases at any time during the term of the lease. If radon measurements at or above 4 pCi/L are detected, the Lessor shall promptly initiate corrective action to reduce the level to below 4 pCi/L. If radon at or above 4 pCi/L is detected, the Lessor shall restrict the use of the area and provide comparable temporary space for the tenants until the corrective action is completed. Follow-up measurements shall be conducted by the Lessor to determine the effectiveness of the corrective action. The Lessor at no additional cost to VA shall provide all corrective actions, tenant relocation, and follow-up measurements. The Lessor shall provide VA with prior written notice of any proposed corrective action or tenant relocation.

4.4.4 RADON IN WATER

Two water samples constituting a sampling pair shall be taken from the same location for quality control. They shall be obtained inside the building and as near the non-public water source as is practical, in accordance with EPA's Radon in Water Sampling Program Manual. An analysis of water samples for radon must be performed by a laboratory that uses the analytical procedures as described in EPA's Two Test Procedures For Radon in Drinking Water.

The Lessor shall perform the necessary radon testing and submit a lab test and a certification to the Contracting Officer before VA occupies the space.

If the EPA action level is reached or exceeded, the Lessor shall institute abatement methods which reduce the radon to below the EPA action level, such as aeration, prior to occupancy by VA.

4.4.5 POTABLE WATER QUALITY

Potable water provided to VA from municipal or community water systems shall meet EPA and/or state standards for contaminants.

If potable water does not meet EPA and/or state standards, Lessor shall take action necessary to reduce contamination to acceptable levels. Lessor shall test potable water periodically to ensure that it continues to meet EPA and state standards. Lessor shall provide bottled water at his/her expense at any time contaminant levels exceed EPA and/or state requirements. If potable water does not meet EPA and/or state standards, Lessor shall take action necessary to reduce contamination to acceptable levels.

Potable water provided to VA from on-site wells or other non-municipal sources shall meet minimal EPA and/or state standards for contaminants.

4.5 SPECIAL ENVIRONMENTAL REQUIREMENTS

Any leased project over 75,000 GSF shall comply with the National Environmental Policy Act of 1969. Sites with proposed buildings of less than 75,000 GSF Must acquire CERCLA and SHPO clearance.

If required, special building equipment to treat and exhaust to the atmosphere toxic gases produced by the agency program equipment shall be provided by Lessor. All such installations shall comply with appropriate OSHA, EPA or related regulations of the local community. Lessor shall obtain all necessary permits for construction and operation. In addition, provide up to 100% outside air for clinical laboratories and other areas designated in Section 6 Mechanical requirements.

4.6 ACCESSIBILITY STANDARDS

The design, construction, and alteration of facilities shall comply with local codes and ordinances. In addition, all VA facilities must comply with the Architectural Barriers Act Accessibility Standards (ABA-AS) as adopted by GSA and VA Program Guide PG-18-13, "Barrier Free Design Guide."

The ABA-AS consists of Appendices C and D to 36 CFR Part 1191 (ABA Chapters 1 and 2, and Chapters 3 to 10) and is available from United States Access Board <http://www.access-board.gov/>.

VA Barrier Free Design Guide PG18-13 is available from VA Technical Information Library at <http://www.cfm.va.gov/til/accessibility.asp>.

The Offeror shall comply with the stricter of these standards for each requirement as determined by the Government. **Offerors are cautioned that compliance with ADA does not assure compliance with UFAS or PG-18-13.** The following list includes some of the requirements from the "Barrier Free Design Guide" that typically exceed ADA or local requirements. The more stringent requirement shall be followed.

VA Accessibility Standards from PG-18-13	
Paragraph	Description of Requirement

VA Accessibility Standards from PG-18-13	
Paragraph	Description of Requirement
4.1.1(5)(e)(i)	3% of total parking spaces shall be accessible
4.3.4	5'-0" minimum width for accessible routes
4.3.7	1:33 (3%) maximum slope for accessible routes, including parking spaces
	1:50 minimum gradient for walk requiring rest areas
	6'-0" x 6'-0" minimum size of level platform at doors
4.5.3	Carpet cushion or padding <u>is not</u> permitted
4.6.3	5'-0" access aisle required <u>both</u> sides of accessible parking spaces
4.7.3	4'-0" minimum width for curb ramps
4.8	Requirements for ramps: 1:20 maximum slope 40-foot max length for slopes between 1:33 and 1:24 35-foot max length for slopes to 1:20 4'-0" minimum clear width 6'-0" x 6'-0" minimum landing where doors swing into landing
4.9.4(5)	34" handrail height (not a range of heights)
4.10	4'-0" minimum elevator door width Double set of handrails required: 3" x 3/8" with centerlines at 30" and 42" above car floor 8'-0" x 6'-0" minimum passenger elevator platform size
4.13	2'-10" (34") minimum clear opening
4.17	Toilet Stalls: 5'6" x 6'-0" minimum accessible stall size 3'-6" x 6'-0" minimum size "front transfer" stall Grab bars are required in all stalls (not just accessible stalls)
4.22	3'-0" (36") minimum width of toilet room entrance doors
5.0	Cafeterias: 2'-3" (25") minimum knee clearance dimension, and

VA Accessibility Standards from PG-18-13	
Paragraph	Description of Requirement
	2'-5" (27") for minimum 5-percent of tables 40 to 48" range for cutlery and supply height

4.7 OSHA REQUIREMENTS

The Lessor agrees to comply with all Occupational Safety & Health Administration (OSHA) Safety and Health Standards located in 29 CFR and will provide monthly safety reports as requested by the VA prior to the 10th of each month.

4.8 SUSTAINABLE DESIGN AND ENERGY EFFICIENCY

4.8.1 LEED® SILVER FOR HEALTHCARE CERTIFICATION

LEED® Silver for Healthcare Certification is required. **Lessor shall be responsible for obtaining LEED® Silver for Healthcare Certification and for all of the associated costs for obtaining the certification.** Lessor shall provide documentation that the design and construction of facilities meets this goal. From the entirety of available LEED® Credits, certain credits are mandatory. The Lessor shall supplement the mandatory credits with other credits chosen to accomplish sufficient credits for LEED® Silver for Healthcare Certification. The latest version of LEED® available shall be used. The mandatory credits (based on LEED® 3) are:

Water Efficiency:	Credit 3 Water Efficient Landscaping, Reduce By 30%
Energy & Atmosphere:	Credit 2 Enhanced Commissioning
Materials and Resources:	Credit 3 Sustainability Source Materials and Products- Minimum 2 points
Solar Hot Water Tanks:	Solar power usage during daylight hours with 10 hour battery
Indoor Environmental Quality:	Credit 3.2 Construction IAQ Management Plan – Before Occupancy
Innovation & Design:	Credit 2 LEED® Accredited Professional

LEED® prerequisites necessary to obtain the required credits are also required. These include:

Sustainable Sites:	SSp1, Construction Activity Pollution Prevention
Water Efficiency:	WEp1, Water Use Reduction
Energy & Atmosphere:	EAp1, Fundamental Commissioning of Building Energy Systems, EAp2, Minimum Energy Performance; and PR3, Fundamental Refrigerant Management
Materials and Resources:	MRp1 Storage and Collection of Recyclables
Indoor Environmental Quality:	EQp1, Minimum Indoor Air Quality Performance; EQp2, Environmental Tobacco Smoke (ETS) Control

4.8.2 STRATEGIES

Design and construction of facilities must meet Federal Mandates for sustainability and energy efficiency.

The Lessor shall employ the following strategies.

A. Employ Integrated Design Principles**(1) Integrated Design**

Use a collaborative, integrated planning and design process that initiates and maintains an integrated project team in all stages of a project's planning and delivery.

Establish performance goals for siting, energy, water, materials, and indoor environmental quality along with other comprehensive design goals and ensure incorporation of these goals throughout the design and lifecycle of the building. Consider all stages of the building's lifecycle, including deconstruction.

(2) Commissioning

Employ commissioning practices tailored to the size and complexity of the building and its system components in order to verify performance of building components and systems and help ensure that design requirements are met. This should include an experienced commissioning provider, inclusion of commissioning requirements in construction documents, a commissioning plan, verification of the installation and performance of systems to be commissioned, and a commissioning report. The systems to be commissioned include active and passive HVAC equipment and controls, plumbing systems, lighting and daylighting controls, domestic hot water systems, and onsite renewable energy systems.

Plumbing systems shall also be integrated into the commissioning plan. The commissioning plan shall define pressure test procedures for all pipe systems, shower or bathroom basin leakage tests, plumbing fixture carrier installation, plumbing fixture flow rate adjustment, system chlorination and flush, *Legionella* disinfection, booster pump package, backflow prevention devices tested by a third party and reports included in the final commissioning report, thermostatic mixing valves, vacuum system, medical air system, oral evacuation system, dental compressed air system, natural gas and fuel system, and special water systems.

B. Optimize Energy Performance**(1) Energy Efficiency**

Establish a whole building performance target that takes into account the intended use, occupancy, operations, plug loads, other energy demands, and design to earn the Energy Star® targets for new construction and major renovation where applicable. For new construction, reduce the energy use by 30% compared to the baseline building performance rating per the American Society of Heating, Refrigerating and Air-Conditioning Engineers, Inc., (ASHRAE) and the Illuminating Engineering Society of North America (IESNA) Standard 90.1-2010, Energy Standard for Buildings Except Low-Rise Residential. If available, use Energy Star and FEMP-designated Energy Efficient Products.

Per the Energy Independence and Security Act (EISA) Section 523, meet at least 30% of the hot water demand through the installation of solar hot water heaters, when life-cycle cost-effective.

(2) Measurement and Verification

Per the Energy Policy Act of 2005 (EPA) Section 103, install building level utility meters in new major construction and renovation projects to track and continuously optimize performance. Per EISA Section 434, include meters for natural gas and steam, where appropriate.

Compare actual performance data from the first year of operation with the energy design target. After one year of occupancy, measure all new major installations using the Energy Star® Portfolio Manager for building and space types covered by Energy Star®.

Annually provide data to VA.

C. Protect and Conserve Water

(1) Indoor Water

Employ strategies that in aggregate use a minimum of 20% less potable water than the indoor water use baseline calculated for the building, after meeting the EPA 1992, Uniform Plumbing Codes 2006, and the International Plumbing Codes 2006 fixture performance requirements. The installation of water meters is encouraged to allow for the management of water use during occupancy.

(2) Outdoor Water

Use water efficient landscape and irrigation strategies, including water reuse and recycling, to reduce outdoor potable water consumption by a minimum of 50% over that consumed by conventional means (plant species and plant densities). The installation of water meters for locations with significant outdoor water use is encouraged.

Employ design and construction strategies that reduce storm water runoff and polluted site water runoff. Per EISA Section 438, to the maximum extent feasible, maintain or restore the predevelopment hydrology of the site with regard to temperature, rate, volume, and duration of flow, using site planning, design, construction, and maintenance strategies.

(3) Process Water

Per the Energy Policy Act of 2005 Section 109, when potable water is used to improve a building's energy efficiency, deploy life-cycle cost-effective water conservation measures.

(4) Water-Efficient Products

Use EPA's WaterSense-labeled products or other water conserving products. Choose irrigation contractors who are certified through a WaterSense-labeled program.

D. Enhance Indoor Environmental Quality

(1) Ventilation and Thermal Comfort

Meet ASHRAE Standard 55-2013, Thermal Environmental Conditions for Human Occupancy, including continuous humidity control within established ranges per climate zone, and ASHRAE Standard 62.1-2007, Ventilation for Acceptable Indoor Air Quality.

(2) Moisture Control

Establish and implement a moisture control strategy for controlling moisture flows and condensation to prevent building damage and mold contamination.

(3) Daylighting

Achieve a minimum of daylight factor of 2% (excluding all direct sunlight penetration) in 75% of all space occupied for critical visual tasks. Provide automatic dimming controls or accessible manual lighting controls, and appropriate glare control.

(4) Low-Emitting Materials

Specify materials and products with low pollutant emissions, including adhesives, sealants, paints, carpet systems, and furnishings.

(5) Protect Indoor Air Quality During Construction

Follow the recommended approach of the Sheet Metal and Air Conditioning Contractor's National Association Indoor Air Quality Guidelines for Occupied Buildings under Construction, 1995. After construction and prior to occupancy, conduct a minimum 72-hour flush-out with maximum outdoor air consistent with achieving relative humidity no greater than 60%. After occupancy, continue flush-out as necessary to minimize exposure to contaminants from new building materials. Prohibit smoking within the building and within 25 feet [7.62 m] of all building main entrances and building ventilation intakes during building occupancy.

E. Reduce Environmental Impact of Materials

(1) Recycled Content

For EPA-designated products, use products meeting or exceeding EPA's recycled content recommendations. For other products, use materials with recycled content such that the sum of postconsumer recycled content plus one-half of the pre-consumer content constitutes at least 10% (based on cost) of the total value of the materials in the project. If EPA-designated products meet performance requirements and are available at a reasonable cost, a preference for purchasing them should be included in all solicitations relevant to construction, operation, maintenance of, or use in the building.

(2) Biobased Content

For USDA-designated products, use products meeting or exceeding USDA's biobased content recommendations. For other products, use biobased products made from rapidly renewable resources and certified sustainable wood products. If these designated products meet performance requirements and are available at a reasonable cost, a preference for purchasing them should be included in all solicitations relevant to construction, operation, maintenance of, or use in the building.

(3) Environmentally Preferable Products

Use products, such as low-emitting materials or products containing no toxic metals, that have a lesser or reduced effect on human health and the environment when compared with competing products or services that serve the same purpose.

(4) Construction Waste and Materials Management

During a project's planning stage, identify local recycling and salvage operations that could process site-related construction and demolition materials. Program the design to recycle or

salvage at least 50% of the non-hazardous construction, demolition, and land clearing materials, excluding soil, where markets or onsite recycling opportunities exist. Provide salvage, reuse, and recycling services for waste generated from major renovations, where markets or onsite recycling opportunities exist.

(5) Ozone Depleting Compounds

Eliminate the use of ozone depleting compounds during and after construction where alternative environmentally preferable products are available, consistent with either the Montreal Protocol and Title VI of the Clean Air Act Amendments of 1990, or equivalent overall air quality benefits that take into account life-cycle impacts.

SECTION 5 SITE DESIGN CRITERIA

5.1 GENERAL

A licensed Landscape Architect or Civil Engineer shall develop the site design. A Landscape Architect, licensed if state registration exists, shall develop the landscape planting plans.

Design of site elements shall comply with Uniform Federal Accessibility Standards (UFAS), with VA Supplement, Barrier Free Design Guide. See Paragraph 4.6 of this solicitation for additional information.

The Lessor shall obtain Topographic/Landscape, Electrical, and Telecommunications to include telephone, data, cable television and special systems, Civil/Mechanical, and Soil Surveys and geotechnical reports. The survey limits shall include a sufficient area to cover the complete project including sufficient offsite locations of existing utilities, i.e., water, sewer, gas, electric and telecommunications. Refer all vertical elevations to permanent benchmarks based on actual geodetic datum (not assumed datum).

Comply with applicable Federal, State, and municipal laws, regulations, and permits concerning design and construction controls for environmental protection of aesthetics, air, water, and land. All the following regulatory categories apply:

- Storm water permits, e.g., National Pollutant Discharge Elimination System (NPDES) permit program
- Pollution control and solid waste disposal
- Erosion control and protection of land resources
- Protection of landscape
- Protection of water resources, wetlands, and areas preserved for wildlife

VA must complete the following due diligence (1) NEPA, (2) SHPO if NEPA is not required, The Lessor is responsible for providing proof of ownership and a clean buildable site.

GENERAL NOTE: Geotechnical reports, surveys and appraisals should be completed by local specialists.

Ensure that the design mitigates any adverse environmental impacts. Ensure all the following:

- Surface water, during and after construction, will not adversely impact the site or areas downstream from the site.
- Grading, seeding, erosion control measures, and storm sewers are used to avoid the above.
- Air and noise pollution is minimized.
- Destruction of land resources is minimized.

- Interference with the normal function of the surrounding community during construction is minimized.

5.2 SITE DEVELOPMENT

Use originality and imaginative design between site and structures, vehicular and pedestrian circulation, visual elements, and open and screened area. Produce a plan that has both functional and aesthetic relationships.

Develop the Site based on an American Land Title Association (A.L.T.A) Survey using a title report current within 90 days. Consider impacts to site encumbrances such as drainage, rock outcroppings, existing utilities, utility easements, abrupt changes in topography, and protected or mature salvageable vegetation.

5.2.1 STORM WATER

Consider impacts on existing natural and man-made storm water drainage patterns and systems. VA is committed to the control of storm water by the Federal Water Pollution Control Act, the Federal Flood Disaster Protection Act, and other Environmental Protection Agency (EPA) regulations that are implemented by Federal, State, and municipal jurisdictions. Provide a Hydrology and Hydraulics analysis and report in support of the proposed design.

5.2.2 CIRCULATION

Provide separate circulation systems for vehicular service and patient/visitor traffic.

Provide a circular driveway to the building drop-off with access to the parking areas. The drop-off shall have canopy cover designed to accommodate public bus and shuttle services.

Design patient exterior areas that are conveniently accessible from the building without vehicular crossings and are oriented to the most favorable site climatic conditions.

5.2.3 LOCATION OF BUILDING AND EQUIPMENT

Ensure that the building property line setbacks are consistent with adjacent structures and local codes.

When locating the proposed building, structures, and equipment, consider topography, adjacent facilities, utility access requirements, environmental impacts, and future development to produce a design that is functional and aesthetically successful.

Provide landscape planting, grading, architectural screening, or fencing of exterior utility, mechanical, and electrical equipment for patient and personnel protection.

5.2.4 PATIENT USE AREAS

Design patient exterior areas that are conveniently accessible from the building without vehicular crossings and are oriented to the most favorable site climatic conditions.

5.2.5 GRADING DESIGN

Coordinate surface grades with architectural, structural, and mechanical design to provide proper surface drainage.

Consult soil classification data in the subsurface investigation (geotechnical report) in support of drainage concepts proposed as part of the Hydraulics and Hydrology analysis.

Use contours at a maximum interval of 1 foot [0.3 m] to show grading of the entire project site. Utilize spot elevations as control points.

Show any temporary (construction period) or permanent erosion control.

Condition	Maximum Slope	Minimum Slope	Preferred
Lawns	25% 4:1 ^a	2% 50:1	2- 10%
Turf athletic area	2% 50:1	0.5% 200:1	1%
Berms and mounds	20% 5:1	5% 20:1	
Mowed slopes	25% 4:1 ^a		20%
Planted slopes and beds	10% 10:1	0.5% 200:1	3-5% ^b
Road crown	3% 33.3:1	2% 50:1	2.5%
Roads, longitudinal*	20% 5:1	0.5% 200:1	1-10%
Walks, longitudinal	10% 10:1	0.5% 200:1	1-5%
Parking, longitudinal	5% 20:1	0.25% 400:1	2-3%

- a. The maximum slope for mowing machinery is 25%.
- b. Slopes over 6% should have erosion protection.
- c. Accessible routes used by people with disabilities shall conform to the criteria of Paragraph 2.4 of this SFO.

* Payload is drastically reduced on heavy trucks sustaining grades over 3%. Ideal maximum sustained grade for safe operation of trucks and automobiles is 6%. On roads subject to frequent icing and winter conditions, the maximum sustained grade is 5%.

General: Provide complete dimensioned layouts for vehicular and pedestrian pavement, structures, and other components of the site and landscape design. Establish control for the layout by a base control line with dimensions from this line. Small scope projects may use property lines for control. Larger projects require coordinates on a grid system.

5.2.6 DESIGN OF VEHICULAR AND PEDESTRIAN PAVEMENT

Design the pavement to reflect topography, soils, climate, local materials, function, and other requirements and specific situations. The Geotechnical Report shall address and recommend ground preparation and pavement section design for the site.

When motorcycle parking is provided, construct designated area of non-reinforced concrete.

Pavement Construction

Design pavement sections of all roads, service areas, fire apparatus vehicle accessibility areas, and parking areas for the maximum anticipated traffic loads and existing soil conditions.

Construct service areas for truck dock, bulk oxygen storage, loading docks, utility buildings, and similar facilities of reinforced concrete.

Principal roads and primary service roads shall include 12'-0" travel lanes for two-way traffic (24'-0" wide between faces of curbs). Secondary service roads shall be 12'-0" between faces of curbs. Consider two-way traffic lanes where possible. One-way traffic plans shall have a minimum width of 12'-0".

Curbs and Gutter

Design all roads with integral concrete curbs and gutters per local standards and specifications. Substitute free-standing or extruded curbs only when justified.

Curb Radii

The radii of curbs at road intersections should be 30'-0" preferred, 25'-0" minimum.

Curb Access Ramps (Curb Cuts)

Provide curb ramps to accommodate people with disabilities as well as lawnmowers.

Pavement Marking and Signing

Provide locations and details of pavement striping and signing for parking, roadways, crosswalks, accessible parking and routes, and other special areas.

Pedestrian Pavement Construction

Design walkways to provide clearly-defined, unobstructed, direct routes through the site, interconnecting site and building entryways, curb ramps, parking areas, pedestrian landscaped features, such as open area plazas, courts, atriums, and other site elements.

Construct walks of concrete. Reinforce the concrete pavement if subbase conditions warrant. Where pedestrian and vehicular pavements meet, thicken the subbase material.

Pedestrian wearing course material may be rigid unit pavers (bricks, stone sets, concrete units, large paving slabs, etc.). To facilitate use by people with disabilities, design a rigid base of concrete or asphaltic concrete beneath pavers.

Walks should be at least 60" wide, except 96" minimum where abutting parking stalls.

Design walks to accommodate people with disabilities. Eliminate steps unless unavoidable.

5.2.7 ENTRANCES TO BUILDING

Coordinate work at entrances to buildings based on the requirements in the Architectural Criteria. Particular reference is made to complying with vertical clearances of buildings and canopies over roadways and vehicular access areas.

Provide access for ambulance entry.

5.2.8 TRUCK DOCK

Design adequate space for truck maneuverability and parking of facility equipment, including trash dumpsters. Provide wheel path diagram to support turning movements of facility parking equipment, delivery, and waste removal vehicles.

5.2.9 PARKING FACILITIES

Develop sufficient new parking so that the total number of facility spaces will be the greater of 158 spaces, or as required by local codes. Provide parking spaces for physically disabled people (handicapped) based on 10% of total provided spaces, including van accessible spaces based on every 6 or fraction of 6 of provided accessible parking spaces. Locate these parking spaces convenient to an entrance accessible by physically disabled people. Provide a minimum of 26 parking spaces, or as required by local code for staff use. Staff parking is included in the total number of facility parking spaces above.

Provide a parking tabulation on the contract drawings indicating the total number of VA facility parking spaces with subtotals for standard spaces, accessible spaces, motorcycle spaces, and van accessible spaces. Locate accessible parking spaces convenient to an accessible building entrance.

Provide parking tabulations for motorcycle parking on the contract drawings. Indicate the total number of spaces provided, using a ratio of one parking space for every 60 auto spaces. Motorcycle parking spaces shall be 4.5 feet [1.37 m] wide x 8 feet [2.44 m] long.

Reference Paragraph 4.3.1 for Parking Site Security Considerations.

Parking at angles other than 90 degrees may be used only when justifiable. Contracting Officer approval is required for deviation. Acceptable dimensions for 90 degrees parking angle are as follows.

	MINIMUM BAY WIDTH	MINIMUM STALL WIDTH
If cars overhang curbs on both sides	60'-0"	8'-6"
	59'-0"	8'-9"
	58'-0"	9'-0"
If cars overhang curbs on one side	62'-6"	8'-6"
	61'-6"	8'-9"
	60'-6"	9'-0"

	MINIMUM BAY WIDTH	MINIMUM STALL WIDTH
If cars will not overhang either curb or will be parked in the center bumper to bumper	65'-0" 64'-0" 63'-0"	8'-6" 8'-9" 9'-0"
Accessible Spaces		8'-0" x 20'-0" w/ 5'-0" access aisle on <u>both</u> sides
Accessible Van Spaces		8'-0" x 20'-0" w/ 8'-0" access aisle

Patient and Visitor spaces shall be 9'-0" minimum width, unless the Contracting Officer approves deviation.

5.2.10 EQUIPMENT PADS

Locate utility transformers, cooling towers, generators, generator fuel tanks, gaseous tank storage, and other equipment pads away from patient and visitor entries and outdoor activity areas, preferably adjacent to service area. To prevent injury to patients and personnel, enclose pad area with chain link fencing. Barriers and fencing shall comply with the requirements of the serving electric utility, where applicable.

Mobile MRI/CT Scanner Truck Provisions

Lessor shall provide the following provisions for mobile MRI/CT Scanner Truck:

Lessor shall furnish a dedicated five-wire 480V, 3-phase wye connection with neutral and ground, 200 Amp circuit to supply power to mobile MRI/CT scanner trucks at the MRI pad shown on the site plan. The safety disconnect switch shall have lock-on provisions, which will allow the switch to be locked in the "ON" position. The disconnect switch shall also have lock-off provisions. Provide safety disconnect in electrical circuit, per code, on exterior of building for MRI/CT. Electrical feed shall terminate on exterior of building at a Russellstoll connector rated for service required receptable, in a weatherproof box. The bottom of the receptacle shall be a minimum of 3 feet above grade. The disconnect switch, receptacle, and telecommunications jacks shall be mounted on concrete posts with strut framing adjacent to the MRI concrete pad.

Lessor shall furnish a weatherproof box for telecommunications located adjacent to power receptacle. Conduit shall extend to interior distribution system in the building. Install three (3) exterior telecommunications jacks.

Truck pad shall be Portland cement concrete, 15'-0" x 70'-0". Design pavement section for loading in accordance with criteria in Paragraph 5.2.6. If reinforcement of concrete is required, use only non-ferrous reinforcement materials. Variations in pad levelness shall not exceed 1/8-inch in 10'-0".

Provide the following plumbing provisions in two in-ground boxes adjacent to the truck pad. One in-ground box shall be for water supply connections and one in-ground box shall be for sanitary wastewater connection:

Provide a hose bib and backflow preventer, connected to a cold water supply line, for connection of a 3/4-inch hose.

Provide 3/4-inch female connector and backflow preventer, connected to a cold water supply line, for connection of a 3/4-inch I.P.S. male threaded hose connector. Size line to provide 5 gallons per minute at 45-60 PSI. Provide an adjustable pressure regulator with gauge to ensure that pressure does not exceed 60 PSI. Water intake equipment will be protected with physical hardware equipment to provide preclusion of entry or introduction of foreign materials and also provide indication of tampering. Intake facilities above ground will provide physical barriers to preclude entry and tampering of equipment.

Provide 1 1/2-inch female threaded connector, connected to the sanitary wastewater drainage system, for connection of a 1 1/2-inch male threaded hose connection.

Provide an accessible sidewalk from an exterior door of the outpatient clinic to the MRI pad. Provide a canopy for the walkway from the clinic to the MRI pad. The canopy shall comply with criteria in SECTION 5 and SECTION 6.

Extend panic (duress) alarm system to MRI pad. Provide connection for one (1) panic button in MRI enclosure, connected to main panic (duress) alarm panel.

The Lessor shall be responsible for constructing and carrying the cost of the MRI/CT scanner as listed above. Upon space acceptance by VA, all cost associated with the Mobile MRI/CT scanner outlined above will be paid by the VA in a lump sum payment to the Lessor. Offerors shall list the lump sum cost associated with Mobile MRI/CT scanners on GSA Form 1364.

5.3 LANDSCAPING DESIGN

Integrate the landscape planting design with the overall design of the site. The landscape planting shall compliment the architecture, preserve designated site features, facilitate water harvesting, facilitate vehicular and pedestrian access, create open areas and vegetative screens, and consist of plant material that promotes sustainable designs.

Select plants that are indigenous to the area, require little maintenance, and are disease and insect resistant. Select plant material that is nursery propagated from sources as close as practicable to the project area, that are indigenous to the area, locally available, low maintenance, and disease and insect resistant. Plant materials shall conform to the standardized system of the American Association of Nurserymen, Inc. current American Standards for Nursery Stock, ANSI Z60.1.

Do not select plants that are poisonous, highly aromatic, irritating, or thorny. In parking and pedestrian areas avoid plants that drop fruit or sap. Locate plants so they do not interfere with driver or pedestrian visibility, circulation, and safety.

Plant bed outlines curvature shall have minimum radii of 3 feet [0.92 m]. Design lawn areas to facilitate maintenance.

Provide metallic edging or concrete curbs around shrub beds (essential where Bermuda or similar grasses are grown).

Utilize ground cover on slopes steeper than 3:1, i.e., 3 feet to 1 foot.

5.4 SITE AMENITIES

5.4.1 FLAGPOLE

The Lessor shall provide a flagpole at a location to be approved by the Contracting Officer. Flagpole must extend at least 30 feet above the ground and shall be equipped with rope and hardware for one flag. The Government will provide the flag. This requirement will be waived if determined inappropriate by the Government. Exterior lighting (two each light fixtures spaced a minimum of 20 feet apart, mounted on the building or at grade) shall be provided to illuminate the flag at night. Automatic switching for light fixtures shall be provided.

5.4.2 SMOKING SHELTERS – INTENTIONALLY DELETED

5.4.3 CANOPIES AND COVERED WALKWAYS

A canopy and covered walkway shall be located at the building entry, staff entry, loading dock and along the mobile technology pad as shown on the conceptual plans. Design of the covered walk shall be integrated with the building structure and architecture. Coordinate site lighting with walkways. Provide fixtures below canopies and covered walks where necessary to maintain illumination levels for exterior walkways.

The Lessor shall be responsible for constructing and carrying the cost of the canopies and covered walkways as listed above. Upon space acceptance by VA, all cost associated with the canopies and covered walkways outlined above will be paid by the VA in a lump sum payment to the Lessor. Offerors shall list the lump sum cost associated with canopies and covered walkways on GSA Form 1364.

5.4.4 EXTERIOR ACTIVITY AREAS AND YARDS

Provide exterior patio for outdoor activities and dining as shown on the conceptual plans. Outdoor areas shall be designed with a diversity of landscape and hardscape elements to create an environment capable of accommodating a variety of activities.

The Lessor shall be responsible for constructing and carrying the cost of the exterior activity areas and yards as listed above. Upon space acceptance by VA, all cost associated with the exterior activity areas and yards outlined above will be paid by the VA in a lump sum payment to the Lessor. Offerors shall list the lump sum cost associated with exterior on GSA Form 1364.

5.5 UTILITIES

5.5.1 WATER DISTRIBUTION SYSTEM

Design and construct system to provide adequate water service for maximum domestic and fire protection requirements.

Place isolation valves to provide control over reasonably sized area. In addition, designate valves in fire hydrant branches and building service lines, near their connection to feeder mains.

Where reduced pressure backflow preventers are required, provide positive drainage.

Connection fees, meter, and system impact fees, as required by the water provider to connect to the existing water distribution system, are the responsibility of the Lessor.

A. Domestic Water Pumping System

If onsite pumping for domestic water is required, use a three-pump system. Size one pump for approximately one-third of the total water demand. Each of the other pumps shall be sized for approximately two-thirds of the total demand. The smaller will operate until water demand exceeds the pump's capacity, at which point it will stop and one of the other larger pumps shall start. When the demand exceeds the capacity of this larger pump, the smaller pump will restart and both pumps will operate together. The other large pump will be a standby and alternate with the first large pump. Provide a pneumatic tank and "NO-FLOW" shut-down controls.

5.5.2 WATER SUPPLY FOR FIRE PROTECTION

Assess adequacy of the water supply. The Lessor must verify the locations involved as well as the quality and accuracy of the data. Perform water supply flow testing.

Fire flows shall be available as required by NFPA 13 for the required occupancy classification. However, duration for Ambulatory Health Care occupancies shall not be less than 60 minutes. The Lessor shall verify and submit documentation of the fire department's capability of handling the manual firefighting requirements to the Contracting Officer prior to occupancy by the Government.

Fire Pumps:

When a fire pump is necessary to supplement fire flow and pressure, size it to comply with NFPA 13.

5.5.3 LAWN IRRIGATION SYSTEM

Provide an automatic irrigation system to operate between the hours of 10:00 pm and 6:00 am.

Keep the number of irrigation system connections to potable system to a minimum. Equip such connections with reduced pressure-type backflow preventers. Limit maximum draft from any connection to 180 gpm [11.4 L/s].

5.5.4 SANITARY SEWERAGE SYSTEM

Design separate underground sanitary sewerage system, including building connections, manholes, clean-outs, cooling tower waste lines, and all appurtenances.

Provide an adequate number of sanitary connections from each building.

Discharge cooling tower drains, overflows, and blow-down piping systems to the sanitary sewerage system. Provide air gaps to prevent cross connections between sewerage and water systems.

To the extent feasible, do not locate sewer pipes and manholes under pavement. Provide manholes at junctions, changes in direction, changes in slope, and changes in invert elevations of sewers 8 inch and above. Clean-outs are required for 4 and 6 inch sewers. Spacing between manholes shall be a minimum of 300 feet [91.44 m], except 500 foot [152.4 m] spacing is permitted in straight runs of long out-fall sewers unless otherwise required by local jurisdictional standards.

Limit sanitary trunk sewers to not less than 8 inch diameter and sanitary sewer building connections to not less than 4 inch diameter. Establish sanitary sewer slopes to provide minimum velocity of 2 ft/s [0.6 mm/s] when pipe is flowing full; maximum slope shall be 9%.

Do not connect storm drainage system to sanitary sewerage systems.

Connection fees and system impact fees as required by the municipality to connect to the existing sewerage system are the responsibility of the Lessor.

If a lift station and pump are required, locate them outside of the building. If required, design sewage pumping system to discharge at maximum sewage flow rate with largest pump not operating. The sewage pump system shall be designed with redundancy in mind apply N+1 to the design.

Wet well shall be large enough to allow an interval of at least 6 minutes between successive starts of same pump motor throughout entire range of estimated flow rates. Include high water level alarm system in wet well, and place warning bell in appropriate location.

5.5.5 STORM DRAINAGE SYSTEM

Design separate underground sanitary and storm sewerage systems, including drainage inlets (yard and curb), junction structures, manholes, open drainage channels and basins, dry wells, etc.

Design all components of storm sewerage system on basis of not less than 10-year storm frequency for one hour.

Comply with the requirements of off-site receptor of storm water. Retention may be required; however; roof storage of storm water is not allowed.

Limit storm sewers serving drainage inlets to not less than 8 in [200 mm] diameter and building connections to not less than 4 in [100 mm] diameter. Establish storm sewer slopes to provide minimum velocity of 2 ft/s [0.6 mm/s] when pipe is flowing full. Maximum storm sewer design velocity shall be in non-erosive range for specified pipe material.

Use State or local standard details for manholes, inlets, endwalls, and pipe cradles. Adjust master specifications as necessary.

Provide an adequate number of storm connections from each building.

Storm drainage system shall serve all areas under construction or affected by construction. Design storm drainage system and components based on storm frequency from local codes and methodologies. Comply with the requirements of off-site receptor of storm water. Retention/detention may be required and should be designed on the percolation results stated in the geotechnical report and the design volumes calculated in the Hydrology and Hydraulics analysis. Roof storage of storm water is not allowed. Do not connect storm drainage system to sanitary sewerage systems.

Do not drain outside building sub-soil drain tile to an interior sump pump. If a pump is required, locate it outside of the building.

5.5.6 GAS DISTRIBUTION SYSTEM

Coordinate with gas company concerning housing and/or fencing for gas metering and regulating equipment. Provide gas filter upstream of meter.

5.5.7 ELECTRICAL SERVICE

Provide underground secondary-voltage electrical service from the serving electric utility. All requirements of the electric utility shall be met, including location of service source, above-ground and underground equipment locations, required easements and/or rights-of-access, above-ground equipment protection and screening requirements, location of required service disconnecting means and/or remote operation for service disconnecting means, as required by the local Authority Having Jurisdiction or utility, meter location and provisions for meter-reading access, co-location of service conductors in common trench with other utility services, and all other applicable requirements of the electric utility.

5.5.8 TELECOMMUNICATIONS SERVICES

Provide underground telephone service from the serving telephone provider. Sufficient capacity shall be provided at the Point of Presence (POP) for all telephone outlets identified in this SFO, plus 50% spare capacity. Comply with all requirements of the telephone provider for cable installation, POP space and security requirements, and POP equipment and access provisions. All low-voltage underground cabling shall be installed in a partitioned 4 inch conduit with innerduct or approved equivalent and shall not share joint trenches with other incoming utilities.

Provide underground cable television service from the serving provider. Sufficient capacity shall be provided at the Point of Presence (POP) for all CATV outlets identified in this SFO, plus 50% spare capacity. Comply with all requirements of the cable service provider for cable

installation, POP space and security requirements, and POP equipment and access provisions. All CATV underground cabling shall be installed in a 4 inch conduit with innerduct or approved equivalent and shall not share joint trenches with other incoming utilities.

Provide cable television service, subject to identical requirements as defined for telephone service.

5.6 EXTERIOR SIGNAGE

Lessor shall develop and provide a complete exterior signage program to include identification, directional, informational, and regulatory signage. Signage must comply with local municipality’s codes and specifications. Careful consideration of the location of monument signs shall be taken to avoid sight triangle encroachment.

Lessor shall provide ground mounted, illuminated, horizontal monument sign to identify the Outpatient Clinic main entrance. Lessor shall provide foundations and electrical power as necessary. Base shall be concrete or masonry and shall be compatible with building design and landscaping scheme. Monument sign shall be 4’-0" high x 8’-0" wide. VA will furnish message layout, content, and colors for the monument sign. Graphic process shall be routed out copy backed with white, translucent acrylic.

Lessor shall provide illuminated, wall mounted building identification signs of dimensional anodized aluminum letters and numerals with VA logo. Letters and numerals shall be minimum 12 inches high. Logo shall be of design provided by VA and shall be 27inches high. Sign messages shall be coordinated with the Government and include the following:

Facility Name. Department of Veterans Affairs – Outpatient Clinic. VA logo shall precede facility name.

Address sign shall consist of numerals for the building street address.

Wall mounted building signs shall be prominently located to be visible from street approach in accordance with VA-approved building elevations.

The cost of signage and installation of exterior signage shall be paid to Lessor by the VA in a lump sum amount upon commencement of the lease. The Offeror shall state this lump sum payment amount as a separate line item on the attachment to GSA Form 1364.

5.7 FENCING

Provide perimeter fencing or walls and gates.

Fencing shall comply with security requirements in Section 4 of this solicitation and VA Physical Security Design Manual for Life Safety Protected Facilities.

The cost of perimeter fencing or walls and gates shall be paid to Lessor by the VA in a lump sum amount upon commencement of the lease. The Offeror shall state this lump sum payment amount as a separate line item on the attachment to GSA Form 1364.

SECTION 6 BUILDING DESIGN CRITERIA

6.1 STRUCTURAL

Structural design shall comply with the locally adopted codes. Structural members shall be of concrete, masonry, or steel. Wood may be used as permitted by building and life safety codes for the Occupancy Group (Business or Ambulatory Care) and size (floor area) and height of structure required by the clinic program.

Where applicable, a licensed structural engineer shall verify the load-bearing capability of the existing structural elements to support the new design loads. Provide evidence of compliance with lateral force requirements with offer as specified in Paragraph 1.7 HOW TO OFFER.

6.1.1 FOUNDATIONS

The building foundation system shall be designed in accordance with the recommendations of the geotechnical report.

6.1.2 FLOOR LOADS

Minimum uniform basic design live loads shall conform to the locally adopted codes and as follows.

In order to provide a flexible design for occupancy changes in the future, generalized live load categories should be applied to large areas of the floor plate.

Where actual occupancy load requirements or concentrated equipment loads exceed the minimum uniform live loads, the areas in question shall be designed to meet the specific load conditions.

6.1.3 ROOF LOAD

Roof live loads shall be based on geographical location and local governing building code requirements; however, they shall not be less than 20 psf [0.96 kPa].

VA may install a rooftop mounted satellite system or other rooftop antennas for the building. The Lessor shall provide a roof structure, which accommodates VA's system, and shall coordinate with VA to provide the required structural mounting devices.

6.1.4 LATERAL FORCES

VA classifies Outpatient Clinics as "essential" or "critical" facilities. Design structures for lateral forces in accordance with local building code requirements for wind and seismic forces using importance factors for essential structures.

6.1.5 SPECIAL INSPECTIONS

Lessor shall comply with all special inspection requirements of the local Authority Having Jurisdiction. Lessor shall obtain services of qualified, independent entities to provide special inspection services during construction. Lessor shall provide copies of the inspectors' reports to the Contracting Officer as evidence of compliance with Codes and the requirements of this solicitation.

6.1.6 BLAST LOADS

Design structural systems for overpressures and dynamic loadings for threat category as established by VA Physical Security Design Manual for Life Safety Protected facility.

6.1.7 MISCELLANEOUS SUPPORT SYSTEMS

Design structural supports for equipment as required and for a ceiling-hung art piece or lighting fixture in Lobby/Waiting.

6.2 ARCHITECTURAL

6.2.1 FOUNDATION DRAINAGE

Subsoil (foundation) drainage provides a means of removing water that may percolate to the footing level of a building foundation system. Reference the geotechnical report for specific percolation results. Provide a subsoil drainage system in accordance with site Hydrology and Hydraulics studies. Subsoil drains shall maintain a pitch as uniform as possible and shall drain to suitable outfall. No subsoil drainage piping shall traverse a building area to reach an outfall.

6.2.2 PATIENT ENTRANCES

Provide canopies over patient entrances to outpatient clinic. The canopies shall extend 2 feet [0.6 m] beyond the curb lines to protect patients from inclement weather. To reduce the size and cost of canopies, locate the curb line near the entrance if compatible with other design considerations.

6.2.3 LOADING DOCKS

Loading dock platforms shall be 4 feet [1.22 m] above the driveway. Platforms shall have a minimum depth of 8 feet [2.44 m] front to back or between dock lift/leveler and back wall.

Provide a canopy over the platform with 14 feet [4.27 m] of clearance from grade to the underside of the canopy. Provide a stair or a ramp to the platform.

Provide dock levelers where shown on conceptual plans. Dock levelers shall be hydraulic with 25,000 pound [11,340 kg] capacity for recessed installation at loading dock.

6.2.4 CANOPIES OR COVERED WALKS

Provide canopies or covered walkways from the outpatient clinic building to locations as shown in the conceptual plans. If canopies or covered walks extend over truck or bus traffic areas, provide 14 feet minimum vertical clearance for vehicular traffic.

6.2.5 ENCLOSURE SYSTEMS

Building envelope systems shall be designed with consideration for performance under local climactic conditions, appearance, durability, security, efficiency in construction, and maintenance and operating costs. Comply with the requirements of this SFO for Sustainable Design and Energy Efficiency, Paragraph 4.8.

Design for heat loss or gain in accordance with energy criteria in this solicitation. Provide vapor barriers at appropriate side of construction based on local climatic conditions.

Fire resistance of building envelope systems shall be as required by applicable codes for construction type and exposure.

A. Exterior Walls

Materials and colors shall be consistent with the overall design concept and structural requirements, and provide the level of physical security required by this solicitation. Walls shall be designed to prevent moisture penetration. Detail and construct moisture barriers, wall cavities and weeps, flashings, and other features as necessary to prevent damage to wall components or entry of moisture into building. Masonry parapet walls are potential sources of water penetration, unequal thermal expansion, additional structural loads, and increased costs. Proposed parapet walls must be justified by aesthetic, functional, or economic considerations.

Structural design of walls shall comply with Paragraph 6.1. The weight of masonry curtain walls or veneer shall be supported by the structural frame at each floor.

Design walls for sound transmission control from external sources at sites near airports, freeways, or heavy city traffic.

B. Fenestration

Lessor shall provide fenestration (windows) consisting of fixed windows, or glazed storefront or curtain wall, including glazed entrance systems, consistent with the overall design concept. Size windows and select glazing and frame materials to meet the overall building envelope performance and sustainability requirements of this SFO.

Window sills/stools shall be a minimum of 18 inches [457.2 mm] above the finished floor.

Windows in examination and treatment rooms shall be designed to maintain patient privacy. Use clerestory windows, patterned or obscured glazing, or other methods as appropriate.

Windows shall comply with Security requirements in SECTION 4 of this solicitation. Provide security screens where required by SECTION 4.

C. Louvers and Screens

Provide louvers in wall openings where required for ventilation. Design louvers and anchorage for wind loads in accordance with building codes. Louvers shall bear AMCA certified rating seals for air performance and water penetration ratings. Provide bird screens on mechanical ventilation supply and exhaust openings in exterior walls. Provide insect screens on the inside of louvered openings in exterior walls where there are no duct connections.

Comply with security requirements in SECTION 4 of this solicitation.

D. Exterior Doors

Entrance doors shall be swinging anodized aluminum construction with safety glazing and shall comply with energy and sustainability requirements.

Swinging exterior doors and frames, except entrance doors, shall be heavy duty, insulated, full flush, hollow steel construction. Exterior doors shall be weather-stripped, self-closing, and open outward. Door hardware shall comply with applicable portions of SECTION 7 of this solicitation. Provide latch guards and hinges with non-removable pins to deter tampering or unauthorized entry.

Doors for vehicular access, including doors to warehouse shall be insulated, industrial grade overhead coiling doors. Nominal size of the door opening shall be 10'-0" wide x 10'-0" high. Doors shall be fully weather-stripped and include an electric operator and manual chain hoist operation. Operator controls shall be located on the secure (interior) side of the opening and shall incorporate a cylinder lock. Provide safeties, including door edge sensors. Overhead door(s) shall not have vision lights.

E. Automatic Doors

Design automatic doors to operate manually in event of power failure. Equip controls with safety devices for pedestrian protection. Provide door operator controls and equipment that are easily accessible for maintenance. Design automatic doors to open from both sides.

F. Roofs

Provide roofing systems to comply with building codes and fire resistance requirements. Design all roofs with slope to roof drains or gutters. Roofs shall not slope to level valleys.

Size roof drains and overflow drains, scuppers, or gutters; and leaders or downspouts to comply with plumbing codes. Locate drains at points of maximum deck deflection where possible. Coordinate roof drainage with site (storm) drainage. Where roof drain leaders do not connect directly to storm drains, provide scuppers under all sidewalks and flatwork to convey storm flow to site drainage system.

Design roofing systems (including anchorage of roof insulation to decks) for wind force resistance in accordance with Factory Mutual Global (FM-Global) Criteria:

- Loss Prevention Data 1-7, "Wind Forces on Buildings and Other Structures"
- Loss Prevention Data 1-28, "Insulated Steel Deck"
- Loss Prevention Data Technical Advisory Bulletin 1-29, "Loose-Laid Ballasted Roof Coverings"
- Loss Prevention Data 1-49, "Perimeter Flashing"

Use minimum 8-inch high base flashing at walls and penetrations. Do not use pitch pockets or similar penetration seals.

VA may require a rooftop mounted satellite system or other roof top antennas for the building. The roof shall be maintained in a watertight condition at all such mounting locations. Provide appropriate sized conduit sleeving and weatherproof box at roof end of conduit sleeve.

Shield roof-mounted equipment from view. Roof structures, such as penthouses and architectural screens, shall be compatible in appearance with the material, texture, color, and shape of the building.

Whenever mechanical equipment requiring periodic maintenance is installed on a roof, provide access to roof areas by industrial stair. Provide roof walkways with nonslip surfaces on access routes over roofs to mechanical equipment requiring recurrent maintenance. If the stair (or fixed ladder) is exterior to the building, provide means to prohibit unauthorized access to roof.

Design low slope roof systems in accordance with the recommendations of the National Roofing Contractors Association (NRCA) Roofing and Waterproofing Manual and this manual. Acceptable low slope roof systems include but are not limited to the following roofing membranes with roof insulation:

- Bituminous built-up roofing systems
- Modified bituminous roofing systems
- Single-ply sheet roofing systems
- Fluid-applied roofing systems

Design low-slope roof systems with a positive slope a minimum of 1:50 (0.25 inch per foot) up to a maximum of 1:12 (1.0 inch per foot) to drains. Use tapered insulation, sloped structural systems, or level structural system with sloped fill to achieve the required slope.

Provide safety anchorage system at all accessible roof areas.

G. Skylights

When provided, skylights shall be self-supporting, aluminum framed style with translucent, insulated sandwich panels, fixed glazing. Lessor shall design, engineer, fabricate, and install skylights to meet building code requirements and as follows:

- Design for uniform live load of not less than 30 psf [1.44 kPa].
- Design for a concentrated load of not less than 250 lbs [113.4 kg] applied to any framing member at a location that will produce the most severe stress or deflection.
- A one-third increase in the allowable stress for wind is acceptable where permitted by code but not in combination with any reduction applied to combined loads.
- Assume that compression flanges of flexural members receive effective lateral bracing only from anchors to the building structure and horizontal glazing bars or interior trim in contact on at least 50% of the member's total length.

Provide for expansion and contraction of metal skylight components resulting from an ambient temperature differential of not less than 120 °F [49 °C].

6.3 EQUIPMENT

6.3.1 GENERAL

SFO PART III Schedule B lists special equipment items to be furnished by either the Lessor or VA for installation in the Outpatient Clinic. As part of the rental consideration, the Offeror must include supporting construction, HVAC systems, utilities, and electrical distribution systems for both Offeror-furnished equipment and VA-furnished equipment to be installed in the Outpatient Clinic.

Offeror shall include provisions for necessary support and attachment of equipment items including, but not limited to, structural reinforcement of wall, floor or roof construction, and blocking or backing in walls and ceilings.

Offeror shall provide HVAC systems necessary to supply and exhaust the clinical spaces, laboratories, and other areas that contain special equipment, including provisions for supply or exhaust connections directly to special equipment items when required for installation and/or operation of the equipment, as part of the rental consideration.

Offeror shall provide building equipment and utility systems including but not limited to piping, water treatment equipment, sanitary or laboratory waste systems, medical or laboratory gas, compressed air, and vacuum systems as required for the installation and operation of the special equipment items as part of the rental consideration.

Offeror shall provide electrical service necessary for special equipment items, including service from emergency source for designated items or locations, as part of the rental consideration.

The prices and costs relating to Schedule B Special Requirement items shall include only the direct installation of equipment to support and distribution systems already included in the basic rent. Therefore, no additional costs relating to the distribution of utilities or supporting construction may be ascribed to the special equipment costs in Schedule B.

Items not listed in Schedule B are to be provided by the Lessor as part of the rental consideration.

6.3.2 LESSOR FURNISHED SPECIAL EQUIPMENT

The Offeror shall submit lump-sum pricing for the purchase and installation of special equipment items specified in Schedule B for laboratory and clinic areas. The price for each item in Schedule B shall include only the direct costs of obtaining and installing the item.

Special equipment items are listed by room type for each functional area within the Outpatient Clinic.

Special systems and equipment (including special electronic safety and security systems) applicable to the entire clinic are listed separately in Schedule B.

All property placed in, upon, or attached to the premises to be leased, and for which the Government pays by means of lump-sum, shall be and remain the property of the Government, and may be removed or otherwise disposed of by the Government.

The Lessor shall be responsible for constructing and carrying the cost of installing the Schedule B items, including all Specialty Items, as listed above. Upon space acceptance by VA, all cost associated with the installation of this equipment as outlined above will be paid by the VA in a lump sum payment to the Lessor. Offerors shall list the lump sum cost associated with installation on GSA Form 1364.

6.3.3 PROVISIONS FOR VA-FURNISHED/VA-INSTALLED EQUIPMENT

As part of the rental consideration, the Offeror shall include supporting construction, HVAC systems, utilities, and electrical distribution as required for VA-furnished and VA-installed equipment to be installed in the Outpatient Clinic.

VA-Furnished/Lessor Installed Equipment

Equipment may include items that are furnished by VA but installed by the Lessor. As part of the rental consideration, the Offeror shall include supporting construction, HVAC systems, utilities, and electrical distribution as required for VA-furnished equipment to be installed by the Lessor.

For equipment designated as installed by the Lessor, the Offeror shall also include installation as part of the rental consideration. Installation shall be defined to include all labor, tools, equipment, and incidental parts (including, but not limited to, screws or bolts for anchoring equipment to substrates, pipe fittings or unions, solder, Teflon tape, pipe joint compound, wire nuts or electrical connectors, electrical wire, etc.) necessary for the equipment to be placed in its final location and to be completely functional.

- Include activities (nodes) in the network analysis schedule for installation by Lessor of VA-furnished equipment.
- Advise Contracting Officer of date(s) work will be ready for installation of equipment.
- Accept delivery of VA-furnished equipment on established dates.
- Jointly with Contracting Officer, inspect the equipment upon delivery to check for damage and confirm quantities.
- Once VA-furnished equipment is accepted by Lessor, the Lessor shall be responsible for protecting and storing the equipment.
- Provide any additional transportation to move equipment to final location.
- Uncrate, assemble, and install equipment.
- Demonstrate proper operation of equipment to the Contracting Officer.

The Lessor shall be responsible for constructing and carrying the cost of installing the VA-Furnished Lessor Installed equipment as listed above. Upon space acceptance by VA, all cost associated with the installation of this equipment as outlined above will be paid by the VA in a lump sum payment to the Lessor. Offerors shall list the lump sum cost associated with installation on GSA Form 1364.

6.4 MECHANICAL

6.4.1 INTRODUCTION

A. General

The Offeror and the Project Design Engineer (henceforth known as the Engineer) shall use the contents of this document to design, install, test, adjust, balance, and commission the HVAC systems in a trouble-free working manner to provide comfort and safety to the veterans, staff, and visitors. The systems shall operate within the specified parameters.

B. Equipment Location

Equipment (examples: Air-Handling Units, Cooling Towers, Chillers, DX Condensing Units, and Fans) can be located on the roof if permitted by the local authorities. Provide supports, bracings, and other mounting devices to withstand wind forces as required by the local authorities. If there are no local codes, use wind forces indicated in American Society of Civil Engineers (ASCE) 7-98 or later version if available. For the seismic zones, the design of the bracing and supports shall be certified by a registered professional structural engineer. See Paragraph 0 for additional safety and access requirements.

6.4.2 MANDATORY PROVISIONS

See Paragraph 4.1 CODES and 4.2.1 VA ADOPTED CODES, STANDARDS, AND EXECUTIVE ORDERS.

6.4.3 APPLICABLE CODES AND CRITERIA

See Paragraph 4.1 CODES.

6.4.4 HVAC DESIGN CALCULATIONS

The HVAC design calculations shall be based on the following parameters:

A. Outdoor Design Conditions

Reference: Latest Edition of ASHRAE Handbook of Fundamentals.

- (1) Cooling Mode – Air Handling Unit (Minimum Outdoor Air)
1%, Monthly Design Dry bulb and Mean Coincident Wet bulb Temperatures.
- (2) Cooling Mode – Air Handling Unit (100% Outdoor Air):
1%, Monthly Design Wet bulb and Mean Coincident Dry bulb Temperatures.
- (3) Heating Mode
99%, Annual Design Dry bulb Temperature.
- (4) Cooling Tower Selection
1%, Monthly Design Wet bulb Temperature.

B. Indoor Design Conditions

- (1) Health Care Functions
 - Radiology
 - Diagnostic and Treatment
 - Sterilizing
 - Central Medical and Surgical Supply

Reference: Latest Edition of ASHRAE Standard 170 (Ventilation of Health Care Facilities)

Base the design on the following parameters listed for each unique specialty function:

- Inside Design Temperature (Dry bulb)
 - Inside Design Humidity (Percentage Relative Humidity)
 - Pressure Relationship to Adjacent Areas (Measured as Volumetric Air Difference)
 - Minimum Total and Outdoor Air Changes per Hour
 - Return Air or Exhaust to Outdoors
- (2) Support Functions
 - Offices
 - Classrooms
 - Conference Rooms
 - Entrance Lobby
 - Waiting Area
 - Lounge
 - Circulation Spaces

- 70 °F @ 30% Relative Humidity (Heating Mode)
- 75 °F @ 50% Relative Humidity (Cooling Mode)
- (RH in cooling mode is uncontrolled)

(3) Food Service

- Canteen Prep/Work Area
- 70 °F to 74 °F (Heating Mode)
- 82 °F to 84 °F (Cooling Mode)
- Dining Areas
- 70 °F @ 30% Relative Humidity (Heating Mode)
- 75 °F @ 50% Relative Humidity (Cooling Mode)
- (RH in cooling mode is uncontrolled)

(4) Miscellaneous Spaces

See Paragraph 6.5 for specific applications.

(5) Unoccupied Mode

Non-sensitive areas shall be provided with a night setback, 55 to 88 F.

C. Heating and Cooling Capacities

(1) General

Using the methodology given in the latest edition of ASHRAE Handbook of Fundamentals, the Engineer shall provide computerized calculations showing computation of the cooling and heating capacities of the occupied spaces. The Engineer shall coordinate with the project-specific ancillaries – Latest Edition of ASHRAE Handbook of Applications (Health Care Facilities) and obtain such data as equipment load, exhaust air volume, pressurization requirements, and the required hours of the system operation per day to establish the cooling and heating capacities and system zoning.

(2) Calculation Details

The computerized calculations shall show such entities as:

- Room-By-Room Peak Cooling and Heating Loads
- Room-By-Room Air Balance Sheets, showing supply, return, exhaust, make-up, and relief air volumes
- Zone cooling and heating loads (a zone is defined as a central cooling and heating apparatus serving a group of rooms)
- Psychometric Analysis

(3) System Losses

The calculations shall include minimum 12% to the calculated load to account for:

- Fan Motor Heat
- Duct Heat Pick-Up

- Duct Leakage
- Assumed Safety Factor
- Reference: ASHRAE Handbook of Applications

6.4.5 HVAC SYSTEM SELECTION CRITERIA – AIR SIDE

A. General

Selection of the airside of the HVAC systems shall be based on the following:

- All-Air Systems
- Fan Coil Units
- Closed-Loop, Ground Source Heat Pumps
- Use of PTAC (Packaged Terminal Air Conditioners) and Terminal Heat Pumps is NOT permitted

6.4.6 ALL-AIR SYSTEMS

A. General

Provide all-air system, where the space criteria require:

- Minimum Fixed Air Changes per Hour
- 100% Exhaust to Outdoors
- Positive (+) or Negative (-) Pressure Relationship with Adjoining Spaces

The AHU shall be:

- ARI Certified
- Factory-Fabricated and Tested
- Modular Design with Solid Double-Wall Construction

Provide IAQ (Indoor Air Quality), double-slopping drain pan to ensure immediate removal of condensate. Provide a variable air volume system (VAV), where variation in air volume is permitted.

B. Zoning

Provide multiple air-handling units to ensure flexibility and energy efficiency. Capacity of a single air-handling unit shall not exceed 50,000 CFM. Provide dedicated air-handling units for spaces, such as:

- Supply Process and Distribution (SPD) also referred to as Central Medical and Surgical Supply
- Entrance Lobby, Admission, and Waiting
- Ancillaries (as defined in ASHRAE Application Handbook – Health Care Facilities)

The above functions and activities shall vary with the size and space program of the OPC (Outpatient Clinic).

C. AHU Components and Specifications

(1) General

All components may not be required at each location and for each application.

(2) Filtration

The following filtration requirements shall apply:

- Pre-filters = 2-inch thick disposable (MERV 8)
- After-Filters = 12-inch thick disposable (MERV 14)
- Locate pre and after filters back-to-back, on the upstream side of the supply air fan.
- Provide HEPA filters (MERV 17) as the terminal final filters for Operating Rooms, and BMT (Bone Marrow Transplant).

Contaminated exhaust of the special systems serving hoods or biological safety cabinets or protective environment rooms (e.g., TB Isolation Rooms) shall pass through the HEPA filters (MERV 17) equipped with pre-filters (MERV 8).

(3) Humidification

Humidification shall be provided to ensure a minimum of 30% RH. Use RO (Reverse Osmosis) water to produce clean steam. Provide a gas-fired, stand-alone steam generator for the steam humidifier in the absence of the campus steam. Use of the electric, stand-alone steam generator should be considered as a last option.

(4) Blenders

Include blenders where blending of cold air and return would be helpful in preventing nuisance tripping activated by the Freeze stat.

D. Air Terminal Units

Provide pressure-independent, DDC-controlled, variable air volume (VAV) and constant volume (CV) terminal units. Provide integral reheat coils for the terminal units serving perimeter and roof-exposed spaces. Full shutdown of the interior spaces is permitted provided provision is made in the design sequence to prevent overcooling. Provide modulating control with hot water as the heating medium. Provide SCR control where electric coils are used for reheat. Provide capability to adjust the air volume between the high and low limits either locally or by the DDC controls. Provide acoustic internal lining for the terminal units.

Capacity of a single terminal unit shall not exceed 1,500 CFM [708 L/s].

Exception: Terminal unit serving the Operating Room can be larger than 1,500 CFM [708 L/s], as required to meet the air changes and cooling load requirements.

E. Room Temperature Control

(1) General

A space is defined as individually-controlled when it is equipped with a dedicated air terminal unit controlled by a dedicated room temperature sensor. The temperature sensor shall be wall-mounted with adjustable setpoint.

(2) Individual Room Temperature Control

Provide individual room temperature control for the following spaces:

- Occupied Corner Spaces with two or more exposed perimeter walls

- Spaces listed below (Interior or Perimeter)
 - Conference Room
 - Laboratory
 - Special Procedure Room
 - Diagnostic and Treatment Room
 - Classroom
 - Entrance Lobby
 - Lounge
 - Canteen
 - Clean Preparation and Storage Room
 - Soiled or Decontamination Room
 - PACT and Specialty Team Work Areas

(3) Zone Temperature Control – Perimeter Spaces

A single terminal box can serve as many as three perimeter spaces if these spaces are located on the same exposure and have identical load characteristics, such as offices or examination rooms.

(4) Zone Temperature Control – Interior Spaces

A single terminal box can serve as many as four interior spaces if these spaces have identical load characteristics, such as offices or examination rooms.

(5) Temperature Control – Interior and Perimeter Spaces

A single terminal unit cannot serve perimeter and interior spaces, including circulation spaces.

(6) Temperature Control – Open Spaces

Open spaces with exposed perimeter and interior spaces shall be divided into two sub-zones, perimeter and interior. Each sub-zone shall be served by a dedicated air terminal unit. Open spaces are defined as the spaces without floor to ceiling partitions.

F. Air Distribution Arrangement

Provide fully ducted supply, return, and exhaust air systems between the fans and inlets/outlets. Use of partial or common ducted return air arrangement is not acceptable. To avoid contamination and other shortcomings cited below, do not use ceiling space between the structural ceiling and suspended ceiling space as the supply or return air plenum.

In the ASHRAE Application Handbook (2007 Edition), drawbacks of plenum return system are cited as reproduced below:

"Suspended ceiling return air plenums eliminate sheet metal return air ductwork to reduce floor-to-floor height requirements. However, suspended ceiling plenums may increase the difficulty of proper air balancing throughout the building. Problems often connected with suspended ceiling return plenums are as follows:

- Air leakage throughout cracks, with resulting smudges.
- Tendency of return air openings nearest to a shaft opening or collector duct to pull too much air, thus creating uneven air motion and possible noise.
- Noise transmission between office spaces."

G. AHU Controls**(1) General**

Provide a fully functional automatic control system to ensure comfort and energy efficiency from full load to part load conditions, with integral safety features to protect the occupants and equipment.

(2) System Components and Minimum Sequences

Provide motorized control valves, automatic dampers, airflow measuring devices, a static pressure sensor, chilled-water flow meters, temperature, pressure, and humidity sensors, humidifiers, smoke detectors and smoke dampers, as required, to address such sequences as:

- Supply Air Temperature Control
- Fan Speed Control
- Provision of Minimum Outside Air from Full Load to Part Load
- System Start-Up
- Morning Warm-Up and Night Setback Cycles
- Smoke Detection
- Alarms

6.4.7 FAN COIL UNITS**A. General**

Provide a 4-pipe fan coil unit system for spaces not required to be in compliance with the criteria cited in Paragraph 0 above. Cooling only fan coil units are permitted, where year-round cooling is required for applications, such as elevator machine room, telephone room, and computer room. Provide at least one fan coil unit for each room. A single fan coil unit cannot serve two or more rooms by ducted supply air takeoffs. Use of a 2-pipe fan coil unit system, with seasonal changeover, is not permitted.

B. Minimum OA – Ventilation

Do not admit raw minimum outside air (for ventilation) from the exterior wall vents. Provide a dedicated, central air-handling unit, complete with air distribution ductwork and outlets, to admit conditioned and filtered ventilation air directly in the occupied spaces and NOT via mixing boxes. Components of the central ventilation units shall be similar to the all-air system.

C. Fan Coil Units – Type

Fan coil units shall be one of the following types:

- Vertical Floor Mounted
- Horizontal Recessed
- Horizontal Concealed

D. Fan Coil Units Controls

Provide modulating controls for the cooling and heating coils. Provide a dead-band between the cooling and heating modes to avoid simultaneous activation of cooling and heating systems.

6.4.8 CLOSED-LOOP – GROUND SOURCE HEAT PUMPS (GSHP)**A. General**

Evaluate and include the closed-loop heat pump system in the design where land area is available to install the outside underground loop. Heat pumps can be used where an all-air system is not feasible.

B. Closed-Loop System Selection**(1) GSHP Type**

The ground source heat exchangers are installed in horizontal or vertical configuration.

The vertical heat exchanger is commonly used, as it has lesser land requirement compared to the horizontal type.

(2) Test Bore

Sample boring or test bore is highly recommended to estimate approximate depth of the bore and soil condition, i.e., thermal properties. Test bore data shall enable the designer to optimize the loop design and eliminate assumptions from the design process.

The test bore can be used as a permanent ground heat exchanger.

(3) Commonly Used Design Parameters

The commonly used parameters are:

- Bore Diameter = 4 to 6 inches [101 to 152 mm]
- Bore Placing = 20 to 30 feet [6 to 9 m]
- Pipe Diameter = 1 inch up to approximately 300 feet [91 m]
- 1-1/4 inch up to approximately 500 feet [152 m]
- 1-1/2 inch for depths greater than 500 feet [152 m]
- Piping Material: HDPE (High-Density Propylene) – thermally fused

(4) Loop Types

Select the loop design and configuration based on the type of buildings. Evaluate and include any one of the following three loops:

- Simple unitary loop
- Sub-central
- Central

The designer may select any one or combination of the above loops.

C. Heat Pumps

Use water-to-air heat pumps with differing configurations to match the applications.

Examples:

- Vertical (up-flow or down-flow)
- Horizontal
- Classroom
- Console

D. Minimum Outdoor Air – Ventilation

Provide a dedicated, central air-handling unit with a heat recovery system for colder climate where outdoor design temperature at 99% is 41°F [5°C] or lower.

6.4.9 REFRIGERATION SYSTEMS – CHILLED WATER AND DIRECT-EXPANSION (DX) SYSTEMS

- Provide ARI certified, air-cooled or water-cooled refrigeration units.
- Use EPA approved refrigerants (HFC-134a, HFC-410a, or HCFC-123).
- Use of HCFC-22 refrigerant is not permitted.

Provide multiple units (minimum two) to ensure flexibility and efficient part load operation. Use of reciprocating compressors is NOT permitted. Equipment efficiencies shall be in compliance with the DOE, FEMP program.

N+1 redundancy is not required.

6.4.10 CHILLED WATER SYSTEMS**A. General**

Capacity of a single air-cooled chiller shall not exceed 200 tons. Capacity of a single water-cooled chiller (Centrifugal or Rotary Screw) shall not exceed 1,250 tons. Provide multiple chillers (at least two) to ensure reliability and efficient part load operation. A chilled water system shall be provided for all 100% OSA units.

B. Chiller Controls

Each chiller shall be equipped with a factory-installed and tested microprocessor for the safety and operating controls. The microprocessor shall be able to interface with the building DDC (Direct Digital Controls) controls with a BACNET open protocol arrangement.

C. Chilled Water Piping/Pumping System

Provide a fully functional chilled-water piping and pumping system complete with accessories and devices, such as variable-speed drives, flowmeter, and temperature and pressure sensors. Selection of the piping and pumping arrangement shall be project-specific. Provide variable flow chilled-water pumping (variable primary or primary-secondary) system to ensure energy efficient operation from full load to part load conditions.

D. Cooling Tower**(1) General**

Provide CTI-certified, corrosion-resistant, gravity-flow cooling tower in induced-draft configuration to cool the condenser water. The tower shall be in compliance with OSHA safety requirements and Physical Security provisions.

(2) Cooling Tower Location

Locate cooling tower to ensure that:

- Tower installation and noise is not objectionable and in compliance with the local ordinance. Provide low noise level fans and attenuators as required to meet the noise levels.

- Discharge from the cooling tower does not find its way into outside air intakes and open windows of the adjoining spaces to create a potential for the Legionellosis disease.

(3) Tower Accessories and Controls

The cooling tower installation shall be accessible and complete with a walking platform and a ladder safety cage.

(4) Water Treatment

Provide a complete and fully functional water treatment system using non-toxic chemicals approved by EPA and local authorities.

N+1 redundancy is not required..

6.4.11 DIRECT-EXPANSION (DX) SYSTEMS

Use of DX systems, packaged or split-system, is permitted, provided the occupants comfort is not compromised due to lack dehumidification at part load conditions. The minimum size unit is 20 tons. The Engineer shall address this issue by including the required control strategy and system configuration, such as:

- Multiple Compressors (single compressor units are NOT acceptable)
- Low-Ambient Operation
- Hot Gas Bypass
- Customized Refrigerant Piping Design (if required to avoid stratification)

6.4.12 HEATING SYSTEMS**A. General**

Provide heating hot water or steam boilers to meet the space heating and domestic hot water heating demand. Provide at least two boilers each of 50% capacity to ensure flexibility. Provide 100% back-up for the circulating pumps.

B. Selection Criteria

Selection of steam and/or hot water boilers shall be based on the following:

- Total heating load
- Total steam demand for winter humidification, sterilizers, kitchen equipment
- Domestic hot water load
- Location of heating equipment according to the OPC

C. Boiler Fuel Selection and Choice

- Use natural gas where uninterrupted supply is available.
- Use No. 2 oil where natural gas is not available.
- Use natural gas and No. 2 oil where supply of natural gas is interruptible.
- Provide complete fuel oil and/or gas piping with a gas meter.

D. Hot Water Heating Piping/Pumping System

- Provide a fully functional heating system complete with circulating pumps and insulated piping.

- Provide two-way modulating control valves to vary flow at part-load conditions.
- Provide variable speed drives for the hot water circulating pumps for sizes larger than 5.0 HP.

E. Steam Heating System

The steam system shall generate heating hot water by using a steam-to-hot water heat exchanger and steam accessories, such as condensate return system comprising of condensate return pump and flash tank, where required. Provide boiler water treatment and steam flow meter, interfacing with the central metering system.

F. Miscellaneous Terminal Heating Devices

Provide thermostatically-controlled terminal heating devices, such as unit heaters, cabinet heaters, convectors, and finned tube radiation to heat the miscellaneous spaces, such as:

- Attic
- Vestibules
- Crawl space
- Exterior stairs
- Exit doors leading to outdoors
- Mechanical Equipment Rooms (MERs)
- Toilets with exposed perimeter

6.4.13 PIPING SYSTEMS – BASIC REQUIREMENTS

A. Pipe Material

Steel, ASTM A53, Grade B, seamless or ERW, schedule 40 for condenser water, chilled-water, hot water, and vent pipes.

Copper Water Tube (Option): ASTM B88, Type K or L, hard drawn. Soft drawn tubing, 3/4-inch and larger may be used for run outs to for fan coil units.

Use pre-fabricated, insulated, chilled water piping for the underground applications or in the tunnels, or pipe basements or tunnels.

Steam Piping: Piping for condenser water, chilled-water, hot water, and vent pipes shall be steel, ASTM A53, Grade B, seamless or ERW, Schedule 40.

Steam Condensate Piping: (a) Concealed above ceiling, in wall, or chase: Copper Water Tube ASTM B88, Type K, hard drawn (b) All Other Locations: Copper Water Tube ASTM B88, Type K, hard drawn or steel, ASTM A53, Grade B, Seamless or ERW, or A106 Grade B Seamless, Schedule 80.

Chemical Feed Water for Condenser Water Treatment: Chlorinated polyvinyl chloride (CPVC), Schedule 80.

B. Minimum Pipe Size

Minimum pipe size shall not be less than 3/4-inch [19 mm].

C. Minimum Water Flow

Minimum water flow shall not be less than 0.5 GPM [1.89 L/m].

D. Pipe Sizing

Select pipe sizes based on the ASHRAE recommendations and the need to provide an energy-efficient design.

E. Piping Connections

(1) Shutoff Valves

Provide shutoff valves to isolate each piece of equipment, such as chillers, boilers, cooling tower, pumps, coils, air terminal units, and terminal heating units requiring isolation, service, and/or replacement.

Provide drain lines at low points and air vents at high points.

(2) Strainers

Provide in-line strainers to protect equipment, such as cooling and heating coils and control valves.

(3) Check Valves

Provide check valves on the pump discharge side with two pumps operating in parallel.

(4) Flexible Connectors

Provide flexible connectors at the pump inlet and outlet connections.

(5) Filters

Provide cartridge-type of filters for the closed-loop chilled water and hot water systems. Provide solid separators for cleaning condenser water.

(6) Water Treatment – Closed-Loop Systems

Provide chemical shot feeder for the closed-loop chilled water and hot water systems.

(7) Piping Specialties

Provide expansion tanks and air separators for the chilled water and hot water closed-loop systems.

(8) Make-Up Water Connections

Provide make-up water connections with reduced pressure backflow preventer for the expansion tanks.

(9) Steam Trap

Provide float and thermostatic trap assembly for the equipment served by a modulating control valve. Provide at least 12-inch static head to facilitate condensate flow by gravity.

(10) Vent Lines

Provide vent lines for the steam condensate return pump and pressure-reducing valve station to discharge outdoors.

(11) Instruments

Provide pressure gauges and thermometers at the pumps and coils and at the equipment requiring measurements of the pressures and temperatures.

6.4.14 AIR DISTRIBUTION SYSTEM**A. Compliance**

All air distribution systems (supply, return, exhaust, relief, and outdoor air) shall be fabricated in accordance with SMACNA Standards.

B. Duct Material

Ductwork, casings, and accessories (e.g., volume dampers, turning vanes, elbows) shall be fabricated from galvanized sheet steel, ASTM A527, coating G90. As an optional material, aluminum sheets complying with ASTM B209, alloy 1100, 3003, 5052 can be used.

Use 18-gauge welded stainless steel ducts with liquid-tight continuous welds for all seams and joints for the "wet exhaust" systems. Wet exhaust systems are meant for dishwashers, cage washers, cart washers, scullery hoods, steam sterilizers, and ethylene oxide sterilizers.

For special exhaust systems serving fume hoods and biological safety cabinets, use welded stainless steel (ASTM A167, Class 302 or 304).

Use duct material in compliance with NFPA 96 and UL labeled for grease exhaust.

Use of fiberglass ducts, concrete ducts, and underground ducts is not permitted.

C. Design Parameters**(1) Minimum Duct Sizes**

- 8 inches x 6 inches for rectangular ducts
- 6 inches for round ducts

(2) Recommended Duct Velocities

Select the duct velocities and limiting static pressure drops in accordance with ASHRAE and SMACNA requirements. The selection shall address such issues as the noise levels, energy conservation, and the prescribed limits on the total fan static pressure as specified in ASHRAE 90.1.

D. Ductwork Accessories

Provide a manual volume damper at each low-pressure branch duct takeoff. Show all fire and smoke dampers and smoke detectors on the floor plans.

E. Air Outlets

Provide supply, return, and exhaust air outlets and inlets to ensure uniform distribution of air and avoid spot cooling and dead-end spaces without circulation. The air outlets shall not result in a drafty and noisy environment. Capacity of a single air outlet shall be based on and limited to meet the noise levels and uniform air distribution.

6.4.15 INSULATION

Provide duct and piping insulation in accordance with the ASHRAE Standard 90.1. External and internal insulation for the equipment shall be in compliance with the manufacturer's standard practice.

6.4.16 APPLICATIONS**A. Air-Conditioning Systems – Miscellaneous Areas**

Provide dedicated and thermostatically-controlled air-conditioning systems for the critical spaces identified below:

- **Telephone Equipment Room:** refer to 6.8.2.J, Telephone Equipment Room
- **Main Computer Room:** refer to 6.8.2.K, Main Computer Room

(1) General

Obtain project-specific scope of work and provide a HVAC system to serve the Mobile MRI facilities. Coordination with the MRI vendor is critical, as the mechanical system requirements shall depend upon the actual make and model number. HVAC system shall be dedicated unless it can be connected to any other system without compromising the design parameters.

(2) Cryogen Exhaust

Removal of cryogen during an accidental spill is a critical safety requirement. Coordinate the exhaust needs with a specific make and model number of the MRI Unit. Provide multiple levels of safety, such as exhaust, vent, and overpressure relief.

(3) Dedicated AC Systems

Closed-loop chilled water unit may be required for the process cooling. Refer also to 6.8.2.J, Telephone Equipment Room and 6.8.2.K, Main Computer Room.

B. Storage Rooms and Flammable and Combustible Storage Room

Provide dedicated exhaust ventilation system to maintain the space under negative air balance. Select fan, motor, and ductwork to handle the stored chemicals. Ensure compliance with NFPA 30. Exhaust fan shall run continuously and shall be served from the emergency power circuit.

C. Laboratories

Design HVAC systems to comply with NFPA 45 with 100% exhaust and negative air balance.

Provide dedicated exhaust systems for the fume hoods and Biological Safety Cabinets (BSC). Ductwork, fans, and motors shall be suitable to handle the chemicals. Exhaust from the hoods and BSC shall be discharged from the roof at appropriate velocity to ensure that contaminated air does not enter into outside air intakes and open windows.

D. Pump Rooms

Provide heating and ventilation as required to be in compliance with NFPA 20. Provide dedicated and controlled equipment.

E. Enclosed Entrances

Refer to Paragraph **Error! Reference source not found.** for the enclosed entrances. Provide independent heating device to activate and maintain 60 °F [16 °C] when the entrance doors are closed in heating season. Use devices such as overhead heating lamps.

F. Radiology**(1) General**

Penetration of lead lining by the HVAC ducts shall be coordinated with the equipment manufacturers.

(2) Inside Design Conditions
Use ASHRAE Standard 170.

(3) Dedicated AC Unit
Evaluate the need for a dedicated AC unit to meet the cooling demand of the equipment load due to computers and other equipment. Coordinate the heat dissipation with the equipment manufacturer.

(4) Air Distribution
Coordinate air distribution with the raised floor where installed in specific rooms. Ensure supply of minimum ventilation room for the spaces cooled by 100% re-circulating AC unit. Maintain room air balance as recommended by ASHRAE Handbook and/or Standard 170.

G. General Exhaust Systems

Ventilate spaces, such as toilets, janitor's closet, soiled utility rooms, and bathrooms, at the rate specified in ASHRAE Standard 62.1. Maintain negative air balance in the spaces.

H. Vestibules

Provide a dedicated terminal heating unit to heat the vestibule. Ventilate vestibule by maintaining positive air balance, i.e., supplying air without taking return air back.

I. General Waiting Areas (Admission and Radiology)

Per CDC and ASHRAE requirements, all waiting areas shall be maintained under negative air balance and exhausted outdoors at the rate of 12 air changes per hour. General exhaust system can be used to ventilate these spaces.

6.5 FIRE PROTECTION

6.5.1 FIRE EXTINGUISHERS

Portable fire extinguishers recessed in cabinets shall be provided, inspected, and maintained by the Lessor in accordance with National Fire Protection Association (NFPA) 10, Standard for Portable Fire Extinguishers.

Recessed cabinets shall be provided in occupied areas. Size fire extinguisher cabinets to accommodate a 2.5 gallon [9.5 liters] pressurized water extinguisher. Recessed cabinets shall be conspicuously marked.

6.5.2 FIXED FIRE EXTINGUISHING SYSTEMS

Provide fixed fire extinguishing systems in accordance with NFPA 96 for cooking operations producing grease laden vapors or smoke.

Fixed fire extinguishing systems shall be wet chemical and shall comply with UL300 in accordance with NFPA 17A. Activation of the fixed fire extinguishing system shall shut down

the power/fuel source to the cooking equipment and shall be connected to the fire alarm system.

6.5.3 AUTOMATIC SPRINKLER SYSTEMS

Automatic sprinkler systems shall be installed in the outpatient clinic building and any accessory buildings. Installation shall comply with NFPA 13. Sprinklers shall be installed throughout the building(s), including walk-in freezers and cold rooms, telecommunications rooms, radiology and MRI suites, loading docks, electrical rooms and closets, audiometric booths, vaults, and generator rooms.

A. Design

The design shall comply with the requirements of NFPA 13. The automatic sprinkler system shall be hydraulically designed by any design approach allowed by NFPA 13. A minimum safety factor of 10% shall be provided in the hydraulic calculations. Sprinkler systems shall be designed based on available water supply without fire pump operating, where possible.

B. Installation

The installation shall comply with the requirements of NFPA 13. Sprinklers shall be provided throughout the building.

Where necessary, provide a fire pump to supplement the fire flow and pressure. The installation of the fire pump shall comply with the requirements of NFPA 20. The fire pump shall be an electric motor driven, horizontal split case centrifugal type. The fire pump shall be provided with both a test header and flowmeter. Relief valves, if provided, shall be recirculated back to the suction side of the pump. Jockey pumps shall be rated for no less than 60 GPM [3.79 L/s]. Fire pumps shall start automatically at 10 psi below the jockey pump start pressure. Fire pumps shall be manually shut down.

Design wet pipe sprinkler systems, unless installed in areas subject to freezing. Dry pendant or sidewall sprinklers are preferred in lieu of dry pipe or antifreeze systems. Propylene glycol shall be used should antifreeze systems need to be installed when permitted by local authorities. Do not use pre-action type systems.

Sprinkler densities shall comply with NFPA 13, except in rooms containing movable/mobile shelving (high density storage) where the density shall be Ordinary Hazard (Group 2).

Rooms containing bulk supply storage shall be classified as defined by NFPA 13. Do not use shelving which obstructs sprinkler water from penetrating down through racks.

Install quick response sprinklers (QRS) in all areas, except where specifically prohibited (e.g., high temperature areas as defined in NFPA 13, elevator shafts, or elevator machine rooms). On retrofit projects, replace existing standard sprinklers with QRS.

Install standard sprinklers with intermediate temperature rating 200 °F [93 °C] or higher in elevator shafts, elevator pits, and elevator machine rooms. Install sprinklers in elevator shafts and pits only where required by NFPA 13. (Comply with necessary power shutdown requirements.)

The installation of flow control (on/off) sprinkler heads is not permitted.

Provide non-ferrous piping for all areas within Magnetic Resonance Imaging (MRI) suites.

Coordinate with architectural, mechanical and electrical work and show smoke zone boundaries, hazard classification, density, and other special requirements on drawings.

Coordinate sprinkler zones with fire or smoke (compartments) and fire alarm evacuation zones. Provide a flow switch, isolation valve, tamper switch, and pressure gauge for each zone. Notification shall comply with NFPA 72.

Determine and identify on drawings the location of fire pump, risers, all valves, fire department connections, drains, and points of connection with underground fire service main.

Provide seismic protection in areas of Moderate High, High, and Very High Seismicities (See VA Seismic Design Requirements (H-18-8), Table 4).

C. Commissioning

For the leased facilities, commissioning of the fire protection systems shall be implemented to verify the intent of the design by inspecting and testing the systems.

6.6 PLUMBING

6.6.1 GENERAL

The Lessor and the Lessor's Design Engineer (henceforth known as the A/E or Engineer) shall use the contents of this document to design, install, test, adjust, balance, and commission the Plumbing systems in a trouble-free working manner to provide comfort and safety to the veterans, staff, and visitors.

6.6.2 MANDATORY PROVISIONS

See Paragraphs 4.1 CODES and 4.2.1 VA ADOPTED CODES, STANDARDS, AND EXECUTIVE ORDERS.

6.6.3 APPLICABLE CODES AND CRITERIA

See Paragraph 4.1 CODES, for applicable codes and standards.

6.6.4 PLUMBING DESIGN SCOPE

The plumbing design scope includes the following systems, which are detailed following this list.

- A. Water Distribution System
- B. Domestic Hot Water System, including Recirculation
- C. Sewer/Vent/Waste System inside buildings
- D. Roof Drainage System
- E. Sub Soil Drainage System

- F. Interior Fuel Gas System
- G. Medical Gas and Vacuum System
- H. Dental Gas and Oral Evacuation System
- I. Laboratory/Shop Compressed Air System
- J. Acid Waste and Vent System
- K. Seismic Restraint System
- L. *Legionella* Mitigation

A. Water Distribution System

Size the piping for the hot and cold water systems per criteria specified in the IPC including backflow preventers, water hammer arrestors, and trap primers. Minimum pipe size shall be 1/2".

Provide wall hydrants (a maximum of 200 feet [60.96 m] apart at the building exterior perimeter) at loading docks and at building entrances, with a minimum of one wall hydrant on each exterior wall.

Maintain a minimum pressure of 35 PSI [240 kPa] at the plumbing fixtures on the top floor. In minimum pressure calculations, use residual pressure at design flow. Monitor for diurnal pressure fluctuations experienced by the building water supply and modify starting pressures accordingly. Provide a pressure gauge on the top floor branch adjacent to the riser.

Where required, provide a domestic water booster system. Use a three-pump system with each pump handling half of the design flow rate. An inlet and discharge potable water bladder type buffer tank shall be provided to absorb pressure fluctuations and minimize pump cycling. Discharge pressure shall be controlled using variable frequency drives through a packaged booster pump controller. Provide spring loaded swing check valves on the pump discharge.

Provide a solenoid valve on the cold water supply to the dental Utility Junction Centers (UJC) with a control switch located in the reception area. A UJC is a grouping of specific utilities brought to a designated location in each dental operatory to provide convenient points of connection to the dental operating unit equipment.

The electrical supply shall be coordinated with the electrical engineer for all electronic faucets and flush valves, trap primers, solenoid valves, pumps, alarm panels, hot water heaters, and other appliances and equipment requiring electrical power.

B. Potable and Special Water Treatment Systems

Potable water provided to VA shall meet minimal EPA and/or state standards for contaminants. If potable water does not meet EPA and/or state standards, Lessor shall take action necessary to reduce contamination to acceptable levels. Lessor shall test potable water periodically to ensure that it continues to meet EPA and state standards.

Provide water treatment as required to meet EPA and/or state drinking water standards, and to meet special water use needs.

- (1) Water Softener

Provide vertical, pressure type, sodium cycle water softeners from a single vendor. Regeneration shall occur no more than once per day. Provide bypass. A water softener system is required under the following conditions:

Entire Clinic: Provide 100% duplex softening equipment (with hard water bypass) when total hardness exceeds 170 ppm (mg/L) as CaCO₃. Blend equipment effluent to a hardness of approximately 50 ppm [mg/L]. Provide a ventilated salt storage room to store a 30 day supply of salt.

Pretreatment: Provide 100% duplex softening equipment (with hard water bypass) for Reverse Osmosis and Hemodialysis water treatment packages.

Boiler Feed-water Make-up Use: Design duplex softeners, each furnishing 100% of the maximum flow rate, at an exchange capacity required for peak boiler feed-water make-up.

(2) Reverse Osmosis

Provide a stand-alone reverse osmosis system, comprised of a factory assembled package, complete with dual alternating carbon filters with automatic backwash, a 20 and 5 micron pre-filter, a reverse osmosis membrane, pressure pump, and all valves and controls necessary for complete automatic operation. All parts and components to be compatible with EPA drinking water standards, and the entire package shall be UL listed.

(3) Dealkalizing System

As facility needs dictate, provide a single chloride-anion pressure-type water-dealkalizing system for boiler feed-water make-up to follow water softening equipment. Reduce alkalinity to 20 ppm [mg/L]. Provide soft water bypass.

Design a separate measuring tank of sufficient size to furnish amount of saturated salt and caustic soda solution required for one regeneration. Caustic soda shall be approximately 10% by weight of total solution. Designate interior floor space for caustic storage.

(4) Deionization System

As facility needs dictate, provide a three-bed deionizer (cation, anion, mixed bed) of the tank exchange type, providing de-ionized water to meet the requirements of the facility. Feedwater to the deionizer system shall be fed through a 5 micron filter, provided as a component of the deionization system. The system shall be factory assembled, full duplex, and designed for automatic production of water with a conductivity of less than 10 micro-ohms.

(5) Reagent Grade System

As facility needs dictate, provide a complete packaged reagent grade water system. Confirm if users require grade 1, 2, or 3 quality, and estimate consumption amounts. Evaluate if it is cost-effective to provide reagent grade water system, or to have the users purchase water from an ISO3696: 1987-listed firm.

C. Domestic Hot Water System

Evaluate whether a central hot water system or stand-alone hot water heaters are better suited to the project. Analyze the various options in providing domestic hot water, and comply with pertinent sections of ASHRAE 90.1-2007 for water heating equipment efficiencies and pipe insulation.

If a central system is provided, evaluate whether it should be dedicated to domestic hot water, or if it should be a part of the central steam plant. Coordinate this design with the facility requirements, as steam requirements for sterilizers and humidifiers may be significant. Provide recirculation pump per IPC.

(1) Stand-Alone Hot Water

Provide gas (or electric if gas not available) storage tank type water heater(s), sized per ASPE. Provide drain pan, pressure/temperature relief valve, flue, and combustion air per IPC and local codes.

(2) Central Storage Tank System

Provide gas (or electric if gas not available) central storage tank hot water system, sized per ASPE. Water heater discharge temperature shall be set at 140 °F [60 °C]. Provide temperature limiting valve set at 105 °F [41 °C] at all shower heads, handwashing sinks, and lavatories. Provide pressure/temperature relief valve, flue, and combustion air per IPC and local codes.

D. Sewer/Vent/Waste Systems Inside Building

Design sewer/vent/waste systems in accordance with IPC and ASPE. "Sovent" combination waste and vent systems are not allowed.

Unless required by local codes, floor drains shall not be installed in private or individual toilet rooms with a single water closet. Provide floor drains with trap primers in public toilet rooms containing two or more water closets, or a combination of one or more water closets and one or more urinals. Floor drains are required in bathrooms with showers.

Provide cleanouts according to the IPC. Identify all cleanouts on plans and riser diagrams. Do not locate cleanouts above ceilings or crawl spaces, and provide additional cleanout at the "end of run" of all groups of fixtures. Wherever possible, extend cleanout to outside the building perimeter.

E. Roof Drainage System

Roof drains shall be sized per IPC with applicable local amendments. In locations where the ASHRAE winter 1% dry bulb temperature is below 32 °F [0 °C], insulate roof drain leaders located under the roof and above lay-in or hard ceilings. Coordinate connection of roof drainage piping to storm drain site piping. Point of connection of building roof drain piping to site piping is at 5'-0" outside the building perimeter.

F. Sub-Soil Drainage Piping

Sub-soil drainage piping for building structure is the responsibility of the site civil engineer.

G. Interior Fuel Gas System

Design in accordance with NFPA 54 or IFGC, as required and as modified by local codes.

Provide natural gas earthquake valve downstream of and adjacent to the main gas meter at all locations within a seismicity rating of moderate-high, high, or very high, as indicated within VA Seismic Design Requirements Publication No. H-18-8.

Provide solenoid valve in the natural gas supply link to the Dental Laboratory and the Dental Clinic Operatories, with an emergency shut-off manual valve for each area (accessible to the users) located at the exit door to the space.

H. Medical Gas and Vacuum Systems

Provide medical gas and vacuum wall connections at locations as dictated by the facility requirements, and design oxygen, medical air, vacuum, and other gas systems in accordance with NFPA 55, NFPA 99, as modified by local codes, and as specified in this document. Medical air and vacuum systems shall be isolated from Dental Compressed Air and Oral Evacuation systems. Provide combined zone valves (oxygen, medical air, and vacuum) in nurse station or other appropriate and coordinated area.

Oxygen and Medical Air systems shall be designed to deliver 50 PSI, with piping system not to exceed a 5 PSI loss from source to point of use. Minimum design flow rate for any pipe section is 7 SCFM. Medical air system compressor shall be of duplex design, 100% redundant with a single receiver.

Vacuum system shall be designed at 15 inches Hg, with piping system not to exceed 3 inches Hg pressure drop from source to point of use. Minimum design flow rate for any pipe section is 4.0 SCFM.

Note: Medical gas and vacuum systems as specified above are minimums. Systems may be considerably more complex based upon facility requirements.

The Lessor shall be responsible for constructing and carrying the cost of the medical gas infrastructure as listed above. Upon space acceptance by VA, all cost associated with the medical gas infrastructure outlined above will be paid by the VA in a lump sum payment to the Lessor. Offerors shall list the lump sum cost associated with medical gas infrastructure on GSA Form 1364.

I. Dental Gas and Oral Evacuation Systems

Systems provide dental gas and oral evacuation connections at locations dictated by the facility requirements, and design oxygen, compressed air, oral evacuation system and other gas systems in accordance with NFPA 55, NFPA 99, as modified by local codes and as specified in this document. Dental compressed air and oral evacuation systems shall be isolated from medical air and vacuum systems. Provide combined zone vales (oxygen and dental compressed air) in receptionist area or other appropriate and coordinated areas.

Oxygen system shall be designed to deliver 50 PSI, with piping system not to exceed a 5 PSI loss from source to point of use. Minimum design flow rate for any pipe section is 7 SCFM.

Dental compressed air system shall be designed to deliver the regulated 100 PSI, with piping system not to exceed 5 PSI loss from source to point of use. Minimum design flow rate for any pipe section is 7 SCFM. Dental compressed air system shall be duplex, with a single receiver.

The Dental Oral Evacuation System is comprised of central vacuum system providing suction to a Saliva Ejector (SE) and a High Volume Evacuator (HVE). The central vacuum system

shall be designed to maintain a vacuum of 8" Hg, using an alternating duplex vacuum producer, each carrying 70% of the load. Provide with solids separator, and discharge exhaust pipe through roof of portion of building in which located. SE piping shall be provided in each operatory. Locate HVE system outlets in floor mounted UJC.

The Lessor shall be responsible for constructing and carrying the cost of the medical gas infrastructure as listed above. Upon space acceptance by VA, all cost associated with the medical gas infrastructure outlined above will be paid by the VA in a lump sum payment to the Lessor. Offerors shall list the lump sum cost associated with medical gas infrastructure on GSA Form 1364.

J. Laboratory/Shop Compressed Air Systems

Provide simplex air compressor to serve equipment and a minimum of one outlet on each wall in shop areas. The shop compressed air system shall include intake silencer, filter, refrigerated dryer, and receiver. Interior outlets shall be no farther apart than 25 feet [7.62 meters].

K. Acid Waste and Vent Systems

Provide chemical-resistant pipe for all waste and vent piping serving laboratory fixtures and photographic developing equipment. When fusion-joined plastic piping systems are used, mechanical joints shall be installed at traps and trap arms for maintenance reasons. Chemical drainage shall pass through an acid-neutralizing tank before connecting to the building sanitary drainage system. Install chemical-resistant vent pipe independently through the roof.

L Seismic Restraint Systems

Earthquake-resistive design for plumbing equipment and piping shall comply with the requirements of VA Seismic Design Requirements Publication No. H-18-8 and the International Building Code (IBC).

Exceptions: When allowed by local code, seismic restraint may be omitted for the following installations:

- Gas and medical air piping less than 1 inch [25 mm] inside diameter.
- Piping in boiler and mechanical equipment rooms less than 1¼ inch [32 mm].
- All other piping not including gas and medical air less than 2½ inch [64 mm].
- Equipment weighing less than 400 pounds [180 kg] support and attached directly on the floor.
- Equipment weighing less than 50 pounds [9 kg] suspended from the roof or floor or hung/supported from the wall.

M. Legionella Mitigation

There are currently no EPA enforceable regulations governing the levels of *Legionella* bacteria in potable water systems; however, EPA has issued a Maximum Contaminant Level Goal (MCLG) of 0 ppm [mg/L]. Municipal water supplies and wells can carry *Legionella*, so it is a given that the bacteria will be introduced into the facility potable water system at some time. The challenge is to limit the amplification of the bacteria to less than lethal levels.

Legionella bacterial amplification occurs when bio-films exist in water storage tanks and dead-end piping legs which allow for growth sites, and when temperature and pH levels are

optimum for growth. Infection can occur when patients inhale atomized droplets while showering, drinking or receiving respiratory treatment.

(1) Piping Design

Provide means to easily remove and disinfect all outlet devices such as showerheads and faucets, etc. Utilize self-draining showerheads.

Provide a ¾" ball valve at the end of each piping section as a means to drain heated (above 140 °F [60 °C]) flushing hot water that will be used for initial and supplemental disinfection. Ball valve shall be within 50 feet [15.24 meters] of a floor sink, floor drain, sink, or lavatory.

Mix hot/cold water as near the showerhead as possible.

Eliminate all dead legs in the piping system.

Design domestic water piping system to facilitate future installation of a copper-silver ion generator system.

(2) Disinfection Methods

Subsequent to piping disinfection required per IPC, and as part of the commissioning process, disinfect the potable water systems against *Legionella* by one of the following methods:

- **Thermal Eradication:** Flush 145°F water through all outlets for a period of at least 30 minutes.
- **Chlorine:** Flush free chlorine at a level of 2 parts per million (PPM) or greater for a period of at least 2 hours.

Further information can be found in ASHRAE paper CH-03-3-2 and in the VA Plumbing Design Manual.

N. Plumbing System Commissioning

Refer to 4.8 SUSTAINABLE DESIGN AND ENERGY EFFICIENCY.

6.6.5 PLUMBING FIXTURES, TRIM AND EQUIPMENT

Provide plumbing fixtures, trim and equipment as required by the IPC.

A. Plumbing Fixtures

Water closets, urinals, sinks and lavatories shall be vitreous china or stainless steel. Bariatric water closets shall be rated at 1,000 pound [454 kg] capacity. Waterless urinals are not permitted. Service sinks (mop sink/basin) shall be floor-mounted cast terrazzo, (a combination of Portland cement and grey marble chips).

B. Plumbing Trim

Faucets and showerheads shall be of chromed brass, monel, or stainless steel; plastic trim is not permitted. Faucets shall be laminar flow; aerators are not permitted. Electronic hands-free controls shall be provided at all hand washing sinks and lavatories.

C. Plumbing Equipment

Provide wall-hung, self-contained, electric wheelchair accessible water cooler.

Hot water re-circulation pump shall be all bronze, with timer based controls.

6.7 ELECTRICAL

6.7.1 GENERAL

The Lessor shall provide all the necessary electrical facilities for the project. It is expected that electrical systems will meet their primary objective of providing appropriate and reliable interior and exterior electrical, lighting, and auxiliary systems and services necessary to the safety and comfort to the veterans, employees, and visitors. In addition, the systems shall be safe, easily accessible for repairs and maintenance, and energy-efficient.

6.7.2 CALCULATIONS

Prepare and submit calculations as required by the type of design work performed. Calculations shall justify lighting designs; size of each branch circuit and feeder conductor, overcurrent protective device, equipment bus, generator, transformer, etc., at all voltage levels; setting of each overcurrent protective device with adjustable characteristic; required PPE to meet arc flash energy levels; etc. The Lessor shall submit the following calculations to VA: fault current calculations, protective device coordination study, arc flash calculations, load calculations, generator-set sizing calculations, voltage drop calculations, lightning protection system risk analysis, and lighting calculations.

6.7.3 LIGHTING CALCULATIONS

Perform all lighting calculations based on illumination criteria per the IESNA Lighting Handbook, latest edition. Calculations shall include room name, room number, fixture type chosen for the room, number and type of lamps to be used in the room, required illumination level, calculated illumination level, and all assumptions used.

Calculations for most interior spaces may be performed using the zonal cavity method. Perform and submit point-by-point calculations for areas of greater architectural or luminous sophistication. Calculations for exterior spaces, including parking structures, shall be point by point. Calculations shall demonstrate compliance with energy requirements per Paragraph 4.8 SUSTAINABLE DESIGN AND ENERGY EFFICIENCY.

6.7.4 FIRE ALARM SYSTEMS

Fire alarm systems shall be provided as required by NFPA 101 or the locally adopted codes.

The fire alarm system shall be designed to meet the requirements of NFPA 72 and the local codes.

For new installations, locate the fire alarm control panel at the main entrance or at a 24-hour constantly attended location.

New fire alarm systems shall be analog addressable.

Fire alarm systems shall not be combined with other systems such as building automation, energy management, security, etc.

Wiring for fire alarm systems shall be as follows: Initiating Device Circuits – Style B (Class B), Signaling Line Circuits – Style 4.0 (Class B), Notification Appliance Circuits – Style Y (Class B), and Communications between fire alarm control units – Style 7 (Class A). Where there are conflicts with local codes, the most stringent requirements shall be enforced.

Initiation devices shall be provided in accordance with NFPA 101, NFPA 72, NFPA 90A, and ASME 17.1 or ASME 17.3, as applicable.

Audible fire alarm notification appliances shall be provided in accordance with NFPA 72 and NFPA 101.

Visual fire alarm notification appliances shall be provided in mechanical rooms, public restrooms, public accessible areas such as corridors, auditoriums, cafeterias, assembly rooms, canteens, retail stores, and other publically accessible rooms of more than 750 square feet [228.6 square meters] of area.

Coordinate fire alarm zones with the location of smoke compartments and sprinkler zones.

The fire alarm system shall be monitored by a listed remote central station.

6.7.5 RACEWAYS AND WIRING

Install all wiring in raceways. All wiring shall be copper. All circuits and branch circuits shall have a separate equipment grounding conductor of appropriate size per the NEC. No more than 3 branch circuits are allowed to run in one homerun.

6.7.6 LIGHTNING PROTECTION SYSTEM

Perform risk analysis per NFPA 780, Annex L and provide a lightning protection system, where $N_d > N_c$. Submit calculations, including all assumptions. The Lessor shall use the following fixed factors in the calculation: $C_3 = 2.0$, $C_4 = 1.0$, $C_5 = 5.0$. All other factors shall be project-specific.

6.7.7 RECEPTACLE CIRCUITS

No more than 6 receptacles shall be installed on a single circuit.

6.7.8 ESSENTIAL ELECTRICAL SYSTEMS FOR CLINICS

The Essential Electrical System shall comply with the Type 1 system as defined in NFPA 99.

A. Emergency System

The Emergency System shall comply with NFPA 70 and 99.

B. Emergency Branch (NEC 700)

The Life Safety Branch shall supply power to loads per NFPA 70 and 99, including:

- Alarm and alerting systems, such as fire alarm and medical gas systems.
- Automatic doors, used for building egress.
- Elevator cab lighting, control, communication, and signal systems.
- Exit signs.
- Generator set location: task illumination, battery charger for emergency battery-powered lighting units and selected receptacles.
- Illumination of means of egress.
- Telecommunications systems, where used for issuing instructions during emergency conditions, including public address and Code One (Blue) systems.

C. Standby Branch (NEC 702)

The Standby Branch shall supply power to loads per NFPA 70 and 99, and as described below:

- Nurse Call Systems.
- Telecommunications Rooms: All UPS equipment, lighting, and receptacles.
- Pharmacy Dispensing Area: Power files, laminar flow hoods, refrigerators, copier for transmittal of physicians' orders, task illumination, and selected receptacles.
- Refrigerated Medical Storage: Refrigeration equipment.
- Other generator accessories essential for generator operation
- Transfer fuel pump

D. Alternate Source of Power (Type 1EES)

The alternate source of power shall be one or more diesel engine-driven generator sets. Provide fuel supply for 24 hours of operation. Locate exhausts such that exhaust gases are not entrained into the building air. Fuel tank(s) shall have leak detection means. Offeror shall be responsible for corrective actions and remediation in the event of a tank malfunction or a violation of EPA or local regulations. Offeror shall license or register tanks as required by EPA or local Authorities Having Jurisdiction.

6.7.9 POWER MONITORING AND METERING

Power monitoring and metering are required to support energy use and conservations goals.

6.7.10 ELECTRICAL ROOMS AND CLOSETS:

No telecommunications equipment, other than telecommunications outlets, shall be placed within electrical rooms. Provide appropriate construction for the type of transformer(s) installed. Electrical closets shall stack vertically, and shall not be further than 150 feet [45.72 m] apart, to limit maximum 120V circuit length to approximately 75 feet [22.86 m].

Rooms that contain freestanding electrical equipment shall be sized so that sufficient space is provided to add one additional section to each unit of freestanding equipment. Provide extended pad space and spare conduits that will facilitate future installation of equipment and conductors. Spare space shall be indicated on drawings.

6.7.11 ELECTRICAL EQUIPMENT

Electrical distribution components shall have copper bussing. Each panelboard shall contain 25% spare breakers.

6.7.12 LIGHTING FIXTURES

Standardize lamp types across fixture types to limit the number of different lamp types and wattages used. Select the number of lamps and the fixture type according to the recommended finishes specified in each area to ensure the intended lighting levels.

LED lighting fixtures are the preferred lighting source. Linear 2-foot and 4-foot T8 fluorescent lamps with CRI>70 and rated lifespan of 20,000 hours are allowed. T5 2-foot and 4-foot double-ended linear sources are allowed for indoor locations. Compact fluorescent lamps in twin-, tri-, and quad-tube T4 configurations are allowed.

Color-corrected lamps, having a CRI of 85 or above and correlated color temperature between 5000 degrees K and 6000 degrees K, are required in recovery rooms, operating rooms (color shall match that of the surgical light), and dental rooms (examination, oral hygiene, oral surgery, recovery, labs, treatment, and x-ray).

Select fixtures and light sources with long operating lives; which utilize controlling elements (lenses, louvers, reflectors, etc.) designed to provide the best utilization of emitted light at the task location; that are appropriate for the ambient temperature; and that are not prone to dirt accumulation. In high ceiling areas, locate fixtures for maintenance access or provide access for maintenance equipment.

The following public spaces should incorporate specialty lighting fixtures.

- (1) In the Lobby/Waiting Areas provide the following:
 - Wall-mounted LED up-lighting to wash the ceiling surface.
 - Recessed LED down lighting and accent lighting at signage for registration.
 - Under-counter LED lighting under Information Desk transaction ledge.
 - Linear LED wall-wash fixtures for at accent points and artwork locations.
- (2) In the Entry Vestibule provide recessed, linear, low-profile LED strip lighting.

(3) In Family Waiting and the Coffee Shop provide decorative LED lighting to animate seating and activity areas.

(4) In Patient Circulation Zones provide 2 x 2 LED basket type, semi indirect lighting to prevent glare and hot spots.

(5) In Conference Rooms coordinate lighting with AV requirements. Provide multiple switching options for scenarios to accommodate each type of presentation format. Linear recessed LED lighting with accent down lights directly over the table surface. Provide accent lighting where required for presentation purposes.

Exterior lighting shall comply with energy requirements, and should comply with Dark Sky principles. When required by VA, exterior lighting designs are to meet the requirements of local outdoor lighting codes. Criteria recommended in the IESNA Guideline for Security Lighting for People, Property, and Public Spaces (latest edition) shall govern the lighting design. Exterior lighting shall be coordinated with physical security, SSTV, and landscaping requirements.

Provide minimum maintained illumination levels for pedestrian pathways, bicycle and vehicle routes, parking structures, parking lots, wayfinding, signage, pedestrian entrances, and building services which will provide safety and security for personnel, buildings and the site. Refer to the VA Electrical Design Manual for illumination requirements. Lighting shall provide for safety and security without compromising the quality of the site, the environment (including neighboring properties) or the architectural character of the facility.

6.7.13 BALLASTS

Electronic high-frequency type ballasts shall be used for all linear fluorescent lamps, unless special environmental and/or sensitive equipment concerns require the use of low-frequency hybrid electronic-electromagnetic ballasts that operate lamps at 60Hz. Hybrid electronic-electromagnetic ballasts are allowed for surgical rooms and critical care units, as deemed appropriate by the design A/E. For metal halide, use pulse-start ballasts, and pulse-start lamps with glass or ceramic arc tubes. Probe-start ballasts and lamps are not acceptable.

6.7.14 LIGHTING CONTROL

Energy consumption constraints dictate the installation of automatic lighting controls for both interior and exterior lighting. Select and design master and room-specific lighting control systems that comply with energy codes and requirements; that respond to daylight harvesting; that utilize the correct sensor and sensor location for the controlled space; that are compatible with the controlled ballasts and lamps; and that are responsive to the occupant's desire not to feel "over-controlled."

6.8 TELECOMMUNICATIONS

6.8.1 TELECOMMUNICATIONS: CABLE PATHWAYS, WIRING, CABLES, AND INFRASTRUCTURE PLANT; AND SPECIAL TELECOMMUNICATIONS SYSTEMS

A. Scope

This section covers requirements for cable pathways and raceways, fiber optic and copper wiring and cables, and special telecommunications systems (hereinafter referred to as "Special Systems"). Special Systems are identified as those telecommunications systems that are not telephone, data, or fire alarm (or related functions).

Cable pathways, wiring, and cables (both copper and fiber optic) make up the Telecommunications Infrastructure Plant (TIP) for the telephone, data, and Special Systems.

B. General Requirements

All TIP wire and cabling shall be installed in drop ceiling using cable hangers and a wire basket cable tray. In hard ceiling areas, a raceway system, which may consist of a mixture of conduits and enclosed cable trays, is required.

TIP wires or cables may be provided inside gypboard walls in flexible conduit, or without conduit, as specifically approved by VA in writing for each specific location.

The term "provide," where used herein, shall mean the same as "designed, engineered, furnished, installed, tested, guaranteed, and certified."

A complete and functional telecommunications infrastructure plant (TIP) is required. In renovation projects, the TIP shall be compatible with the facility's existing TIP. The TIP shall at a minimum incorporate all telephone, data, and Special Systems cables.

C. Conduits and Boxes

(1) General

For system conduits, junction boxes, routing, termination, risers, horizontal runs, sizing, etc., follow industry-standard requirements.

(2) Minimum Size

Conduit from outlet to above ceiling should be a minimum of one (1) inch.

Conduit runs outside buildings will be equipped with a pull box (inside) or manhole (outside) after two 90-degree bends or an accumulation of 120-degrees of total pathway deviations from a straight line between each point of access.

Conduits outside of buildings shall be waterproof and shall not exceed 400 feet [122 meters] between manholes or pull boxes (not counting bend or traverse loss).

(3) Interconnecting Conduit Requirements

The following table identifies the minimum conduit requirements for the telecommunications and special systems infrastructure (not all conduits may be required, depending on rooms provided):

Conduit Requirements

Location A	Location B	Conduit Type	Quantity	Size
Entrance from street	TER	Direct burial PVC or PE	4	4 inch [100 mm]
TER	MCR	EMT	4	
Stacked Telecommunications Rooms (TR)	Next Stacked TR	Sleeve	4-6	4 inch [100 mm]
MCR (Optional)	Each TR Vertical Riser Stack	EMT	4	4 inch [100 mm]
Between TRs on same floor	Between TRs on same floor	EMT	Cable Tray	12 inch [305 mm]
MCR (Optional)	PCR	EMT	1	4 inch [100 mm]
HE Room (Optional)	Roof or access to antennas	EMT	2	3 inch [75 mm]

(4) Horizontal Conduits

Basket type cable tray may be installed above suspended ceilings in corridors for station wiring in non-critical areas. Minimum size shall be 12 in [305 mm] wide with 2 in [50 mm] sidewalls.

Surface metal raceways are not acceptable and will not be approved for wire or cable on the outside of walls.

Provide cable radius drop fittings (aka waterfalls) where cables exit basket type cable tray.

(5) Vertical Risers

Provide conduits of the size and counts depicted in the Conduit Requirements table in each TR as shown. Also, ensure each floor and ceiling penetration is sleeved and the corresponding conduit ends secured AFF and BFC, as described herein. Seal each conduit and associated cable with fire-proofing compound. Also, ensure each empty conduit penetration is like sealed.

(6) Telecommunications Cable Ducts Under Cellular Floors

Underfloor ducts and/or cellular floors shall be considered as air plenum areas. Therefore, all system wires and cables provided in these areas shall be plenum-rated and installed accordingly.

Each underfloor cable duct and/or cellular floor installation shall be provided with appropriate wire management system(s).

D. Telecommunications Outlets

Outlet boxes shall be the same minimum size as NEC standard quadraplex (or dual duplex) electrical outlet boxes.

Outlet boxes shall be equipped with full covered wall faceplates and two (2) each modular Category Six RJ-45 jacks and contain enough space for two (2) each additional modular Category Six RJ-45 jacks, one additional modular (1) stainless steel fiber-optic, and one (1) BNC (A/E note: an "F" type may be substituted "depending on system design) with analog coax cable jacks (for a total of six available modular jack positions). For cable installed in systems furniture route cables through raceways internal to the furniture frame to the outlet at each workstation.

Unless otherwise specified, mounting heights for telecommunication outlets shall be:

Telecommunications Outlets Mounting Height	
AREA/FUNCTION	MOUNTING REQUIREMENTS
Pay station	4 ft [1,200 mm] above finished floor (AFF)
Desk outlet	1.5 ft [450 mm] AFF
Special Use Areas	As required by design

Special Systems: Provide each outlet minimum 18 in [450 mm] AFF unless otherwise specified by system design or indicated on the drawings.

Outlets shall not be located within 48 in [1200 mm] of the "swing open" side of inward opening doors or within 18 in [450 mm] of light switches, thermostats, or other electrical receptacles.

Elevator voice cables providing voice service to the elevator car shall be extended to the elevator equipment room.

E. Drawings

The A/E shall clearly show the locations of telecommunications outlets, conduit runs, cable trays or wireways, equipment cabinets and/or racks, telecommunications rooms/backboards, terminal, junction, and/or pull boxes on the drawings.

The A/E shall clearly show the exterior and/or underground raceway system, including distances between buildings, manholes, and in-ground pullboxes.

All raceways sizes shall be indicated on the drawings.

Drawings must include a detailed riser diagram for all distribution systems, and the interfaces between systems.

F. Wires and Cables

For new construction, the voice and data structured cabling system shall be Category 6 cable and Category 6 termination hardware. Additionally, the system should be installed by a structured cabling contractor certified by the manufacturer to install the system and capable of offering the manufacturer's system warranty. Such warranty should be a minimum of 20 years.

Plenum/CMP-rated wire or cable shall be provided in all areas' air-handling plenum locations. Non-plenum/CM wire or cable may be provided in all other areas.

G. Special Systems Specific Requirements

(1) General

Provide systems as determined by project requirements. Not all systems may be required, and not all required systems may be listed below.

(2) Nurse Call

Provide nurse call system(s) as required. System(s) shall be as manufactured by Rauland Borg, General Electric, Simplex, or approved equivalent, as updated to most current technology or manufacturer.

Provide emergency nurse call stations at all patient toilet rooms. Staff toilets do not require call stations. For exam/treatment area nurse call stations provide master/duty stations at Extended Care Team Work Areas. For toilet rooms adjacent to the Waiting areas provide master/duty station at Reception.:

(3) Public Address (PA)

Provide public address and mass notification (PA) system(s) as required throughout all occupied public spaces and staff work areas.. System(s) shall be as manufactured by Bogen, JBL, Dukane, or approved equivalent, as updated to most current technology or manufacturer.

(4) Intercommunication System

Provide intercommunications system(s) with two-way voice communication and remote door unlocking capability as required at designated facility ingress and egress points connected to Reception.. System(s) shall be as manufactured by Bogen, Aiphone, Leviton, or approved equivalent, as updated to most current technology or manufacturer.

(5) Radio Entertainment Distribution (RED)

Provide radio entertainment distribution (RED) systems as required. System(s) shall be as manufactured by Bogen, JBL, Dukane, or approved equivalent, as updated to most current technology or manufacturer.

All loudspeakers shall be of the recessed or ceiling type in lieu of surface-mounted type, wherever possible.

Loudspeakers in each waiting room and lobbies, and other designated areas that also contain PA speakers may be combined within the same speaker back box and grille, and use the same speaker cone, as long as each speaker function contains a separate matching transformer and voice coil for each service (i.e., one transformer and associated voice coil for RED and one transformer and associated voice coil for PA). This consolidation practice is an acceptable alternate to two individual speakers, back boxes, grilles, and mounts in these locations. Also, provide volume and selector controls in each of the aforementioned RED only areas at Reception.

(6) Master Television (MATV)

Provide Master Cable or Satellite Television systems as required. System(s) shall be as manufactured by Blonder Tongue, Scientific Atlanta, Olson Technologies, or approved equivalent, as updated to most current technology or manufacturer.

Satellite TV System(s) shall be as manufactured by Scientific Atlanta, Blonder Tongue, Pico Macom, or approved equivalent, as updated to most current technology or manufacturer.

(7) Security Surveillance Television (SSTV)

Provide SSTV systems as required. System(s) shall be as manufactured by Panasonic, Video Tek, Pelco, or approved equivalent, as updated to most current technology or manufacturer.

- Exterior: The complete exterior of the facility must have adequate lighting to provide illumination with no concealing shadows preventing camera visual. Each camera must have a resolution to which a face and or/license plate can be identified and read at a distance of a minimum of 75 feet in light and darkened conditions. Camera must have overlapping coverage with each other eliminating any blind spots of the exterior of the building and property parking lots. All exits/entrances must have camera visual coverage. Camera placement to the rear of the building must address the 3 individual alcoves providing coverage as they each end in depth at a window. All exterior cameras must have weather proof housing and the ability to operate in low light periods. Both parking lots need unobstructed camera coverage of the entire lot as well as all sidewalk surfaces.
- Interior: All exit/entrances must have camera visual coverage. All common lobby areas, the 5 hallways leading from the lobby/waiting areas to the clinical areas must have 100% overlapping coverage. Cameras must provide 100% coverage, to include a 5 degree overlap from each camera. A dedicated camera must be installed over the cash register inside the coffee shop with a 360 degree view of the area within 10 feet of the register. Cameras need to provide 100% coverage of all non-clinical hallways with an emphasis on all doors leading to the exterior of the facility.
- Camera system should go into a motion activation mode during non-duty hours and provide for a minimum of 30 days image storage. System software must allow for end user saving and copying of video and/or camera image. System is to be compliant and compatible with the current software and hardware camera systems currently utilized by the Kansas City VA Medical Center Police Department.
- System server and hardware should be installed into the VA Police designated office (designated per design as room 1001), to include video monitors and camera control hardware.
- Installation and placement of camera system plan will be coordinated with the VA Police prior to actual installation.

(8) Security Management and Control, and Centralized Police Security Management Systems (aka Security Management Telecommunications System SMTS)

Provide SMTS systems as required. System(s) shall be as manufactured by Lockheed, Viper, Access Gold, Casi-Rusco, or approved equivalent, as updated to most current technology or manufacturer. LAN/WAN based systems must be on a separate and standalone system and NOT connected to the Facility's LAN/WAN.

- Electronic Access and Door Control – Dyna Lock, Locknetics, Sentrol, or approved equivalent, as updated to most current technology or manufacturer.
- Motion Intrusion Detection – Security Metrics, Ademco, Honeywell, or approved equivalent, as updated to most current technology or manufacturer or these can be integrated with SSTV cameras.
- Duress Alarm and Emergency Notification System at Patient Exam Rooms and each Reception Station – Code Blue Pole Systems or approved equivalent, as updated to most current technology or manufacturer. Under no circumstance shall the telephone system be used to provide duress alarm functions.

(9) Radio Paging System

Provide radio paging system (identified as Public Safety Operation and upgraded to Life Safety when interfaced to Code One (Blue)) as required. System(s) shall be as manufactured by Motorola, Johnson, Kenwood, or approved equivalent, as updated to most current technology or manufacturer.

(10)Two-Way Radio System

Provide two-way radio systems as required. System(s) shall be as manufactured by Motorola, Johnson, Vertex Standard, or approved equivalent, as updated to most current technology or manufacturer.

(11)Video Conferencing System (VTS)

Provide VTS systems as required. System(s) shall be as manufactured by Polycom, Tandberg, HP, or approved equivalent, as updated to most current technology or manufacturer.

(12)Satellite System

Provide VTS systems as required. System(s) shall be as manufactured by Scientific Atlanta, Blonder Tongue, Pico Macom, or approved equivalent, as updated to most current technology or manufacturer.

6.8.2 TELECOMMUNICATIONS/SPECIAL SYSTEMS ROOMS AND SPACE REQUIREMENTS

A. Scope

This chapter covers the requirements for telecommunications, data, and special systems rooms and spaces.

B. Room Types and Definitions

(1) General

Provide rooms as determined by project requirements. Not all room types may be required, and not all required room types may be listed below.

(2) Head End Equipment (HE) Entrance Room (Optional) (Labeled as Comm Room on plan)

The Head End (HE) Equipment Entrance Room is a room to accommodate all provided and planned Special Systems, Head-end Cabinets (i.e., MATV, SSTV, RED, Satellite TV, PA, Two-Way Radio, Radio Paging, nurse call, and M/W Radio, etc.). The room will be sized for a minimum of (5) each separate systems. The Head End Equipment Entrance Room shall be provided with rack mounted uninterruptible power supplies capable of providing a minimum of 10 minutes of standby power to all system head end cabinets.

(3) Telecommunications Room (TR) (Labeled as Telcom Room on plan)

The Telecommunications Room is a room designed to be the initial termination point for services being brought to the building by outside providers, such as the telephone company, data providers, CATV providers, etc.. The TR room is also designed to centrally deliver data, telephone, and special systems services to users and equipment on that floor. There may be multiple rooms on a floor. The Telecommunications Room shall be provided with rack mounted uninterruptible power supplies capable of providing a minimum of 10 minutes of standby power to rack mounted equipment.

The design "Telecommunications Room" replaces the term "Signal Closet," which is no longer used. The new designation indicates the current construction practice of combining telephone, data, special systems, and fire alarm functions into one terminus, control, and distribution point. If security requirements require separation of systems, this will be accomplished by a chain link or other barrier that will provide physical security while allowing common lighting, heating and cooling, and power protection systems.

(4) Police, Emergency, and Designated Control Rooms (Labeled as Police on plan)

Police Control Room (PCR), Engineering Control Room (ECR), and other designated control rooms are other rooms throughout the facility that house specialized functions.

C. General Environmental, Power and Space Requirements

(1) General

The following is a list of minimal environmental, power, and space requirements that apply to all telephone, data, and special system rooms and spaces (hereinafter 'rooms' in this article) that contain electronic equipment. The list is not all inclusive and additional information or requirements may be found in this chapter.

(2) Location, Protection, and Access

Rooms shall be rectangular in shape and free of obstructions, such as columns and braces, if possible. If columns or braces are present, they shall not impede the installation or operation of individual system equipment and access to each equipment cabinet's front, side, or rear. The floor area occupied by the column shall not be counted as a part of the room's minimum useable square foot requirements.

Rooms shall be located above the Base Flood Elevation. Rooms shall not be located beneath toilets, showers, laboratories, kitchens, sinks, open courtyards, planters, roof drain leaders, or other areas where water service is provided. Active telephone, data, and special systems equipment is not allowed to be installed in elevator penthouses or mechanical rooms; dedicated rooms are required.

Rooms shall be designed to allow maintenance equipment access, and to facilitate equipment replacement without significant demolition and reconstruction.

Rooms shall not be located in patient care areas.

Any pipe or duct system foreign to the telecommunications installation shall not enter or pass through a room. The A/E shall ensure that foreign piping such as water pipes, steam pipes, medical gas pipes, soil pipes, sanitary drains, storm drains, A/C ducts, and other unrelated

systems utilized for or containing liquids, or gases are not installed or pass through rooms. Sprinkler piping serving only telecommunications spaces shall not be considered foreign to the telecommunications installation, and shall not pass through the space to serve other areas.

Rooms shall be located away from or protected from sources of EMI at a distance which will reduce the interference to less than 3.0V/M through the frequency spectrum. Pay special attention to EMI from electrical power supplies, transformers, motors, generators, x-ray equipment, radio transmitters, and induction heating devices.

Rooms shall be located to minimize effects of lightning strikes and sunlight radiant heating. Rooms shall not have windows.

Rooms that are considered computer rooms should not be located on exterior walls.

Rooms shall have a controlled access door with card reader to control access to authorized personnel.

(3) Room Envelope

Finish flooring shall be anti-static plastic laminate or vinyl tile. The acceptable resistance range is from 0.5 megohm minimum to 20,000 megohm maximum.

Floors, walls and ceilings shall be sealed to prevent dust, and all walls shall be painted a light color.

Backboards shall be 3/4" fire-retardant plywood.

(4) Heating, Ventilation, and Air Conditioning

Design conditions shall be 75 °F [24 °C] dry bulb temperature (cooling), 65 °F [18 °C] dry bulb temperature (heating), with individual room temperature control.

(5) Power

Equipment shall be backed by an uninterruptible power supply (UPS), except HVAC equipment. Provide 120V 20A and 30A capacity, and 220/208V 20/30A capability as required. Match receptacles types with equipment provided and installed by VA Office of Information and Technology (OI&T).

(6) Grounding

Telecommunications systems grounding and bonding will consist, at a minimum, of an equipotential grounding system (Telecommunications Bonding Backbone (TBB)) that originates from the Telecommunications Main Ground Bar (TMGB). The TMGB (typically located in the Telephone Equipment Room) is then connected to other telecommunications spaces (independently from other building grounding systems such as electrical or lightning protection) via the TBB. The TMGB is connected to the building electrical service ground point via a mechanically and electrically protected minimum #1/0 copper equipotential grounding conductor, and to building steel. The TBB helps ensure that all equipment in the telecommunications spaces is referenced at the same equipotential earth ground level, and reduces high frequency electrical noise resulting from high speed digital switching, RFI, and EMI. Cabinet, rack and fixed structures bonding conductor(s) shall be minimum #6 AWG-

insulated stranded copper wire (or equal copper braid). All frames and cabinets shall be grounded in accordance with ANSI/TIA/EIA-607.

The telecommunications grounding system will comply with ANSI/TIA/EIA-607 requirements and follow BICSI – Telecommunications Distribution Methods Manual (Latest Edition) guidelines.

(7) Security

Comply with Physical Security Criteria in Paragraph 4.2.4 PHYSICAL SECURITY AND NATURAL DISASTERS RESISTIVE DESIGN and as follows. Provide electronic security system that is connected to and fully functional with the PCR SMTS and a cipher lock with numeric keypad, associated electronic card access device, and electric strike. Each room security system shall be powered from either the building or a local UPS system.

Each programmable door control shall be fully functional with the SMTS in a stand-alone status if its connection to the controller is cut. Once the connection is restored, the local door control system shall update the SMTS on all operations that occurred after the connection was interrupted, and the SMTS shall update the local door control units to current operational function.

(8) Wire Management

Refer to Paragraph 6.8.1 for requirements.

D. Police, Engineering and Other Designated Control Room(s) (Labeled as Police on plan)

(1) Configuration

Space shall be per the following table:

Telephone Console Room Size Requirements

NUMBER OF CONSOLES	SPACE REQUIRED SQ M (SQ FT)
1	100 [9]
2	150 [14]
3	200 [19]

(2) Heating, Ventilation, and Air Conditioning

Refer to Paragraph 6.8.2 **Error! Reference source not found.** -Heating, Ventilation, and Air Conditioning.

(3) Power

Refer to Paragraph 6.8.2 **Error! Reference source not found.** .

Provide sufficient 120V receptacles at each operator position.

(4) Alarm Panels

Provide adequate space, heating and cooling, power, lighting, and telecommunications raceways for alarm panels as required for each project. At a minimum, provide for nurse call

Code One (Blue), public address, emergency notification, duress alarm, fire alarm, and emergency and standby generator alarm annunciator panels.

E. Head End Equipment (HE) Entrance Room (Labeled as Comm Room on plan)

(1) General

This section covers the requirements for the Head End Equipment (HE) Room. The HE Room may include, but is not limited to, head end cabinets for Nurse Call, MATV, SSTV, RED, satellite TV, PA, two-way radio, and radio paging systems.

(2) Location

A dedicated room is required. This room may be located in the mechanical penthouse (as close as possible to a roof entrance) or attic, or an area as dictated by system design. It shall not be located in the elevator equipment room, or in the basement, or below the Base Flood Elevation.

The HE Room shall not be located further than 300 feet [91.44 meters] from the nearest vertically stacked Telecommunications Room.

If located in the mechanical penthouse or attic, the room may be separated from the rest of the area by floor-to-ceiling metal chain-link security fence with a minimum 40" x 84" inch locking gate with two sets of keys. If located in the HE Room, telephone or data equipment shall not use fencing of any type except to partition area within the secure HE Room.

(3) Configuration

The HE Room shall be a minimum of 10 foot x 12 foot [3.0 m x 3.7 m], or as large as the sum of the provided and future systems require, including space for UPS equipment. The HE Room shall be sized for the head end equipment of a minimum of five (5) each separate systems, four (4) each future systems, one (1) each overhead, and wall wire management system, four (4) each 4" ID weatherproof wall/ceiling cable feedthroughs, and two (2) each 4" ID conduits to the nearest vertically stacked telecommunications room. The space for future systems shall be clearly indicated on the contract documents. Space shall be per the following table:

Head End Equipment Room Size

NUMBER OF EQUIPMENT CABINET/RACKS	ROOM SIZE SQ M (SQ FT)
4 minimum	224 [22]
Add 2 UPS	224 [22]
Add 1 for System Grounding Block/Main TIP Distribution Panel (MTDP)	256 [24]
5 minimum	256 [24]
Add 2 for UPS	256 [24]
Add 1 for System Grounding Block/MTDP	289 [27]

Cabinets are installed joined or side by side, in which case where the 3 foot [900 mm] rule applies around the entire assembly. Minimum ceiling height shall be 8 feet [2.4 m] above finished floor.

The HE Room may be sized to use an Environmental Equipment Protection Cabinet in lieu of an air-handled space, if previously approved by VA. Add three (3) each sf with 3 ft clear floor area circumference per environmental cabinet.

(4) Tip Wire/Cable Interface Area

Provide a wall area, minimum size of 8 feet x 8 feet [2.4 m x 2.4m] (plywood covered, to provide a common termination point for all the cabling entering and leaving the HE Room).

(5) Heating, Ventilation, and Air Conditioning

Refer to Paragraph 6.8.2 **Error! Reference source not found.** .

A fully climate-controlled, standalone equipment cabinet is acceptable for each special system in lieu of fully acclimatizing the HE Room.

(6) Power

Refer to Paragraph 6.8.2 **Error! Reference source not found.** .

(7) Grounding

Provide a copper bus plate minimum 6 in [150 mm] w x 18in [470 mm] L x 0.5 in [13 mm], with a connection point located on the inside wall within the immediate area of the antenna coaxial cable(s) entrance conduit sleeves. Connect this plate to the lightning protection system with a minimum #1/0 (AWG) stranded copper wire, or increased sized connection device (i.e., strap, buss, etc.), as approved by the RE, to maintain the integrity of the lightning protection system so each of the system antenna cables' coaxial cable lightning protector can be installed and connected to the plate.

Refer to Paragraph 6.8.2 **Error! Reference source not found.** for additional requirements.

(8) Wire Management

Refer to Paragraph 6.8.1 for additional requirements.

The HE Room shall be provided with waterproof wall entrance sleeves to allow connecting of each outside antenna coaxial cable to the HE Room equipment. Add extra like sleeves for additional outside-mounted antennas as required by system design. One of these sleeves shall contain only the lightning protection connection.

The HE Room shall be provided with a minimum separate 6 in [150 mm] x 6 in [150 mm] cable duct/ladder/wireway from the designated TIP interface point to the dedicated waterproof locking 24" x 24" x 12" [600 mm x 600 mm x 300 mm] TIP connection enclosure. A minimum 12" cable ladder may be used for this purpose. A minimum of five (5) each 3" conduits may be provided in lieu the cable duct/ladder/wireway; additional cable duct/ladder/wireway shall be provided based on overall system design.

The mixing of coaxial cables and STP/UTP/fiber optic/AC and DC power wiring within the cable duct/ladder/wireway and/or conduits is not allowed.

Each wire/cable connection point shall be provided with a connection MDF capability and routes to connect the room's internal wire management system to the facility's TIP system.

F. Telecommunications Room (TR) (Labeled as Telcom Room on plan)

Rooms shall be provided in the quantities and locations that will limit telephone/data/special systems TIP cable/wire runs from the Telecommunications Room to the outlets to a maximum of 300 feet [90 m]. Splicing of cables is not allowed. Terminal cabinets shall not be used in lieu of Telecommunications Rooms.

(1) Configuration

Refer to Table 8-4. Minimum room size shall be 10 feet [3 m] deep x 12 feet [3.6 m] wide. Minimum door size shall be 50 in [1,000 mm] wide x 84 in [2,100 mm] high. For every additional 10,000 sq ft [930 sq m] of floor space served, there shall be 10 linear feet [3 linear m] of wall space required.

Rooms shall be vertically stacked for multistory buildings.

The back wall of all rooms shall be lined with backboards, 8 feet [2.44 m] high, with the bottom 1 foot [0.30 m] above the finished floor.

Room height shall be a minimum of 9 feet [2.74 m] above finished floor. Rooms shall not have a suspended ceiling.

Entrance must have a minimum unobstructed area of 48 in [1200 mm] directly in front of the room door.

The Telecommunications Rooms shall be a minimum of 10 feet x 10 feet [3 m x 3 m], or as large as the sum of the provided and future systems require, including space for UPS equipment. The TR Room will have a minimum of 4-19 inch racks with vertical wire management. The TR Room shall be sized for the building head end equipment requirements.

(2) Heating, Ventilation, and Air Conditioning

Refer to Paragraph 6.8.2 **Error! Reference source not found.** .

Cooling shall be provided according to the actual expected equipment installation and use.

(3) Power

Refer to Paragraph 6.8.2 **Error! Reference source not found.** .

Provide a separate 120V, dedicated 20A circuit with two (2) quadraplex receptacles centered in each side backboard, two (2) quadraplex receptacles centered in each front backboard either side of the room door, and three (3) quadraplex receptacles centered in the rear backboard. All receptacles shall be 18 in [457.2 mm] above finished floor. Allow 3 quadraplex receptacles on each 20 A circuit.

(4) Grounding

Refer to Paragraph 6.8.2Error! Reference source not found. .

(5) Wire Management
Refer to Paragraph 6.8.1.

Each room shall be provided with lateral and vertical risers from the TER and MCR to each room to support a separate TIP distribution system for telephone, data and special systems.

6.9 ELEVATORS – INTENTIONALLY DELETED

SECTION 7 INTERIOR CONSTRUCTION, FINISHES, AND INTERIOR DESIGN**7.1 GENERAL****7.1.1 SPACE PLANNING AND FUNCTIONAL LAYOUT**

The conceptual floor plan (PART VIII) provided in this solicitation shall be used as the basis for the planning and functional layout of the facility. The final layout, design development documents, and construction documents shall be in accordance with Paragraph "Design and Construction Documents After Award" in this solicitation. The completed building shall accommodate VA's space program and interior functional requirements. Offerors are advised that the conceptual plans have been developed using VA Space Planning Criteria and information from VA Outpatient Clinic (SOC/CBOC) Design Guide which may be found at <http://www.cfm.va.gov/til/dGuide.asp#PC>.

Lessor shall provide accurate space layout drawings (floor plans) with offer and during design and construction document phases. Plans shall include sufficient information for the Government to compute the net area of each function (room), and to compute Building Gross Area and Net Usable Area in order to determine compliance with solicitation requirements.

7.1.2 ROOM NUMBERING

The Lessor shall work closely with VA to establish the room numbering system to be used for the facility.

7.1.3 CIRCULATION SYSTEMS

The conceptual floor plan in this SFO defines the basic elements of the interior circulation systems and their relation to the functional plan within VA occupied space. The Lessor is responsible for the final design of horizontal and vertical circulation systems including building support space and common areas within the building during Design Development as defined in SECTION 3 MISCELLANEOUS above. Lessor shall integrate the design of circulation systems with building entrances, functional elements, wayfinding systems (refer to Paragraph 7.6.2 INTERIOR DESIGN CRITERIA) and signage (refer to Paragraph 7.12 INTERIOR SIGNAGE).

Circulation system components include entrances, lobbies, corridors, and vertical circulation (stairs and elevators).

Refer to Paragraph 3.14 for calculations involving circulation systems in the determination of Rentable and Net Usable Area.

7.1.4 FLOOR-TO-FLOOR HEIGHTS

Floor-to-floor heights shall be sufficient to maintain minimum ceiling heights required in this solicitation (see Schedule E) and to install mechanical and electrical systems above the ceiling. Lessor is responsible for coordinating ceiling heights, structural members, space to install mechanical and electrical systems, and floor-to-floor heights (see Paragraph "Submittal

Requirements for DD and CD Reviews" for drawings required during design development and construction document phases).

7.1.5 MATERIALS AND PRODUCTS FOR INTERIOR CONSTRUCTION AND FINISHES

A. General

The Lessor shall use materials and products for interior construction that comply with the minimum requirements specified in this solicitation. Materials not definitively specified in this solicitation shall be manufacturer's or supplier's regular production, first quality, and suitable for commercial use.

The final selected finishes shall coordinate with the Kansas City VA Medical Center concepts and color schemes to promote brand recognition.

B. Recycled Contents Products

The Lessor shall comply to the extent feasible with the Resource Conservation and Recovery Act (RCRA), Section 6002, 1976. The Lessor shall use recycled content products as indicated in this SFO and as designated by the U.S. Environmental Protection Agency (EPA) in the Comprehensive Procurement Guidelines (CPG), 40 CFR Part 247, and its accompanying Recovered Materials Advisory Notice (RMAN). The CPG lists the designated recycled content products. EPA also provides recommended levels of recycled content for these products. The list of designated products, EPA's recommendations, and lists of manufacturers and suppliers of the products can be found at the www.epa.gov/cpg/products.htm website.

The Offeror, if unable to comply with both the CPG and RMAN lists, shall submit a request for waiver for each material to the Contracting Officer with the pricing submittal. The request for waiver shall be based on the following criteria:

- The cost of the recommended product is unreasonable.
- Inadequate competition exists.
- Items are not available within a reasonable period of time.
- Items do not meet the SFO's performance standards.

C. Environmentally Preferable Building Products and Materials

The Lessor shall use environmentally preferable products and materials. The Lessor shall consider the life-cycle analysis of the product in addition to the initial cost.

Refer to EPA's environmentally preferable purchasing website, www.epa.gov/epp and USDA BioPreferred products website, www.biobased.oce.usda.gov/fb4p/. In general, environmentally preferable products and materials do one or more of the following:

- Contain recycled material, are biobased, are rapidly renewable (10-year or shorter growth cycle), or have other positive environmental attributes.
- Minimize the consumption of resources, energy, and water.

- Prevent the creation of solid waste, air pollution, or water pollution.
- Promote the use of nontoxic substances and avoid toxic materials or processes.

The Lessor shall give preference to materials and products that are extracted and manufactured regionally.

7.1.6 SEISMIC DESIGN

Nonstructural elements of buildings shall be designed and constructed to resist damage caused by earthquakes as required by local code and VA *Seismic Design Requirements* H-18-8.

7.2 PARTITIONS

Non-bearing interior partitions shall be capable of supporting equipment and furnishings specified for the clinic. For interior partition framing use minimum 3-5/8 inch, 20-gauge, galvanized metal studs ASTM C645 with fasteners and accessories complying with ASTM C 754. Stud spacing shall be 16-inches on center maximum. For special requirements, use other sizes or systems as appropriate. Where pipe spaces are required, size partition framing thickness to conceal piping. Installation of metal studs shall comply with ASTM C754. Provide support required for equipment, furnishings, and work of other trades.

Use 5/8-inch thick gypsum wallboard ASTM C1396, except for special conditions. Use fire resistant Type X or Type C wallboard ASTM C1396 in fire resistant rated assemblies. Use moisture resistant wallboard ASTM C620 at wet locations. Provide accessories, fasteners, and finishing materials in accordance with ASTM C1047, C1002, and C840. Install and finish gypsum wallboard in accordance with ASTM C840. Use Level 4 finish for all occupied areas with paint finish. Provide Level 5 finish in Waiting Areas. Provide Level 4 finish for surfaces to receive Type I vinyl wall coverings or ceramic tile. Provide Level 3 finish for surfaces to receive Type II vinyl wall coverings. Provide Level 2 finish in rooms or spaces for which no decorative finish is specified in Schedule E.

Provide fire and/or smoke rated partitions that comply with published UL, FM Global, or IBC designs.

Extend all layers of gypsum board, on both sides of studs, from floor to underside of structure above on the following partitions:

- Fire rated partitions
- Security partitions (see Paragraph 0)
- Smoke barriers
- Sound rated partitions
- Corridor partitions as required by building code

In other locations, extend gypsum board from floor to heights as follows:

- Not less than 4 inches [101.6 mm] above suspended acoustical ceilings
- At ceiling of suspended gypsum board ceilings

Use minimum 4-inch solid concrete masonry units for partitions housing service windows of Pharmacy, Agent Cashier, and Credit Union.

Use lead-lined gypsum wallboard for shielding of x-ray rooms. Refer to Paragraph 7.5 below.

7.3 INTERIOR DOORS

7.3.1 GENERAL

Schedule E, "Room Finishes, Door and Hardware Schedule" indicates sizes and types of doors required. Doors shall be of flush design.

Fire rated door and frame assemblies shall comply with NFPA 80.

Acoustical door and frame assemblies shall provide STC rating specified. Submit certified test reports per ASTM E90.

All corridor-to-corridor doors shall have 100 sq. in. glass vision panels and shall swing in opposite directions from each other. Doors in fire partitions and smoke barriers shall have fire-rated glazing vision panels and be held open with electromagnetic holders, except doors which should remain closed for functional reasons.

Interior Stairway Doors: Provide interior stairway doors with passage latch sets having inside and outside door handles free at all times. Exceptions are where stairway doors are required to be locked to prevent entrance into and elopement from functional departments or areas. Locking shall comply with NFPA 101.

7.3.2 WOOD DOORS

Interior wood doors shall be solid core, 1-3/4 inch thick, with maple grain/undertone face veneers for transparent, stained finish.

Wood doors shall comply with Window and Door Manufacturer's Association (WDMA) I.S.1-A, Heavy Duty with Type II adhesives.

7.3.3 HOLLOW METAL DOORS

Hollow metal doors shall be 1-3/4 inch thick and comply with Standard Duty Doors per Steel Door Institute (SDI) A250.8, Level 1, Model 2; except:

- Stairwell doors shall comply with Heavy Duty Doors: SDI A250.8, Level 2, Model 2.
- Security doors (Type 36) shall comply with Extra Heavy Duty Doors SDI A250.8, Level 3, Model 2.

- Detention Doors (Type 22) shall comply with Extra Heavy Duty Doors SDI A250.8, Level 3, Model 2 with core type 'd' or 'f.'

7.3.4 HOLLOW METAL DOOR FRAMES

A. Frames for Hollow Metal Doors

Hollow metal door frames shall comply with Steel Door Institute (SDI) 250 for type and grade of doors required (Standard, Heavy Duty, or Extra Heavy Duty) and as follows. Frames shall be welded construction; knockdown frames are not allowed. Frames for doors specified to have automatic operators shall be minimum 16-gauge.

B. Frames for Wood Doors

Hollow metal door frames shall be shop fabricated, pre-finished, site assembled steel frames. Provide fire rated assemblies where scheduled. Fabricate frames from cold rolled steel ASTM A1008, minimum 18-gauge; casings and trim minimum 20-gauge. Prepare frames for door hardware. Provide reinforcements for hardware specified.

Pre-finished frames shall not be used for sound rated doors. Provide frames complying with SDI 114.

Hollow metal door frames shall comply with Steel Door Institute (SDI) 250 for Standard Duty, minimum 18 gauge.

Frames for wood doors specified to have automatic operators shall comply with Steel Door Institute (SDI) 250; shall be welded construction; knockdown frames are not allowed; and shall be minimum 16 gauge.

7.3.5 VAULT DOOR – INTENTIONALLY DELETED

7.3.6 AUTOMATIC DOORS

Provide operators which will move the doors from the fully closed to fully opened position in five seconds maximum time interval, when speed adjustment is at maximum setting. Provide key operated power disconnect wall switch for each door installation. Automatic door operators and hardware shall be selected and sized appropriately for the door and frame, and for the type and frequency of traffic anticipated for the opening. Provide controls to open automatic doors from both sides. Equip controls with safety devices for pedestrian protection. Provide door operator controls and equipment that are easily accessible for maintenance.

Swing door operators shall be of institutional type, door panel size 2'-0" to 5'-0" width, weight not to exceed 600 pounds, electric operated for overhead mounting. Furnish metal mounting supports, brackets, and other accessories necessary for the installation of operators at the head of the door frames. The motor on automatic door operator shall be provided with an interlock so that the motor will not operate when doors are locked. Operators shall have checking mechanism providing cushioning action at last part of door travel, in both opening and closing cycle. Operators shall be capable of recycling doors instantaneously to fully open position from any point in the closing cycle when control switch is activated. Operators shall,

when automatic power is interrupted or shut-off, permit doors to easily open manually without damage to automatic operator system.

Sliding doors shall have electric operators. Assembly shall be single or bi-parting sliding doors as shown on conceptual drawings. Doors shall be opened by electric motor pulling door from closed to open position and shall stop door by electrically reducing voltage and stalling door against mechanical stop. System shall permit manual control of door in event of power failure. Opening and closing speeds shall be adjustable. In compliance with NFPA-101, all door panels shall allow "breakout" to the fully open position to provide instant egress at any point in the door's movement."

Single use Public Restrooms indicated on the drawings shall have automatic door operators. Provide ON/OFF hold open switch. . Provide a separate F19 privacy lock with dead bolt.

For interior doors other than restrooms, automatic door operators shall be activated by two (2) each hard wired push plates or card readers with one located on each side of the door(s). Provide ON/OFF hold open switch. If doors are located in a rated wall, provide components and accessories to the automatic door operator as required to provide positive latching as required by the NFPA.

7.3.7 FINISH HARDWARE

Comply with requirements specified in "Room Finishes, Door and Hardware Schedule" in Schedule E for door hardware, hardware sets, and installation methods.

7.3.8 DOOR IDENTIFICATION

Special door identification for handicapped accessibility and hazard warning signs shall be installed at all necessary interior room doors. The forms and locations of door identification must comply with Paragraph 7.12 INTERIOR SIGNAGE. Doors leading into hazardous areas that might prove dangerous to a blind person shall be made quickly identifiable to the touch by knurling, roughening, or applying an abrasive coating to the surface of the knob, door handle, pull, or other hardware. Tactile warning indicators shall not be provided for emergency exit doors.

7.4 NOISE TRANSMISSION CONTROL

7.4.1 GENERAL

Provide sound-resistant construction at the rooms and areas listed in paragraphs below. Submit details of sound resistant construction with Second Design Development Submittal. Include test reports for designs or systems to be used. Construct partition, ceiling, and floor systems to provide necessary performance. Special attention shall be given to prevent possible flanking paths for noise transmission. Verification of noise transmission control shall be included in building commissioning.

Sound damping in meditation rooms, quiet rooms, and similar areas shall be provided by finish materials shown for these areas in Schedule E, "Room Finishes, Door, & Hardware Schedule."

Sounds damping in PACT and Specialty Team Work Areas shall be coordinated with systems furniture, clerestory and ceiling design. A building acoustical solution, such as sounds baffles, acoustical clouds or sound masking system, shall be provided in these areas.

Where an area generating unusual noise or vibration is located adjacent to occupied spaces, the Lessor's A/E shall obtain the services of a professional acoustical consultant to design the sound suppression measures required to produce a comfortable working environment in the adjacent spaces.

7.4.2 SOUND TRANSMISSION CLASS (STC) 45

The sound resistant enclosures (partitions, doors, duct system) of the spaces listed below shall be designed to suppress generated noise and provide a satisfactory degree of acoustical isolation for adjacent occupied spaces. A minimum Sound Transmission Class (STC) rating of 45 shall be achieved.

- A/C and other mechanical equipment rooms
- Emergency generator rooms
- PACT and Specialty Team Work Areas
- Shared Medical Appointment Room
- Multipurpose Rooms
- Group Therapy rooms

7.4.3 SOUND TRANSMISSION CLASS (STC) 40

The sound resistant enclosures of the following spaces shall be designed to assure speech privacy and achieve an STC rating of 40.

- Conference rooms
- Consultation offices
- Examination and treatment rooms
- Audiology and Speech Pathology areas

7.5 X-RAY RADIATION SHIELDING AND RADIOGRAPHIC ROOMS

7.5.1 X-RAY RADIATION SHIELDING

A. General

Provide shielding against radiation from x-ray equipment. Obtain the services of a physicist approved by the American Board of Radiology in accordance with the appropriate standards and regulations of the National Council on Radiation Protection and Measurements (obtainable from NCRP Publications; 7910 Woodmont Avenue, Suite 400; Bethesda, MD; 20814) to design and specify the level of radiation protection required.

State the prescribed shielding in terms of millimeters of lead or in inches of wall, ceiling, floor, and door construction of equivalent protection thickness. Post a certificate, stating the lead equivalent protection of each surface, in all rooms with radiation shielding.

B. Lead Lined Doors and Frames

Lead lining of frames, doors and other items occurring in partitions shall provide an x-ray absorption equivalent to that of partitions in which they occur.

(1) Lead Lined Wood Doors

- Use flush veneered construction.
- Face veneers shall be same species and grade as used for other wood doors in the project.
- Construct doors of two separate solid wood cores with a single sheet of lead lining through center.
- Extend sheet lead lining to all door edges, providing x-ray absorption equal to partition in which door occurs.
- Fasten wood cores together with either countersunk steel bolts through lead with bolt heads and nuts covered with poured lead, or with poured lead dowels.
- Finish face of dowels and lead covering of bolt heads and nuts flush with wood cores.
- **Edge strips:** Use same species of wood as face veneer.
- Minimum thickness shall be 1-1/2 inches at top edge and 2-1/2 inches at bottom edge.
- Extend vertical edge strips full height of door and bevel 1/8-inch for each two inches of door thickness.

Hardware for lead lined doors is specified in Schedule E. Make total thickness of sheet lead used for lining hardware equivalent to thickness of sheet lead core of door.

7.5.2 DESIGN FOR RADIOGRAPHIC EQUIPMENT

Rooms containing radiographic equipment shall be designed to be shelled in and finish work scheduled for completion as late as possible in the construction process.

Rooms containing radiographic equipment shall be designed for a generic installation system that can accept and accommodate all vendors' radiology equipment (DOD/VA Universal X-Ray (R-F) Room). Design and construct room(s) in accordance with requirements shown on conceptual drawings.

The structural support for overhead radiology equipment shall be designed such that movement of the radiology equipment ceiling-mounted support rails shall not exceed 0.2 in [5 mm] in any direction.

For a list of work items and materials required for the completion of rooms with radiographic equipment, refer to Schedules B and C of this solicitation. The Lessor will be required to provide unit costs for these items.

7.5.3 SPECIAL X-RAY CONTROL ROOM REQUIREMENTS

Provide single pane viewing windows of conventional lead glass for x-ray control rooms. Where the control room projects into and is located near the corner of the diagnostic x-ray room, the projecting control room partition shall have a portion of wall angled toward the x-ray work space. Locate the viewing window in this angled section.

To allow for clearance for x-ray tube crane travel, do not exceed a height of 7' 6" above the floor for that portion of the shielded partition of a control room which projects into a diagnostic x-ray room. Feed all electric service, located in or on the projecting control room partition, up from the floor or horizontally from the wall where the control room projects. Leave the space above the projecting control area clear to allow x-ray equipment to traverse.

7.6 INTERIOR FINISHES**7.6.1 GENERAL**

Interior finishes are prescribed in "Room Finishes, Door and Hardware Schedule" in Schedule E of this Solicitation. VA must review and approve any deviation from this document prior to start of final construction documents.

The Interior Design concept and materials, finishes, colors, patterns and textures must be approved by the Contracting Officer. Submit sample boards for review and approval by Contracting Officer with 95% construction documents (Paragraph 3.20.4).

Finish materials, including vinyl wall covering, vinyl composition tile flooring, sheet vinyl, carpet, and ceramic wall and floor tile finish, as specified herein, shall be included in the rental rate. An estimate of base quantities of finish material that should be included in the proposed rental rate is indicated on Schedule C in this solicitation. Adjustments will be made at the end of the construction based on actual measurement. Payment will be made per the pre-negotiated unit cost for these items.

7.6.2 INTERIOR DESIGN CRITERIA**A. Goal**

To provide a supportive interior environment that is conducive to healing both the patient's mind and body, is respectful of the public monies, promotes staff performance, and expresses progressive high quality design.

B. Concept

The design is to pivot from the facility's mission and its patient profile. This includes a working knowledge of the profile and characteristics of the veteran as a patient population and the distinct profile of the users of said facility and said project. VA patients are often long-term, high repeaters with multi-medical problems. Each user group will reveal the degree of need for the design to address aging, physical and mental disabilities, abusiveness, loss of function and perceptual ability.

C. Function

Functional requirements dictate maintainable colors, textures, patterns, material selections, combination of materials, and installation techniques. Materials must be chosen for longevity and good appearance retention.

D. Signage and Wayfinding

A "wayfinding" process needs to be designed into every project. Patients, visitors, and staff need to know where they are, what their destination is, how to get there, and how to return to their origination point. Identification, personalization of occupied spaces, and orientation are all to be addressed in the design. Wayfinding is to be thought of broadly as building elements, color, texture, and pattern cues, as well as a coordinated set-up for separate contacted signage and artwork.

E. Guidelines

Design attention shall be given to all spaces. Areas which could initiate the design may be the lobby or administrative suite, but extensions of the same quality and variety are required for the corridors, staff areas, and patient areas. The design must offer a distinctive and clear lead for the planning and selecting of interior furnishings. Designs that narrow choices of procurement furnishings are inappropriate. A working understanding of the limits of government sources is to be considered. This consideration will produce a good environment for the furnishings.

Designs that use "lifetime of the building" materials in colors, patterns, and designs that transcend time are endorsed. Trendy colors and patterns are to be restricted to cycle replacement materials, such as paint and wall coverings.

7.7 CEILINGS

7.7.1 ACOUSTICAL CEILINGS

Ceiling suspension system shall be heavy-duty system.

Acoustical units shall be mineral fiber units that provide a noise reduction coefficient (NRC) of at least 0.55 and a ceiling attenuation class (CAC) rating of at least 33. Provide acoustical units in PACT and Specialty Team Work Areas with an NRC of 0.85 minimum. Provide units with manufacturer's standard white painted finish, except provide membrane faced (mylar) units in locations scheduled for non-absorbent, scrubbable finish. Ceiling units shall have a flame-spread of 25 or less and a smoke development rating of 50 or less (ASTM E-84).

7.7.2 CUBICLE CURTAIN TRACKS

Provide cubicle curtain tracks with white plastic grommet C-shape carriers and hooks in exam rooms and other locations indicated in Schedule B and on the concept drawings for privacy.

Provide surface-mounted tracks of extruded aluminum, ASTM B221, alloy 6063, temper T5 or T6, channel shaped, with smooth inside raceway for curtain grommets. End stop connectors, ceiling flanges and other accessories shall be fabricated from the same material with the same finish as the tracks or from nylon.

Curtain shall hang by a "hookless" plastic grommet style in the shape of a "C" to allow staff to easily remove curtains for changing. Provide 2.2 plastic grommet carriers for every foot (or fraction thereof) of each section of each track length, plus one additional carrier.

Any operating mechanism shall be removable with common tools.

VA will supply and maintain fabric cubicle curtains.

7.8 FLOORING

An estimate of base quantities of each type of flooring that should be included in the proposed rental rate is indicated in Schedule C. Adjustments will be made at the end of the construction based on actual measurement and payment will be made per the pre-negotiated unit cost for these items.

Flooring material specifications and installation methods shall conform to the requirements of this SFO and referenced national standards. Under floor concrete must be smooth and level. Patching and leveling compounds containing gypsum are prohibited. When floor coverings are newly installed or changed, samples must be approved in advance by the Contracting Officer.

Unless other material is scheduled for a room or area, perimeter base shall be rubber or vinyl complying with ASTM F1861. Base shall be 1/8-inch thick, 4 inches high with molded top. Style B (cove) shall be used throughout.

7.8.1 MEMBRANE WATERPROOFING AT INTERIOR FLOOR DRAINS

Provide membrane waterproofing under floor finishes surrounding floor drains in areas subject to wet conditions to prevent water and moisture from penetrating the underlying floor slabs and damaging the finishes and contents of the rooms or spaces below. Attach the membrane waterproofing to the floor drain by a clamp, extend outward from the floor drain under the entire area of the surrounding floor finish surface or concrete topping which slopes toward the floor drain or which is subject to surface water, and carry up abutting vertical surfaces at least 3 in [76.2 mm].

Do not provide membrane waterproofing if either:

- The floor slab is placed on grade.
- The floor finish itself is latex mastic with waterproofing membrane.

7.8.2 FLOOR SLAB DEPRESSIONS

Floor slab depressions are required in specific areas or rooms for the purpose of providing slopes in floors to:

- Direct water into drains.
- Provide for special floor finishes that require a setting bed.
- Provide flush transition to grid walk off system at Entry Vestibule.

- Provide flush transition and installation of Audio Booth and Imaging Equipment.

It is the responsibility of the Lessor to ensure that depressions are provided to suit the actual finishes and equipment provided, and to satisfy the actual conditions required by the design.

Liquid applied water proofing shall be latex based water proofing membrane, ANSI A118.10; ready to use liquid latex compatible with Cement Backer Boards and tile setting mortars. Reinforcing fabric shall be alkali-resistant glass fiber. Final Performance shall be as follows in conformance with ANSI A118.10:

Waterproofing ability (ASTM D 4068)	Conforms (no water penetration)
Seam strength and breaking strength (ASTM D751)	Conforms (no water penetration)
Seam strength and breaking strength (ASTM D751)	Conforms
Dimensional stability (ASTM D1204)	Conforms
Shear strength to ceramic tile (ASTM C482)	Conforms
Fungus and microorganism resistance (ASTM G21-96)	Conforms

7.8.3 FLOORING, PORCELAIN TILE

Porcelain tile shall be used in all toilet rooms and other areas specified in Schedule E. Provide slab depressions, setting beds and waterproof membrane per Paragraph 7.8.2 above.

Provide quarry tile in areas designated in Schedule E.

- Comply with ANSI A137.1, Standard Grade, and as follows. Coefficient of friction, when tested in accordance with ASTM C1028 and measured per the TCNA DCOF AcuTest shall be equal to or greater than 0.42 for level interior tile floors that will be walked on when wet.

7.8.4 FLOORING, VINYL TILE AND SHEET VINYL

A. Vinyl Composition Tile

Vinyl composition floor tile (VCT) ASTM F1066, Composition 1, Class 2 (through pattern), 1/8-inch thick, 12 inches square minimum, shall be provided at locations in Schedule E.

B. Resilient Sheet Flooring

Resilient Sheet Flooring (RSF) shall be provided at locations listed in Schedule E. //Rooms to receive RSF shall have 6-inch integral cove base (flash coving).// RSF shall conform to ASTM F1913 and material requirements specified in ASTM F1303 for sheet vinyl flooring, Type II, Grade 1, backing classification not applicable. Foam-backed sheet flooring is not acceptable. Use smooth face, minimum thickness nominal 0.08 inch. Provide maximum size sheet material produced by manufacturer to provide minimum number of joints; minimum width acceptable 48 inches. Each color and pattern of sheet flooring shall be of same production run.

C. Welded Seam Sheet Flooring

Welded Seam Sheet Flooring (WSF) shall be provided at locations listed in Schedule E. Rooms to receive WSF shall have 6-inch integral cove base (flash coving). WSF shall

conform to ASTM F1303 for sheet vinyl flooring, Type II, Grade 1, except for backing requirements. Flooring shall be homogeneous through full thickness; backed sheet flooring is not acceptable. Minimum nominal thickness is 0.08 in [2 mm]; minimum width, 6 feet [18 m]. Each color and pattern of sheet flooring shall be of same production run. Welding rod shall be product of floor covering manufacturer; color of welding rod shall match field color of sheet vinyl.

7.8.5 FLOORING, RUBBER

Rubber tile shall conform to ASTM F1344, Class 1, homogenous rubber tile, through mottled, 24 inches square, thick; color and pattern uniformly distributed throughout tile. Molded pattern wearing surface base thickness shall be 1/8-inch thick. Where rubber tile is used, provide tiles with a minimum of 90% post-consumer rubber.

Resilient treads shall conform to Fed. Spec. RR-T-650, Composition A, Type 2,-3/16 inch thick on wear surface tapering to 1/8-inch thick at riser end. Nosing shape shall to conform to sub-tread nosing shape.

Sheet rubber flooring shall conform to ASTM F1344, F1859 or F1860, 36 inches wide, 1/8-inch thick, material by the same manufacturer as the rubber treads, color and pattern to match treads. Provide rubber flooring made with a minimum of 90% consumer rubber where possible.

7.8.6 FLOORING, CARPET

A. Carpet

The successful Offeror/Lessor shall submit carpet samples and specifications.

Provide new carpet tile as floor covering in those areas indicated in Schedule E of this Solicitation.

(1) Physical Characteristics

Carpet shall be free of visual blemishes, streaks, poorly-dyed areas, fuzzing of pile yarn, spots or stains, and other physical and manufacturing defects.

Carpet shall be manufacturer's standard construction commercial carpet:

Modular Tile: 24 in [600 mm] square tile.

Provide static control to permanently control static build up to less than 2.0 kV when tested at 20% relative humidity and 70 °F [21 °C] in accordance with AATCC 134.

Pile Height: Maximum 0.10 in [3.25 mm].

Pile Fiber: Nylon with recycled content 25% minimum branded (federally registered trademark), solution dyed type 6 minimum.

Pile Type: Level Loop.

Backing materials: Manufacturer's unitary backing designed for glue-down installation using recovered materials.

Appearance Retention Rating (ARR): Carpet shall be tested and have the minimum 3.5-4.0 Severe ARR when tested in accordance with either the ASTM D 5252 (Hexapod) or ASTM D 5417 (Vettermann) test methods using the number of cycles for short and long term tests as specified.

Tuft Bind: Minimum force of 40 N (10 lb) required to pull a tuft or loop free from carpet backing. Test per ASTM D1335.

Colorfastness to Crocking: Dry and wet crocking and water bleed, comply with AATCC 165 Color Transference Chart for colors, minimum class 4 rating.

Colorfastness to Ozone: Comply with AATCC 129, minimum rating of 4 on the AATCC color transfer chart.

Delamination Strength: Minimum of 440 N/m (2.5 lb/inch) between secondary backing.

Flammability and Critical Radiant Flux Requirements: Test Carpet in accordance with ASTM E 648: Class I: Not less than 0.45 watts per square centimeter.

Corridors, lobbies, entrances, common areas or multipurpose rooms, open offices, waiting areas and dining areas: Minimum APYD 6000.

Other areas: Minimum APYD 4000.

VOC Limits: Use carpet that complies with the testing and product requirements of the Carpet and Rug Institute's Green Label Program. Use carpet adhesives that comply with the product requirements of the South Coast Air Quality Management District (SCAQMD), rule #1168.

B. Installation

Carpet shall be a direct glue down installation following the manufacturer's instructions. All patterns and/or stripes shall match. A seam layout plan shall be provided for broadloom to assure that seams are located out of major traffic patterns.

C. Replacement

Carpet must be replaced at any time during the lease when it cannot be satisfactorily cleaned, stains removed or when excessive wearing or tearing occurs or unsightly seaming is noticed. The determination will be made by the Contracting Officer. **At a minimum, the carpet will be replaced every eight (8) years.** All replacement work will be done after hours at the Lessor's expense, including moving and replacing furniture.

D. Samples for Color Selection

When carpet must be newly installed or be changed, the Lessor will provide the Government a minimum of four samples of carpeting which vary in color. The color selected shall have the ability to disguise soil in entrance areas and wax-track off in areas adjacent to vinyl composition. A small pattern, tweed, or heather effect is most desirable. The sample and color must be approved by the Contracting Officer prior to installation. No substitution will be made by the Lessor after sample selection.

7.8.7 FLOORING, LATEX MASTIC

Traffic-bearing, trowel-applied, vinyl resin, neoprene resin, or polyacrylate resin flooring system, latex mastic (LM) shall be provided at locations listed in Schedule E. A reinforced elastomeric waterproof membrane is not required for slab-on-grade installations of latex mastic.

A. Latex Mastic Flooring

Mil. Spec. MIL D 3134, Type II.

B. Waterproof Membrane

Shall consist of a neoprene emulsion or elastomeric polyurethane resin reinforced with fiberglass net or cloth.

7.8.8 COMPUTER ROOM FLOORING – INTENTIONALLY DELETED**7.9 WALL COVERINGS**

Walls shall be covered in accordance with "Room Finish Schedule" in Schedule E, or other requirements of this Solicitation. An estimate of base quantities of each type of wall covering that should be included in the proposed rental rate is indicated in Schedule C. Adjustments will be made at the end of construction based on actual measurement and payment will be made per the pre-negotiated unit cost for these items. Colors and patterns shall be as selected or approved by the Contracting Officer.

7.9.1 PORCELAIN WALL TILE

Porcelain tile at showers and wet locations shall be installed over cement backer board or Portland cement mortar on metal lath.

Comply with ANSI A137.1, Standard Grade; cushion edges. Trim shapes shall conform to applicable requirements of adjoining floor and wall tile. Provide standard cove and bullnose shapes and finish trim corners as required to complete tile work.

Cementitious backer units shall comply with ANSI A118.9.

A. Vinyl Wallcovering (W)

Vinyl wall covering shall comply with CFFA-2575. Fungi-resistance rating shall be 0 in accordance with ASTM G21. Provide factory-applied clear delustered polyvinyl-fluoride (PVF) coating minimum ½ mil [0.0125 mm] thickness. Do not include PVF coating weight in minimum total weight. Fire hazard classification with PVF coating shall be Class A. Type II (Medium Duty).

Adhesive shall be vermin and mildew resistant.

B. Protective Wallcovering (WP)

Wainscot of rigid PVC protective wall covering (WP) shall be installed on walls in corridors and other locations in accordance with Schedule E.

Provide rigid, embossed, impact-resistant protective wallcovering of PVC plastic sheets or roll stock. Material shall have following minimum properties: Thickness: 0.060 inch; Roll Width: 48 inches [1200 mm]; or Sheet Size: 48" x 96" [1200 mm x 2400 mm]; Flame/Smoke Ratings: ASTM E 84, Class A; Flame Spread 0-25; Smoke Developed 0-450. Provide accessories: color matched rigid vinyl moldings and trim; acrylic latex primer/sealer, and mildew-resistant adhesives and caulk. Materials shall be cadmium and mercury free.

7.9.2 MAINTENANCE AND REPLACEMENT

All wall covering is to be maintained in "like new" condition for the life of the lease. Wall covering must be replaced or repaired at the Lessor's expense, including moving and replacing furnishings (except where wall covering has been damaged due to the negligence of VA), anytime during the occupancy by VA if it is torn, peeling, or permanently stained. Tile must be replaced or repaired if it is loose, chipped, broken, or permanently discolored. All repair and replacement work is to be done after working hours.

7.10 PAINTING

A. General

Painting shall include field application of paints, stains, epoxies, and other coatings for surfaces and materials not supplied with factory finish or otherwise pre-finished. Painting includes shellacs, stains, varnishes, coatings specified, striping or markers, and identity markings. Wall surfaces shall be painted throughout, except where wall coverings per Paragraph 7.9 above are called for in "Room Finish Schedule" in Schedule E.

Immediately prior to VA occupancy, all surfaces designated by VA for painting must be newly painted in colors acceptable to VA. At a minimum, all painted surfaces including public areas must be repainted after working hours at the Lessor's expense every three (3) years. This includes moving and replacement of furniture.

B. Submittals

Before work is started, or sample panels are prepared, submit manufacturer's literature indicating brand label, product name, and product code as of the date of contract award. Each coating system is to be from a single manufacturer. All coats on a particular substrate must be from a single manufacturer.

Sample Panels: After painters' materials have been approved and before work is started, submit sample panels showing each type of finish and color specified. Panels to show color shall be composition board, 4 inch x 10 inch x 1/8 inch [101.6 mm x 254 mm x 3.175 mm]; Panels to show transparent finishes shall be wood of same species and grain pattern as wood approved for use, 4 inch x 10 inch face x 1/4 inch [101.6 mm x 254 mm x 6.35 mm] thick minimum.

C. Products

Provide the best quality grade of the various types of painting materials and coatings as regularly manufactured by acceptable paint manufacturer. Materials not displaying the manufacturer's identification as a standard, best-grade product will not be acceptable. Paint products of the following manufacturers are acceptable:

- Dunn-Edwards
- Frazee
- ICI
- Sherwin-Williams
- Benjamin Moore

Use primers with pigment and vehicle recommended by top coat manufacturer as compatible with substrate and finish coats specified. Use only thinners approved by the paint manufacture and use only within recommended limits.

Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately, and paints requiring specified additives.

Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction. Volatile Organic Compounds (VOC) content of paint materials shall not exceed local, state or district requirements. Lead-base paints shall not be used. Materials shall not contain asbestos, zinc-chromate, strontium-chromate, cadmium, mercury or mercury compounds, or free crystalline silica. Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.

D. Application

Unless otherwise specified, apply paint in three coats: prime, body, and finish. When two coats applied to prime coat are the same, the first coat applied over primer is body coat and the second coat is the finish coat. Apply each coat evenly and cover substrate completely. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.

E. Paint Schedule

Gypsum Wallboard, except where epoxy coating (SC) is required:

- 1 coat primer sealer applied prior to texturing
- 1 coat pigmented sealer/primer
- 2 coats acrylic latex enamel semi-gloss

Gypsum Wallboard epoxy coating, (SC):

- 1 coat primer sealer
- 2 coats waterborne epoxy semi-gloss

Ferrous and Galvanized Metal:

- 1 coat vinyl acrylic primer or vinyl pre-wash primer (if not factory-primed)
- 2 coats acrylic latex enamel semi-gloss

Wood – Transparent Finish:

- Provide hand-wiped stained finish, water-based, clear acrylic, premium grade gloss and color as selected
- Stain
- 2 coats clear finish

7.11 HANDRAILS, WALL GUARDS AND CORNER GUARDS

An estimate of base quantities of each type of handrail, wall guard, and corner guard that should be included in the proposed rental rate is indicated in Schedule C. Adjustments will be made at the end of the project based on actual measurement and payment will be made per the pre-negotiated unit cost for these items.

Stainless steel shall conform to ASTM A167, Type 302B. Extruded aluminum components shall conform to ASTM B221, Alloy 6063, Temper T5 or T6. Resilient materials shall be extruded and injection molded acrylic vinyl or extruded polyvinyl chloride meeting following requirements:

- Minimum impact resistance of 2150 ft-lbs [200 Nm] (when tested in accordance with ASTM D256 (Izod impact, ft-lbs per inch notch).
- Class 1 fire rating when tested in accordance with ASTM E84, having a maximum flame spread of 25 and a smoke developed rating of 450 or less.
- shall be rated self extinguishing when tested in accordance with ASTM D635
- Material shall be labeled and tested by Underwriters Laboratories or other approved independent testing laboratory.

Provide resilient materials with integral color with all colored components matched in accordance with SAE J 1545 to within plus or minus 1.0 on the CIE LCH scales.

7.11.1 HANDRAILS AND WALL GUARDS

Provide handrails and wall guards on both sides of all public/patient corridors. Provide chair rail at locations indicated in Schedule C. Provide continuous reinforcing in the wall attachment of handrails and bumper guards.

Handrail/Wall Guard Combination shall consist of snap-on covers of resilient material, minimum 0.078-inch thick, free-floated on a continuous, extruded aluminum retainer, minimum 0.072-inch thick, anchored to wall at maximum 32 inches on center.

Wall Guards (Crash Rails) shall consist of snap-on covers of resilient material, minimum 0.110-inch thick, free-floated over a continuous extruded aluminum retainer, minimum 0.090-inch thick anchored to wall at maximum 24 inches on center.

7.11.2 CORNER GUARDS

Resilient, shock-absorbing corner guards shall be surface mounted type with ¼-inch [6.35 mm] radius corner. Snap-on corner guards shall be formed from resilient material, minimum 0.078-inch [1.98 mm] thick, free floating on a continuous 0.063-inch thick extruded aluminum retainer. Provide appropriate mounting hardware, cushions and base plates as required. Provide factory fabricated end closure caps at top and bottom of surface mounted corner guards.

Stainless steel corner guards shall be provided in private/staff/"back of house" areas in lieu of resilient corner guards. Stainless steel corner guards shall be fabricated of 0.0625 inch [1.59 mm] thick stainless steel. Stainless steel corner guards shall be surface mounted, with 3-inch [76-mm] wings and ¼-inch [6.35 mm] corners.

All corner guards shall be 8'-0" high.

A. Resilient and Corrosion Resisting Metal Guards

Provide resilient or corrosion-resisting metal corner guards for the external corners of finished interior walls and columns in the paths of wheeled traffic as indicated below. Use surface applied, resilient-type corner guards on gypsum wallboard, veneer plaster, or plaster walls. Use corrosion-resisting-metal corner guards on masonry or ceramic tile walls. Corner guards are not required in corridors where continuous handrails and bumper guards are used around external corners.

Corridors of:

- Ambulatory Care and Clinical Areas
- Warehouse and Receiving Areas

Areas of:

- Cart Storage
- Pharmacy
- Service Elevator Lobbies
- Rooms containing dumbwaiters or cart-lift elevators
- Warehouse and Receiving

B. Structural Steel Angle Guards

Unless noted otherwise provide structural steel angle guards, protected from corrosion by painting or galvanizing, for use in corridors and areas of:

- Warehouse and Receiving

Provide structural steel angle guards, protected from corrosion by painting or galvanizing, for exterior use in the paths of motor vehicle traffic to the receiving platform (loading dock) and at exposed corners on the platform.

7.12 INTERIOR SIGNAGE

Lessor shall develop and submit a signage plan for review and approval by the Contracting Officer during design development. Interior signage systems shall include identification, directional, informational, and code required signage. The Lessor shall furnish and install interior signs for all rooms, areas, conditions or features in the facility. Comply with accessibility standards listed in Paragraph 4.6 of this solicitation. For informational purposes, Offerors are advised that VA has an established signage program, VA *Signage Design Guide*, which may be found at <http://www.cfm.va.gov/til/spclRqmts.asp>.

7.13 BUILT-IN WORK**7.13.1 CASEWORK AND COUNTERTOPS**

Type(s), quantities and locations of plastic laminate casework and countertops shall be per Schedule B and as shown on conceptual plans.

Special counter tops (wood, stainless steel, chemical resistant laminate, or epoxy) shall be provided as indicated in Schedule B.

A. Casework

Casework shall be of the flush overlay design and, except as otherwise specified, be in conformance with AWI 1600, Modular Cabinets. Fabricate casework of plastic laminated covered particleboard.

- Plastic laminate shall conform to NEMA LD-3
- Exposed vertical surfaces including both sides of cabinet doors shall be high pressure laminate Type VGS (0.28)
- Cabinet interiors including shelving shall comply with NEMA, LD3.1 at a minimum: high pressure cabinet liner Type CLS (0.20), OR thermally fused melamine laminate.
- Backing (concealed surfaces) shall be high pressure backer Type BKH (0.28).

Core materials shall be as follows:

- Particleboard up to 7/8 inch [22.22 mm] thick shall be Industrial Grade average 47-pound density particleboard, ANSI A 208.1, M-3.
- Particleboard 1 inch [25.4 mm] thick and thicker shall be Industrial Grade average 45-pound density particle-board, ANSI A 208.1, M-2.
- Moisture Resistant Particleboard shall be average 47-pound density particleboard, ANSI A208.1, M-3.
- Medium Density Fiberboard 1/4 inch thick shall be average 54-pound density grade, ANSI A208.2.

Edging materials shall be 1 mm PVC banding, machine applied, and 3 mm PVC banding, machine applied and machine profiled to 1/8 inch radius.

Exposed hardware, except as otherwise specified, shall be satin-finished chromium-plated brass or nickel plated brass.

Hinges shall be fabricated of minimum 0.072-inch [1.83-mm] thick chromium-plated steel leaves, with minimum 0.139-inch [3.53-mm] diameter stainless steel pin. Hinges shall be five knuckle design with 2-1/2 inch [63.5 mm] high leaves and hospital type tips. Doors 36 inches [914.4 mm] and more in height shall have three hinges, and doors less than 36 inches [914.4 mm] in height shall have two hinges. Each door shall close against two rubber bumpers.

Door catches shall be friction or magnetic type, fabricated with metal housing. Provide one catch for cabinet doors 48 inches [1200 mm] high and under, and two for doors over 48 inches [1200 mm] high.

Locks shall be cylinder type, 5 pin tumbler, cam style lock with strike. Acceptable locks for 3/4-inch [19 mm] thick doors include: National #M2-3708-157 lock and National #M2-3709-100 with strike. Provide two keys for each lock. The name of the manufacturer, or trademark by which manufacturer can readily be identified, shall be legibly marked on each lock, the key change number shall be marked on the exposed face of lock, and also stamped on each key. Key change numbers shall provide sufficient information for replacement of the key by the manufacturer.

Drawer and door pulls shall be a heavy-duty arc style pull in a satin chrome finish. Drawer slides shall be full extension, 150-pound [68-kg] load rated epoxy coated steel with nylon, ball bearing rollers, with positive stop both directions.

B. Countertops

Plastic Laminate (HPDL) shall conform to NEMA LD 3. Decorative surfaces shall be either:

- **Horizontal:** High-pressure decorative laminate type HGS (.048)
- **Post forming:** High-pressure decorative laminate type HGP (.039)

Concealed backing sheet shall be high-pressure backer BKH (.048) or (.039) to match exposed faces.

Chemical-resistant plastic laminate, NEMA LD3 types HGS or HGP.

Test for resistance to reagents as follows: Test with five 0.25 mil drops remaining on surface for 16 hours followed by washing off with tap water, then cleaned with liquid soap and water, dried with soft cotton cloth and then cleaned with naphtha. There shall be no change in color, surface texture, and original protectability remaining from test results of following reagents:

98% Acetic Acid	Butyl Alcohol	Acetone
90% Formic Acid	Benzine	Chloroform
28% Ammonium Hydroxide	Xylene	Carbon Tetrachloride
Zinc Chloride (Sat.)	Toluene	Cresol
Sodium Carbonate (Sat.)	Gasoline	Ether
Calcium Hypochlorite (Sat.)	Kerosene	Cottonseed Oil
Sodium Chloride (Sat.)	Mineral Oil	40% Formaldehyde
Methyl Alcohol	Ethyl Acetate	Trichlorethylene

Ethyl Alcohol

Amyl Acetate

Monochlorobenzene

Superficial effects only: Slight color change, spot, or residue only with original protectability remaining from test results of following reagents:

77% Sulfuric Acid
33% Sulfuric Acid
85% Phosphoric Acid

37% Hydrochloric Acid
20% Nitric Acid
30% Nitric Acid

85% Phenol
Furfural
Dioxane

- Particleboard up to 7/8 inch [22.22 mm] thick shall be Industrial Grade average 47-pound density particleboard, ANSI A 208.1, M-3.
- Particleboard 1 inch [25.4 mm] thick and thicker shall be Industrial Grade average 45-pound density particle-board, ANSI A 208.1, M-2.
- Moisture Resistant Particleboard shall be average 47-pound density particleboard, ANSI A208.1, M-3.

Solid Surface Material (SSM): Solid surface material shall be a homogenous filled solid polymer, not coated, laminated, or of a composite construction, and meeting ANSI Z124.3 and ANSI Z124.6 requirements.

Flammability: Flame Spread shall be 25 max. Smoke Developed shall be 25 max. Material thickness shall be as indicated on the drawings. Cast, 100 % acrylic solid polymer material shall be composed of acrylic polymer, mineral fillers, and pigments and shall meet the following minimum performance requirements:

Property	Typical Result	Test
Tensile Strength	6,000 PSI	ASTM D 638
Tensile Modulus	1.5 x 10 ⁶ PSI	ASTM D 638
Tensile Elongation	0.4% min.	ASTM D 638
Flexural Strength	10,000 PSI	ASTM D 790
Flexural Modulus	1.2 x 10 ⁶ PSI	ASTM D 790
Hardness	>85	Rockwell "M" Scale ASTM D 785
Thermal Expansion	3.02 x 10 ⁻⁵ in./in./°C	ASTM D 696 (1.80 x 10 ⁻⁵ in./in./°F)
Gloss (60° Gardner)	5–75 (matte—highly polished)	ANSI Z124
Light Resistance	(Xenon Arc) No effect	NEMA LD 3 Method 3.3
Wear and Cleanability	Passes	ANSI Z124.3 & Z124.6
Stain Resistance: Sheets	Passes	ANSI Z124.3 & Z124.6
Fungus and Bacteria	Does not support microbial	ASTM G21&G22

Property	Typical Result	Test
Resistance	growth	
Boiling Water Resistance	No visible change	NEMA LD 3
High Temperature Resistance	No change	NEMA LD 3
Water Absorption	Long-term 0.6% (1/2") 0.8% (1/4")	ASTM D 570

Molded Resin Tops shall be non-glare epoxy resin or furan resin compounded and cured for minimum physical properties specified. Material shall be of uniform mixture throughout.

Compressive strength	200 MPa (30,000 PSI)
Flexural strength	70 MPa (10,000 PSI)
Rockwell hardness	105
Water absorption, 14 hours (weight)	.01%

Stainless Steel shall conform to ASTM A167, Type 304.

Sheet Steel shall conform to ASTM A366, cold rolled, Class 1 finish, stretcher leveled.

Hardwood Countertop shall be solid maple, clear grade.

Adhesive for plastic laminate shall conform to FS A-A-1936. Adhesive for shop and field joints in Solid Surface Material (SSM) shall be a two-part adhesive kit to create permanent, inconspicuous, non-porous, hard seams and joints by chemical bond between solid polymer materials and components to create a monolithic appearance of the fabrication. Adhesive shall be approved by the solid polymer manufacturer. Adhesive shall be color-matched to the surfaces being bonded where solid-colored, solid polymer materials are being bonded together. The seam adhesive shall be clear or color-matched where particulate patterned, solid polymer materials are being bonded together.

Fasteners shall be studs, bolts, spacers, threaded rods with nuts, or screws suitable for materials being joined with metal splice plates, channels, or other supporting shapes.

7.13.2 COMPUTER WORKSTATIONS AND KEYBOARD TRAYS

Computer keyboard trays shall be provided at each sit down height and standing height knee space in casework and at each Radiology room control station countertop. All keyboard trays will be provided by the VA and installed by the General Contractor.

7.13.3 LOCKERS AND SHELVING

Type(s), quantities, and locations of lockers and shelving shall be per Schedule B and as shown on conceptual plans.

7.14 PLUMBING FIXTURES, TOILETS AND BATHS

7.14.1 TOILETS

Provide toilet partitions as indicated on conceptual plans. Room entrance screens that double as part of a toilet partition enclosure shall be of typical stud construction, from floor to ceiling. Do not use toilet stalls or divider partitions in single-user toilet rooms in which only a lavatory and water closet are provided.

Conform to Fed. CID A-A-60003, except as modified herein. Fabricate to dimensions shown or specified.

Toilet Enclosures shall be Type 1, Style B (Ceiling hung) . Reinforce panels to receive toilet tissue holders, grab bars, or other accessories specified. Upper pivots and lower hinges shall be adjustable to hold doors open 30 degrees. Latching devices and hinges for handicap compartments shall comply with ADA requirements.

Finish: Stainless steel doors, pilasters, and enclosure panels, including those adjacent to urinals, which shall be stainless steel.//

Urinal Screens shall be Type III, Style D (wall hung), stainless steel, with integral flanges and continuous, full height wall anchor plate. Screens shall be 24 in' wide x 42 in high [600 mm wide x 1070 mm high].

7.14.2 SHOWERS

Use porcelain tile applied with thinset Portland cement to concrete-fiber reinforced backer board for shower enclosures and partitions of contiguous areas. Warp finished floors of adjoining drying rooms or toilet rooms toward showers to assure drainage to the shower drain. Floor slopes in and around a shower shall not exceed 5%.

Construct all patient showers without curbs. In non-patient shower rooms, provide at least one shower stall without a curb.

7.14.3 TOILET AND SHOWER ACCESSORIES

Types and locations of toilet accessories shall be as indicated in Schedule B of this solicitation. Multiple units of each type of accessory shall be furnished by the same manufacturer. Lessor shall provide suitable backing and other preparation as necessary for items indicated to be furnished by VA.

Toilet accessories shall be shop or factory assembled, free of dents and scratches and packaged complete with anchors and fittings, steel anchor plates, adapters, and anchor components for installation. Grind welded joints smooth. Fabricate units made of metal sheet of seamless sheets with flat surfaces.

Stainless steel sheet shall conform to ASTM A167, Type 304. Stainless steel tubing shall conform to ASTM A269. Galvanized sheet steel shall conform to ASTM A653, G60.

Mirror glass shall be float glass, Type I, Class 1, Quality q2 (ASTM C 1036), with silvering, copper coating, and suitable protective organic coating to copper backing in accordance with FS DD-M-411.

Adhesive shall be two component epoxy type or contact type and waterproof. Fasteners, screws, and bolts shall be stainless steel or hot dip galvanized. Exposed fasteners shall be tamper-proof. Expansion shields shall be fiber, lead, or rubber as recommended by accessory manufacturer for component and substrate.

Stainless steel shall have No. 4 satin brushed finish, unless otherwise noted. Chrome/Nickel Plating shall conform to ASTM B456, Type SC 2, satin finish, unless otherwise noted. Galvanizing for items other than sheet metal shall conform to ASTM A123, 1.25oz/sq yd.

7.15 WINDOW TREATMENTS

All exterior windows shall be equipped with window roller shades. Shades should be of a wipable, scrubbable PVC free plastic mesh fabric with a 1% openness on all private rooms. An openness of 5% is to be used on public spaces such as waiting rooms and conference rooms. Bottom of mesh curtain shall have a fabric wrapped 2" sealed pocket hem bar. The shade housing must have a 3" high fascia and coordinate with the mesh color. The shades must have a 2" Sealed Pocket Hem bar, clutch, bead chain, bead chain stops, bead chain connector, tension device, end plug, clutch bracket, end plug bracket, adapter for the clutch and end plugs, a clutch with spring assist, a front fascia, fascia brackets and end caps. The Fiber Content shall be inherently and permanently flame resistant. Recommended composition is 36% Vinyl, 64% Fiberglass. The fabric for the shades shall comply with NFPA 701 fire code standards.

At all windows in Waiting areas and at all clerestory window locations shades shall be electronically-controlled in tandem and shall be programmed so that shading fabric is raised or lowered at the same level, at the same time. Coordinate shade control mechanism with AV consultant.

SECTION 8 SERVICES, UTILITIES AND MAINTENANCE

8.1 UTILITIES

The Lessor shall ensure that public utilities necessary for operation are available and operable at the site at the time of final inspection. The Lessor is required to pay any deposits and hook-up fees relative to utilities (water-tap fee, water connection fee, sewer connection fee, sewer tap fee, etc.).

The cost of utilities is included as part of the rental consideration. Lessor will pay all expenses related to utility usage (electricity, gas, water, and sewage) for space occupied and utilized by VA.

8.2 BUILDING MAINTENANCE AND CLEANING BY LESSOR

8.2.1 BUILDING MAINTENANCE BY LESSOR

A. Lessor’s Responsibilities

The Lessor is responsible for total maintenance of the leased premises in accordance with Paragraph 14 of GSA Form 3517B; **including special equipment items specified in Schedule B to be maintained by the Lessor.** Replacement costs for Schedule B items due to normal wear and tear are the Lessor’s responsibility. Maintenance of special equipment items identified in Schedule B to be maintained by VA is excluded from the Lessor’s responsibility.

The Lessor must have a building superintendent or a local, designated representative available to promptly correct deficiencies or attempt to correct deficiencies upon written notice of such condition from VA. The Lessor’s superintendent or designated representative shall correct or attempt to correct deficiencies within the timeframes specified in the O&M Plan (Paragraph 8.4 below) and agreed to by the Government. If no substantial attempt has been made to correct the deficiencies within the specified time, action will be taken by VA to correct such deficiencies and the cost of repairs will be deducted from the next month’s rental payment.

The Lessor shall provide the labor, material, and supervision to adequately maintain the structure, the roof, the exterior walls, windows, doors, and any other necessary building appurtenances to provide watertight integrity, structural soundness, and acceptable appearance.

The Lessor’s maintenance responsibility includes initial supplies of all items, materials, and equipment necessary for such maintenance. All maintenance work will be done in accordance with applicable local Building Codes and ordinances, and inspection certificates will be displayed as appropriate.

Maintenance by Lessor includes, but is not limited to, interior and exterior care of the building and the site; all sidewalks, parking areas, driveways, private access roads, lawns, and

shrubby; utilities; and building service equipment; including all repairs and replacements. All equipment and systems shall be maintained to provide reliable service without unusual interruption, disturbing noises, exposure to fire or safety hazards, or unusual emissions of dirt.

Lessor shall maintain the Essential Electrical System as required by NFPA and JCAHO, including, but not limited to, weekly, monthly, annually, and triennial tests and activities.

B. Frequency of Maintenance

At a minimum, the Lessor shall perform the following at the frequency indicated:

(1) Weekly

Mow and edge lawns weekly during the growth season.

(2) Monthly

Remove weeds from around building, parking areas, all landscaped areas (including lawn), and fence borders (both sides of fence).

Mow and edge lawns at least once a month during the dormant season.

Trim and prune shrubbery and trees to maintain an attractive appearance. Shrubbery shall not be allowed to grow up and cover windows.

(3) Quarterly

Provide interior and exterior extermination of insects and rodents. Use of chemicals shall conform to EPA and State requirements. The Lessor shall provide additional service at the request of VA, if any signs of re-infestation appear.

Pest management is to be done using an integrated pest management approach that minimizes the use of toxic chemicals.

Pesticide shall only be applied by persons deemed qualified by EPA and state requirements.

Lessor shall coordinate application of pesticide with the Government and only apply pesticide in a manner that VA agrees is protective of the health of patients, employees, and visitors.

(4) Semi-Annually

Replace all filters in HVAC system. Replace on a more frequent basis if required by the manufacturer's recommendations.

(5) Annually

Clean interior of all double-walled HVAC units and drain pans. Cleaning shall be done at times when clinic is not in operation.

Re-mulch all planting beds.

(6) As Required

Lessor is responsible for the repair and replacement of all light fixture ballasts and starters (refer to GSA Form 1217). Lessor shall replace burned out bulbs and fluorescent tubes in interior light fixtures.

Lessor is responsible for replacement of worn floor or wall coverings (this includes the moving and returning of furnishings and equipment), unless caused by negligence on the part of VA. Provide interior extermination of insects and rodents upon any sign of infestation. Use of chemicals shall conform to EPA and State requirements.

Water the grass and plantings as necessary to maintain their health and attractive appearance.

Fertilize all lawn areas at least three times per year. Fertilizer application prior the start of the growth season shall contain weed killer per manufacturer's recommendations.

Fertilize plants and trees with type of fertilizer recommended by manufacturer. Fertilize with frequency recommended by manufacturer of type of fertilizer used.

Dead plantings or lawn shall be replaced with like kind immediately. Partially dead plantings may be trimmed if, after trimming, a good appearance is maintained.

Rake and remove leaves to ensure a good appearance of the site.

Clean HVAC units inside and out upon any signs of mildew or bacterial growth.

Pans in HVAC units shall be treated as required to prevent mildew or bacterial growth.

Before working hours **7:00 AM to 5:30 PM** remove snow and ice from all entrances, sidewalks parking lots, and approaches. In the event of snow or freezing rain during working hours, removal must occur within one hour from receipt of notification by VA staff. Chemicals or sand may be used to reduce safety hazards.

8.2.2 EXTERIOR CLEANING BY LESSOR

A. Lessor's Responsibilities

The Lessor shall maintain the leased premises to provide a clean, neat, and attractive appearance by performing the functions described below.

B. Waste and Recycling

The Lessor shall have no responsibility for disposing of waste other than exterior waste.

C. Extermination

Extermination of insects and rodents shall be provided on a regular basis (minimum of every three (3) months), and upon any sign of infestation. Use of chemicals shall conform to EPA and state requirements. If any signs of re-infestation appear, additional service shall be provided by the Lessor at the request of VA.

D. Frequency

At a minimum, the Lessor shall perform the following at the frequency indicated:

- (1) Daily

Building entrances, smoking shelter, and gazebo: Pick up trash, litter, debris, and cigarette butts.

(2) Three Times Weekly
Sweep landings, steps, and sidewalks.

Police all sidewalks, parking areas, green areas, planting beds, driveways, lawns, shrubbery, outside loading dock areas, platforms, etc., to maintain a neat and attractive appearance. This shall include, but not be limited to, the removal of cigarette butts, debris, litter, trash, limbs, etc. (from both sides of fences).

(4) Quarterly
Quarterly, or as needed, Lessor shall clean bugs from the interior of exterior light lenses.

Clean balconies, ledges, courts, areaways, gutters, and flat roofs.

Clean mildew from exterior of building, smoking shelter, sidewalks, and roof areas, etc.

(5) Semi-Annually
Wash outside of all exterior windows, glass located over and in exterior and vestibule doors, and all exterior plate glass around entrances, lobbies, vestibules, and skylights.

(6) Annually
Clean exterior of building. Remove all spider webs, wasp nests, dirt dobber nests, stains, etc.

8.2.3 INTERIOR CLEANING BY LESSOR

With the exception of cleaning bugs from the interior light lenses, the Lessor shall have no cleaning responsibility for the interior of the leased premises. VA shall have responsibility for interior janitorial services and shall maintain the interior of the leased premises.

8.3 NORMAL HOURS

Normal working hours are **7:00 AM to 5:30 PM**, except Saturdays, Sundays and Federal holidays.

8.4 BUILDING OPERATING PLAN

Offerors shall submit a building operating plan with the offer. The plan shall include a schedule of startup and shutdown times for operation of each building system, such as lighting, cooling, ventilation, and plumbing, necessary for the operation of the building. The plan shall be in operation on the effective date of the lease.

The Lessor shall submit an Operations and Maintenance Plan narrative as required in PART II Schedule A.

8.5 OVERTIME USAGE

Government shall have access to air-cooled or heated leased space at all times, including the use of elevators, toilets, and lights without additional payment.

8.6 FLAG DISPLAY

The Government will be responsible for flag display.

8.7 SECURITY

The Government shall provide security personnel to prevent illegal entry or loitering in the leased space and to prevent unauthorized entry during duty hours.

The Lessor shall be responsible for providing security to prevent unauthorized entry after normal working hours.

8.8 VA CLEANING RESPONSIBILITY

VA shall have no cleaning responsibility for the outside of the leased premises. .

SECTION 9 SAFETY, FIRE PROTECTION, AND ENVIRONMENTAL MANAGEMENT

9.1 GENERAL

9.1.1 PERMITS

Space must have a current occupancy permit issued by the local jurisdiction. Lessor shall obtain and maintain in force all necessary permits for operation of building services and equipment, including but not limited to fuel-fired mechanical equipment, emergency and stand-by generators, equipment to treat or exhaust toxic or hazardous gases, and solid or liquid wastes.

9.1.2 INSPECTIONS BY LESSOR

Lessor shall inspect, test and maintain building systems, fire and life safety systems and equipment, as required by the more stringent of NFPA guidelines or local codes. Lessor shall submit documentation as acceptable to the Contracting Officer of tests, report, and maintenance logs.

At a minimum, systems and equipment for which inspections and reports are required include, but are not limited to, those systems as enumerated in those systems as enumerated in the most current edition of NFPA 110, 101, 99, 72, 25, 24, 20, 13, 1, the VA Fire Protection Design Manual, and other applicable NFPA codes and standards, the Joint Commission, and and the following:

- Essential Electrical System
- Gas and Vacuum Systems
- Environmental Systems
- Fire Doors and Shutters
- Portable Fire Extinguishers
- Fire Suppression Systems
- Fire Pump
- Standpipe Systems
- Fire Detection and Alarm Systems
- Fire Dampers
- Fire Shutters
- Batteries for Systems Requiring Battery Back-up
- Fire Department Connections
- Emergency Egress Systems and Lighting

9.1.3 INSPECTIONS BY GOVERNMENT

The government reserves the right to conduct independent inspections, testing, assessments, and detailed studies in space it occupies, as well as in space serving the VA leased space (e.g., common use areas, mechanical rooms, HVAC systems, etc.). The Lessor shall assist VA in its assessments and detailed studies by making available information on building operations and Lessor activities, and providing access to space for assessment and testing, if required. These may include, but are not limited to, noise and vibration testing, water and air

quality sampling, water, and air sampling for pathogens, *Legionella* cultures and copper/silver analysis, radon testing, mold testing, Facility Condition Assessments of building systems and equipment, etc. Work may be performed by independent consultants, or VA personnel.

Lessor shall implement corrective measures required by the Contracting Officer.

9.2 CODE VIOLATIONS

Equipment, services, or utilities furnished, and activities of other occupants, shall be free of safety, health, and fire hazards. When hazards or code violations are detected, they must be promptly corrected at the Lessor's expense. Where requirements conflict, the decision of the Contracting Officer shall be final.

9.3 SPECIAL ENVIRONMENTAL REQUIREMENTS

9.3.1 INDOOR ENVIRONMENT

Lessor shall maintain building envelope and building systems in good repair in accordance with Section 8 and Part II, Appendix A of this solicitation. Excess or uncontrolled water can damage interior finishes, furnishings, or equipment, and can contribute to growth of mold and other pathogens. Lessor shall take precautions in design, construction, operation, and maintenance of the facility to control the entry of water from outside sources or leaks from building systems.

Lessor shall promptly repair any leaks and replace damaged materials or finishes. If mold or other pathogens are discovered, Lessor shall be responsible for remediation.

9.3.2 SPECIAL BUILDING EQUIPMENT

Special building equipment required to treat and exhaust to the atmosphere toxic gases produced by the agency program equipment shall be maintained in proper operating condition. Maintain all such installations in compliance with appropriate OSHA, EPA, or related regulations of the local community.

Offeror shall obtain operating permits as required by EPA and local Authorities Having Jurisdiction for the operation of exhaust-producing generators and building air and water heating equipment.

SECTION 10 INSTRUCTIONS AND PREPARATION**10.1 NOTICE TO OFFERORS**

Offerors must read all parts of this Solicitation. All forms required for offer are included in this Solicitation. Any additional information must be requested in writing. **Oral instructions are not binding.**

When there is a discrepancy between this Basic Solicitation and GSA forms, the Basic Solicitation will prevail.

NOTE: Current GSA forms are available electronically from the GSA web page at the following address: <http://www.gsa.gov/portal/forms/type/ALL>.

Offerors may utilize these current electronic versions of GSA forms to fill in the appropriate information in lieu of using hardcopy versions provided elsewhere in this Solicitation and filling in the information by hand.

10.2 DEVIATIONS

Offers will be construed to be in full and complete compliance with this Solicitation unless the Offeror describes any deviation in the offer. The Contracting Officer shall make decisions regarding deviations that cause the offer to be non-responsive.

10.3 ERASURES OR CHANGES

The person signing the offer must initial erasures on, or changes to, the offer forms.

NOTE: Agents must submit a valid copy of a notarized agreement authorizing him/her to submit offer and negotiate on behalf of owner/developer.

10.4 COMPLETION OF GSA FORM 3518

The Offeror must submit with the offer a signed copy of GSA Form 3518, Representations and Certifications, with all information completed as requested.

10.5 PREPARATION OF GSA FORM 1217

The Offeror must submit a signed copy of GSA Form 1217, Lessor's Annual Cost Statement, with the offer. Directions for completion of the form are on the back of the form.

10.6 PREPARATION OF GSA FORM 1364A (REVISED 5/98)

Offerors are required to submit a completed and signed 1364A for EACH pricing alternative identified in Paragraph 1.8.3 of this Solicitation.

The following instructions will assist you in completing GSA Form 1364, Proposal to Lease Space. **Offers must be submitted in Net Usable Square Feet (NUSF).**

Section I – Description of Premises

Blocks 1 – 7: Enter the general information about the site/building, including address and number of floors. Enter total amount of Net Usable Square Feet of space offered. Do not break out the space by type. Enter floor load, type of construction, and building age. If not applicable, place N/A in appropriate block(s).

Section II – Space Offered and Rates

Blocks 8 – 11: Indicate whether space is Full or Partial Floor, enter the number of Net Usable Square Feet of space offered. If not applicable, place N/A in appropriate block(s).

Enter the Net Usable Square Foot rate per year for the Initial Term, **including** costs of special requirements as described in Schedule B and as specified in this Solicitation (refer to Paragraph 1.8 PROPOSALS) to be provided by the Lessor.

Enter the Net Usable Square Foot rate per year for the Renewal Option **including** costs of special requirements as described in Schedule B and as specified in this Solicitation (refer to Paragraph 1.8 PROPOSALS) to be provided by the Lessor. Alternate Proposals may be submitted on plain bond paper, attached to the form, and signed by the Offeror.

Proposals excluding cost of special requirements may be submitted on plain bond paper, attached to the form, and signed and dated by the Offeror.

Block 11: Determine the Composite Square Foot Rate Per Annum.

Block 12: Determine the cost per square foot for operating cost base rate (line 27 of the 1217), the cost per square foot for base year taxes (line 28 of the 1217), estimated total cost of buildout and estimated amortization rate for buildout.

Note: Buildout = Total Construction Costs.

Block 13: Enter the number of parking spaces offered (inside and outside) and indicate any cost to the Government, if applicable.

Section III – Lease Terms

Blocks 14 – 21: Enter information regarding Initial Lease Terms and Renewal Options of any Alternate Proposals, Schedule B lump sum costs, Rentable Square Foot Rate and Square Footage, Lists of Attachments, and any Additional Remarks, List of Attachments, Alternates, and any Additional Remarks.

Section IV – Owner Identification and Certifications

Part I: Basic Solicitation Requirements – Page 191 of 197

Blocks 22 – 27: Indicate the Offeror's interest in the offered property. Specify if other than owner or agent. Agents must submit a valid copy of a notarized agreement authorizing him/her to submit and negotiate on behalf of the owner/developer. If the Offeror is a partnership, VA must receive written evidence, by agreement or otherwise, that the person signing this offer has been authorized to do so by all partners. If the Offeror is a corporation, VA must receive a corporate resolution, signed by the Secretary of the corporation under corporate seal that sets forth all officers of the corporation and indicates which are authorized to bind the corporation.

Complete, sign, and date offer.

NOTE: OFFER MUST BE RECEIVED BY 4:00 PM (ET) ON THE DATE SPECIFIED IN PARAGRAPH 1.5, AT THE ADDRESS CONTAINED IN PARAGRAPH 1.7 OF THIS SOLICITATION. ENVELOPE SHOULD BE IDENTIFIED IN THE LOWER LEFTHAND CORNER WITH THE WORDS:

"JOHNSON COUNTY, KANSAS COMMUNITY-BASED OUTPATIENT CLINIC – SFO NO. VA-101-15-N-0098"

10.7 DRAWINGS AND SPECIFICATIONS – SUBMISSION WITH OFFER

Offeror shall submit drawings and specifications CDs as specified in SFO Paragraph 1.7.1 and hard copy sets of drawings and specifications with the following minimum information. Format and for hard copy submittal shall be as follows:

C. Drawings

Hard copies shall be black line prints on bond paper, full size (30" x 42"). Each set shall contain all sheets for all disciplines.

D. Specifications

Hard copies shall be printed on 8½" x 11" bond paper. Materials may be one-sided or double sided copies. Each copy shall contain all sections. Organize and tab materials by discipline.

NOTE 1: Failure to provide drawings and specifications in accordance with the requirements above may cause the offer to be deemed unacceptable and rejected accordingly.

NOTE2: The conceptual floor diagram provided by VA as a part of this Solicitation is intended to convey desired floor locations and adjacency relationships of the main components of the program. The interior layout and footprint of the building may vary as a result of actual site conditions and building design development. The number and location of doors will vary as the Offeror develops detailed plans. The conceptual diagram also shows rooms dedicated to building services. The size and location of these rooms will vary as the Offeror develops detailed plans. It is the Offeror's responsibility to design the building to comply with applicable Building Codes and ordinances. **Offerors are advised that rent payment will not be made for delivered space that is in excess of the maximum NUSF solicited.**

NOTE 3: All drawings shall be prepared per VHA National CAD Standard Application Guide, available on the VA Technical Information Library (TIL) website at

<http://www.cfm.va.gov/til/projReq.asp>. Drawings shall be on Architectural E-size sheets (30x42 inches). Title blocks shall identify the Offeror and shall include Solicitation Number, Clinic Name, and Location. Drawings shall be organized by discipline and shall include the following minimum information.

10.7.1 SITE PLAN(S)

Minimum scale 1"=40' or per local jurisdictions standard requirements, whichever is greater. Plan(s) shall show all site and building demolition, and all site improvements including grading, exterior equipment location, parking, vehicle and pedestrian circulation, storm water retention, and landscaping. Indicate any relationship to flood plains, adjacent uses, and current zoning status.

Lessor shall identify potential issues as they pertain to the site complying with all Federal standards when applicable, i.e., National Environmental Policy Act (NEPA), The Department of Veterans Affairs Environmental Compliance Manual, Jurisdictional waters of the United States (404 & 401b) individual or nationwide permits, etc.

10.7.2 FLOOR PLAN(S)

Submit, as a minimum, a double line layout for all floors, penthouses, and roof areas with double line exterior walls at a scale not less than 1/8 inch. Show all rooms, doors, corridors, basic column grid, assumed column sizes, expansion and seismic joint locations, mechanical, electrical, and telecommunications rooms, shafts, and (if applicable) all vertical circulation, i.e., stairs and elevators.

Identify each room or space with its space identification number from the VA conceptual plan or Room Finish and Door Schedule. Names on drawings shall be the same as those used in the SFO.

Provide a spreadsheet of rooms/spaces and square footages required by VA for comparison to the offered rooms/spaces and square footages. The spreadsheet shall utilize room/space names as listed by VA. Provide square footage totals for each service/department and overall square footages, net and gross.

Provide a Roof Plan that indicates the location and number, and size of skylights that offered with a spreadsheet for comparisons with the number and sizes of skylights required by VA.

Show the overall exterior dimensions, dimensions for building wings or offsets, and dimensions for column grids.

10.7.3 ELEVATIONS

Submit preliminary elevations of all facades showing massing, proposed fenestration, and the building relationship to finish grades. Show all significant building materials, any proposed roof top mechanical equipment, and architectural screens on the elevation drawings.

Provide a schematic section to define building configuration.

10.7.4 COLOR RENDERINGS

Submit a minimum of two color renderings of perspective views to communicate the design concept and materials. Submit at least one exterior view illustrating building massing, exterior materials and colors, fenestration, and relationship to context. Submit at least one interior view to illustrate approach to the interior design concept, materials, colors, and integration with wayfinding.

Renderings may be prepared using the A/E's preferred media. Renderings shall be minimum 24"x36". Submit renderings or prints mounted on mat board, foam core, or similar lightweight material. Do not frame renderings.

10.7.5 SPECIFICATIONS

Submit outline specifications for foundations, superstructure, exterior closure and building envelope systems, plumbing, fire protection, HVAC, electrical, and telecommunications systems.

10.8 DESIGN CONCEPT: SUBMISSION WITH OFFER

Offeror shall submit design concept materials with other technical as specified in Paragraph 1.7.1 hard copy sets of drawings and specifications with the following minimum information. Materials shall be organized and tabbed to follow the outline in paragraphs 10.8.1 through 10.8.12 below.

Hard copies shall be printed on 8½" x 11" bond paper. Materials may be one-sided or double-sided at Offeror's option. Bind in one or more volumes as necessary. Identify each volume with Offeror's information, solicitation number, clinic name, and location. Each set shall contain all volumes.

10.8.1 ARCHITECTURE/STRUCTURAL

Submit a narrative explaining the design concept including exterior design, interior finishes, and interior design concept. Describe overall design concept and relationship to site and context. Describe any changes from VA-supplied concept plan for organization of spaces, departments, building entrances, and major circulation routes. Discuss preliminary concept for interiors and finishes.

Submit a narrative that clearly explains the engineering criteria and rationale used in selecting the proposed structural system. Describe proposed materials and approach to be used in design of foundations, vertical members, floor and roof systems, and lateral force resisting system. Indicate typical structural bay size.

10.8.2 SUSTAINABLE DESIGN AND ENERGY EFFICIENCY

Submit a checklist identifying targeted solutions to meet energy reduction goals and LEED® Silver equivalency. Along with the checklist, the Offeror shall submit a brief statement outlining how each of the LEED® credits proposed will be achieved.

10.8.3 FIRE PROTECTION

Submit a narrative explaining building construction type, building fire/smoke separation, fire sprinkler/standpipe systems, water supply available fire flow/maximum demand, and hazard rating and fire alarm systems. Indicate NFPA 220 and IBC fire-resistive ratings of the building.

10.8.4 MECHANICAL

Submit a narrative that clearly states the engineering criteria and rationale used for selecting the type of HVAC system(s) and tentative zoning of the systems. State clearly all assumptions and parameters used in calculating heating and cooling loads. If the calculations are performed on a computer, provide the name of the program. Provide a list of the energy conservation measures proposed to be used in the HVAC system design. State clearly the logic and criteria used in selecting each conservation measure. Investigate the availability of utilities, such as natural or propane gas, electricity, etc., for the HVAC equipment and provide description of their status.

Provide a single-line schematic plan of HVAC zoning.

10.8.5 ELECTRICAL

Submit a narrative that clearly states the electrical power and lighting design approach, including basic assumptions and information regarding the local electrical utility company. Describe extent of utility company work if any is required.

10.8.6 STRUCTURED CABLING

Submit a narrative that clearly states the structured cabling design approach, including basic assumptions and information regarding the data, telephone and CATV/SATV backbone, and horizontal cabling within the guidelines. Describe the extent of outside plant connections, either to service provider connections, or if required, as extensions of existing systems.

10.8.7 SECURITY

Submit a narrative that clearly states the security intent and cabling design for access control, intrusion detection, and video surveillance, including basic assumptions and information regarding the topology and connectivity within the guidelines. Describe the extent of monitoring, recording, control, and retention of all equipment.

10.8.8 AUDIO VISUAL

Submit a narrative that clearly states the audio visual intent and cabling design for the facility, including basic assumptions and information regarding the topology and connectivity within the guidelines. Describe the extent of digital signage, video projection, and sound.

10.8.9 SPECIAL SYSTEMS

Special systems may include but are not limited to the following:

- Nurse Call

- Public Address (PA)
- Intercommunication System
- Radio Entertainment Distribution (RED)
- Master Antenna Television (MATV)
- Radio Paging System
- Patient Annunciator/Locator System
- Two-Way Radio System
- Duress Alarm and Emergency Notification System
- Security Management and Control, and Centralized Police Security Management Systems

Submit a narrative that clearly states the special systems cabling design approach, including basic assumptions and information regarding the special systems backbone and horizontal cabling within the guidelines. Describe the extent of the special systems and connections for new installed equipment, or if required, for extension of existing systems.

10.8.10 PHYSICAL SECURITY MEASURES

VA Outpatient facilities must comply with the requirements for Life Safety Protected (LSP) as defined in VA Physical Security Design Manual (PSDM). Submit a narrative describing physical security measures incorporated into the design. Include features related to both man-made and natural events. See Paragraph 4.2.4.

10.8.11 WATER DISTRIBUTION

Submit a narrative that clearly states the water distribution design approach, including basic assumptions and information regarding the local water utility. Describe the required demand including the fire flow, the availability to connect to the existing water distributions system, whether the existing system can meet the proposed demand, and the ability to provide a looped system. If the water utility cannot provide modeling information that substantiates that the existing system can support the new structure(s), the Lessor shall be responsible for providing modeling information that supports the new structure(s).

10.8.12 SANITARY SEWERAGE SYSTEM

Submit a narrative that discusses the sanitary sewer design approach. Discuss existing capacity in the downstream sewer system and proposed points of connection. Provide calculations substantiating the proposed flows to be generated from this site.

10.9 CALCULATIONS: SUBMISSION WITH OFFER

This information will be used to evaluate the "Quality of Building and Design Concept" factor as referenced in Paragraph 2.2.

Offeror shall submit calculations with other technical submittals CDs and hard copy as specified in Paragraph 1.7.1. Materials shall be organized and tabbed to follow the outline in Paragraphs 10.9.1 through 10.9.3 below.

Hard copies shall be printed on 8½" x 11" bond paper. Materials may be one-sided or double-sided at Offeror's option. Bind in one or more volumes as necessary. Identify each volume with Offeror's information, solicitation number, clinic name, and location. Each set shall contain all volumes.

10.9.1 AREA COMPUTATIONS

Submit key plans or diagrams to indicate methodology used to compute total gross area of the building and the total inside gross area minus the deductions as specified in Paragraph 3.14 RENTABLE AND NET USABLE SQUARE FEET of this Solicitation to arrive at the total net usable square foot calculation.

10.9.2 HVAC CALCULATIONS

Submit preliminary HVAC block load calculations for estimated heating and cooling requirements of the building (BTUH's per gross square foot per year).

10.9.3 ELECTRICAL CALCULATIONS

Submit preliminary electrical square foot load calculations for both normal and emergency use. Separate calculations into lighting, receptacles, and equipment power (medical, radiology, and mechanical).