



VETERANS AFFAIRS

Outlying Building Repairs, Phase 2

MEDICAL CENTER (568) FORT MEADE, SD 57741

Invitation No. _____


Project No. 568-11-107

Issue 3/14/12

Open _____

Property of Veterans Affairs

This specification must be returned to the issuing office
within ten days after date of opening bids.




BLACK HILLS HEALTH CARE SYSTEM
DEPARTMENT OF VETERANS AFFAIRS
FORT MEADE, SD

Outlying Building Repairs, Phase 2
VA PROJECT #568-11-107

ARCHITECT

FourFront Design, Inc.
517 Seventh Street
Rapid City, SD 57701
(605) 342-9470

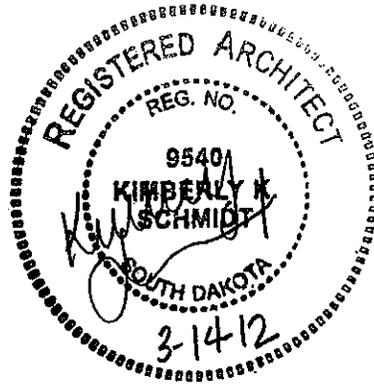

THIS PAGE INTENTIONALLY LEFT BLANK

DEPARTMENT OF VETERANS AFFAIRS
VHA MASTER SPECIFICATIONS

TABLE OF CONTENTS
Section 00 01 10

	DIVISION 00 - SPECIAL SECTIONS	DATE
00 01 10	Table of Contents	09-11
00 01 15	List of Drawing Sheets	09-11
	DIVISION 01 - GENERAL REQUIREMENTS	
	Bid Schedule	
01 00 00	General Requirements	06-11
01 01 00	Medical Center Requirements	
01 33 23	Shop Drawings, Product Data, and Samples	11-08
01 74 19	Construction Waste Management	09-10
	DIVISION 02 - EXISTING CONDITIONS	
02 83 33.13	Removal and Disposal of Lead Based Paint/ Materials	8-11
	DIVISION 03 - CONCRETE	
	Not used	
	DIVISION 04 - MASONRY	
	Not used	
	DIVISION 05 - METALS	
	Not used	
	DIVISION 06 - WOOD, PLASTICS AND COMPOSITES	
06 20 00	Finish Carpentry	5-10
	DIVISION 07 - THERMAL AND MOISTURE PROTECTION	
07 01 50.19	Preparation for Re-Roofing	10-10
07 31 13	Asphalt Shingles	10-08
07 40 00	Standing Seam Roofing	04-08
07 92 00	Joint Sealants	02-11
	DIVISION 08 - OPENINGS	
	Not used	
	DIVISION 09 - FINISHES	
09 91 00	Painting	04-09

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 00 01 15
LIST OF DRAWING SHEETS**

The drawings listed below accompanying this specification form a part of the contract.

Drawing No.	Title
G0.00	Cover Sheet and Index

ARCHITECTURAL

A1.00	Building 2/3
A1.01	Building 4/5
A1.02	Building 9/10
A1.03	Building 11
A1.04	Building 12
A1.05	Building 13
A1.06	Building 13
A1.07	Building 51
A1.08	Building 51
A1.09	Building 65
A1.10	Building 65
A3.10	Details

SUPPLEMENTAL DRAWINGS

1	Building 4/5 and 20
2	Building 11, 13 and 105/106
3	Building 46

REFERENCE DRAWINGS

R1.00	Reference Plan and Elevation - Building 2/3
R1.01	Reference Plan and Elevation - Building 4/5
R1.02	Reference Plan and Elevation - Building 9/10
R1.03	Reference Plan and Elevation - Building 11 & 13
R1.04	Reference Plan and Elevation - Building 12
R1.05	Reference Plan and Elevation - Building 51
R1.06	Reference Plan and Elevation - Building 65
R1.07	Reference Plan and Elevation - Building 65

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

Bid Schedule for: Outlying Building Repairs, Phase 2, Project No. 568-11-107

A single award will be made on **Base Bid** , but in the event the offer exceeds the funds available, a single award will be made on **Alternate Bid 1**, in that order, based on available funding. Offerors should quote a price on each item listed.

Base Bid: Furnish and install all labor and materials and equipment necessary to complete all the work as shown on the project drawings (including the Supplemental Drawings) and described in the specifications.

Total Lump Sum Bid for Base Bid: _____

Alternate Bid 1: Furnish and install all labor and materials and equipment necessary to complete all the work as shown on the project drawings (including the Supplemental Drawings) and described in the specifications except delete all the work associated with replacing the porch decks on Building 11 and Building 13.

Total Lump Sum Bid for Alternate Bid 1: _____

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 01 00 00
GENERAL REQUIREMENTS**

TABLE OF CONTENTS

1.1 GENERAL INTENTION.....	1
1.2 STATEMENT OF BID ITEM(S)	1
1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR	2
1.4 CONSTRUCTION SECURITY REQUIREMENTS	2
1.5 FIRE SAFETY	2
1.6 OPERATIONS AND STORAGE AREAS.....	4
1.7 ALTERATIONS	7
1.8 INFECTION PREVENTION MEASURES	8
1.9 DISPOSAL AND RETENTION.....	10
1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS	11
1.11 RESTORATION.....	12
1.12 As-Built Drawings	13
1.13 TEMPORARY TOILETS.....	13
1.14 AVAILABILITY AND USE OF UTILITY SERVICES	13
1.15 TESTS.....	13
1.16 INSTRUCTIONS.....	14

**SECTION 01 00 00
GENERAL REQUIREMENTS**

1.1 GENERAL INTENTION

- A. Contractor shall completely prepare site for building operations, including demolition and removal of existing construction, and furnish labor and materials and perform work for **Project 568-12-107, Outlying Buildings Repair, Phase 2** as required by drawings and specifications.
- B. Visits to the site by Bidders may be made only by appointment with the Medical Center Engineering Officer.
- C. All employees of general contractor and subcontractors shall comply with VA security management program and obtain permission of the VA police, be identified by project and employer, and restricted from unauthorized access.
- D. Prior to commencing work, general contractor shall provide proof that a OSHA certified “competent person” (CP) (29 CFR 1926.20(b)(2)) will maintain a presence at the work site whenever the general or subcontractors are present.
- E. The Contractor shall provide evidence of a company safety program in accordance with the requirements of Section 010100, Medical Center Requirements. All employees of general contractor and subcontractors shall have relevant competency training for the work being performed.

1.2 STATEMENT OF BID ITEM(S)

- A. **GENERAL CONSTRUCTION:** Work includes general construction, demolition, alterations, and installing new roofing materials as indicated and shown on the plans and specifications.

Base Bid: This includes all labor, materials, and equipment necessary to complete all the work shown on the drawings (including the Supplemental Drawings) and described in the specification.

Alternate Bid 1: This includes all the labor, materials, and equipment necessary to complete all the work shown on the drawings (including the Supplemental Drawings) and described in the specifications except delete/deduct all work associated with replacing the porch decks on Buildings 11 and 13.

1.3 SPECIFICATIONS AND DRAWINGS FOR CONTRACTOR

A. AFTER AWARD OF CONTRACT, the Contactor is responsible to print the necessary copies of the plans and specifications to complete this Project at his/her expense.

1.4 CONSTRUCTION SECURITY REQUIREMENETS

A. Refer to Section 010100, Medical Center Requirements.

1.5 FIRE SAFETY

A. Applicable Publications: Publications listed below form part of this Article to extent referenced. Publications are referenced in text by basic designations only.

1. American Society for Testing and Materials (ASTM):
 - E84-2007.....Surface Burning Characteristics of Building Materials
2. National Fire Protection Association (NFPA):
 - 10-2006Standard for Portable Fire Extinguishers
 - 30-2003Flammable and Combustible Liquids Code
 - 51B-2003.....Standard for Fire Prevention During Welding, Cutting and
Other Hot Work
 - 70-2005National Electrical Code
 - 241-2004Standard for Safeguarding Construction, Alteration, and
Demolition Operations
3. Occupational Safety and Health Administration (OSHA):
 - 29 CFR 1926.....Safety and Health Regulations for Construction

B. Fire Safety Plan: Establish and maintain a fire protection program in accordance with 29 CFR 1926. Prior to start of work, prepare a plan detailing project-specific fire safety measures, including periodic status reports, and submit to COTR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES. Prior to any worker for the contractor or subcontractors beginning work, they shall undergo a safety briefing provided by the general contractor's competent person per OSHA requirements. This briefing shall include information on the construction limits, VAMC safety guidelines,

means of egress, break areas, work hours, locations of restrooms, use of VAMC equipment, etc. Documentation shall be provided to the Resident Engineer that individuals have undergone contractor's safety briefing.

- C. Site and Building Access: Maintain free and unobstructed access to facility emergency services and for fire, police and other emergency response forces in accordance with NFPA 241.
- D. Separate temporary facilities, such as trailers, storage sheds, and dumpsters, from existing buildings and new construction by distances in accordance with NFPA 241. For small facilities with less than 6 m (20 feet) exposing overall length, separate by 3m (10 feet).
- E. NOT USED
- F. Temporary Heating and Electrical: Install, use and maintain installations in accordance with 29 CFR 1926, NFPA 241 and NFPA 70.
- G. Means of Egress: Do not block exiting for occupied buildings, including paths from exits to roads. Minimize disruptions and coordinate with COTR.
- H. Egress Routes for Construction Workers: Maintain free and unobstructed egress. Inspect daily. Report findings and corrective actions weekly to COTR.
- I. Fire Extinguishers: Provide and maintain extinguishers in construction areas and temporary storage areas in accordance with 29 CFR 1926, NFPA 241 and NFPA 10.
- J. Flammable and Combustible Liquids: Store, dispense and use liquids in accordance with 29 CFR 1926, NFPA 241 and NFPA 30.
- K. Existing Fire Protection: Do not impair automatic sprinklers, smoke and heat detection, and fire alarm systems, except for portions immediately under construction, and temporarily for connections. Provide fire watch for impairments more than 4 hours in a 24-hour period. Request interruptions in accordance with Article, OPERATIONS AND STORAGE AREAS, and coordinate with COTR and Fire Department. All existing or temporary fire protection systems (fire alarms, sprinklers) located in construction areas shall be tested as coordinated with the medical center. Parameters for the testing and results of any tests performed shall be recorded by the medical center and copies provided to the COTR.

- L. Smoke Detectors: Prevent accidental operation. Remove temporary covers at end of work operations each day.
- M. Hot Work: Perform and safeguard hot work operations in accordance with NFPA 241 and NFPA 51B. Coordinate with Fire Department per Section 010100, Medical Center Requirements. Obtain permits from Fire Department daily. Designate contractor's responsible project-site fire prevention program manager to permit hot work.
- N. Fire Hazard Prevention and Safety Inspections: Inspect entire construction area daily, and document on Contractors Daily Log.
- O. Smoking: Smoking is prohibited in and adjacent to construction areas inside existing buildings and additions under construction. Smoking is prohibited except in designated smoking rest areas.
- P. Dispose of waste and debris in accordance with NFPA 241. Remove from buildings daily.
- Q. Perform other construction, alteration and demolition operations in accordance with 29 CFR 1926.

1.6 OPERATIONS AND STORAGE AREAS

- A. The Contractor shall confine all operations (including storage of materials) on Government premises to areas authorized or approved by the Contracting Officer. The Contractor shall hold and save the Government, its officers and agents, free and harmless from liability of any nature occasioned by the Contractor's performance.
- B. Temporary buildings (e.g., storage sheds, shops, offices) and utilities may be erected by the Contractor only with the approval of the Contracting Officer and shall be built with labor and materials furnished by the Contractor without expense to the Government. The temporary buildings and utilities shall remain the property of the Contractor and shall be removed by the Contractor at its expense upon completion of the work.
- C. The Contractor shall, under regulations prescribed by the Contracting Officer, use only established roadways, or use temporary roadways constructed by the Contractor when and as authorized by the Contracting Officer. When materials are transported in prosecuting the work, vehicles shall not be loaded beyond the loading capacity recommended by the manufacturer of the vehicle or prescribed by any Federal, State, or local law or regulation.

When it is necessary to cross curbs or sidewalks, the Contractor shall protect them from damage. The Contractor shall repair or pay for the repair of any damaged curbs, sidewalks, or roads.

- D. Working space and space available for storing materials shall be as determined by the Resident Engineer.
- E. Workmen are subject to rules of Medical Center applicable to their conduct.
- F. Execute work so as to interfere as little as possible with normal functioning of Medical Center as a whole, including operations of utility services, fire protection systems and any existing equipment, and with work being done by others.
 - 1. Do not store materials and equipment in other than assigned areas.
 - 2. Provide unobstructed access to Medical Center areas required to remain in operation.
 - 3. Where access by Medical Center personnel to vacated portions of buildings is not required, storage of Contractor's materials and equipment will be permitted subject to fire and safety requirements.
- G. Phasing: To insure such executions, Contractor shall furnish the Resident Engineer with a schedule of approximate dates on which the Contractor intends to accomplish work in each specific area of site, building or portion thereof. In addition, Contractor shall notify the Resident Engineer two weeks in advance of the proposed date of starting work in each specific area of site, building or portion thereof. Arrange such dates to insure accomplishment of this work in successive phases mutually agreeable to Medical Center and Contractor.
- H. Coordinate all temporary equipment shut downs with the Project Engineer/COTR prior to beginning work. The Contractor shall maintain all essential services for each building during normal business hours.
- I. Utilities Services: Maintain existing utility services for Medical Center at all times. Provide temporary facilities, labor, materials, equipment, connections, and utilities to assure uninterrupted services. Where necessary to cut existing water, steam, gases, sewer or air pipes, or conduits, wires, cables, etc. of utility services or of fire protection systems and communications systems (including telephone), they shall be cut and capped at

suitable places where shown; or, in absence of such indication, where directed by Resident Engineer.

1. No utility service such as water, gas, steam, sewers or electricity, or fire protection systems and communications systems may be interrupted without prior approval of the COTR.
 2. Contractor shall submit a request to interrupt any such services to COTR, in writing, 48 hours in advance of proposed interruption. Request shall state reason, date, exact time of, and approximate duration of such interruption.
 3. Contractor will be advised (in writing) of approval of request, or of which other date and/or time such interruption will cause least inconvenience to operations of Medical Center. Interruption time approved by Medical Center may occur at other than Contractor's normal working hours.
 4. Major interruptions of any system must be requested, in writing, at least 15 calendar days prior to the desired time and shall be performed as directed by the COTR.
 5. In case of a contract construction emergency, service will be interrupted on approval of COTR. Such approval will be confirmed in writing as soon as practical.
- J. Abandoned Lines: All service lines such as wires, cables, conduits, ducts, pipes and the like, and their hangers or supports, which are to be abandoned but are not required to be entirely removed, shall be sealed, capped or plugged. The lines shall not be capped in finished areas, but shall be removed and sealed, capped or plugged in ceilings, within furred spaces, in unfinished areas, or within walls or partitions; so that they are completely behind the finished surfaces.
- K. To minimize interference of construction activities with flow of Medical Center traffic, comply with the following:
1. Keep roads, walks and entrances to grounds, to parking and to occupied areas of buildings clear of construction materials, debris and standing construction equipment and vehicles.
 2. Method and scheduling of required cutting, altering and removal of existing roads, walks and entrances must be approved by the Resident Engineer.

- L. Coordinate the work for this contract with other construction operations as directed by Resident Engineer.

1.7 ALTERATIONS

- A. Survey: Before any work is started, the Contractor shall make a thorough survey with the COTR of areas of buildings in which alterations occur and areas which are anticipated routes of access, and furnish a report, signed by both, to the Contracting Officer. This report shall list by rooms and spaces:
 - 1. Existing condition and types of resilient flooring, doors, windows, walls and other surfaces not required to be altered throughout affected areas of building.
 - 2. Existence and conditions of items such as plumbing fixtures and accessories, electrical fixtures, equipment, venetian blinds, shades, etc., required by drawings to be either reused or relocated, or both.
 - 3. Shall note any discrepancies between drawings and existing conditions at site.
 - 4. Shall designate areas for working space, materials storage and routes of access to areas within buildings where alterations occur and which have been agreed upon by Contractor and COTR.
- B. Any items required by drawings to be either reused or relocated or both, found during this survey to be nonexistent, or in opinion of COTR, to be in such condition that their use is impossible or impractical, shall be furnished and/or replaced by Contractor with new items in accordance with specifications which will be furnished by Government. Provided the contract work is changed by reason of this subparagraph B, the contract will be modified accordingly, under provisions of clause entitled "DIFFERING SITE CONDITIONS" (FAR 52.236-2) and "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) of Section 00 72 00, GENERAL CONDITIONS.
- C. Re-Survey: Thirty days before expected partial or final inspection date, the Contractor and COTR together shall make a thorough re-survey of the areas of buildings involved. They shall furnish a report on conditions then existing, of resilient flooring, doors, windows, walls and other surfaces as compared with conditions of same as noted in first condition survey report:

1. Re-survey report shall also list any damage caused by Contractor to such flooring and other surfaces, despite protection measures; and will form basis for determining extent of repair work required of Contractor to restore damage caused by Contractor's workmen in executing work of this contract.
- D. Protection: Provide the following protective measures:
1. Wherever existing roof surfaces are disturbed they shall be protected against water infiltration. In case of leaks, they shall be repaired immediately upon discovery.
 2. Temporary protection against damage for portions of existing structures and grounds where work is to be done, materials handled and equipment moved and/or relocated.
 3. Protection of interior of existing structures at all times, from damage, dust and weather inclemency. Wherever work is performed, floor surfaces that are to remain in place shall be adequately protected prior to starting work, and this protection shall be maintained intact until all work in the area is completed.

1.8 INFECTION PREVENTION MEASURES

- A. Implement the requirements of VAMC's Infection Control Risk Assessment (ICRA) team. ICRA Group may monitor dust in the vicinity of the construction work and require the Contractor to take corrective action immediately if the safe levels are exceeded.
- B. Establish and maintain a dust control program as part of the contractor's infection preventive measures in accordance Section 010100, Medical Center Requirements, and with the Pre-Construction Risk Assessment. Prior to start of work, prepare a plan detailing project-specific dust protection measures, including periodic status reports, and submit to COTR for review for compliance with contract requirements in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA AND SAMPLES.
 1. All personnel involved in the construction or renovation activity shall be educated and trained in infection prevention measures established by the medical center.
- C. In general, the following preventive measures shall be adopted during construction to keep down dust and prevent mold.
 1. Dampen debris to keep down dust and provide temporary construction partitions in existing structures where directed by Resident Engineer. Blank off ducts and diffusers to prevent circulation of dust into occupied areas during construction.

2. Do not perform dust producing tasks within occupied areas without the approval of the Resident Engineer. For construction in any areas that will remain jointly occupied by the medical Center and Contractor's workers, the Contractor shall:
 - a. Provide dust proof temporary drywall construction barriers to completely separate construction from the operational areas of the hospital in order to contain dirt debris and dust. Barriers shall be sealed and made presentable on hospital occupied side. Install a self-closing door in a metal frame, commensurate with the partition, to allow worker access. Maintain negative air at all times. A fire retardant polystyrene, 6-mil thick or greater plastic barrier meeting local fire codes may be used where dust control is the only hazard, and an agreement is reached with the COTR.
 - b. HEPA filtration is required where the exhaust dust may reenter the breathing zone. Contractor shall verify that construction exhaust to exterior is not reintroduced to the medical center through intake vents, or building openings. Install HEPA (High Efficiency Particulate Accumulator) filter vacuum system rated at 95% capture of 0.3 microns including pollen, mold spores and dust particles. Insure continuous negative air pressures occurring within the work area. HEPA filters should have ASHRAE 85 or other prefilter to extend the useful life of the HEPA. Provide both primary and secondary filtrations units. Exhaust hoses shall be heavy duty, flexible steel reinforced and exhausted so that dust is not reintroduced to the medical center.
 - c. Adhesive Walk-off/Carpet Walk-off Mats, minimum 600mm x 900mm (24" x 36"), shall be used at all interior transitions from the construction area to occupied medical center area. These mats shall be changed as often as required to maintain clean work areas directly outside construction area at all times.
 - d. Vacuum and wet mop all transition areas from construction to the occupied medical center at the end of each workday. Vacuum shall utilize HEPA filtration. Maintain surrounding area frequently. Remove debris as they are created. Transport these outside the construction area in containers with tightly fitting lids.

- e. The contractor shall not haul debris through patient-care areas without prior approval of the Resident Engineer and the Medical Center. When, approved, debris shall be hauled in enclosed dust proof containers or wrapped in plastic and sealed with duct tape. No sharp objects should be allowed to cut through the plastic. Wipe down the exterior of the containers with a damp rag to remove dust. All equipment, tools, material, etc. transported through occupied areas shall be made free from dust and moisture by vacuuming and wipe down.
- f. Using a HEPA vacuum, clean inside the barrier and vacuum ceiling tile prior to replacement. Any ceiling access panels opened for investigation beyond sealed areas shall be sealed immediately when unattended.
- g. There shall be no standing water during construction. This includes water in equipment drip pans and open containers within the construction areas. All accidental spills must be cleaned up and dried within 12 hours. Remove and dispose of porous materials that remain damp for more than 72 hours.
- h. At completion, remove construction barriers and ceiling protection carefully, outside of normal work hours. Vacuum and clean all surfaces free of dust after the removal.

D. Final Cleanup:

1. Upon completion of project, or as work progresses, remove all construction debris from above ceiling, vertical shafts and utility chases that have been part of the construction.
2. Perform HEPA vacuum cleaning of all surfaces in the construction area. This includes walls, ceilings, cabinets, furniture (built-in or free standing), partitions, flooring, etc.
3. All new air ducts shall be cleaned prior to final inspection.

1.9 DISPOSAL AND RETENTION

- A. Materials and equipment accruing from work removed and from demolition of buildings or structures, or parts thereof, shall be disposed of as follows:
1. Reserved items which are to remain property of the Government are noted on drawings or in specifications as items to be stored. Items that remain property of the Government shall be removed or dislodged from present locations in such a manner

as to prevent damage which would be detrimental to re-installation and reuse. Store such items where directed by Resident Engineer.

2. Items not reserved shall become property of the Contractor and be removed by Contractor from Medical Center.
3. Items of portable equipment and furnishings located in rooms and spaces in which work is to be done under this contract shall remain the property of the Government. When rooms and spaces are vacated by the Department of Veterans Affairs during the alteration period, such items which are NOT required by drawings and specifications to be either relocated or reused will be removed by the Government in advance of work to avoid interfering with Contractor's operation.

1.10 PROTECTION OF EXISTING VEGETATION, STRUCTURES, EQUIPMENT, UTILITIES, AND IMPROVEMENTS

- A. The Contractor shall preserve and protect all structures, equipment, and vegetation (such as trees, shrubs, and grass) on or adjacent to the work site, which are not to be removed and which do not unreasonably interfere with the work required under this contract. The Contractor shall only remove trees when specifically authorized to do so, and shall avoid damaging vegetation that will remain in place. If any limbs or branches of trees are broken during contract performance, or by the careless operation of equipment, or by workmen, the Contractor shall trim those limbs or branches with a clean cut and paint the cut with a tree-pruning compound as directed by the Contracting Officer.
- B. The Contractor shall protect from damage all existing improvements and utilities at or near the work site and on adjacent property of a third party, the locations of which are made known to or should be known by the Contractor. The Contractor shall repair any damage to those facilities, including those that are the property of a third party, resulting from failure to comply with the requirements of this contract or failure to exercise reasonable care in performing the work. If the Contractor fails or refuses to repair the damage promptly, the Contracting Officer may have the necessary work performed and charge the cost to the Contractor.

(FAR 52.236-9)

- C. Refer to Section 01 57 19, TEMPORARY ENVIRONMENTAL CONTROLS, for additional requirements on protecting vegetation, soils and the environment. Refer to Articles, "Alterations", "Restoration", and "Operations and Storage Areas" for additional instructions concerning repair of damage to structures and site improvements.

1.11 RESTORATION

- A. Remove, cut, alter, replace, patch and repair existing work as necessary to install new work. Except as otherwise shown or specified, do not cut, alter or remove any structural work, and do not disturb any ducts, plumbing, steam, gas, or electric work without approval of the COTR. Existing work to be altered or extended and that is found to be defective in any way, shall be reported to the COTR before it is disturbed. Materials and workmanship used in restoring work, shall conform in type and quality to that of original existing construction, except as otherwise shown or specified.
- B. Upon completion of contract, deliver work complete and undamaged. Existing work (walls, ceilings, partitions, floors, mechanical and electrical work, lawns, paving, roads, walks, etc.) disturbed or removed as a result of performing required new work, shall be patched, repaired, reinstalled, or replaced with new work, and refinished and left in as good condition as existed before commencing work.
- C. At Contractor's own expense, Contractor shall immediately restore to service and repair any damage caused by Contractor's workmen to existing piping and conduits, wires, cables, etc., of utility services or of fire protection systems and communications systems (including telephone) which are indicated on drawings and which are not scheduled for discontinuance or abandonment.
- D. Expense of repairs to such utilities and systems not shown on drawings or locations of which are unknown will be covered by adjustment to contract time and price in accordance with clause entitled "CHANGES" (FAR 52.243-4 and VAAR 852.236-88) and "DIFFERING SITE CONDITIONS" (FAR 52.236-2) of Section 00 72 00, GENERAL CONDITIONS.

1.12 AS-BUILT DRAWINGS

- A. The contractor shall maintain two full size sets of as-built drawings which will be kept current during construction of the project, to include all contract changes, modifications and clarifications.
- B. All variations shall be shown in the same general detail as used in the contract drawings. To insure compliance, as-built drawings shall be made available for the Resident Engineer's review, as often as requested.
- C. Contractor shall deliver two approved completed sets of as-built drawings to the Resident Engineer within 15 calendar days after each completed phase and after the acceptance of the project by the Resident Engineer.

1.13 TEMPORARY TOILETS

- A. Provide where directed, (for use of all Contractor's workmen) ample temporary sanitary toilet accommodations with suitable sewer and water connections; or, when approved by Resident Engineer, provide suitable dry closets where directed. Keep such places clean and free from flies, and all connections and appliances connected therewith are to be removed prior to completion of contract, and premises left perfectly clean.

1.14 AVAILABILITY AND USE OF UTILITY SERVICES

- A. The Government shall make all reasonably required amounts of utilities available to the Contractor from existing outlets and supplies, as specified in the contract. The Contractor shall carefully conserve any utilities furnished without charge.
- B. The Contractor, at Contractor's expense and in a workmanlike manner satisfactory to the Contracting Officer, shall install and maintain all necessary temporary connections and distribution lines. Before final acceptance of the work by the Government, the Contractor shall remove all the temporary connections, distribution lines, meters, and associated paraphernalia.

1.15 TESTS

- A. Pre-test mechanical and electrical equipment and systems and make corrections required for proper operation of such systems before requesting final tests. Final test will not be conducted unless pre-tested.

- B. Conduct final tests required in various sections of specifications in presence of an authorized representative of the Contracting Officer. Contractor shall furnish all labor, materials, equipment, instruments, and forms, to conduct and record such tests.
- C. Mechanical and electrical systems shall be balanced, controlled and coordinated. A system is defined as the entire complex which must be coordinated to work together during normal operation to produce results for which the system is designed. For example, air conditioning supply air is only one part of entire system which provides comfort conditions for a building. Other related components are return air, exhaust air, steam, chilled water, refrigerant, hot water, controls and electricity, etc. Another example of a complex which involves several components of different disciplines is a boiler installation. Efficient and acceptable boiler operation depends upon the coordination and proper operation of fuel, combustion air, controls, steam, feedwater, condensate and other related components.
- D. All related components as defined above shall be functioning when any system component is tested. Tests shall be completed within a reasonably short period of time during which operating and environmental conditions remain reasonably constant.
- E. Individual test result of any component, where required, will only be accepted when submitted with the test results of related components and of the entire system.

1.16 INSTRUCTIONS

- A. Contractor shall furnish Maintenance and Operating manuals and verbal instructions when required by the various sections of the specifications and as hereinafter specified.
- B. Manuals: Maintenance and operating manuals (four copies each) for each separate piece of equipment shall be delivered to the COTR coincidental with the delivery of the equipment to the job site. Manuals shall be complete, detailed guides for the maintenance and operation of equipment. They shall include complete information necessary for starting, adjusting, maintaining in continuous operation for long periods of time and dismantling and reassembling of the complete units and sub-assembly components. Manuals shall include an index covering all component parts clearly cross-referenced to diagrams and illustrations. Illustrations shall include "exploded" views showing and identifying each separate item. Emphasis shall be placed on the use of special tools and

instruments. The function of each piece of equipment, component, accessory and control shall be clearly and thoroughly explained. All necessary precautions for the operation of the equipment and the reason for each precaution shall be clearly set forth. Manuals must reference the exact model, style and size of the piece of equipment and system being furnished. Manuals referencing equipment similar to but of a different model, style, and size than that furnished will not be accepted.

- C. Instructions: Contractor shall provide qualified, factory-trained manufacturers' representatives to give detailed instructions to assigned Department of Veterans Affairs personnel in the operation and complete maintenance for each piece of equipment. All such training will be at the job site. These requirements are more specifically detailed in the various technical sections. Instructions for different items of equipment that are component parts of a complete system, shall be given in an integrated, progressive manner. All instructors for every piece of component equipment in a system shall be available until instructions for all items included in the system have been completed. This is to assure proper instruction in the operation of inter-related systems. All instruction periods shall be at such times as scheduled by the Resident Engineer and shall be considered concluded only when the Resident Engineer is satisfied in regard to complete and thorough coverage. The Department of Veterans Affairs reserves the right to request the removal of, and substitution for, any instructor who, in the opinion of the Resident Engineer, does not demonstrate sufficient qualifications in accordance with requirements for instructors above.

--- E N D ---

Medical Center Requirements

Section 010100

1.0 General Intention: This document pertains to station safety, health, and environmental policies for construction projects performed at the VA Black Hills Health Care System. Safety and health concerns are taken seriously at this facility. Both our staff and yours are expected to strictly adhere to the regulations and requirements. This is exceedingly important, since we must be primarily concerned for the safety of our patients. In this regard, OSHA Standards may protect worker safety and health, but they have minimal benefit for protecting the safety and health of our patients, due primarily to their differing medical conditions. Review this information as orientation with your personnel performing work on site. In addition, construction can have significant impacts to the environment. It is the policy of this organization to minimize impacts in accordance with the facility's integrated Green Environmental Systems (GEMS). Where the requirements as outlined in this and Section 010000 are differing, the more stringent shall apply.

2.0 Requirements:

A. Security:

1. Secure all construction areas, especially mechanical and electrical rooms against entry of unauthorized individuals including patients.
2. Notify the Contracting Officer's Technical Representative (COTR) for permission to work after hours and weekends. Standard work hours for the medical center are Monday-Friday, 7:00 a.m. to 4:30 p.m.
3. The VA will issue ID tags to contractor personnel. All contractor personnel are required to wear the VA provided ID at all times while working on government property. The Contractor will submit ID requests for each employee (including subcontractor employees) using the request form on attachment A.

B. Key Security:

1. Only a limited number of keys will be issued to the contractor. Key requests shall be made using the request form on attachment B.
2. If the Contractor loses a key, a charge of \$30 will be billed for a replacement key.
3. Ensure all doors leading to and from construction are either monitored or locked to prevent access to the area from unauthorized persons.

C. Contractor General Safety Program and Training Requirements:

1. The Contractor shall appoint a "Competent Person" (CP) for the project. The CP will have primary responsibility for construction safety, OSHA compliance, and adherence to the Contractor's safety program. The Contractor shall provide for approval, as part of the submittal process, the name of the CP and documentation that the individual has had the necessary training, experience, and has the authority to carry out their responsibilities with respect to safety and health during construction activities. Evidence of training shall include completion of OSHA approved courses or other construction safety training consistent with the scope of the project.

2. The Contractor shall also provide for approval, as part of the submittal process, evidence of a company safety policy that includes, as a minimum, the following components: a) Safety is the first priority and will not be compromised, b) PPE is provided for employees, and the employees are trained in its use, c) Details of regularly scheduled safety training for jobs site employees in regards to OSHA requirements, construction related impacts, and Life Safety Code requirements. This may be accomplished through documented "tool box talks", or other similar methods.
3. The Contractors CP and primary workers will be required to view a VA provided video tape, "Playing It Safe", approximate viewing time 15 minutes. The video identifies concerns regarding patients safety, privacy, and infection control; and introduces Contractor's workers to the unique safeguards required when working in a hospital environment.
4. Adhere to the following:
 - a. Follow all federal, state and local safety and health regulations.
 - b. Maintain safety in the construction site/area in accordance with the provisions of the contract that includes the Occupational Safety and Health Administration (OSHA) Regulations; National Electrical Codes; National Fire Protection Association (NFPA) 70, National Electric Code; and NFPA 101, Life Safety Code. Work in a safe manner and take all proper precautions while performing your work. Extra precautions shall be taken when working around persons occupying the building during construction.
 - c. Provide Personal Protective Equipment (PPE) for your employees.
 - d. Post appropriate signs in specific hazardous areas.
 - e. Keep tools, ladders, etc., away from patients to prevent injuries.

D. Safety Inspections:

1. The VA professional Occupational Safety and Health staff at this facility will perform safety inspections of all contract operations. Written reports of unsafe practices or conditions will be reported to the COTR and Contracting Officer for immediate attention and resolution.
2. The Contractor's superintendent/CP is required to monitor work on a daily basis, including surveillance related to health and safety. The daily inspections are to be documented via the check list included on the back of the Daily Log form (attachment C). Completed Daily Logs should be provided to the COTR at the end of each shift, and no later than the next working day.

E. Fire Alarms:

1. The fire alarm system connects all buildings at this facility, and is activated by various heat, duct, manual pull stations and smoke sensors. Manual pull stations are provided at each entrance. Survey the area in which you are working to locate the manual pull stations.
2. In the event of a fire alarm sounding, you are to remain in your area, unless medical center personnel (Safety, Nursing or Engineering) instruct otherwise, or unless a fire situation is in your area, in which case you should immediately evacuate.

3. Any work involving the fire protection systems requires written permission to proceed from the COTR. *Do not tamper with or otherwise disturb any fire alarm system components without prior written permission. To do so without written permission will result in an adverse action.*

F. Hazardous Materials:

1. Many of the operations you are scheduled to perform may involve the use of hazardous materials. Prior to locating hazardous materials on site, submit all Material Safety Data Sheets (MSDS) through the COTR for evaluation by the facility Safety Officer.
2. Storage of hazardous materials within buildings shall be minimal with only enough on hand to perform daily work tasks. Flammable materials must either be removed from buildings at the end of the work shift or stored in approved flammable storage containers.
3. Care must be taken to ensure adequate ventilation to remove vapors of hazardous materials in use. Many of the patients being cared for in the facility are susceptible to environmental contaminants, even when odors seem minimal. Isolate those areas where vapors are produced, and ventilate to the most extent possible to reduce the number of complaints.

G. Airborne Dust Control During Construction:

1. Generation of dust is of major concern within staff, and especially in patient occupied buildings. Where operations involve the generation of dust, all efforts shall be directed at reducing airborne generated dust to the lowest level feasible. This may be accomplished by a number of methods. These include misting the area with water, or use of tools attached to high efficiency particulate air (HEPA) filtering vacuums. Where large amounts of materials may be disturbed, resulting in airborne dust, establishment of full ceiling-to-floor barriers shall be required.
2. Classification of Jobs:
 - a. CLASS I - Includes, but is not limited to, minor disturbances involving plumbing, electrical, carpentry, ductwork and minor aesthetic improvements.
 - b. CLASS II - (projects require barrier precautions) - Includes, but is not limited to, construction of new walls, construction of new rooms, major utility changes, major equipment installation, demolition of wallboards, plaster, ceramic tiles or ceiling and floor tiles, removal of windows, removal of casework, etc.

H. Class I Procedures:

1. Mist (with water) work surfaces to control dust while cutting. Alternatively a high efficiency particulate air vacuum (HEPA) can be used by positioning the vacuum next to the equipment at the use site.
2. Tape doors for activities that produce large amounts of dust, and block off and seal air vents.

3. Cover holes/openings (penetrations), in walls, ceiling, floors or door that cannot be patched or fixed within 4 hours. Only approved fire-rated materials will be used to fill holes in fire/smoke walls.
4. Comply with the OSHA regulations regarding noise and vapor containment.
5. Cleanup and disposal: Construction waste must be contained before transport using plastic bags and/or covered transport receptacle and/or cart and tape covering.
6. Wet mop and/or HEPA vacuum before leaving work area.
7. Place dust mats at entrance and exit of work area, and clean or change daily to prevent tracking of dust into occupied areas.
8. After work completion, remove covering from air vents.

I. Class II (Post Construction Warning Signs):

1. Same procedures as Class I - however, use of a HEPA vacuum is mandatory.
2. Construct all dust barriers before construction begins per the following instructions: For single rooms, seal door/frame with tape and plastic. The sheet should be divided vertically with a knife. Flaps should be taped on either side of the single sheet to create a flapped entrance.
3. For larger areas, install an airtight (fire retardant) barrier that extends from floor to ceiling, or seal to prevent dust and debris from escaping. Seal all seams with duct tape. Install barrier partitions to stop movement of air and debris penetrating ceiling envelopes, chases and/or ceiling spaces. Construct entrance with a double flap of plastic to prevent escape of debris; or, if elevator shafts or stairways are within the field of construction, install solid barriers.

J. Contact with Asbestos Containing Materials (ACM):

1. Due to the age of buildings, many contain asbestos containing materials (ACM). Primary ACM uses in the medical center includes floor tile, mastic, piping and HVAC insulation. The medical center has performed a comprehensive asbestos survey and has identified accessible ACM. Some areas contain damaged asbestos and should not be accessed without prior abatement.
2. The most common type of ACM insulation you may encounter includes thermal system insulation (TSI) and floor tile. ACM TSI is generally covered with a cloth wrap or lagging, and the asbestos substrate generally appear white in color. *Do not sand, drill, gouge or otherwise disturb this type of insulation.* Contractors disturbing or releasing asbestos containing materials will be liable for all damages and cleanup costs.
3. Where disturbance of asbestos is likely, it has been addressed in the contract for removal. If contact with the presence of asbestos is presented, stop all work in the immediate area and immediately contact the COTR or Safety Officer to make necessary arrangements for removal.
4. In some areas, asbestos insulation has been identified on elbows, between fiberglass piping insulation, as patching materials among the fiberglass insulation. Fiberglass insulation used in this facility is usually yellow or pink in color, wrapped either by cloth or paper lagging.

5. A complete assessment of asbestos materials and conditions are available for viewing by contacting the COTR. Prior to performing work above any ceiling or starting in a new area, consult with the COTR concerning existing conditions of ACM.
6. Some of the areas in the facility are identified as restricted areas due to condition of ACM. These are readily labeled. *Do not enter these areas* unless first contacting the COTR. Entry requirements to these areas are awareness of the hazards, proper protective clothing (coveralls and respirators) and personal monitoring in accordance with OSHA requirements.

K. Environmental Protection:

1. It may help you to be aware of the seriousness that the environmental protection requirements of each contract are regarded. Adherence to these requirements is subject to continuing scrutiny from the community and backed by severe penalties, such as fines and incarceration. These environmental requirements will be strictly enforced. Contractors are required to abide by all Federal, State, and Local environmental regulations.
2. *No* hazardous materials will be disposed of on Government property. Haul all waste off-site or dispose in contractor owned and operated waste removal containers.
3. Forward a copy of all waste manifests for special or hazardous wastes to the COTR. Environmental requirements will be strictly enforced.

L. Permit Required Confined Spaces:

1. Contractors performing work on this facility shall follow all requirements outlined in OSHA Standards for working in confined spaces. There are numerous permit required confined spaces on this facility. These spaces have been identified. Some spaces have been posted, but the majority have not due to their configuration. A complete listing of these areas is located in the Fire Department.
2. Confined spaces are areas that are large enough to be entered, have limited egress/exit potential and are not designed for permanent human occupancy. If you encounter any space that meets this definition, and if it is a suspected confined space, contact the COTR.
3. Contractors performing work in confined spaces are responsible for compliance with all applicable standards and regulations.

M. Housekeeping:

1. Protect patients and VA personnel in occupied areas from the hazards of dust, noise, construction debris and material associated with a construction environment. Keep work area clear, clean and free of loose debris, construction materials and partially installed work that would create a safety hazard or interfere with VA personnel duties and traffic.
2. Wet mop occupied areas clean and remove any accumulation of dust/debris from cutting or drilling from any surface at the end of each workday.
3. Make every effort to keep dust and noise to a minimum at all times. Take special precautions to protect VA equipment from damage including excessive dust.

4. Maintain clear access to mechanical, electrical devices, equipment and main corridors. This will ensure access to existing systems in the event of an emergency.
5. Clean area of all construction debris and dust upon completion of demolition and/or renovation.
6. During construction operations, keep existing finishes protected from damage. Cover and protect all carpets during construction. Any carpets or surfaces damaged as a result of construction activities will be replaced at the contractor expense.

N. Hot Work Permits:

1. Any hot work operations including cutting, welding, thermal welding, brazing, soldering, grinding, thermal spraying, thawing pipes or any other similar activity, require a Hot Work Permit to be obtained by the Contractor from the Fire Department. The Contractor is responsible for conforming to all Medical Center regulations, policies and procedures concerning Hot Work Permits as outlined below:
 - a. Prior to the performance of hot work in patient-occupied buildings, request a Hot Work Permit from the Fire Department.
 - b. The Fire Department will inspect the area and ensure that the requirements of NFPA 241 and OSHA standards have been satisfied. The Hot Work Permit will be granted and must be posted in the immediate area of the work.
 - c. The Hot Work Permit will apply only to the location identified on the permit. If additional areas involve hot work, additional permits must be requested.
 - d. Upon completion of all hot work, notify the Fire Department to perform a re-inspection of the area.
2. Do not use any of the extinguishers in the medical center for standby purpose while conducting hot work. Contractors are required to supply their own Class ABC extinguishers. Medical center extinguishers are only to be used in the event of a fire.

O. Emergency Medical Services: Emergency medical services for stabilization purposes are available for contractors at this facility. For medical emergencies, dial 6911 when inside any building. Report the nature of the emergency and location. The operator will dispatch in-house personnel or coordinate an outside emergency assistance based on the nature of the emergency.

P. Use of Government-Owned Material and Equipment: Use of Government-owned material and equipment is *prohibited*.

Q. Superintendent Communications: At all times during the performance of this contract, the Contractors Superintendent is to be available by cellular phone. At the beginning of the contract and prior to beginning any construction, supply the COTR with the telephone number for the Superintendent.

R. Parking: Contractor employees shall be assigned a parking area during the preconstruction meeting.

S. Traffic:

1. Traffic hazards are minimal at this facility. Drivers should be particularly concerned with pedestrian traffic.
 2. Seat belt use is mandatory on the station.
 3. Federal police officers maintain a 24-hour patrol of the area.
 4. Speed limits are to be observed, and are strictly enforced.
- T. Contractor's Trailers: Contractor's trailers shall be located at the area assigned. All utility connections to the trailer shall be installed at the contractor expense. Trailer removal is required upon completion of the contract, unless approved by the COTR to leave in place.
- U. Smoking: No smoking is permitted in buildings or around hazardous areas. Any smoking inside a government building is subject to a fine without warning.
- V. Lock out/tag out: Contractors performing work on equipment and systems are responsible for compliance with the facilities lock out/tag out policies.
- W. Road Closures: For any work requiring closure of a road or parking lot, a request for closure shall be made in writing at least 5 days in advance for approval by the COTR and Fire Department.

The following forms will be given to the contractor after award by the COTR.

- A. Contractor ID Badge Request Form.
- B. Contractor Key Request Form.
- C. Contractor Daily Log Form.

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 01 33 23
SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES

- 1-1. Refer to Articles titled SPECIFICATIONS AND DRAWINGS FOR CONSTRUCTION (FAR 52.236-21) and, SPECIAL NOTES (VAAR 852.236-91), in GENERAL CONDITIONS.
- 1-2. For the purposes of this contract, samples, test reports, certificates, and manufacturers' literature and data shall also be subject to the previously referenced requirements. The following text refers to all items collectively as SUBMITTALS.
- 1-3. Submit for approval, all of the items specifically mentioned under the separate sections of the specification, with information sufficient to evidence full compliance with contract requirements. Materials, fabricated articles and the like to be installed in permanent work shall equal those of approved submittals. After an item has been approved, no change in brand or make will be permitted unless:
 - A. Satisfactory written evidence is presented to, and approved by Contracting Officer, that manufacturer cannot make scheduled delivery of approved item or;
 - B. Item delivered has been rejected and substitution of a suitable item is an urgent necessity or;
 - C. Other conditions become apparent which indicates approval of such substitute item to be in best interest of the Government.
- 1-4. Forward submittals in sufficient time to permit proper consideration and approval action by Government. Time submission to assure adequate lead time for procurement of contract - required items. Delays attributable to untimely and rejected submittals will not serve as a basis for extending contract time for completion.
- 1-5. Submittals will be reviewed for compliance with contract requirements by Architect-Engineer, and action thereon will be taken by Resident Engineer on behalf of the Contracting Officer.
- 1-6. Upon receipt of submittals, Architect-Engineer will assign a file number thereto. Contractor, in any subsequent correspondence, shall refer to this file and identification number to expedite replies relative to previously approved or disapproved submittals.
- 1-7. The Government reserves the right to require additional submittals, whether or not particularly mentioned in this contract. If additional submittals beyond those required by the contract are furnished pursuant to request therefor by Contracting Officer, adjustment in contract price

and time will be made in accordance with Articles titled CHANGES (FAR 52.243-4) and CHANGES - SUPPLEMENT (VAAR 852.236-88) of the GENERAL CONDITIONS.

- 1-8. Schedules called for in specifications and shown on shop drawings shall be submitted for use and information of Department of Veterans Affairs and Architect-Engineer. However, the Contractor shall assume responsibility for coordinating and verifying schedules. The Contracting Officer and Architect-Engineer assumes no responsibility for checking schedules or layout drawings for exact sizes, exact numbers and detailed positioning of items.
- 1-9. Submittals must be submitted by Contractor only and shipped prepaid. Contracting Officer assumes no responsibility for checking quantities or exact numbers included in such submittals.
 - A. Submit samples required by Section 09 06 00, SCHEDULE FOR FINISHES, in quadruplicate. Submit samples in single units unless otherwise specified. Submit shop drawings, schedules, manufacturers' literature and data, and certificates in quadruplicate, except where a greater number is specified.
 - B. Submittals will receive consideration only when covered by a transmittal letter signed by Contractor. Letter shall be sent via first class mail and shall contain the list of items, name of Medical Center, name of Contractor, contract number, applicable specification paragraph numbers, applicable drawing numbers (and other information required for exact identification of location for each item), manufacturer and brand, ASTM or Federal Specification Number (if any) and such additional information as may be required by specifications for particular item being furnished. In addition, catalogs shall be marked to indicate specific items submitted for approval.
 1. A copy of letter must be enclosed with items, and any items received without identification letter will be considered "unclaimed goods" and held for a limited time only.
 2. Each sample, certificate, manufacturers' literature and data shall be labeled to indicate the name and location of the Medical Center, name of Contractor, manufacturer, brand, contract number and ASTM or Federal Specification Number as applicable and location(s) on project.
 3. Required certificates shall be signed by an authorized representative of manufacturer or supplier of material, and by Contractor.

- C. If submittal samples have been disapproved, resubmit new samples as soon as possible after notification of disapproval. Such new samples shall be marked "Resubmitted Sample" in addition to containing other previously specified information required on label and in transmittal letter.
- D. Approved samples will be kept on file by the Resident Engineer at the site until completion of contract, at which time such samples will be delivered to Contractor as Contractor's property. Where noted in technical sections of specifications, approved samples in good condition may be used in their proper locations in contract work. At completion of contract, samples that are not approved will be returned to Contractor only upon request and at Contractor's expense. Such request should be made prior to completion of the contract. Disapproved samples that are not requested for return by Contractor will be discarded after completion of contract.
- E. Submittal drawings (shop, erection or setting drawings) and schedules, required for work of various trades, shall be checked before submission by technically qualified employees of Contractor for accuracy, completeness and compliance with contract requirements. These drawings and schedules shall be stamped and signed by Contractor certifying to such check.
1. For each drawing required, submit one legible photographic paper or vellum reproducible.
 2. Reproducible shall be full size.
 3. Each drawing shall have marked thereon, proper descriptive title, including Medical Center location, project number, manufacturer's number, reference to contract drawing number, detail Section Number, and Specification Section Number.
 4. A space 120 mm by 125 mm (4-3/4 by 5 inches) shall be reserved on each drawing to accommodate approval or disapproval stamp.
 5. Submit drawings, ROLLED WITHIN A MAILING TUBE, fully protected for shipment.
 6. One reproducible print of approved or disapproved shop drawings will be forwarded to Contractor.
 7. When work is directly related and involves more than one trade, shop drawings shall be submitted to Architect-Engineer under one cover.

1-10. Samples, shop drawings, test reports, certificates and manufacturers' literature and data, shall be submitted for approval to

Four Front Design, Inc.

517 Seventh Street

Rapid City, SD 57701

1-11. At the time of transmittal to the Architect-Engineer, the Contractor shall also send a copy of the complete submittal directly to the Resident Engineer.

- - - E N D - - -

SECTION 01 74 19
CONSTRUCTION WASTE MANAGEMENT

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies the requirements for the management of non-hazardous building construction and demolition waste.
- B. Waste disposal in landfills shall be minimized to the greatest extent possible. Of the inevitable waste that is generated, as much of the waste material as economically feasible shall be salvaged, recycled or reused.
- C. Contractor shall use all reasonable means to divert construction and demolition waste from landfills and incinerators, and facilitate their salvage and recycle not limited to the following:
 - 1. Waste Management Plan development and implementation.
 - 2. Techniques to minimize waste generation.
 - 3. Sorting and separating of waste materials.
 - 4. Salvage of existing materials and items for reuse or resale.
 - 5. Recycling of materials that cannot be reused or sold.
- D. At a minimum the following waste categories shall be diverted from landfills:
 - 1. Soil.
 - 2. Inerts (eg, concrete, masonry and asphalt).
 - 3. Clean dimensional wood and palette wood.
 - 4. Green waste (biodegradable landscaping materials).
 - 5. Engineered wood products (plywood, particle board and I-joists, etc).
 - 6. Metal products (eg, steel, wire, beverage containers, copper, etc).
 - 7. Cardboard, paper and packaging.
 - 8. Bitumen roofing materials.
 - 9. Plastics (eg, ABS, PVC).
 - 10. Carpet and/or pad.
 - 11. Gypsum board.
 - 12. Insulation.
 - 13. Paint.
 - 14. Fluorescent lamps.

1.2 RELATED WORK

- A. Section 02 41 00, DEMOLITION.
- B. Section 01 00 00, GENERAL REQUIREMENTS.
- C. Lead Paint: Section 02 83 33.13, LEAD BASED PAINT REMOVAL AND DISPOSAL.

1.3 QUALITY ASSURANCE

- A. Contractor shall practice efficient waste management when sizing, cutting and installing building products. Processes shall be employed to ensure the generation of as little waste as possible. Construction /Demolition waste includes products of the following:
1. Excess or unusable construction materials.
 2. Packaging used for construction products.
 3. Poor planning and/or layout.
 4. Construction error.
 5. Over ordering.
 6. Weather damage.
 7. Contamination.
 8. Mishandling.
 9. Breakage.
- B. Establish and maintain the management of non-hazardous building construction and demolition waste set forth herein. Conduct a site assessment to estimate the types of materials that will be generated by demolition and construction.
- C. Contractor shall develop and implement procedures to reuse and recycle new materials to a minimum of 50 percent.
- D. Contractor shall be responsible for implementation of any special programs involving rebates or similar incentives related to recycling. Any revenues or savings obtained from salvage or recycling shall accrue to the contractor.
- E. Contractor shall provide all demolition, removal and legal disposal of materials. Contractor shall ensure that facilities used for recycling, reuse and disposal shall be permitted for the intended use to the extent required by local, state, federal regulations. The Whole Building Design Guide website <http://www.wbdg.org> provides a Construction Waste Management Database that contains information on companies that haul, collect, and process recyclable debris from construction projects.
- F. Contractor shall assign a specific area to facilitate separation of materials for reuse, salvage, recycling, and return. Such areas are to be kept neat and clean and clearly marked in order to avoid contamination or mixing of materials.
- G. Contractor shall provide on-site instructions and supervision of separation, handling, salvaging, recycling, reuse and return methods to be used by all parties during waste generating stages.

- H. Record on daily reports any problems in complying with laws, regulations and ordinances with corrective action taken.

1.4 TERMINOLOGY

- A. Class III Landfill: A landfill that accepts non-hazardous resources such as household, commercial and industrial waste resulting from construction, remodeling, repair and demolition operations.
- B. Clean: Untreated and unpainted; uncontaminated with adhesives, oils, solvents, mastics and like products.
- C. Construction and Demolition Waste: Includes all non-hazardous resources resulting from construction, remodeling, alterations, repair and demolition operations.
- D. Dismantle: The process of parting out a building in such a way as to preserve the usefulness of its materials and components.
- E. Disposal: Acceptance of solid wastes at a legally operating facility for the purpose of land filling (includes Class III landfills and inert fills).
- F. Inert Backfill Site: A location, other than inert fill or other disposal facility, to which inert materials are taken for the purpose of filling an excavation, shoring or other soil engineering operation.
- G. Inert Fill: A facility that can legally accept inert waste, such as asphalt and concrete exclusively for the purpose of disposal.
- H. Inert Solids/Inert Waste: Non-liquid solid resources including, but not limited to, soil and concrete that does not contain hazardous waste or soluble pollutants at concentrations in excess of water-quality objectives established by a regional water board, and does not contain significant quantities of decomposable solid resources.
- I. Mixed Debris: Loads that include commingled recyclable and non-recyclable materials generated at the construction site.
- J. Mixed Debris Recycling Facility: A solid resource processing facility that accepts loads of mixed construction and demolition debris for the purpose of recovering re-usable and recyclable materials and disposing non-recyclable materials.
- K. Permitted Waste Hauler: A company that holds a valid permit to collect and transport solid wastes from individuals or businesses for the purpose of recycling or disposal.
- L. Recycling: The process of sorting, cleansing, treating, and reconstituting materials for the purpose of using the altered form in the manufacture of a new product. Recycling does not include burning, incinerating or thermally destroying solid waste.

1. On-site Recycling - Materials that are sorted and processed on site for use in an altered state in the work, i.e. concrete crushed for use as a sub-base in paving.
 2. Off-site Recycling - Materials hauled to a location and used in an altered form in the manufacture of new products.
- M. Recycling Facility: An operation that can legally accept materials for the purpose of processing the materials into an altered form for the manufacture of new products. Depending on the types of materials accepted and operating procedures, a recycling facility may or may not be required to have a solid waste facilities permit or be regulated by the local enforcement agency.
- N. Reuse: Materials that are recovered for use in the same form, on-site or off-site.
- O. Return: To give back reusable items or unused products to vendors for credit.
- P. Salvage: To remove waste materials from the site for resale or re-use by a third party.
- Q. Source-Separated Materials: Materials that are sorted by type at the site for the purpose of reuse and recycling.
- R. Solid Waste: Materials that have been designated as non-recyclable and are discarded for the purposes of disposal.
- S. Transfer Station: A facility that can legally accept solid waste for the purpose of temporarily storing the materials for re-loading onto other trucks and transporting them to a landfill for disposal, or recovering some materials for re-use or recycling.

1.5 SUBMITTALS

- A. In accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, and SAMPLES, furnish the following:
- B. Prepare and submit to the Resident Engineer a written demolition debris management plan. The plan shall include, but not be limited to, the following information:
 1. Procedures to be used for debris management.
 2. Techniques to be used to minimize waste generation.
 3. Analysis of the estimated job site waste to be generated:
 - a. List of each material and quantity to be salvaged, reused, recycled.
 - b. List of each material and quantity proposed to be taken to a landfill.

4. Detailed description of the Means/Methods to be used for material handling.
 - a. On site: Material separation, storage, protection where applicable.
 - b. Off site: Transportation means and destination. Include list of materials.
 - 1) Description of materials to be site-separated and self-hauled to designated facilities.
 - 2) Description of mixed materials to be collected by designated waste haulers and removed from the site.
 - c. The names and locations of mixed debris reuse and recycling facilities or sites.
 - d. The names and locations of trash disposal landfill facilities or sites.
 - e. Documentation that the facilities or sites are approved to receive the materials.
- C. Designated Manager responsible for instructing personnel, supervising, documenting and administer over meetings relevant to the Waste Management Plan.
- D. Monthly summary of construction and demolition debris diversion and disposal, quantifying all materials generated at the work site and disposed of or diverted from disposal through recycling.

1.6 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced by the basic designation only. In the event that criteria requirements conflict, the most stringent requirements shall be met.
- B. U.S. Green Building Council (USGBC):
LEED Green Building Rating System for New Construction

1.7 RECORDS

- A. Maintain records to document the quantity of waste generated; the quantity of waste diverted through sale, reuse, or recycling; and the quantity of waste disposed by landfill or incineration. Records shall be kept in accordance with the LEED Reference Guide and LEED Template.

PART 2 - PRODUCTS

2.1 MATERIALS

- A. List of each material and quantity to be salvaged, recycled, reused.
- B. List of each material and quantity proposed to be taken to a landfill.

- C. Material tracking data: Receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices, net total costs or savings.

PART 3 - EXECUTION

3.1 COLLECTION

- A. Provide all necessary containers, bins and storage areas to facilitate effective waste management.
- B. Clearly identify containers, bins and storage areas so that recyclable materials are separated from trash and can be transported to respective recycling facility for processing.
- C. Hazardous wastes shall be separated, stored, disposed of according to local, state, federal regulations.

3.2 DISPOSAL

- A. Contractor shall be responsible for transporting and disposing of materials that cannot be delivered to a source-separated or mixed materials recycling facility to a transfer station or disposal facility that can accept the materials in accordance with state and federal regulations.
- B. Construction or demolition materials with no practical reuse or that cannot be salvaged or recycled shall be disposed of at a landfill or incinerator.

3.3 REPORT

- A. With each application for progress payment, submit a summary of construction and demolition debris diversion and disposal including beginning and ending dates of period covered.
- B. Quantify all materials diverted from landfill disposal through salvage or recycling during the period with the receiving parties, dates removed, transportation costs, weight tickets, manifests, invoices. Include the net total costs or savings for each salvaged or recycled material.
- C. Quantify all materials disposed of during the period with the receiving parties, dates removed, transportation costs, weight tickets, tipping fees, manifests, invoices. Include the net total costs for each disposal.

- - - E N D - - -

SECTION 02 83 33.13
REMOVAL AND DISPOSAL OF LEAD BASED PAINT/ MATERIALS

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies removal and disposal of material that may have lead-based paint (LBP) and controls needed to limit occupational and environmental exposure to lead hazards.

1.2 RELATED WORK

- A. Section 09 91 00, PAINTING.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referred to in the text by basic designation only.
- B. Code of Federal Regulations (CFR):
- CFR 29 Part 1910.....Occupational Safety and Health Standards
 - CFR 29 Part 1926.....Safety and Health Regulations for Construction
 - CFR 40 Part 148.....Hazardous Waste Injection Restrictions
 - CFR 40 Part 260.....Hazardous Waste Management System: General
 - CFR 40 Part 261.....Identification and Listing of Hazardous Waste
 - CFR 40 Part 262.....Standards Applicable to Generators of Hazardous Waste
 - CFR 40 Part 263.....Standards Applicable to Transporters of Hazardous Waste
 - CFR 40 Part 264.....Standards for Owners and Operations of Hazardous Waste Treatment, Storage, and Disposal Facilities
 - CFR 40 Part 265.....Interim Status Standards for Owners and Operators of Hazardous Waste Treatment, Storage, and Disposal Facilities
 - CFR 40 Part 268.....Land Disposal Restrictions
 - CFR 49 Part 172.....Hazardous Material Table, Special Provisions, Hazardous Material Communications, Emergency Response Information, and Training Requirements
 - CFR 49 Part 178.....Specifications for Packaging
- C. National Fire Protection Association (NFPA):
- NFPA 701-2004.....Methods of Fire Test for Flame-Resistant Textiles and Films
- D. National Institute for Occupational Safety And Health (NIOSH)
- NIOSH OSHA Booklet 3142. Lead in Construction
- E. Underwriters Laboratories (UL)

UL 586-1996 (Rev 2009).. High-Efficiency, Particulate, Air Filter
Units

F. American National Standards Institute

Z9.2-2006.....Fundamentals Governing the Design and Operation
of Local Exhaust Systems

Z88.6-2006.....Respiratory Protection

1.4 DEFINITIONS

- A. Control Area: Area to limit to control construction activities.
- B. Lead: Metallic lead, inorganic lead compounds, and organic lead soaps.
Excluded from this definition are other organic lead compounds.

1.5 QUALITY ASSURANCE

- A. The Contractor shall ensure the following:
 1. Train employees performing construction work that may require the removal of materials that contain lead based paint.
 2. Create a work plan for conformance to the applicable standards.
 3. Ensure work is performed in strict accordance with the work plan at all times.
 4. Ensure hazardous exposure to personnel and to the environment is adequately controlled at all times.
 5. Hazardous Waste Management: The Hazardous Waste Management plan shall comply with applicable requirements of Federal, State, and local hazardous waste regulations.
 6. Comply with laws, ordinances, rules, and regulations of federal, state, and local authorities regarding removing, handling, storing, transporting, and disposing of lead waste materials. Comply with the applicable requirements of the current issue of 29 CFR 1910.1025. Submit matters regarding interpretation of standards to the Contracting Officer for resolution before starting work.
 - a. The following local laws, ordinances, criteria, rules and regulations regarding removing, handling, storing, transporting, and disposing of lead-contaminated materials apply:
 1. EPA
 2. South Dakota Department of Environment and Natural Resources
- B. Pre-Construction Conference: Contractor shall meet with the Contracting Officer to discuss in detail the possibility of materials with lead-containing paint being removed and work plan.

1.6 SUBMITTALS

- A. Submit the following in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
 1. Work Plan.

PART 2 PRODUCTS (NOT USED)**PART 3 EXECUTION****3.1 PROTECTION****A. Control Area.**

1. Establish a control area to contain any lead based paint/materials that may be removed.

B. Protection of Existing Work to Remain: Perform work without damage of adjacent areas. Where existing work is damaged restore work to its original condition.**C. Heating, Ventilating and Air Conditioning (HVAC) Systems: Shut down, lock out, and isolate HVAC systems that supply or exhaust. Seal vents in the lead control area with 6-mil plastic sheet and tape.****D. Personnel Protection: Per the work plan.****3.2 WORK PROCEDURES**

- A. Complete construction activities including removal of lead based paint items accordance with approved work plan. Use procedures and equipment required to limit occupational and environmental exposure to lead when lead- containing paint and items are removed in accordance with 29 CFR 1926.62, except as specified herein. Dispose of removed paint chips and associated waste in compliance with Environmental Protection Agency (EPA), federal, state, and local requirements.

3.3 LEAD-CONTAINING PAINT MATERIAL REMOVAL

- A. Remove loose paint/ materials within the buildings designated on the drawings. Take whatever precautions are necessary to minimize damage to the underlying substrate.
- B. Outside Lead Paint Material Removal: Select removal processes to minimize contamination of work areas with lead-contaminated dust or other lead-contaminated debris/waste. Perform manual sanding and scraping to the maximum extent feasible.

3.4 CLEANUP AND DISPOSAL

- A. Cleanup: Maintain surfaces of the control area free of accumulations of paint chips and dust. Restrict the spread of dust and debris; keep waste from being distributed over the area. At the end of each shift and when the paint removal material operations has been completed, clean the area of visible lead paint contamination.
- B. Disposal:
 1. Collect lead-contaminated waste, scrap, debris, bags, containers, equipment, and lead-contaminated clothing, which may produce airborne concentrations of lead particles.

2. Comply with land disposal restriction notification requirements as required by 40 CFR 268.

- - - E N D - - -

**SECTION 06 20 00
FINISH CARPENTRY**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies replacement of the exterior trim, subflooring flooring, deck flooring and structural items.
- B. This section notes repair/ replacement requirements.

1.2 DELIVERY, STORAGE AND HANDLING

- A. Protect trim from dampness, maintaining moisture content specified both during and after delivery at site.

1.3 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
- B. American Society of Testing and Materials (ASTM):
 - A36/A36M-08.....Structural Steel
 - A53-07.....Pipe, Steel, Black and Hot-Dipped Zinc Coated, Welded and Seamless
 - A167-99 (R2009).....Stainless and Heat-Resisting Chromium-Nickel Steel Plate, Sheet, and Strip
 - B26/B26M-09.....Aluminum-Alloy Sand Castings
 - B221-08.....Aluminum and Aluminum-Alloy Extruded Bars, Rods, Wire, Profiles, and Tubes
 - E84-09.....Surface Burning Characteristics of Building Materials
- C. American Hardboard Association (AHA):
 - A135.4-04.....Basic Hardboard
- D. Builders Hardware Manufacturers Association (BHMA):
 - A156.9-03.....Cabinet Hardware
 - A156.11-04.....Cabinet Locks
 - A156.16-02.....Auxiliary Hardware
- E. Hardwood Plywood and Veneer Association (HPVA):
 - HP1-09.....Hardwood and Decorative Plywood
- F. National Particleboard Association (NPA):
 - A208.1-99.....Wood Particleboard
- G. American Wood-Preservers' Association (AWPA):
 - AWPA C1-03.....All Timber Products - Preservative Treatment by Pressure Processes
- H. Architectural Woodwork Institute (AWI):

AWI-99.....Architectural Woodwork Quality Standards and
Quality Certification Program

- I. National Electrical Manufacturers Association (NEMA):
 - LD 3-05.....High-Pressure Decorative Laminates
- J. U.S. Department of Commerce, Product Standard (PS):
 - PS20-05.....American Softwood Lumber Standard
- K. Military Specification (Mil. Spec):
 - MIL-L-19140E.....Lumber and Plywood, Fire-Retardant Treated
- L. Federal Specifications (Fed. Spec.):
 - A-A-1922A.....Shield Expansion
 - A-A-1936.....Contact Adhesive
 - FF-N-836D.....Nut, Square, Hexagon Cap, Slotted, Castle
 - FF-S-111D(1).....Screw, Wood
 - MM-L-736(C).....Lumber, Hardwood

PART 2 - PRODUCTS

2.1 EXTERIOR FASCIA TRIM

- A. Trim: Match existing sizes.
- B. Softwood: PS-20, exposed to view appearance grades:
 - 1. Use Prime for painted or opaque finish.
- C. Use edge grain Wood members exposed to weather.

2.2 DECK FLOORING

- A. 5/4x4" Douglas Fir tongue and groove porch decking, kiln dried and square edge.
- B. Finish
 - 1. Prep /paint per section 09 91 00; PAINTING.

2.3 LUMBER (STRUCTURAL REPLACEMENT):

- A. Unless otherwise specified, each piece of lumber bear grade mark, stamp, or other identifying marks indicating grades of material, and rules or standards under which produced.
 - 1. Identifying marks in accordance with rule or standard under which material is produced, including requirements for qualifications and authority of the inspection organization, usage of authorized identification, and information included in the identification.
 - 2. Inspection agency for lumber approved by the Board of Review, American Lumber Standards Committee, to grade species used.
- B. Structural Members: Species and grade as listed in the AFPA, National Design Specification for Wood Construction having design stresses as shown.
- C. Sizes:
 - 1. Conforming to Prod. Std., PS20.
 - 2. Match existing.

D. Moisture Content:

1. At time of delivery and maintained at the site.
2. Boards and lumber 50 mm (2 inches) and less in thickness: 19 percent or less.
3. Lumber over 50 mm (2 inches) thick: 25 percent or less.

2.4 FABRICATION**A. General:**

1. Trim shall be members of the same species and size.
2. Edges of members in contact with concrete or masonry shall have a square corner caulking rebate.
3. Fabricate new members in one length.

2.5 EPOXY REPAIR

- A. Epoxy for wood repair work. Two part product as recommended by manufacturer based on installation requirements.

PART 3 - EXECUTION**3.1 BUILDING 51 DECKING REPLACEMENT**

- A. Remove existing tongue and groove decking.
- B. Existing subfloor and structural components will remain.
- C. Install new tongue and groove deck flooring.

3.2 BUILDING 65 DECKING REPLACEMENT

- A. Remove existing tongue and groove decking.
- B. After decking removal review existing conditions with resident engineer. Review existing subfloor and structural components for deterioration. Replace deteriorated components with in-kind materials to match existing. See drawings for approximate extents of deterioration and replacement.
- C. Install new tongue and groove decking.

3.3 TRIM INSTALLATION**A. General:**

1. Secure trim with fine nails as required.
2. Plumb and level items unless shown otherwise.
3. Exterior Work: Joints shall be close fitted, metered, tongue and grooved, rebated, or lapped to exclude water.

3.4 INSTALLATION OF FRAMING AND MISCELLANEOUS WOOD MEMBERS:**A. Conform to applicable requirements of the following:**

1. AFPA National Design Specification for Wood Construction for timber connectors.
2. ASTM F 499 for wood underlayment.

B. Fasteners:

1. Nails.

- a. Nail in accordance with the Recommended Nailing Schedule as specified in AFPA Manual for House Framing where detailed nailing requirements are not specified in nailing schedule. Select nail size and nail spacing sufficient to develop adequate strength for the connection without splitting the members.
2. Screws to Join Wood:
 - a. ASTM C1002, sized to provide not less than 25 mm (1 inch) penetration into anchorage member.
 - B. Spaced same as nails.
- C. Subflooring:
 1. Lay board subflooring diagonally, with close joints. Stagger end joints and make joints over supports. Bear each board on at least three supports.
 2. Provide a clearance of approximately 13 mm (1/2 inch) at masonry or concrete at walls.
 3. Apply plywood subflooring with face grain or long dimension at right angles to the supports, with edges 6 mm (1/4 inch) apart at side joints, and 3 mm (1/8 inch) apart at end joints.
 4. Stagger panel end joints and make over support.
 5. Match and align plywood which is an extension of work in place to existing.
- D. Deck flooring:
 1. Lay deck flooring to match existing direction (perpendicular to building).
 2. Prime all sides prior to install.
 3. Cut boards to allow an overhang (match existing).
 4. Use flooring nailer to install the porch deck board. Make sure the tongue and groove boards fit tightly before nailing them into place.
 5. Provide a straight line across and trim excess. Prime any cut boards.
 6. Field paint.

3.5 REPAIR EXISTING WOOD TRIM/ FASCIA

- A. Remove damaged or rotted wood. Ensure that all the damaged/ rotted wood is removed.
- B. Let the exposed wood dry completely before continuing with the repair.
- C. Blend the epoxy: resin and hardener per manufacturer's recommendations.
- D. Use a stiff putty knife to work the first layer into the wood.
- E. Shape the hardened epoxy with woodworking tools. Start by roughing out the basic contour with plane or rasp. Finish with files and sand paper.
- F. Provide a second application, if needed.
- G. Caulk

H. Prep /paint per section 09 91 00; PAINTING.

3.6 REPLACE EXISTING WOOD TRIM/ FASCIA

- A. Remove all the damaged or rotted wood. Cut out the wood to a section that is solid, so no damaged portion is left. If possible, remove wood to a rafter to aid in replacement. If not, provide nailing block.
- B. Provide a new board the same species and size as the existing condition. Provide wood with no visible knots or cracks. Small knots will need to be sealed. Provide a tight fit. New board should align with existing boards.
- C. Caulk.
- D. Prep /paint per section 09 91 00; PAINTING.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 01 50.19
PREPARATION FOR RE-ROOFING

PART 1 - GENERAL

1.1 DESCRIPTION

- A. Roof tear-off and roof re-cover preparation on existing construction in preparation to receive new roofing membrane.

1.2 RELATED WORK

- A. Use of the premises and phasing requirements: Section 01 00 00 GENERAL REQUIREMENTS.
- B. Temporary construction and environmental-protection measures for reroofing preparation: Section 01 00 00 GENERAL REQUIREMENTS

1.3 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by the basic designation only. Editions of applicable publications current on date of issue of bidding documents apply unless otherwise indicated.
- B. American National Standards Institute/Single-Ply Roofing Institute (ANSI/SPRI):
- ANSI/SPRI FX-1-01(R2006) Standard Field Test Procedure for
Determining the Withdrawal Resistance of
Roofing Fasteners.
- C. ASTM International (ASTM):
- C208-08.....Cellulosic Fiber Insulating Board
- C728-05.....Perlite Thermal Insulation Board
- C1177/C1177M-08.....Standard Specification for Glass Mat Gypsum
Substrate for Use as Sheathing
- C1278/C1278M-07.....Standard Specification for Fiber-Reinforced
Gypsum Panel
- D1079-09.....Standard Terminology Relating to Roofing and
Waterproofing
- D. FM Approvals: RoofNav Approved Roofing Assemblies and Products.
- 4450-89.....Approved Standard for Class 1 Insulated Steel
Deck Roofs
- 4470-10.....Approved Standard for Class 1 Roof Coverings
- 1-28-09.....Loss Prevention Data Sheet: Design Wind Loads.
- 1-29-09.....Loss Prevention Data Sheet: Above-Deck Roof
Components
- 1-49-09.....Loss Prevention Data Sheet: Perimeter Flashing

E. National Roofing Contractors Association: Roofing and Waterproofing Manual

1.4 MATERIALS OWNERSHIP

A. Assume ownership of demolished materials and remove from Project site and dispose of legally, unless indicated to be reused, reinstalled, or otherwise to remain Owner's property.

1.5 DEFINITIONS

A. Refer to ASTM D1079 and NRCA "The NRCA Roofing and Waterproofing Manual" for definition of terms.

1.6 QUALITY CONTROL

A. Requirements of Division 07 roofing section for qualifications of roofing system and roofing insulation Installer; work of this section shall be performed by same Installer.

1. Where Project requirements include removal of asbestos-containing material, Installer must be legally qualified to perform the required work.

2. Where Project requirements include work affecting existing roofing system to remain under warranty, Installer must be approved by warrantor of existing roofing system.

B. Regulatory Requirements: Comply with governing EPA notification regulations. Comply with hauling and disposal regulations of authorities having jurisdiction.

C. Reroofing Conference: Conduct conference at Project site.

1. Meet with Owner; Architect-Engineer; testing and inspecting agency representative; roofing system manufacturer's representative; roofing Installer including project manager, superintendent, and foreman; and installers whose work interfaces with or affects reroofing.

2. Review methods and procedures related to roofing system tear-off and replacement

1.7 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturer's Literature and Data:

1. Recover boards.

C. List of proposed infill materials.

D. List of proposed temporary roofing materials.

E. Fastener pull-out test report.

- F. Photographs or Videotape: Document existing conditions of adjacent construction including site improvements.
- G. Landfill Records: Indicate receipt and acceptance of hazardous wastes by a licensed landfill facility.
- H. Qualification Data: For Installer.
 - 1. Certificate indicating Installer is licensed to perform asbestos abatement.
 - 2. Certificate indicating Installer is approved by warrantor of existing roofing system.

1.8 PROJECT CONDITIONS

- A. Owner will occupy portions of building below reroofing area. Conduct reroofing so Owner's operations will not be disrupted.
 - 1. Coordinate work activities daily with Owner.
 - 2. Provide Owner with not less than 72 hours' notice of activities that may affect Owner's operations.
- B. Protect building and landscaping from damage.
- C. Maintain access to existing walkways and adjacent occupied facilities.
- D. Available Information: The following are available for Contractor reference:
 - 1. Roof Moisture Survey of existing membrane roofing system.
 - 2. Analysis of test cores from existing membrane roofing system.
 - 3. Construction Drawings and Project Manual for existing roofing system.
 - 4. Contractor is responsible for interpretation and conclusions based upon available information.
- E. Weather Limitations: Proceed with reroofing preparation only when weather conditions permit Work to proceed without water entering existing roofing system or building.
- F. Hazardous Materials: It is not expected that Contractor will encounter hazardous materials such as asbestos-containing materials.
 - 1. Owner will remove hazardous materials before start of the Work.
 - 2. Do not disturb materials suspected of containing hazardous materials. Notify Architect-Engineer and Owner. Hazardous materials will be removed by Owner under a separate contract.
- G. Hazardous Materials: A report on the presence of hazardous materials is available to Contractor for review and use.
 - 1. Examine report to become aware of locations where hazardous materials are present.

2. Hazardous material remediation is specified elsewhere in the Contract Documents.

1.9 WARRANTY

- A. Existing Warranties: Remove, replace, patch, and repair materials and surfaces affected by reroofing, by methods and with materials acceptable to warrantor.
 1. Notify warrantor of existing roofing system before proceeding, and upon completion of reroofing.
 2. Obtain documentation verifying that existing roofing system has been inspected by warrantor and warranty remains in effect. Submit documentation at Project closeout.

PART 2 - PRODUCTS

2.1 TEMPORARY ROOFING MATERIALS

- A. Design of temporary roofing and selection of materials are responsibilities of Contractor.

2.2 AUXILIARY REROOFING MATERIALS

- A. General: Auxiliary reroofing preparation materials recommended by roofing system manufacturer and compatible with components of existing and new membrane roofing system.
- B. Base Sheet Fasteners: Capped head, factory-coated steel fasteners, listed in FM Approval's "RoofNav."
- C. Metal Flashing Sheet: Metal flashing sheet is specified in Section 07 60 00 SHEET METAL FLASHING AND TRIM.

PART 3 - EXECUTION

3.1 PREPARATION

- A. During removal operations, have sufficient and suitable materials on-site to facilitate rapid installation of temporary protection in the event of unexpected rain.
- B. Verify that rooftop utilities and service piping have been shut off before beginning the Work.

3.2 ROOF TEAR-OFF

- A. General: Notify Owner each day of extent of roof tear-off proposed for that day and obtain authorization to proceed.
- B. Roof Tear-Off: Remove existing roofing components down to the existing sheathing.
 1. Dry bitumen and felts that are firmly bonded to concrete decks may remain. Remove wet or unadhered bitumen and felts.

2. Comply with FM Approvals requirements for removal of excess asphalt from steel decks.
3. Remove fasteners from deck.

3.3 ROOF RE-COVER PREPARATION

- A. Remove blisters, ridges, buckles, and other substrate irregularities from existing roofing that inhibit new roofing from conforming to substrate.
 1. Broom clean existing substrate.
 2. Remove materials that are wet and damp. Removal will be paid for by adjusting the Contract Sum according to unit prices included in the Contract Documents.

3.4 EXISTING BASE FLASHINGS

- A. Remove existing base flashings around parapets, curbs, walls, and penetrations.
 1. Clean substrates of contaminants such as asphalt, sheet materials, dirt, and debris.
- B. Do not damage metal counterflashings that are to remain. Replace metal counterflashings damaged during removal with counterflashings specified in Section 07 60 00 SHEET METAL FLASHING AND TRIM.

3.5 DISPOSAL

- A. Collect demolished materials and place in containers. Promptly dispose of demolished materials. Do not allow demolished materials to accumulate on-site.
 1. Storage or sale of demolished items or materials on-site is not permitted.
- B. Transport and legally dispose of demolished materials off Owner's property.

END OF SECTION

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 07 31 13
ASPHALT SHINGLES

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies underlayment, asphalt shingles and PVC liner for existing gutters.

1.2 SUMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Samples: Shingle, each type, color and texture.
- C. Manufacturer's Literature and Data:
 - 1. Shingles
 - 2. Installation instructions

1.3 DELIVERY AND STORAGE

- A. Deliver materials in manufacturer's unopened bundles or containers with the manufacturer's brand and name clearly marked thereon.
- B. Shingle bundle wrapping shall bear the label of Underwriters Laboratories, Inc.
- C. Store shingles in accordance with manufacturer's printed instructions. Store roll goods on end in an upright position.
- D. Keep materials dry, covered completely and protected from the weather.

1.4 WARRANTY

- A. Manufacturer's Warranty: Furnish shingle manufacturer's warranty for the product listed below:
 - 1. CertainTeed Landmark Plus Lifetime limited warranty.
 - 2. 10-year SureStart warranty (100% replacement and labor cost due to manufacturing defects.
 - 3. Wind warranty upgrade: up to 130 mph.

1.5 APPLICABLE PUBLICATIONS

- A. Publications listed below form a part o this specification to the extent referenced. Publications are referenced in the text by the basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - D226-06.....Asphalt-Saturated Organic Felt Used in Roofing and Waterproofing
 - D1970-08.....Self-Adhering Polymer Modified Bituminous Sheet Materials Used as Steep Roofing Underlayment for Ice Dam Protection

- D2178-04.....Asphalt Glass Felt used in Roofing and
Waterproofing
- D3018-03.....Class A Asphalt Shingles Surfaced with Mineral
Granules
- D3462-07.....Asphalt, Shingles Made from Glass Felt and
Surfaced with Mineral Granules
- F1667-05.....Driven Fasteners: Nails, Spikes, and Staples
- C. Underwriter's Laboratories Inc. (UL):
- UL790-04.....Fire Tests of Roof Covering
- D. ASTM International (ASTM):
- A167-99(R2009).....Stainless and Heat-Resisting Chromium-Nickel
Steel Plate, Sheet, and Strip
- A653/A653M-09.....Steel Sheet Zinc-Coated (Galvanized) or Zinc
Alloy Coated (Galvanized) by the Hot- Dip
Process
- B32-08.....Solder Metal
- B209-07.....Aluminum and Aluminum-Alloy Sheet and Plate
- B370-09.....Copper Sheet and Strip for Building
Construction
- D173-03.....Bitumen-Saturated Cotton Fabrics Used in
Roofing and Waterproofing
- D412-06.....Vulcanized Rubber and Thermoplastic Elastomers-
Tension
- D1187-97(R2002).....Asphalt Base Emulsions for Use as Protective
Coatings for Metal
- D1784-08.....Rigid Poly (Vinyl Chloride) (PVC) Compounds and
Chlorinated Poly (Vinyl Chloride) (CPVC)
Compounds
- D3656-07.....Insect Screening and Louver Cloth Woven from
Vinyl-Coated Glass Yarns
- D4586-07.....Asphalt Roof Cement, Asbestos Free
- E. Sheet Metal and Air Conditioning Contractors National Association
(SMACNA): Architectural Sheet Metal Manual.
- F. National Association of Architectural Metal Manufacturers (NAAMM):
- AMP 500-06.....Metal Finishes Manual
- G. Federal Specification (Fed. Spec):
- A-A-1925A.....Shield, Expansion; (Nail Anchors)
- UU-B-790A.....Building Paper, Vegetable Fiber

H. International Code Commission (ICC): International Building Code,
Current Edition

PART 2 - PRODUCTS

2.1 SHINGLES

- A. Class A: (Fire resistive), per UL790. ASTM D3018, Type I-self-sealing; ASTM D3161-08b, Class "F" Wind Resistance; ASTM D3161-03b, Class "F" Wind Resistance (Regional); ASTM D3161-99a Wind Resistance; UL997 Wind Resistance; UL997 Wind Resistance; UL 2390/ASTM D6381 Class "H" and ASTM D7158 Class "H" Wind Resistance; glass fiber mat base, ceramic colored/UV resistant mineral surface granules across entire face of shingle; two-piece laminated self sealing shingle.
- B. Weight: 265 lbs per square
- C. Wind-resistant: Upgrade to 130 mph. Provide manufacturer's recommendation for accessories including but not limited to: starter, hip and ridge shingles.
- D. Product: Certain Teed Landmark PLUS.
- E. Color: Colonial Slate to match shingles on adjacent buildings throughout the Fort Meade campus.

2.2 ROOFING NAILS

- A. ASTM F1667; Type I, Style 20, galvanized steel, deformed shanks, with heads 9.5 mm to 11 mm (3/8-inch to 7/16-inch) diameter.
- B. Use nails 32 mm (1-1/4 inches) long for shingles and 19 mm (3/4-inch long) for felt.

2.3 UNDERLAYMENT

- A. Eave protection and roof underlayment: CertainTeed 'winter guard', ASTM D1970 sheet barrier of shelf adhering rubberized asphalt membrane shingle underlayment having internal reinforcement and 'split' back plastic release film; provide material warranty equal in duration to that of shingles being applied.
- B. Felt: ASTM D 4869, Asphalt saturated felt.

2.4 PVC GUTTER LINER

- A. 60 mil (1.5mm) thick reinforced PVC membrane, ASTM D4434, Classification: Type III.
- B. Color: White
- C. Adhesive

PART 3 EXECUTION**3.1 PREPARATION**

- A. Roof surfaces shall be sound, reasonably smooth and free from defects which would interfere with roofing installation.

3.2 Gutters

- A. Gutters shall be inspected prior to installation.
- B. Substrate shall be clean, dry and free from debris.
- C. Install PVC membrane liner in existing gutters per manufacturer's recommendations.

3.3 INSTALLATION EAVE ICE DAM PROTECTION

- A. Place eave edge and gable metal edge flashing tight with fascia boards. Weather lap joints 2 inches (50mm). Secure flange with nails spaced 8 inches (200 mm) on center.
- B. Apply 'winter guard' waterproofing shingle underlayment as eave protection in accordance with manufacturer's instructions.
- C. Extend eave protection membrane a minimum 48 inches (1220 mm) up slope beyond interior face of exterior wall.

3.4 VALLEY PROTECTION

- A. Apply one ply of 'winter guard' waterproofing shingle underlayment, minimum 36 inches (910 mm) wide, centered over valleys. Lap joints minimum of 6 inches (152 mm). Follow instructions of shingle manufacturer.

3.5 INSTALLATION UNDERLAYMENT

- A. Lay underlayment under shingles over entire roof.
- B. Apply one layer of 'winter guard' over all areas not protected by winter guard as eaves, with end and edges weather lapped minimum of 19 inches (480 mm). Stagger end laps each consecutive layer. Nail in place.
- C. Contractor option (in lieu of one layer of winter guard): At roof slopes greater than 4:12: Install two layers of asphalt felt shingle underlayment perpendicular to slope of roof and lap a minimum 4 inches (100 mm) over eave protection.
- D. Weather lap and seal watertight with asphalt roofing cement items projecting through or mounted on roof. Avoid contact or solvent based cements with winter guard.

3.6 METAL DRIP EDGES

- A. Install metal drip edges made of stainless steel. Apply the metal drip edge directly over the underlayment along the rakes.

1. Form drips at lower edge of fascias by folding edge back 13 mm (1/2 inch) and bending out 45 degrees from vertical to carry water away from the wall.
 2. Form drip to provide hook to engage cleat or edge strip for fastening for not less than 19 mm (3/4 inch) loose lock where shown.
- B. Secure metal drip edges with compatible nails spaced not more than 250 mm (10 inches) on center along the inner edges.
- C. All metal roof edges shall meet requirements of IBC, current edition.

3.7 FLASHINGS

- A. Provide metal flashings at the intersections of roofs, adjoining walls, or projections through the deck such as chimneys and vent stacks. Give careful attention to the installation of all flashings.
1. Finish exposed edges of flashing with a 6 mm (1/4 inch) hem formed by folding edge of flashing back on itself when not hooked to edge strip or cleat.
 2. Color: Flashings exposed to view shall be prefinished metal. Color selected by resident engineer.

3.8 RIDGE, HIP AND STARTER SHINGLES

- A. Install manufacturer's shingles specifically made for each application including but not limited to starter, ridge and hip shingles.

3.9 SHINGLES

- A. Install shingles in accordance with manufacturer's instructions for product type and application needed. Nail shingles in accordance with manufacturer's published directions.

3.10 Completion and Final Clean-up

- A. Singles: Field inspect installation prior to final inspection. Ensure a water tight condition at roof, flashings and penetrations. Correct all unacceptable work.
- B. Gutters: Field inspect to verify water tight installation. Correct all unacceptable work.
- C. Clean: Check all gutters and surrounding site, remove all roofing debris, check all flashings and roofing boots to ensure a water tight condition.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

**SECTION 07 40 00
STANDING SEAM ROOFING**

PART 1 - GENERAL

1.1 DESCRIPTION

- A. This section specifies underlayment and steel standing seam roof system.

1.2 RELATED WORK

- A. PVC gutter liner: Section 07 31 13, ASPHALT SHINGLES.
B. Sealant: Section 07 92 00, JOINT SEALANTS.

1.3 MANUFACTURER'S QUALIFICATIONS

- A. Metal roof panels shall be products of a manufacturer regularly engaged in the fabrication and erection of standing seam roofs of the type and design shown and specified.

1.4 SUBMITTALS

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA and SU
B. Samples: Metal panel, 150 mm (six inch) square, showing finish, each color and texture.
C. Shop Drawings: Submit complete installation drawings and installation details by the manufacturer for review and approval by COTR.
Installation drawings shall show methods of installation, elevations, and plans of the roof, flashings, roof curbs, vents, sealants.
D. Manufacturer's Literature and Data: Roof panels

1.5 APPLICABLE PUBLICATIONS

- A. The publications listed below form a part of this specification to the extent referenced. The publications are referenced in the text by the basic designation only.
B. American Society for Testing and Materials (ASTM):
A653/A653M-07..... Steel Sheet, Zinc-Coated (Galvanized), or Zinc-Iron Alloy-Coated (Galvannealed) by the Hot-Dip Process.
A463-06..... Steel Sheet, Cold-Rolled, Aluminum-Coated, by the Hot-Dip Process
A924/A924M-07..... Steel Sheet, Metallic Coated by the Hot-Dip Process
A1008/A1008M-07..... Steel, Sheet, Cold-Rolled, Carbon, Structural, High Strength Low Alloy
B209/209M-07..... Aluminum and Aluminum Alloy Sheet and Plate

E119-08..... Fire Test of Building Construction and
Materials

PART 2 - PRODUCTS

2.1 STEEL PANELS

- A. Steel Panels: ASTM A653M-02, G90 (lock-forming quality), extra smooth, tension-leveled, galvanized steel, minimum spangle. Match existing width of panel as close as possible.
- B. Thickness: 24 gauge
- C. Steel, Sheet, Galvanized: ASTM A653/A653M, Structural.
 - 1. Grade 40, galvanized coating conforming to ASTM A924/A924M, Class Z 275 G-90.
- D. Product: UNA-CLAD UC-3 Double-Lock Standing Seam, roll formed steel roofing panels manufactured by Firestone Metal Products/UNACLAD or approved equal.

2.2 FASTENERS

- A. Fasteners of size, type and holding strength as recommended by manufacturer.

2.3 UNDERLAYMENT

- A. Manufacturers (from metal roofing manufacturer) self adhered premium metal roofing underlayment with a non reinforced, rubberized asphalt waterproofing membrane, superior adhesion and outstanding traction. The membrane is water and fire resistant and can withstand temperatures up to 250 degrees. CLAD-GARD SA or approved equal.

2.4 FINISH

- A. Manufactures standard Kynar 500/Hylar 5000 Fluropon finish by Valspar.
- B. Color: Selected from manufactures' standard colors
- C. Provide factory applied strippable plastic film for protection during fabrication and installation.

PART 3 - EXECUTION

3.1 INSTALLATION

- A. General: Install panels in accordance with the manufacturer's approved erection instructions and diagrams, except as specified otherwise. Panels shall be in full and firm contact with supports and with each other at side and end laps. Where panels are cut in the field, or where any of the factory applied coverings or coatings are abraded or damaged in handling or installation, they shall, after the necessary repairs have been made with material of the same type and color as the weather coating, be approved before being installed. All cut ends and edges,

including those at openings through the sheets shall be sealed completely. Correct defects or errors in the materials in an approved manner. Replace materials which cannot be corrected in an approved manner with nondefective material. Provide molded closure strips where indicated and whenever sheets terminate with open ends after installation.

- B. Roof Panels: Apply roofing panels with the configurations parallel to the slope of the roof. Provide roofing panels in full lengths from ridge (or ridge panel) to eaves, with no transverse joints except at the junction of ventilators, curbs, skylights, chimneys and similar openings. Lay all side laps away from the prevailing wind, and seal side and end laps with joint sealing material. Flash and seal the roof at the ridge, at eaves and rakes, at projections through the roof, and elsewhere as necessary. Install closure strips, flashing, and sealing material in an approved manner that will assure complete weather tightness.
- C. Flashing: All flashing and related closures and accessories in connection with the preformed metal panels shall be provided as indicated and as necessary to provide a watertight installation. Details of installation, which are not indicated, shall be in accordance with the panel manufacturer's printed instruction and details, or the approved shop drawings. Installation shall allow for expansion and contraction of flashing.
- D. Fasteners: Fastener spacings shall be in accordance with the manufacturer's recommendations, and as necessary to withstand the design loads indicated. Install fasteners in valleys or crowns as recommended by the manufacturer of the sheet being used. Install fasteners in straight lines within a tolerance of 13 mm (1/2-inch) in the length of a bay. Exercise extreme care in drilling pilot holes for fastenings to keep drills perpendicular and centered in valleys, or crowns, as applicable. After drilling, remove metal filings and burrs from holes prior to installing fasteners and washers. Torque used in applying fasteners shall not exceed that recommended by the manufacturer. Remove panels deformed or otherwise damaged by over-torqued fastenings, and provide new panels. Remove metal shavings and filings from roofs on completion to prevent rusting and discoloration of the panels.

3.2 Gutter liner

- A. Install PVC membrane liner in existing gutters. See requirements under section 07 31 13 Asphalt shingles.

3.3 PROTECTION AND CLEANING

- A. Protect panels and other components from damage during and after erection, and until project is accepted by the Government.
- B. After completion of work, all exposed finished surfaces of panels shall be cleaned of soil, discoloration and disfiguration. Touch-up abraded surfaces of panels.

- - - E N D - - -

**SECTION 07 92 00
JOINT SEALANTS**

PART 1 - GENERAL

1.1 DESCRIPTION:

- A. Section covers all sealant and caulking materials and their application, wherever required for complete installation of building materials or systems.

1.2 QUALITY CONTROL:

- A. Installer Qualifications: An experienced installer who has specialized in installing joint sealants similar in material, design, and extent to those indicated for this Project and whose work has resulted in joint-sealant installations with a record of successful in-service performance.
- B. Source Limitations: Obtain each type of joint sealant through one source from a single manufacturer.
- C. VOC: Acrylic latex and Silicon sealants shall have less than 50g/l VOC content.

1.3 SUBMITTALS:

- A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.
- B. Manufacturer's installation instructions for each product used.
- C. Cured samples of exposed sealants for each color where required to match adjacent material.
- D. Manufacturer's Literature and Data:
1. Caulking compound
 2. Primers
 3. Sealing compound, each type, including compatibility when different sealants are in contact with each other.

1.4 PROJECT CONDITIONS:

- A. Environmental Limitations:
1. Do not proceed with installation of joint sealants under following conditions:
 - a. When ambient and substrate temperature conditions are outside limits permitted by joint sealant manufacturer or are below 4.4 °C (40 °F).
 - b. When joint substrates are wet.
- B. Joint-Width Conditions:

1. Do not proceed with installation of joint sealants where joint widths are less than those allowed by joint sealant manufacturer for applications indicated.

C. Joint-Substrate Conditions:

1. Do not proceed with installation of joint sealants until contaminants capable of interfering with adhesion are removed from joint substrates.

1.5 DELIVERY, HANDLING, AND STORAGE:

- A. Deliver materials in manufacturers' original unopened containers, with brand names, date of manufacture, shelf life, and material designation clearly marked thereon.
- B. Carefully handle and store to prevent inclusion of foreign materials.
- C. Do not subject to sustained temperatures exceeding 32° C (90° F) or less than 5° C (40° F).

1.6 APPLICABLE PUBLICATIONS:

- A. Publications listed below form a part of this specification to extent referenced. Publications are referenced in text by basic designation only.
- B. American Society for Testing and Materials (ASTM):
 - C509-06.....Elastomeric Cellular Preformed Gasket and Sealing Material.
 - C612-10.....Mineral Fiber Block and Board Thermal Insulation.
 - C717-10.....Standard Terminology of Building Seals and Sealants.
 - C834-10.....Latex Sealants.
 - C919-08.....Use of Sealants in Acoustical Applications.
 - C920-10.....Elastomeric Joint Sealants.
 - C1021-08.....Laboratories Engaged in Testing of Building Sealants.
 - C1193-09.....Standard Guide for Use of Joint Sealants.
 - C1330-02 (R2007).....Cylindrical Sealant Backing for Use with Cold Liquid Applied Sealants.
 - D1056-07.....Specification for Flexible Cellular Materials--Sponge or Expanded Rubber.
 - E84-09.....Surface Burning Characteristics of Building Materials.
- C. Sealant, Waterproofing and Restoration Institute (SWRI).

The Professionals' Guide

PART 2 - PRODUCTS**2.1 SEALANTS:**

A. S-1:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade NS.
5. Shore A hardness of 20-40

B. S-2:

1. ASTM C920, polyurethane or polysulfide.
2. Type M.
3. Class 25.
4. Grade P.
5. Shore A hardness of 25-40.

C. S-6:

1. ASTM C920, silicone, neutral cure.
2. Type S.
3. Class: Joint movement range of plus 100 percent to minus 50 percent.
4. Grade NS.
5. Shore A hardness of 15-20.
6. Minimum elongation of 1200 percent.

2.2 CAULKING COMPOUND:

- A. C-1: ASTM C834, acrylic latex.

2.3 COLOR:

- A. Match adjacent surface to the extent possible.

2.4 JOINT SEALANT BACKING:

- A. General: Provide sealant backings of material and type that are nonstaining; are compatible with joint substrates, sealants, primers, and other joint fillers; and are approved for applications indicated by sealant manufacturer based on field experience and laboratory testing.
- B. Cylindrical Sealant Backings: ASTM C1330, of type indicated below and of size and density to control sealant depth and otherwise contribute to producing optimum sealant performance:
1. Type C: Closed-cell material with a surface skin.

2.5 FILLER:

- A. Mineral fiber board: ASTM C612, Class 1.
- B. Thickness same as joint width.

C. Depth to fill void completely behind back-up rod.

2.6 PRIMER:

- A. As recommended by manufacturer of caulking or sealant material.
- B. Stain free type.

2.7 CLEANERS-NON POUROUS SURFACES:

- A. Chemical cleaners acceptable to manufacturer of sealants and sealant backing material, free of oily residues and other substances capable of staining or harming joint substrates and adjacent non-porous surfaces and formulated to promote adhesion of sealant and substrates.

PART 3 - EXECUTION

3.1 INSPECTION:

- A. Inspect substrate surface for bond breaker contamination and unsound materials at adherent faces of sealant.
- B. Coordinate for repair and resolution of unsound substrate materials.
- C. Inspect for uniform joint widths and that dimensions are within tolerance established by sealant manufacturer.

3.2 PREPARATIONS:

- A. Prepare joints in accordance with manufacturer's instructions and SWRI.
- B. Clean surfaces of joint to receive caulking or sealants leaving joint dry to the touch, free from frost, moisture, grease, oil, wax, lacquer paint, or other foreign matter that would tend to destroy or impair adhesion.
 - 1. Clean porous joint substrate surfaces by brushing, grinding, blast cleaning, mechanical abrading, or a combination of these methods to produce a clean, sound substrate capable of developing optimum bond with joint sealants.
 - 2. Remove loose particles remaining from above cleaning operations by vacuuming or blowing out joints with oil-free compressed air. Porous joint surfaces include the following:
 - a. Concrete.
 - b. Masonry.
 - c. Unglazed surfaces of ceramic tile.
 - 3. Remove laitance and form-release agents from concrete.
 - 4. Clean nonporous surfaces with chemical cleaners or other means that do not stain, harm substrates, or leave residues capable of interfering with adhesion of joint sealants.
 - a. Metal.
 - b. Glass.

- c. Porcelain enamel.
- d. Glazed surfaces of ceramic tile.
- C. Do not cut or damage joint edges.
- D. Apply masking tape to face of surfaces adjacent to joints before applying primers, caulking, or sealing compounds.
 - 1. Do not leave gaps between ends of sealant backings.
 - 2. Do not stretch, twist, puncture, or tear sealant backings.
 - 3. Remove absorbent sealant backings that have become wet before sealant application and replace them with dry materials.
- E. Apply primer to sides of joints wherever required by compound manufacturer's printed instructions.
 - 1. Apply primer prior to installation of back-up rod or bond breaker tape.
 - 2. Use brush or other approved means that will reach all parts of joints.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

3.3 BACKING INSTALLATION:

- A. Install back-up material, to form joints enclosed on three sides as required for specified depth of sealant.
- B. Where deep joints occur, install filler to fill space behind the back-up rod and position the rod at proper depth.
- C. Cut fillers installed by others to proper depth for installation of back-up rod and sealants.
- D. Install back-up rod, without puncturing the material, to a uniform depth, within plus or minus 3 mm (1/8 inch) for sealant depths specified.
- E. Where space for back-up rod does not exist, install bond breaker tape strip at bottom (or back) of joint so sealant bonds only to two opposing surfaces.
- F. Take all necessary steps to prevent three sided adhesion of sealants.

3.4 SEALANT DEPTHS AND GEOMETRY:

- A. At widths up to 6 mm (1/4 inch), sealant depth equal to width.
- B. At widths over 6 mm (1/4 inch), sealant depth 1/2 of width up to 13 mm (1/2 inch) maximum depth at center of joint with sealant thickness at center of joint approximately 1/2 of depth at adhesion surface.

3.5 INSTALLATION:

- A. General:

1. Apply sealants and caulking only when ambient temperature is between 5° C and 38° C (40° and 100° F).
 2. Do not use polysulfide base sealants where sealant may be exposed to fumes from bituminous materials, or where water vapor in continuous contact with cementitious materials may be present.
 3. Do not use sealant type listed by manufacture as not suitable for use in locations specified.
 4. Apply caulking and sealing compound in accordance with manufacturer's printed instructions.
 5. Avoid dropping or smearing compound on adjacent surfaces.
 6. Fill joints solidly with compound and finish compound smooth.
 7. Tool joints to concave surface unless shown or specified otherwise.
 8. Finish paving or floor joints flush unless joint is otherwise detailed.
 9. Apply compounds with nozzle size to fit joint width.
 10. Test sealants for compatibility with each other and substrate. Use only compatible sealant.
- B. For application of sealants, follow requirements of ASTM C1193 unless specified otherwise.
- C. Where gypsum board partitions are of sound rated, fire rated, or smoke barrier construction, follow requirements of ASTM C919 only to seal all cut-outs and intersections with the adjoining construction unless specified otherwise.
1. Apply a 6 mm (1/4 inch) minimum bead of sealant each side of runners (tracks), including those used at partition intersections with dissimilar wall construction.
 2. Coordinate with application of gypsum board to install sealant immediately prior to application of gypsum board.
 3. Partition intersections: Seal edges of face layer of gypsum board abutting intersecting partitions, before taping and finishing or application of veneer plaster-joint reinforcing.
 4. Openings: Apply a 6 mm (1/4 inch) bead of sealant around all cut-outs to seal openings of electrical boxes, ducts, pipes and similar penetrations. To seal electrical boxes, seal sides and backs.
 5. Control Joints: Before control joints are installed, apply sealant in back of control joint to reduce flanking path for sound through control joint.

3.6 CLEANING:

- A. Fresh compound accidentally smeared on adjoining surfaces: Scrape off immediately and rub clean with a solvent as recommended by the caulking or sealant manufacturer.
- B. After filling and finishing joints, remove masking tape.
- C. Leave adjacent surfaces in a clean and unstained condition.

3.7 LOCATIONS:

- A. Exterior Building Joints, Horizontal and Vertical:
 - 1. Metal to Metal: Type S-1, S-2
 - a. Color: match adjacent color
 - 2. Metal to Masonry or Stone: Type S-1
 - a. Color: match adjacent color
 - 3. Wood to Masonry: Type S-1
 - a. Color: match adjacent color

- B. Metal Reglets and Flashings:
 - 1. Flashings to Wall: Type S-6
 - a. Color: match adjacent color
 - 2. Metal to Metal: Type S-6
 - a. Color: match adjacent color

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK

SECTION 09 91 00
PAINTING

PART 1-GENERAL

1.1 DESCRIPTION

A. Section specifies field prep and painting requirements.

1.2 SUBMITTALS

A. Submit in accordance with Section 01 33 23, SHOP DRAWINGS, PRODUCT DATA, AND SAMPLES.

B. Manufacturers' Certificates indicating compliance with specified requirements:

1. Manufacturer's paint substituted for Federal Specification paints meets or exceeds performance of paint specified.

1.3 DELIVERY AND STORAGE

A. Deliver materials to site in manufacturer's sealed container marked to show following:

1. Name of manufacturer.
2. Product type.
3. Batch number.
4. Instructions for use.
5. Safety precautions.

B. In addition to manufacturer's label, provide a label legibly printed as following:

1. Federal Specification Number, where applicable, and name of material.
2. Surface upon which material is to be applied.
3. If paint or other coating, state coat types; prime, body or finish.

C. Maintain space for storage, and handling of painting materials and equipment in a neat and orderly condition to prevent spontaneous combustion from occurring or igniting adjacent items.

D. Store materials at site at least 24 hours before using, at a temperature between 18 and 30 degrees C (65 and 85 degrees F).

1.4 APPLICABLE PUBLICATIONS

A. Publications listed below form a part of this specification to the extent referenced. Publications are referenced in the text by basic designation only.

B. American Conference of Governmental Industrial Hygienists (ACGIH):
ACGIH TLV-BKLT-2008.....Threshold Limit Values (TLV) for Chemical
Substances and Physical Agents and Biological
Exposure Indices (BEIs)

ACGIH TLV-DOC-2008.....Documentation of Threshold Limit Values and
Biological Exposure Indices, (Seventh Edition)

- C. American National Standards Institute (ANSI):
 A13.1-07.....Scheme for the Identification of Piping Systems
- D. American Society for Testing and Materials (ASTM):
 D260-86.....Boiled Linseed Oil
- E. Commercial Item Description (CID):
 A-A-1555.....Water Paint, Powder (Cementitious, White and
 Colors) (WPC) (cancelled)
 A-A-3120.....Paint, For Swimming Pools (RF) (cancelled)
- F. Federal Specifications (Fed Spec):
 TT-P-1411A.....Paint, Copolymer-Resin, Cementitious (For
 Waterproofing Concrete and Masonry Walls) (CEP)
- G. Master Painters Institute (MPI):
 No. 1-07.....Aluminum Paint (AP)
 No. 4-07.....Interior/ Exterior Latex Block Filler
 No. 5-07.....Exterior Alkyd Wood Primer
 No. 7-07.....Exterior Oil Wood Primer
 No. 8-07.....Exterior Alkyd, Flat MPI Gloss Level 1 (EO)
 No. 9-07.....Exterior Alkyd Enamel MPI Gloss Level 6 (EO)
 No. 10-07.....Exterior Latex, Flat (AE)
 No. 11-07.....Exterior Latex, Semi-Gloss (AE)
 No. 18-07.....Organic Zinc Rich Primer
 No. 22-07.....Aluminum Paint, High Heat (up to 590° - 1100F)
 (HR)
 No. 26-07.....Cementitious Galvanized Metal Primer
 No. 27-07.....Exterior / Interior Alkyd Floor Enamel, Gloss (FE)
 No. 31-07.....Polyurethane, Moisture Cured, Clear Gloss (PV)
 No. 36-07.....Knot Sealer
 No. 43-07.....Interior Satin Latex, MPI Gloss Level 4
 No. 44-07.....Interior Low Sheen Latex, MPI Gloss Level 2
 No. 45-07.....Interior Primer Sealer
 No. 46-07.....Interior Enamel Undercoat
 No. 47-07.....Interior Alkyd, Semi-Gloss, MPI Gloss Level 5 (AK)
 No. 48-07.....Interior Alkyd, Gloss, MPI Gloss Level 6 (AK)
 No. 49-07.....Interior Alkyd, Flat, MPI Gloss Level 1 (AK)
 No. 50-07.....Interior Latex Primer Sealer
 No. 51-07.....Interior Alkyd, Eggshell, MPI Gloss Level 3
 No. 52-07.....Interior Latex, MPI Gloss Level 3 (LE)
 No. 53-07.....Interior Latex, Flat, MPI Gloss Level 1 (LE)
 No. 54-07.....Interior Latex, Semi-Gloss, MPI Gloss Level 5 (LE)
 No. 59-07.....Interior/Exterior Alkyd Porch & Floor Enamel, Low
 Gloss (FE)

- No. 60-07.....Interior/Exterior Latex Porch & Floor Paint, Low Gloss
- No. 66-07.....Interior Alkyd Fire Retardant, Clear Top-Coat (ULC Approved) (FC)
- No. 67-07.....Interior Latex Fire Retardant, Top-Coat (ULC Approved) (FR)
- No. 68-07.....Interior/ Exterior Latex Porch & Floor Paint, Gloss
- No. 71-07.....Polyurethane, Moisture Cured, Clear, Flat (PV)
- No. 74-07.....Interior Alkyd Varnish, Semi-Gloss
- No. 77-07.....Epoxy Cold Cured, Gloss (EC)
- No. 79-07.....Marine Alkyd Metal Primer
- No. 90-07.....Interior Wood Stain, Semi-Transparent (WS)
- No. 91-07.....Wood Filler Paste
- No. 94-07.....Exterior Alkyd, Semi-Gloss (EO)
- No. 95-07.....Fast Drying Metal Primer
- No. 98-07.....High Build Epoxy Coating
- No. 101-07.....Epoxy Anti-Corrosive Metal Primer
- No. 108-07.....High Build Epoxy Coating, Low Gloss (EC)
- No. 114-07.....Interior Latex, Gloss (LE) and (LG)
- No. 119-07.....Exterior Latex, High Gloss (acrylic) (AE)
- No. 135-07.....Non-Cementitious Galvanized Primer
- No. 138-07.....Interior High Performance Latex, MPI Gloss Level 2 (LF)
- No. 139-07.....Interior High Performance Latex, MPI Gloss Level 3 (LL)
- No. 140-07.....Interior High Performance Latex, MPI Gloss Level 4
- No. 141-07.....Interior High Performance Latex (SG) MPI Gloss Level 5

PART 2 - PRODUCTS

2.1 MATERIALS

- A. Exterior Oil Wood Primer.
1. Sherwin Williams Y24W8020.
- B. Exterior Latex, Satin.
1. Sherwin Williams Series A89-100.
- C. Exterior Deck pre treatment.
1. As recommended by the manufacturer.
- D. Exterior Acrylic Solid Deck Stain.
1. Sherwin Williams DeckScapes.

2.2 PAINT PROPERTIES

- A. Use ready-mixed (including colors), except two component epoxies, polyurethanes, polyesters, paints having metallic powders packaged separately and paints requiring specified additives.
- B. Where no requirements are given in the referenced specifications for primers, use primers with pigment and vehicle, compatible with substrate and finish coats specified.

2.3 REGULATORY REQUIREMENTS/QUALITY ASSURANCE

- A. Paint materials shall conform to the restrictions of the local Environmental and Toxic Control jurisdiction.
 - 1. Volatile Organic Compounds (VOC): VOC content of paint materials shall not exceed 10g/l for interior latex paints/primers and 50g/l for exterior latex paints and primers.
 - 2. Lead-Base Paint:
 - a. Comply with Section 410 of the Lead-Based Paint Poisoning Prevention Act, as amended, and with implementing regulations promulgated by Secretary of Housing and Urban Development.
 - b. Regulations concerning prohibition against use of lead-based paint in federal and federally assisted construction, or rehabilitation of residential structures are set forth in Subpart F, Title 24, Code of Federal Regulations, Department of Housing and Urban Development.
 - c. For lead-paint removal, see Section 02 83 33.13, LEAD-BASED PAINT REMOVAL AND DISPOSAL.
 - 3. Asbestos: Materials shall not contain asbestos.
 - 4. Chromate, Cadmium, Mercury, and Silica: Materials shall not contain zinc-chromate, strontium-chromate, Cadmium, mercury or mercury compounds or free crystalline silica.
 - 5. Human Carcinogens: Materials shall not contain any of the ACGIH-BKLT and ACGHI-DOC confirmed or suspected human carcinogens.
 - 6. Use high performance acrylic paints in place of alkyd paints, where possible.
 - 7. VOC content for solvent-based paints shall not exceed 250g/l and shall not be formulated with more than one percent aromatic hydro carbons by weight.

PART 3 - EXECUTION

3.1 JOB CONDITIONS

- A. Safety: Observe required safety regulations and manufacturer's warning and instructions for storage, handling and application of painting materials.

1. Take necessary precautions to protect personnel and property from hazards due to falls, injuries, toxic fumes, fire, explosion, or other harm.
2. Deposit soiled cleaning rags and waste materials in metal containers approved for that purpose. Dispose of such items off the site at end of each days work.

B. Atmospheric and Surface Conditions:

1. Do not apply coating when air or substrate conditions are:
 - a. Less than 3 degrees C (5 degrees F) above dew point.
 - b. Below 10 degrees C (50 degrees F) or over 35 degrees C (95 degrees F), unless specifically pre-approved by the Contracting Officer and the product manufacturer. Under no circumstances shall application conditions exceed manufacturer recommendations.
2. Do no exterior painting when it is windy and dusty.
3. Do not paint in direct sunlight or on surfaces that the sun will soon warm.
4. Apply only on clean, dry and frost free surfaces except as follows:
 - a. Apply water thinned acrylic and cementitious paints to damp (not wet) surfaces where allowed by manufacturer's printed instructions.
 - b. Dampened with a fine mist of water on hot dry days concrete and masonry surfaces to which water thinned acrylic and cementitious paints are applied to prevent excessive suction and to cool surface.

3.2 SURFACE PREPARATION

- A. Method of surface preparation is optional, provided results of finish painting produce solid even color and as smooth as possible finish.
- B. Painting, General:
 1. Remove prefinished items not to be painted such as lighting fixtures, hardware, trim, and similar items for reinstallation after paint is dried.
- C. Decking, General:
 1. Clean deck as recommended by manufacturer.

3.3 REFINISHING EXISTING PAINTED SURFACES

- A. Clean, patch and repair existing surfaces.
- B. Scrape/ remove loose paint.
- C. Pull out loose nails and re-nail using stainless steel nails.
- D. Fill any dents and holes with either wood or epoxy filler.
- E. Sand the surface to remove old paint, dull existing paint to remain and smooth rough edges between remaining existing paint and areas where paint was removed.
- F. Caulk cracks.
- G. Apply one coat of primer.

- H. Apply two coat of paint.
- I. Remove and reinstall items as specified under surface preparation.
- J. Coat knots and pitch streaks showing through old finish with MPI 36 (Knot Sealer) before refinishing.

3.4 PAINT PREPARATION

- A. Thoroughly mix painting materials to ensure uniformity of color, complete dispersion of pigment and uniform composition.
- B. Do not thin unless necessary for application and when finish paint is used for body and prime coats. Use materials and quantities for thinning as specified in manufacturer's printed instructions.
- C. Remove paint skins, then strain paint through commercial paint strainer to remove lumps and other particles.
- D. For tinting required to produce exact shades specified, use color pigment recommended by the paint manufacturer.

3.5 APPLICATION

- A. Start of surface preparation or painting will be construed as acceptance of the surface as satisfactory for the application of materials.
- B. Unless otherwise specified, apply paint in three coats; prime, body, and finish. When two coats applied to prime coat are the same, first coat applied over primer is body coat and second coat is finish coat.
- C. Apply each coat evenly and cover substrate completely.
- D. Allow not less than 48 hours between applications of succeeding coats, except as allowed by manufacturer's printed instructions, and approved by Resident Engineer.
- E. Finish surfaces to show solid even color, free from runs, lumps, brushmarks, laps, holidays, or other defects.
- F. Apply by brush or roller.
- G. Do not paint in closed position operable items such as doors, window sashes and similar items.

3.6 PRIME PAINTING

- A. After surface preparation prime surfaces before application of body and finish coats.
- B. Spot prime and apply body coat to damaged and abraded painted surfaces before applying succeeding coats.

3.7 EXTERIOR FINISHES

- A. Apply two finish coats to the building components noted on the drawings.

3.8 PAINT COLOR

- A. Coat Colors:
 - 1. Color of priming coat: Lighter than body coat.
 - 2. Color of body coat: Lighter than finish coat.

3. Color prime and body coats to not show through the finish coat and to mask surface imperfections or contrasts.

B. Paint 1

1. Manufacturer: Sherwin Williams
2. Gloss level: 4
3. Color: White- verify color with resident engineer.
4. Location: All existing components painted white including to but not limited to fascias, columns, handrails, guard rails, stair risers/stringers, trim, siding, downspouts, patio/deck ceilings, doors and windows. See drawings to building components to be painted.

C. Paint 2

1. Manufacturer: Sherwin Williams
2. Gloss level: 4
3. Color: Black- verify color with resident engineer.
4. Location: All existing components painted black including but not limited to handrails. See drawings to building components to be painted.

D. Paint 3 (possible 3rd color)

1. Manufacturer: Sherwin Williams
2. Gloss Level: 4
3. Color: Selected by owner.
4. Location: To be determined.

3.9 PROTECTION CLEAN UP, AND TOUCH-UP

- A. Protect work from paint droppings and spattering by use of masking, drop cloths, removal of items or by other approved methods.
- B. Upon completion, clean paint from hardware, glass and other surfaces and items not required to be painted of paint drops or smears.
- C. Before final inspection, touch-up or refinished in a manner to produce solid even color and finish texture, free from defects in work which was damaged or discolored.

- - - E N D - - -

THIS PAGE INTENTIONALLY LEFT BLANK