


Department of Veterans Affairs

DALLAS-FORT WORTH NATIONAL CEMETERY

DALLAS, TX

SHELTER "C": REPLACE CONCRETE
PROJECT NUMBER 916-16-101

PROJECT NUMBER 916-16-101

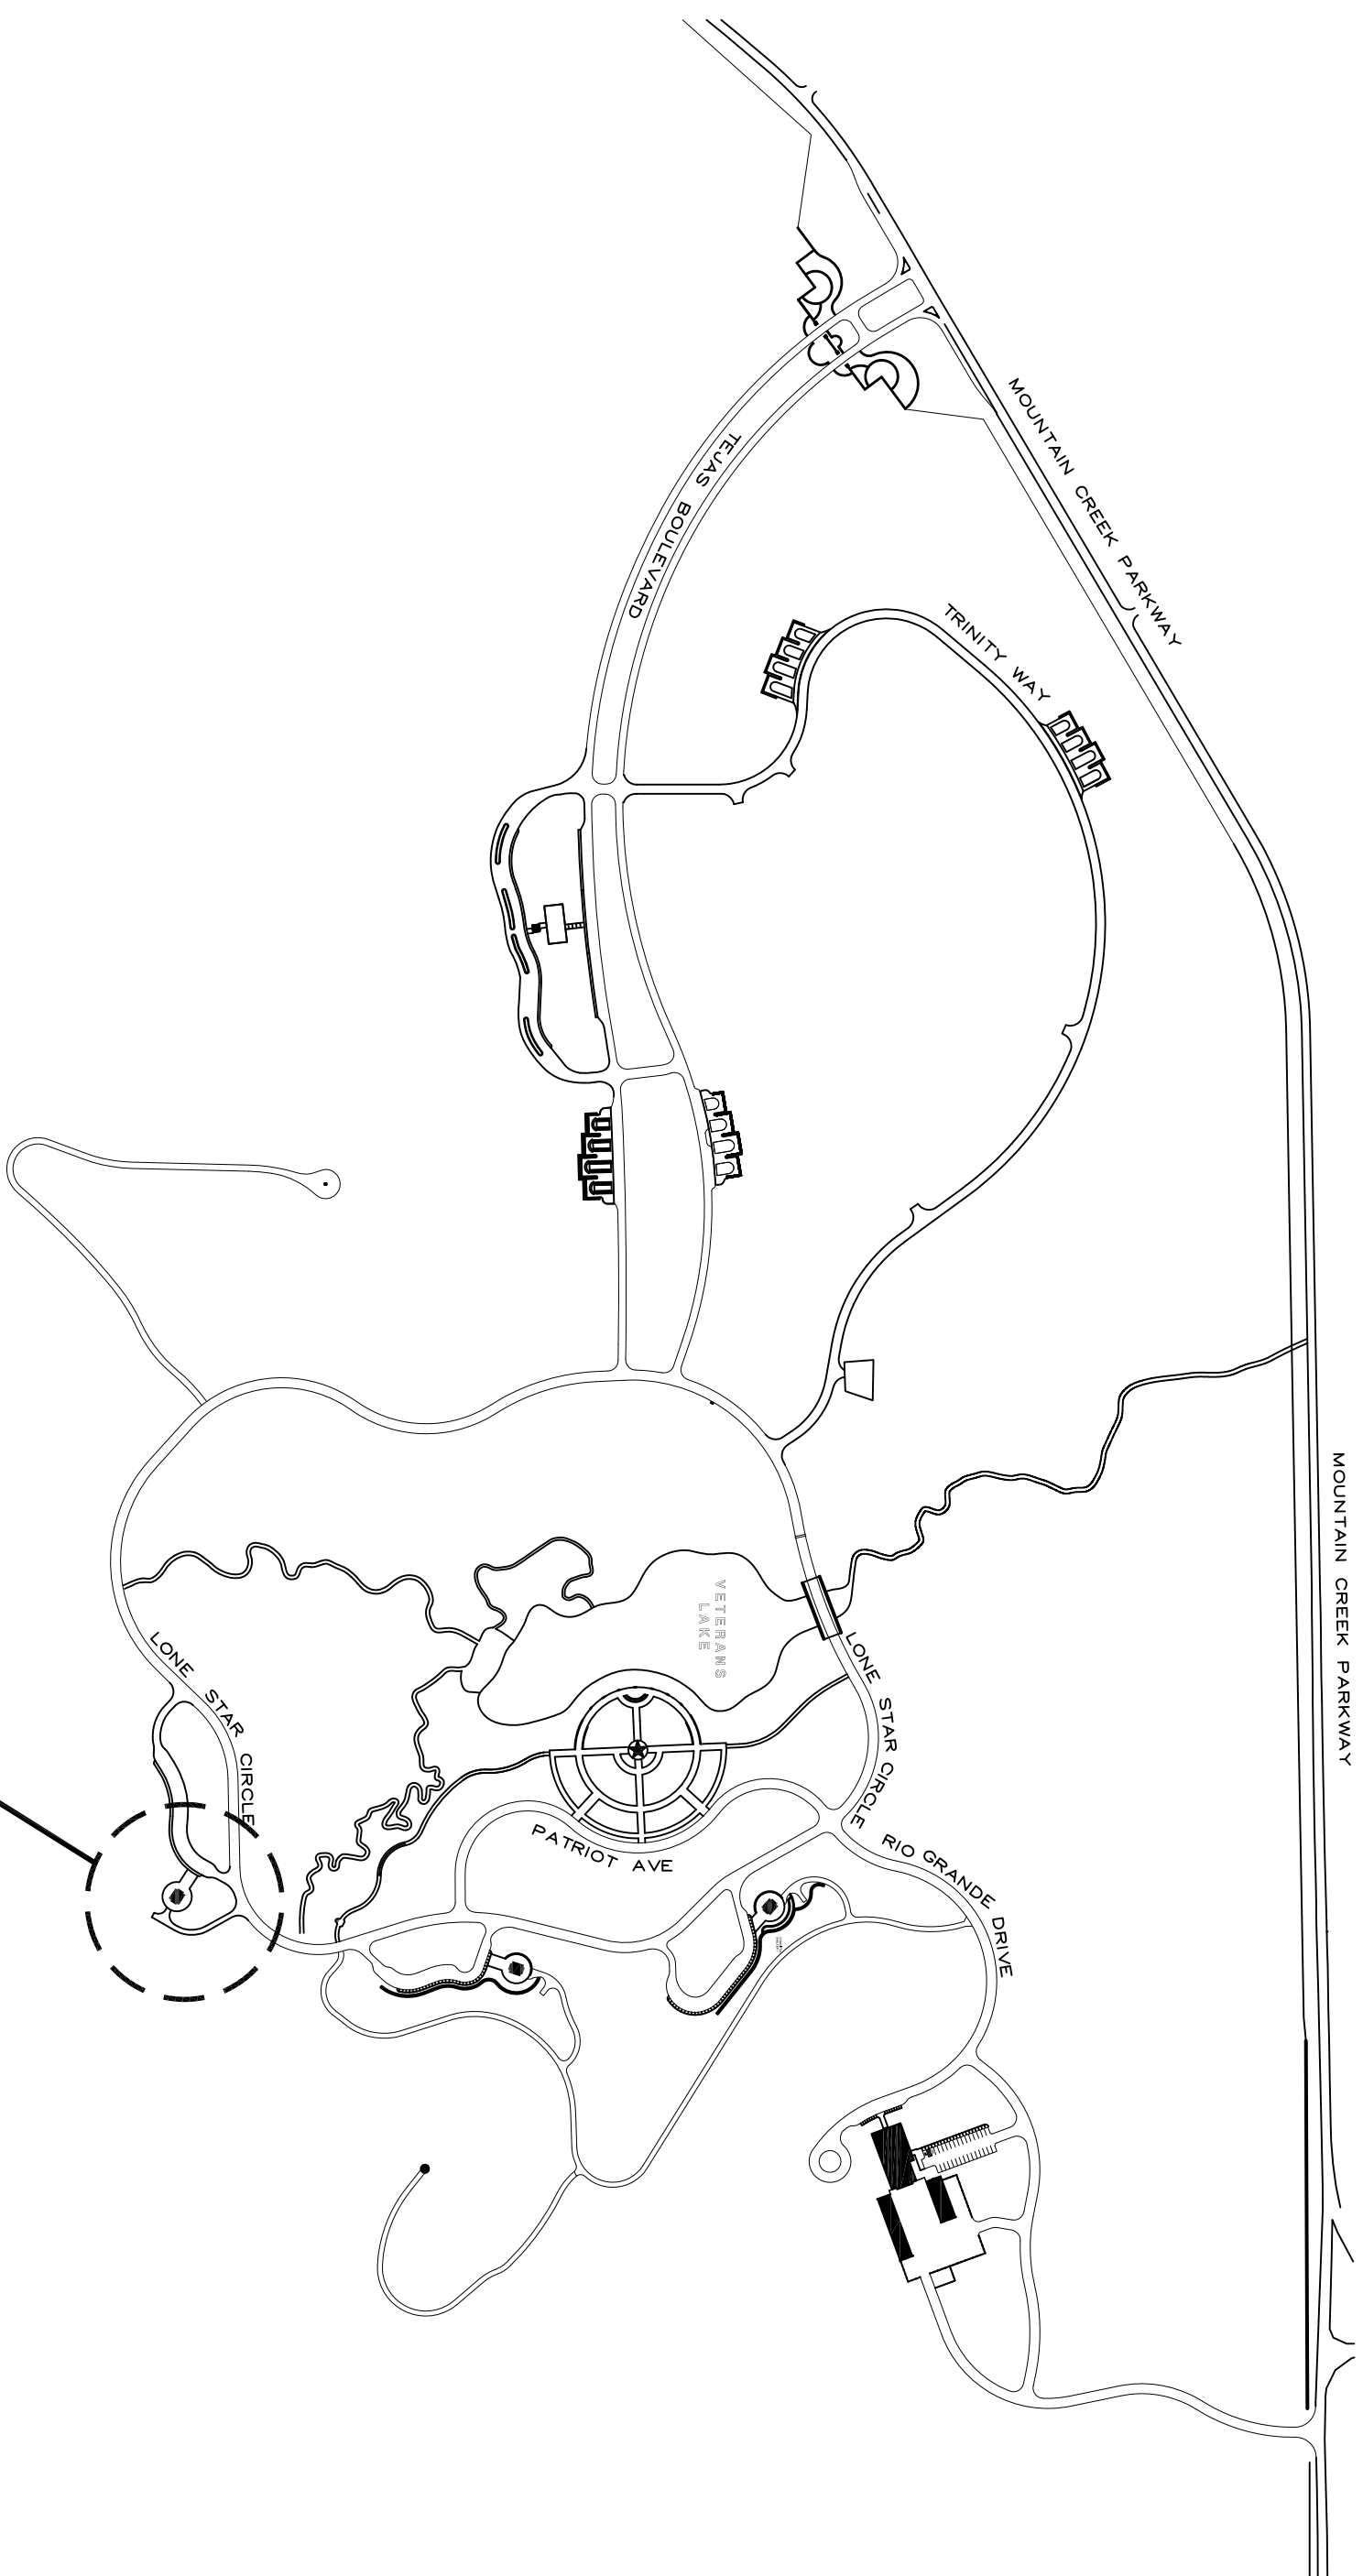

PROJECT LOCATION

SITE PLAN



NATIONAL
CEMETERY
ADMINISTRATION

GENERAL NOTES:

1. ALL CONSTRUCTION WITHIN DALLAS-FORT WORTH NATIONAL CEMETERY SHALL BE CONDUCTED WITH THE EMPHASIS ON PROPER CEMETERY ETIQUETTE AS THIS IS AN ACTIVE CEMETERY. NO DISRESPECTFUL ACTIVITY WILL BE TOLERATED.
2. COORDINATE ALL CONSTRUCTION ACTIVITIES WITH THE CEMETERY DIRECTOR TO AVOID CONFLICTS AND DISRUPTIONS OF SCHEDULED CEREMONIES AND DAILY CEMETERY OPERATIONS. SEQUENCE WORK AS NECESSARY TO ENSURE THAT CEMETERY OPERATIONS REMAIN UNINTERRUPTED DURING CONSTRUCTION OPERATIONS.

3. CONTRACTOR SHALL PROVIDE AND MAINTAIN PROPER SIGNS, BARRICADES, CONES, AND FENCES TO PROPERLY PROTECT THE PUBLIC AND CEMETERY STAFF FROM INJURY. WORK AREAS SHALL BE BARRICADED OFF DURING NON-WORKING HOURS AND WHEN THERE IS NO ACTIVE CONSTRUCTION AT THE SITE.

4. THE CONTRACTOR SHALL PROVIDE CONSTRUCTION SIGNAGE AND CONES AT THE LIMITS OF ALL PAVEMENT WORK AREAS SHOWING DETOUR AND POINTING VISITOR TRAFFIC AROUND THE CONSTRUCTION ZONE(S). ONE LANE OF TRAFFIC INBOUND AND OUTBOUND SHALL BE MAINTAINED AT ALL TIMES.

5. THE CONTRACTORS REGISTERED PROFESSIONAL LAND SURVEYOR SHALL ESTABLISH AND CONTROL THE WALKWAY ALIGNMENTS, GRADES, ELEVATIONS, AND CROSS SECTIONS. THE NEW WALKWAY SHALL BE INSTALLED SO THAT THE WALKWAY SLOPES AWAY FROM THE SHELTER BY CONTINUING THE EXISTING SLOPE OF THE EXISTING SHELTER SLAB (INSIDE THE SHELTER TO OUTSIDE). CONTRACTORS ARE TO EXCAVATE AND CONSTRUCT ALL NEW WORK TO MATCH EXISTING GRADING/ELEVATIONS AND TO ENSURE FAIR AND COMPLETE SIDEWALK AND TURRETGRASS DRAINAGE WITH NO EVIDENCE OF PONDING OR BIRD BATH AREAS.

6. THE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ANY EROSION CONTROL MEASURES NECESSARY TO PREVENT EROSION AND SEDIMENTATION. ALL SEDIMENT SHALL BE PREVENTED FROM ENTERING THE EXISTING STORM DRAINAGE SYSTEM. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING SEDIMENT RESULTING FROM THIS PROJECT FROM THE STORM DRAINAGE STRUCTURES AND SYSTEM.

7. ANY DAMAGE INCURRED TO EXISTING UTILITIES, IRRIGATION SYSTEM COMPONENTS, INSIDE AND OUTSIDE THE LIMITS OF WORK, DUE TO CONTRACT OPERATIONS INCLUDING DAMAGE TO PAVEMENT CURBS AND GUTTER SIDEWALKS AND OTHER STRUCTURES BY THE CONTRACTOR SHALL BE REPAIRED OR REPLACED BY THE CONTRACTOR AT AN ADDITIONAL COST TO THE CONTRACTMENT. IF ANY EXISTING UTILITIES, UTILITY STRUCTURES, OR IRRIGATION SYSTEM COMPONENTS ARE UNCOVERED OR ENCOUNTERED DURING CONSTRUCTION, THEY SHALL BE SAFEGUARDED, PROTECTED FROM DAMAGE, AND SUPPORTED AS NECESSARY.

8. ALL AREAS ADJACENT TO THE SITE SHALL BE MAINTAINED IN A CLEAN CONDITION. MUD AND DUST FREE AT ALL TIMES. CONSTRUCTION OPERATIONS SHALL BE CONDUCTED IN SUCH A WAY AS TO PREVENT TRACKING OF MUD OR SOIL ONTO PUBLIC THOROUGHFARES. AT THE END OF EACH DAY THE CONTRACTOR SHALL CLEAN UP ALL MUD OR SOIL WHICH HAS BEEN TRACKED ON TO CEMETERY AND PUBLIC STREETS.

9. AREAS OUTSIDE OF THE CONSTRUCTION LIMITS IMPACTED BY OPERATIONS OF THE CONTRACTOR SHALL BE RETURNED TO THE STATE IT WAS FOUND PRIOR TO NEW CONSTRUCTION, EXCEPT WHERE NEW WORK IS SHOWN.
10. TREES NOT INDICATED TO BE REMOVED SHALL BE PROTECTED FROM DAMAGE TO TRUNKS, BRANCHES AND ROOTS.

11. ALL DEBRIS, EXCESS SOIL, CONCRETE, ASPHALT, ETC. SHALL BE REMOVED OFF CEMETERY PROPERTY AND PROPERLY DISPOSED OF AT AN APPROVED WASTE DISPOSAL SITE.

12. THOROUGHLY CLEAN UP THE WORK AREA AT THE END OF EACH DAY'S WORK, AND AT COMPLETION OF THE PROJECT. LEAVE PREMISES CLEAN AND FREE OF WASTE, SCRAP, USED EQUIPMENT, OR OTHER MATERIAL, INTENTIONALLY OR INCIDENTALLY DELIVERED TO THE SITE BY CONTRACTOR OR CONTRACTORS' PERSONNEL.

13. ALL NEW CONCRETE FLATWORK SHALL BE 5" THICK, 4,000 PSI CONCRETE. BROOM FINISH SHALL MATCH THE PREVIOUSLY EXISTING FINISH AND PATTERNS.

17. CONTROL JOINTS SHALL BE HAND TOoled TO MATCH EXISTING CONDITIONS. WHEN CONCRETE HAS CURED, CONTRACTOR SHALL SAW CUT ALL CONTROL JOINTS TO A DEPTH OF 1" AND SEAL.

16. PROTECT IRRIGATION PIPING AND SPRINKLER HEADS TO ACCOMMODATE THE REPLACEMENT WALKWAY AND TURF AS NECESSARY. COORDINATE IRRIGATION SHUTDOWN, OPERATION, AND PROTECTION WITH THE COR

- 1/. REMOVED AND DAMAGE TURFGRASS AREAS SHALL BE FULLY RESTORED WITH SOD. SEEDING TO RE-ESTABLISH TURFGRASS IS NOT ALLOWED. TURFGRASS SOD TO BE APPROVED BY COR PRIOR TO INSTALLATION.

19. CONTRACTOR TO PROVIDE ALL MATERIALS AND MANUFACTURED COMPONENTS TO INSTALL THE TRENCH DRAIN SYSTEM IN FULL ACCORDANCE WITH THE MANUFACTURER'S REQUIREMENTS AND RECOMMENDATIONS.

SHEET INDEX:

- | | |
|-----|---------------------------|
| X-1 | TITLE SHEET |
| L-1 | DEMOLITION PLAN & DETAILS |
| L-2 | PLAN AND SECTION VIEWS |
| L-3 | PICTURES |

7/25/16

PROJECT NO.
916-16-10

DRAWING N

Dwg. 1 Of