


A  
B  
C  
D  
E  
F

three inches = one foot  
one and one half inches = one foot  
one inch = one foot  
three quarters inch = one foot  
one half inch = one foot  
three eighths inch = one foot  
one quarter inch = one foot  
one eighth inch = one foot

|                                     |          |
|-------------------------------------|----------|
| ISSUE 006 - CD BID                  | 01.20.11 |
| ISSUE 005 - CD OWNER REVIEW         | 12.17.10 |
| ISSUE 004 DESIGN DEVELOPMENT RECORD | 11.12.10 |
| Revisions:                          | Date     |

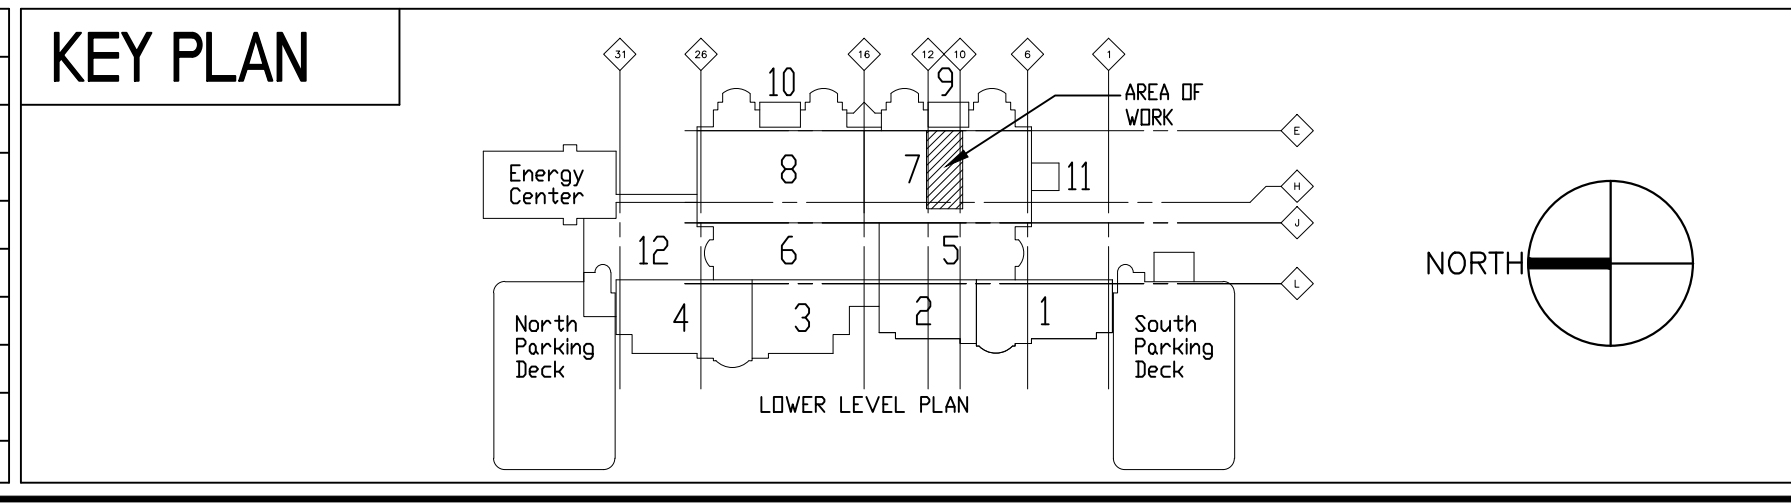

US DEPARTMENT OF  
VETERANS AFFAIRS  
JOHN D. DINGELL  
VA MEDICAL CENTER  
4646 JOHN R. STREET  
DETROIT, MI 48202

ARCHITECT/ENGINEERS:

**Albert Kahn Associates, Inc.**  
Albert Kahn Building  
7430 Second Ave.  
Detroit, Michigan 48202-2798  
Albert Kahn Associates, Inc. is a member of  
the Albert Kahn Family of Companies. © 2007  
ALBERT KAHN JOB # 03988-00.000

|                           |                             |
|---------------------------|-----------------------------|
| Drawing Title             | SIGN ELEVATIONS AND DETAILS |
| Approved Project Director | K. JAPOWICZ                 |

|               |                            |
|---------------|----------------------------|
| Project Title | POLICE SERVICES RELOCATION |
| Location      | DETROIT, MICHIGAN          |
| Date          | 01-20-2011                 |
| Checked       | EAM                        |
| Drawn         | CAT                        |

|                 |            |
|-----------------|------------|
| Project Number  | 553-11-108 |
| Building Number | 100        |
| Drawing Number  | 403        |
| Dwg. 19 of 50   |            |

Office of  
Construction  
and Facilities  
Management

Department of  
Veterans Affairs

FULLY SPRINKLERED

IN-15.09-12 Interior Signs

Soffit Mounted Directional Sign

**Size**  
IN-15.09  
152 mm x 1016 mm  
(6" x 40")  
IN-15.10  
305 mm x 1016 mm  
(12" x 40")  
IN-15.11  
457 mm x 1016 mm  
(18" x 40")  
IN-15.12  
305 mm x 1016 mm  
(12" x 40")

**Description & Use**  
Use this sign for directional information that needs to be communicated overhead.

**Message Configuration**  
(Refer to layout drawing for lettering sizes and dimensions)

**Sign Components**  
Sliding Flat Black Copy Panel; Top Accent Bar; End Clasp

**Graphic Process**  
Surface applied vinyl.

**Colors**  
Text & Arrows: Refer to Color Chart.  
Background & Accent Bar: Refer to Color Chart

**Typography**  
Helvetica Medium Condensed  
75 mm (3") cap height required for all text.

**Mounting**  
Double sided foam tape, silastic adhesive or screw.

**Installation**  
On soffits above doors, alcoves and counters.

**Recommendations**  
This sign is for use in corridors to direct patients and public through the building. Because of required letter height there is a limit to the length of messages and limited number of messages.




IN-15.09  
↑ Canteen

IN-15.10  
↑ Canteen  
← Spinal Rehab

IN-15.11  
↑ Emergency  
← Spinal Rehab  
← Canteen

IN-15.12  
Outpatient  
← Registration

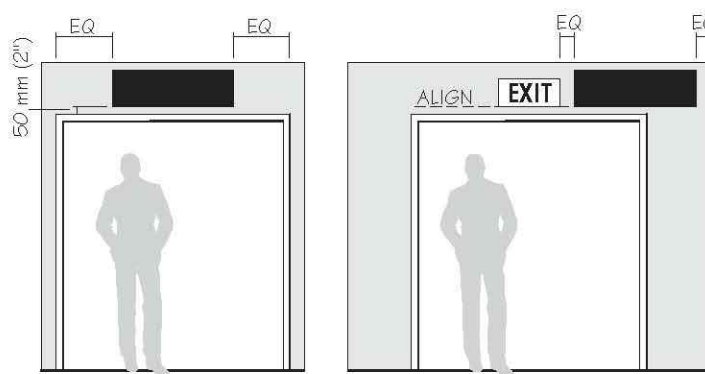


02/2005


Page 6-5-97

IN-15.09-12 Interior Signs


Soffit Mounted Directional Sign

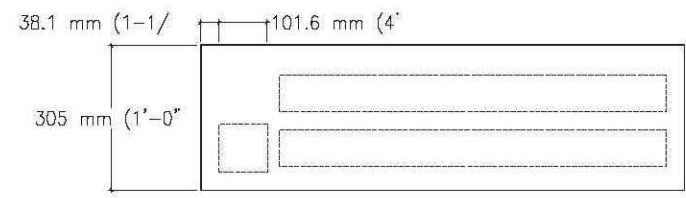


IN15.12



IN15.09

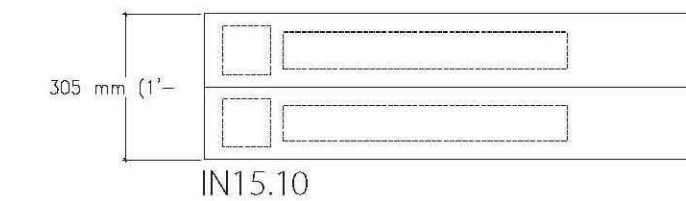

IN15.10

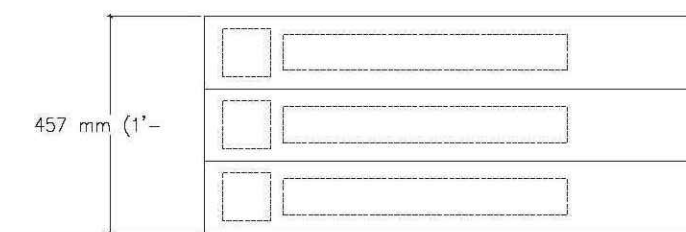

IN15.11

ARROW: R -> and L -> arrow pointing right (R) or left (L)