



one eighth inch = one foot
0 4 8 16
one quarter inch = one foot
0 4 8
three eighths inch = one foot
0 4
one half inch = one foot
0 4
three quarters inch = one foot
0 4
one inch = one foot
0 6
two inches = one foot
0 6
three inches = one foot
0 6
four inches = one foot
0 6
five inches = one foot
0 6
six inches = one foot
0 6
seven inches = one foot
0 6
eight inches = one foot
0 6
nine inches = one foot
0 6
ten inches = one foot
0 6
eleven inches = one foot
0 6
twelve inches = one foot
0 6

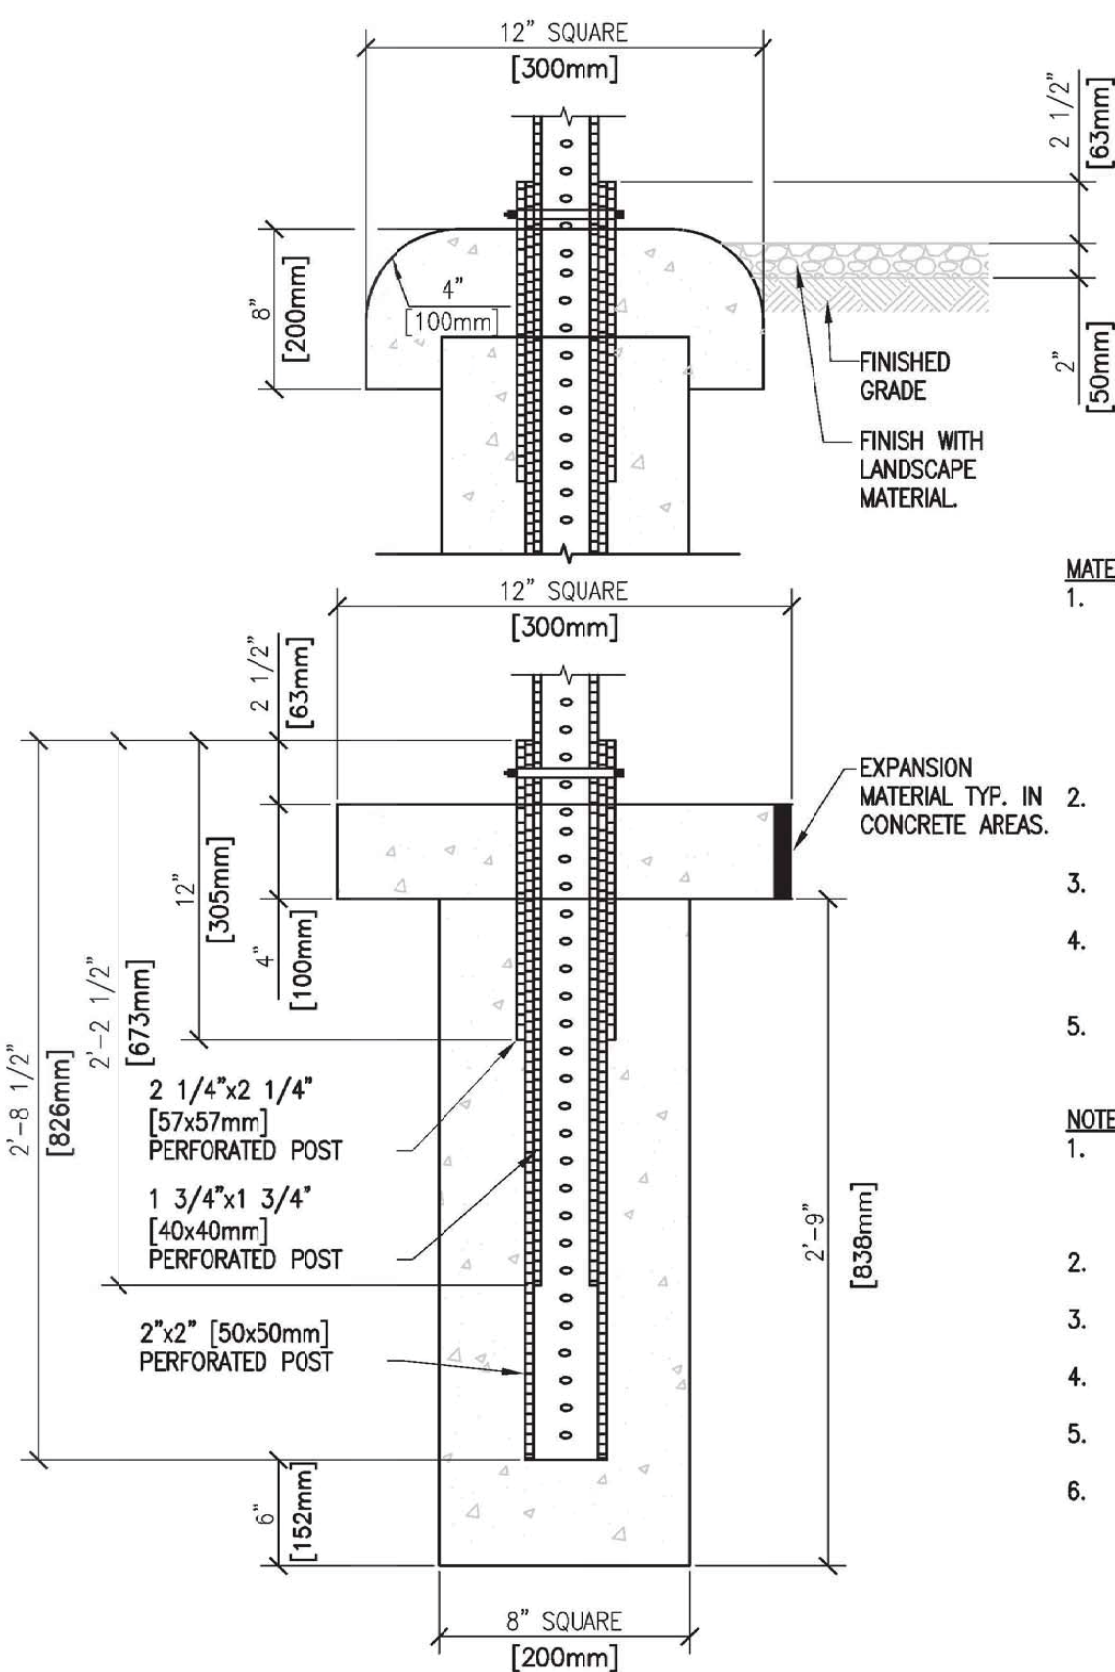


1 SIGN POST DETAIL SQUARE TUBE FOUNDATION
NTS

- MATERIALS:**
- PERFORATED POSTS SHALL BE SQUARE TUBE FORMED FROM 0.105 U.S.S. GAUGE ASTM A-368 COLD ROLLED CARBON STEEL. THE SQUARE TUBES SHALL BE WELDED DIRECTLY IN THE CORNER BY HIGH FREQUENCY RESISTANCE WELDING OR EQUAL. THE POSTS SHALL BE EXTERNALLY SCARFED TO AGREE WITH STD. CORNER RADI OF 5/32" [4mm] TO 1/64" [3mm].
 - PERFORATED POSTS SHALL BE GALVANIZED TO CONFORM TO ASTM A-525. COATING DESIGNATION G-40.
 - ALL HARDWARE SHALL CONFORM TO ASTM A-307 CLASS A.
 - ALL HARDWARE SHALL BE GALVANIZED TO CONFORM TO ASTM A-153 OR CADMIUM PLATED TO CONFORM TO ASTM A-185.
 - ALL CONCRETE SHALL BE 2500 PSI.
- NOTES:**
- FOUNDATION WILL BE CONSTRUCTED WITH 1 3/4"x1 3/4" STARTER SIGN POST. STARTER SIGN POST SHALL BE REMOVED AFTER CONCRETE HAS SET AND EXPOSED SQUARE TUBING WRAPPED AND SEALED WITH DUCT TAPE.
 - FOUNDATION LOCATED 1" FROM EDGE OF PAVEMENT.
 - FOUNDATION LOCATION TO BE APPROVED BY ENGINEERING.
 - POST FOUNDATIONS SHALL BE PERPENDICULAR TO THE PAVED SURFACE.
 - BOLT WITH NUT AND LOCK WASHER TO BE 7/16"x3" GALVANIZED.
 - REFER TO SIGN POST LOCATION DETAIL DETAIL 4, THIS SHEET FOR INSTALLATION LOCATION.

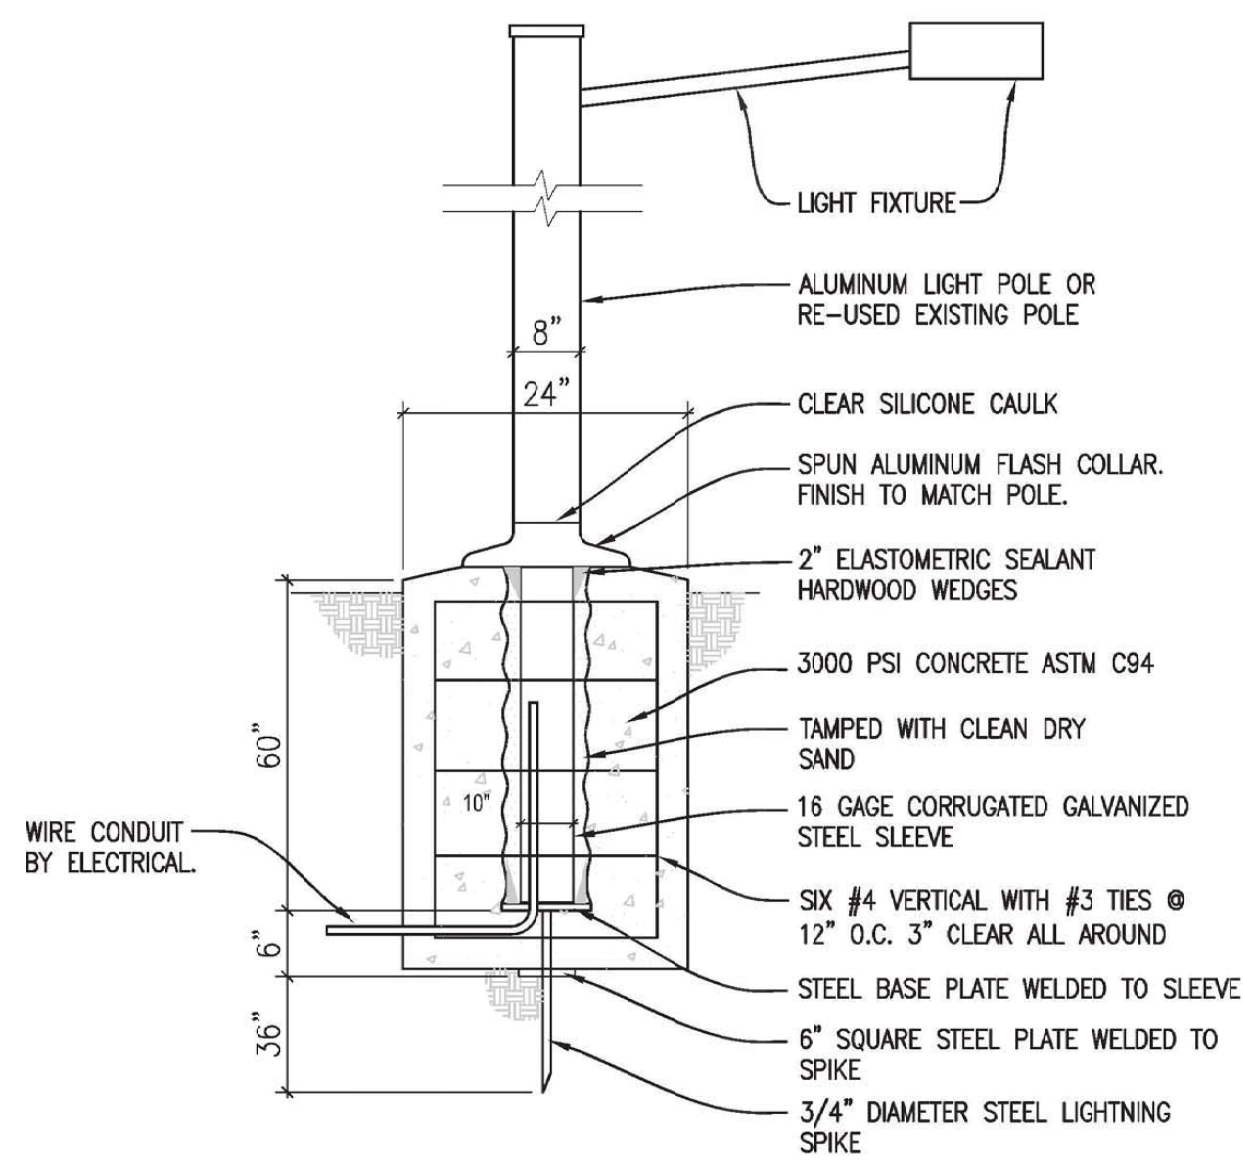


4 LIGHT POLE BASE SECTION
N.T.S.

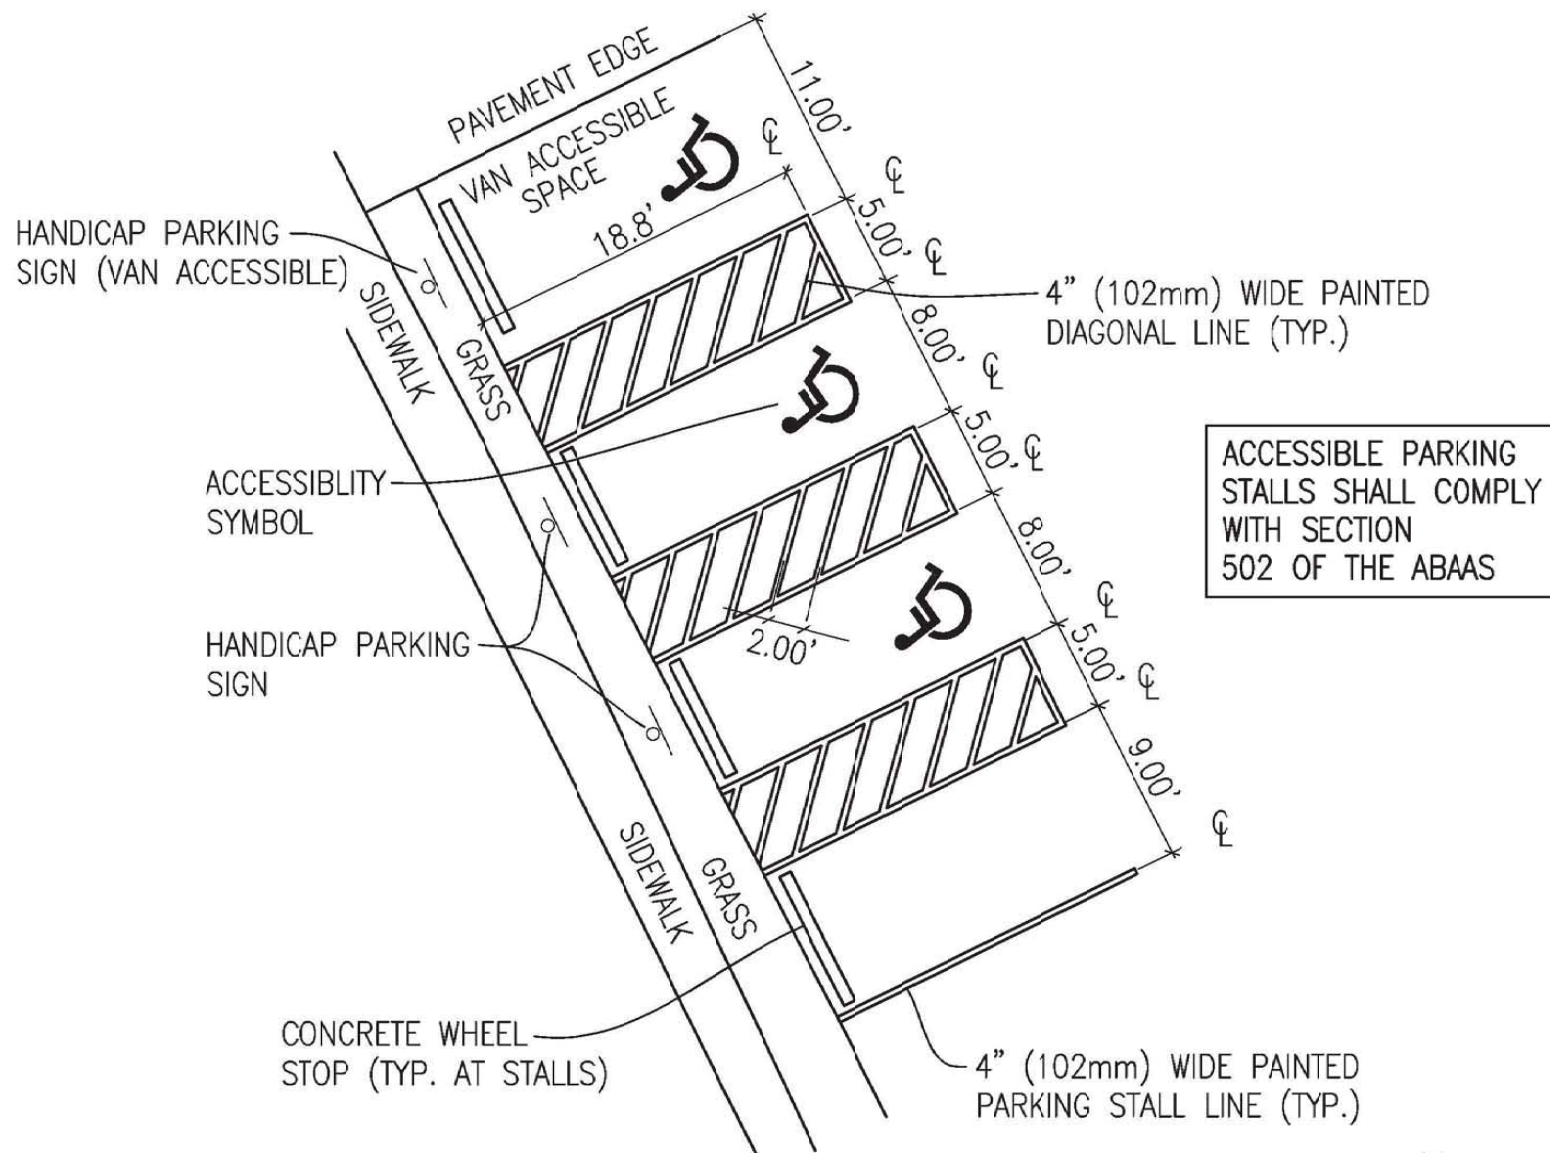

- NOTES- STRIPE PAINT COLOR BY SURFACES:**
- CONCRETE- MATCH CURRENT VA STANDARD USED AT SITE
 - ASPHALT- MATCH CURRENT VA STANDARD USED AT SITE
- PAINT SHALL CONFORM TO FEDERAL SPECIFICATION TT-P-115.
- CONTRACTOR SHALL APPLY TWO (2) COATS FOR STRIPING.

5 TYPICAL PARKING STALL LAYOUT
1" = 10'-0"

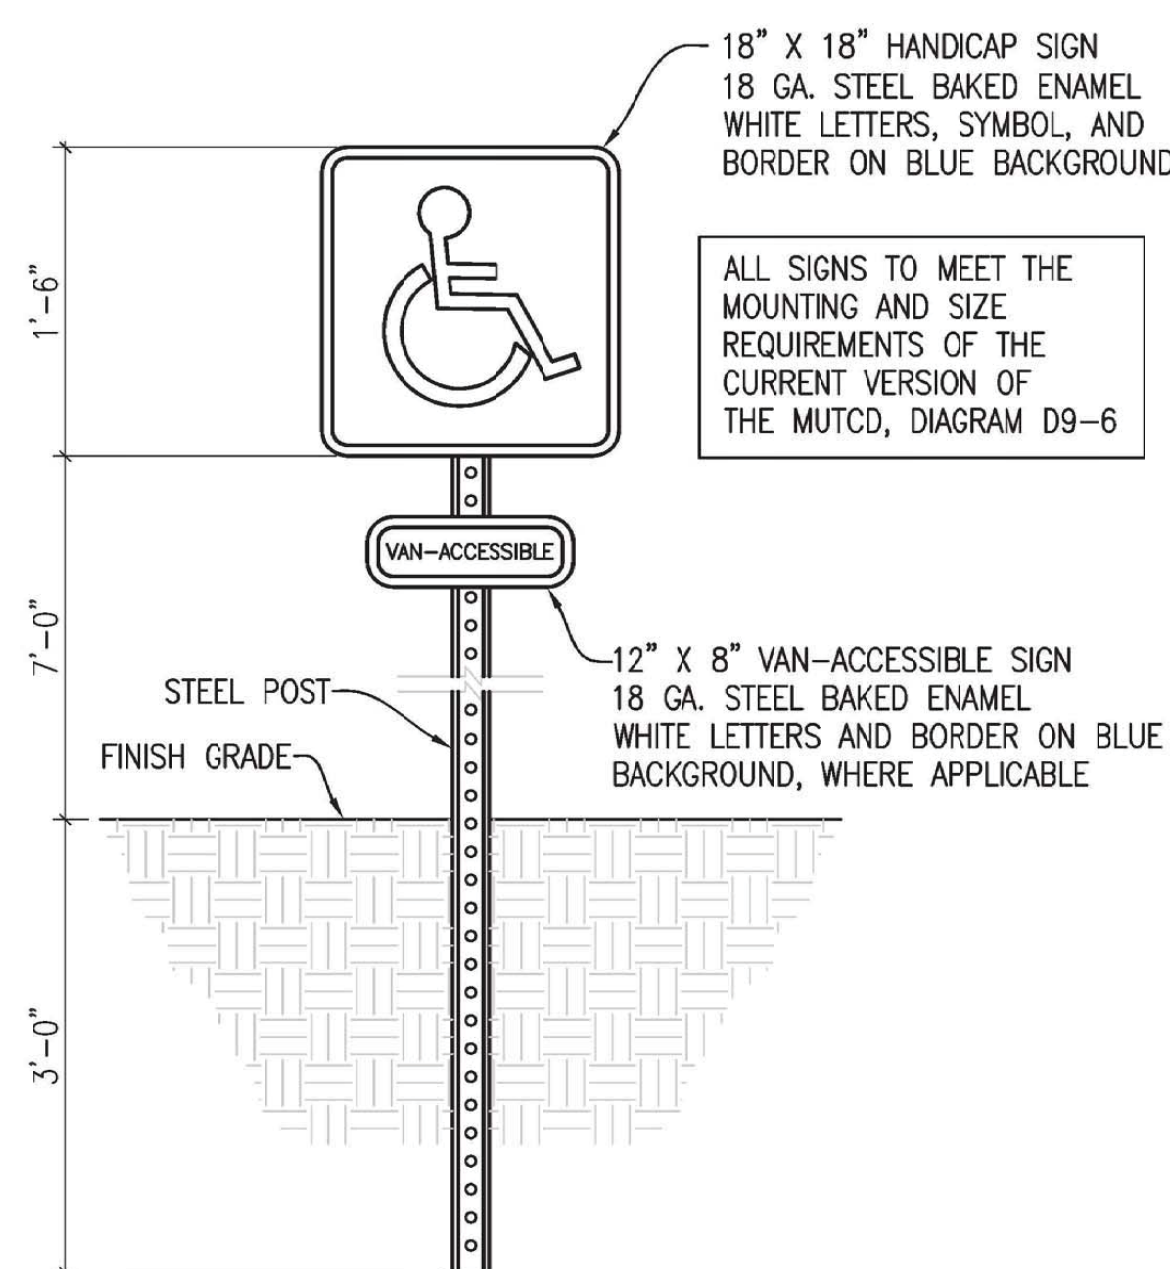

- NOTES:**
- SIGNS SHALL BE 18X18 INCH REFLECTIVE SHEETING ON 0.080 ALUMINUM.
 - POSTS SHALL BE 8' LONG (MINIMUM) HOT-ROLLED HIGH TENSILE RAIL STEEL, PERFORATED WITH 3/8" HOLES AT 1" CENTERS, FINISHED WITH GREEN BAKED ENAMEL.
 - SIGNS MAY BE INSTALLED ONTO BUILDING AT VA'S DISCRETION VERIFY W/COR PRIOR TO CONSTRUCTION.

6 HANDICAP PARKING SIGN DETAIL
NTS

CONSULTANTS:		ARCHITECT/ENGINEERS:		Architect Project No. 003-10121-017	Drawing Title SITE-CIVIL DETAILS	Project Title FISHER HOUSE SITE PREP	Project Number 636-CSI-100	Office of Construction and Facilities Management	
		LEO A DAILY PLANNING ARCHITECTURE ENGINEERING INTERIORS EST. 1985			Approved Project Director	Location OMAHA, NE	Building Number A, B, 3		
Revisions		Date		8600 Indian Hills Drive Omaha, NE 68114-4039 USA Tel 402-391-8111 Fax 402-391-8564		Date October 18, 2016	Checked AAH	Drawn JMK	Drawing Number C503