


SHEET NOTES


- Demolish all casework, fume hoods, flooring, partial walls for cased openings, ceilings, lighting, cold room 101A, 117A, and associated doors and frames. Demolish disconnect switch and associated piping for cold room and cap off at perimeter.
- Adjacent occupancies contain restricted operations and shall not be disturbed without prior authorization of CDR. Limit demolition and any other noise-producing activities to after-hour work or provide noise reducing measures to limit disruption of adjacent tenants and be within DSHA limits.
- New flooring is to be installed in all locations where demolition occurs. Where affecting majority of room, replace throughout.
- All lighting and ceiling grid/tile shall be replaced in project extents.
- Extend walls to deck. Existing walls tie into hard ceiling below deck. Evaluate existing conditions to ensure continuity to meet security and smoke compartment configuration at perimeter fill-in and existing perimeter walls.

KEYNOTES

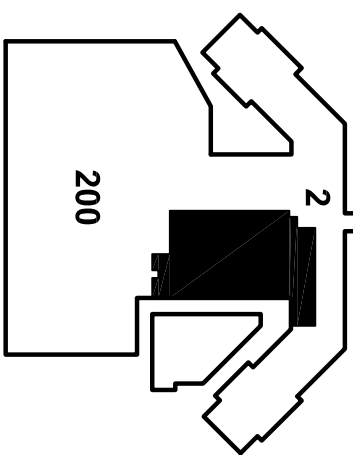

FULLY SPRINKLERED

100% CONSTRUCTION DDCS.

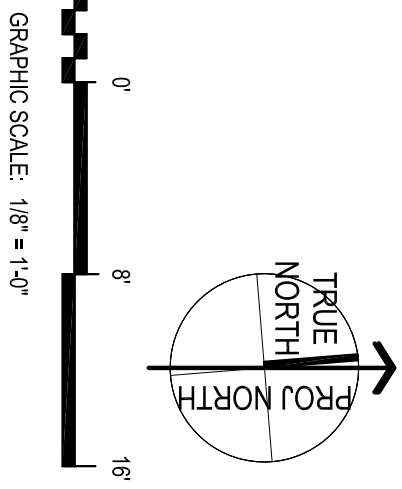

CONSULTANTS:		Scale and Signatures		ARCHITECT/ENGINEERS:		Drawing Title		Project Title		Project Number		Office of Construction and Facilities Management	
						BLDG 1 SWING SPACE DEMOLITION		VA SAN FRANCISCO MEDICAL CENTER OUTPATIENT PHARMACY DESIGN		662.12.112			
						Approved Project Director		Location		Building Number			
						Date		4150 Clement Street, San Francisco, CA 94121		B1			
						12/15/2015		Checked		Drawing Number			
								PH		AD101			