




# MINOR SURGERY LIGHT


*For Medical Examinations & Outpatient Procedures*




Double Ceiling Mount



Wall mount



Fastrac Single Ceiling Mount



**NEW!!!** Fastrac Double Ceiling Mount

## Specifications

- Internal 12 volt step down transformer (120 volt input standard, 240 volts optional)
- Ceiling mounts are direct wired. Wall mount and floor stand models have 8', 18 gauge, 3-wire power cord with hospital grade plug.
- Double dichroic reflectors filter out three times more infrared rays than standard reflector lights.
- Energy efficient halogen lamps provide 3200°K color corrected illumination for true tissue color visualization
- Optical Characteristics: 8" spot diameter: 5500 footcandles at 18". 10" spot diameter: 3500 footcandles at 24". 12" spot diameter: 2000 footcandles at 36".
- Certification: U.L. and C.U.L. Listed.
- Lamps: Three radially spaced 12 volt 50 watt MR-16 EXT Halogen lamps (installed in fixture)
- Flexible, drift-free arm is counterbalanced to maintain position & durability during use
- 16 gauge welded steel arms, 11 gauge welded tube extension arm
- Made in the U.S.A. with a 3-year warranty!
- Zinc die-cast yoke & fittings
- 5,000 footcandles at 24"
- Foamed lexan light housing & handle with painted urethane finish

## Specifier's Reference

Project

Type

Model No.

Comments





# MINOR SURGERY LIGHT


For Medical Examinations & Outpatient Procedures




## Ordering Information

Series	Options
<b>V200470</b>	
<b>V0124522</b> Single Ceiling Mount	<b>V1007696B</b> 25 Disposable Handle Covers
<b>V0124532</b> Double Ceiling Mount	
<b>V0124512</b> Floor Stand	
<b>V0124542</b> Wall Mount	
<b>V200470</b> 6' Fastrac Single Ceiling Mount	
<b>V200472</b> 6' Fastrac Double Ceiling Mount	


## Mounting and Dimensional Data

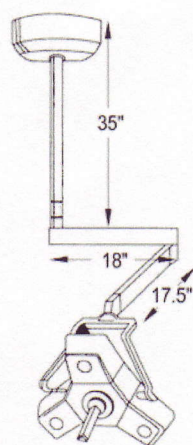


Single Ceiling Mount

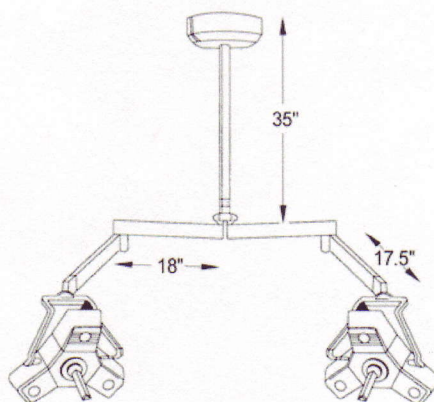

Double Ceiling Mount

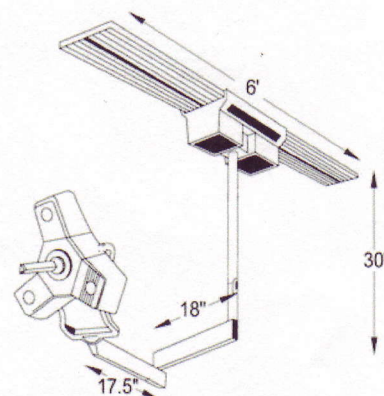

Fastrac Single Ceiling Mount



Wall Mount