



1 NEW FLOOR PLAN - SHELL AREA - MECHANICAL
H3 SCALE: 1/8" = 1'-0"

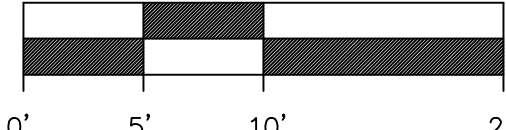

- KEYED NOTES:
- 1 CONNECT TO BIOSAFETY CABINET THRU THIMBLE ACCESSORY; BALANCE TO 330-CFM. AIRFLOW IS CRITICAL FOR SAFETY OF OCCUPANTS, SO ANY OTHER CFM-VALUE SHALL BE VERIFIED WITH DESIGN ENGINEER PRIOR TO INSTALLATION.
 - 2 RELOCATE EXISTING AIR DEVICE AS INDICATED.
 - 3 RELOCATE EXISTING THERMOSTAT AS INDICATED.
 - 4 REMOVE EXISTING AIR DEVICE AND RE-INSTALL IN IMMEDIATE VICINITY AS NECESSARY TO ACCOMMODATE NEW CEILING.
 - 5 MAINTAIN MAXIMUM CLEARANCE IN THIS AREA TO ACCOMMODATE FUTURE EQUIP/WORK NOT IN THIS CONTRACT.

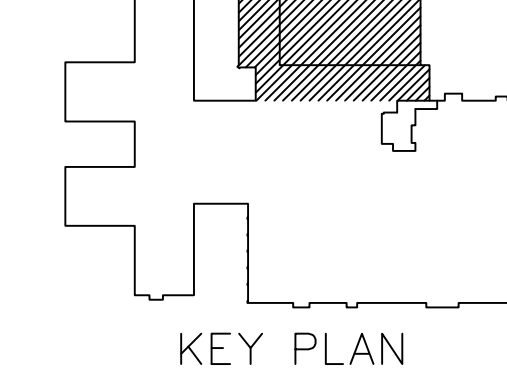

KEY PLAN

		<div>THE RESIDENT ENGINEER MUST BE NOTIFIED 24 HOURS IN ADVANCE OF ANY COMPROMISE IN THE FIRE SUPPRESSION OR SMOKE DETECTION SYSTEMS. A COPY OF THE INTERIM LIFE SAFETY CODE MEASURES MUST BE OBTAINED AND FOLLOWED DURING CONSTRUCTION.</div>	<div>Chesney Morgles ARCHITECTS/PLANNERS & Associates, Inc. 4901 Broadway, Suite 250 / San Antonio, Texas 78209 / (210) 828-9481</div>	<div><div>M</div><div>M</div><div>Morman & McKee</div></div>	Approved: Service Chief	Approved: Service Chief	<div>Drawing Title 1ST FLOOR PLAN SHELL FINISHOUT MECHANICAL NEW WORK</div>	<div>Project Title CLINICAL LAB EXPANSION PROJECT PACKAGE A</div>	Date 28 JUNE 05		<div>W:\02064\Ref\valogo.jpg</div>	<div>Department of Veterans Affairs</div>
					Concur M & O	Approved: Service Chief			Project No. 671-220			
					Concur Bio-Med	Approved: Service Chief			DRAWING NO. H3			
					Concur Safety	Approved: Service Chief			Dwg. 11 of 19			
Revisions		Date			Approved: Service Chief	Approved: Admin. Officer	Approved: Associate Director	<div>Location AUDIE L. MURPHY VETERANS MEMORIAL HOSPITAL - SAN ANTONIO, TEXAS</div>				