


REMOVE ALL PREVIOUS PAVING, SIDEWALK, LANDSCAPING AND GRADING. REPLACE BELOW

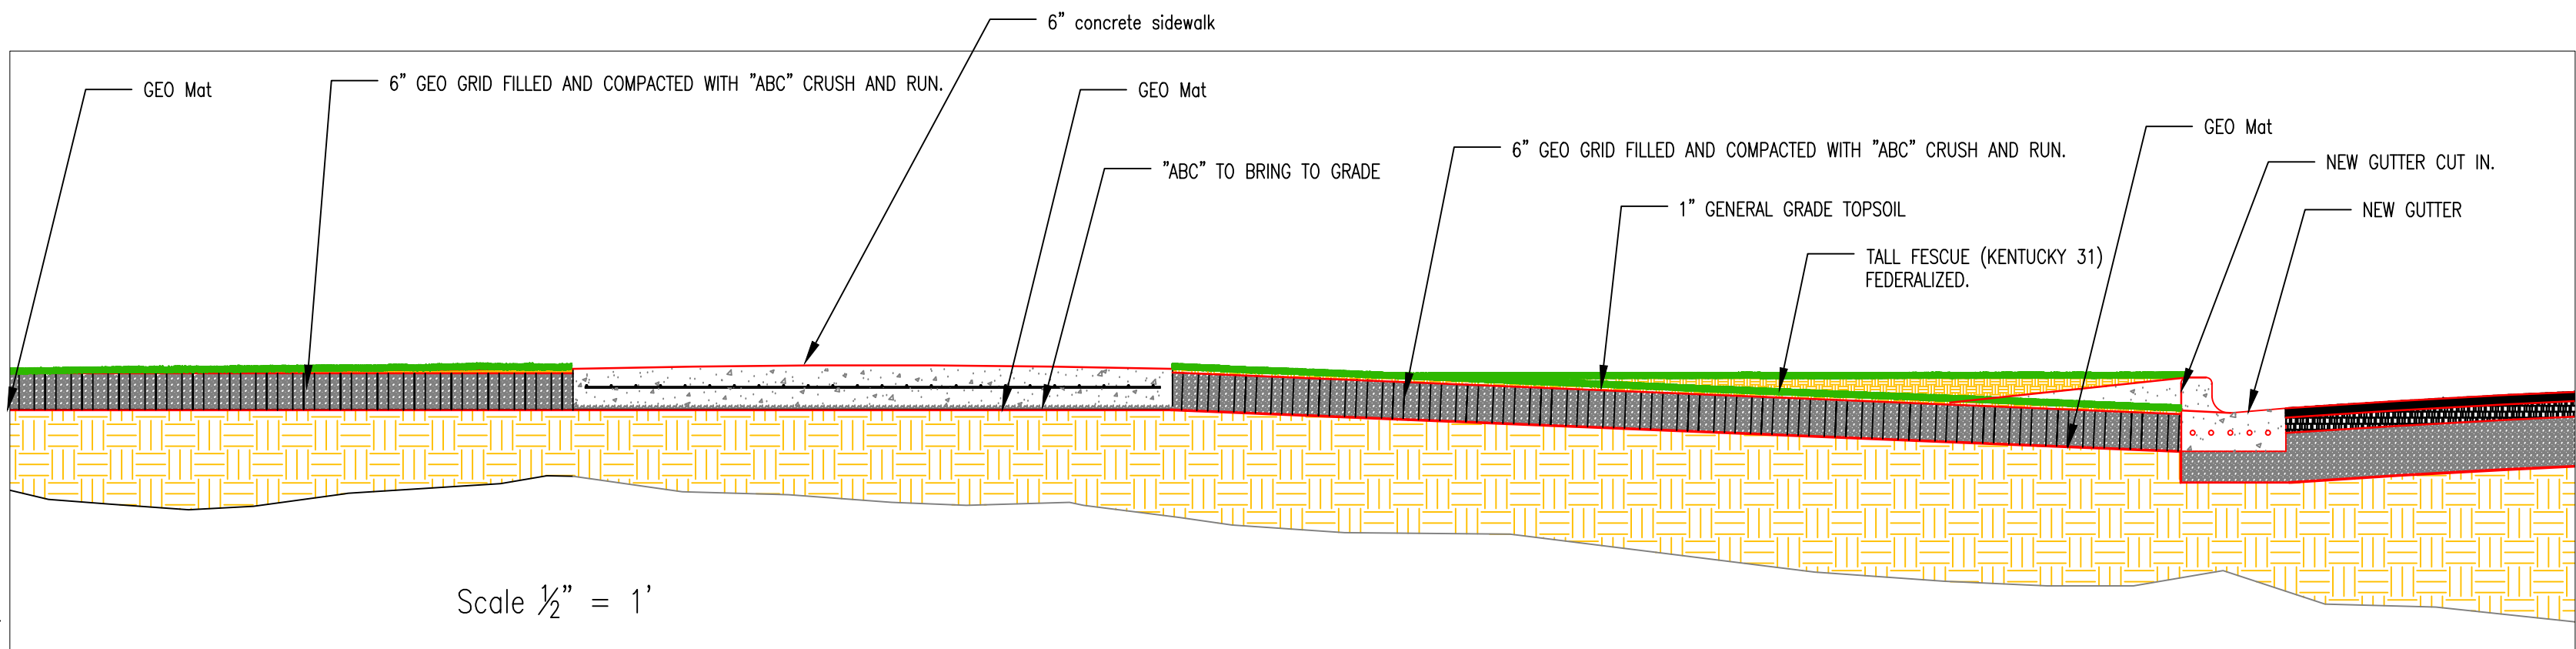

THE CONTRACTOR IS TO CUT IN AN EXIT RAMP FROM THE STREET IN CURRENT GUTTER REMOVE SIDEWALK AND EXCAVATE TO INSTALL GEO MAT AND GRID.

1. INSTALL MAT PER MANUFACTURES INSTRUCTIONS AND PIN TO EARTH WITH PROPER OVERLAY.
2. INSTALL SIDEWALK, BALLARD'S AND GUTTER.
3. INSTALL GEO GRID
4. FILL GEO GRID WITH ABC CRUSH AND RUN AND COMPACT START FROM STREET WORKING TOWARD BUILDING.
5. ADD TOPSOIL EVENLY ACROSS FILLED GEO GRID FROM NEW RODE GUTTER TO SIDEWALK.
6. ADD TOPSOIL FROM SIDEWALK OVER FILLED GEO GRID TO BUILDING GRADE TOPSOIL SO THAT WATER RUNS AWAY FROM BUILDING NO MORE THAN 2% GARDE.

Scale 1/8"=1'

Revision 1 6/20/2016		RECOMMEND APPROVAL				Drawing Title		Project Title		Date	
		REQUESTER		Date		BID ITEM II		ROAD ACCESS MODIFICATION AT BLDG3		5/11/2016	
		CHIEF OF SERVICE		Date		CHIEF OF STAFF		Date		Project No. 659-16-302	
		ASSOC. DIR. PATIENT CARE SVC.		Date		ASSOC. DIR. for OPERATIONS		Date		DRAWING NO. G-103A	
		APPROVAL BY:		Date		Approved:Chief of Facilities Management Svr.		Location		DWG. OF	
Revision		Date		MEDICAL CENTER DIRECTOR				W.G.(BII) Hefner Medical Center 1601 Brenner Ave. Salisbury NC 28144		Department of Veterans Affairs	