



1. SEE SHEET L13.04 FOR DETAILS

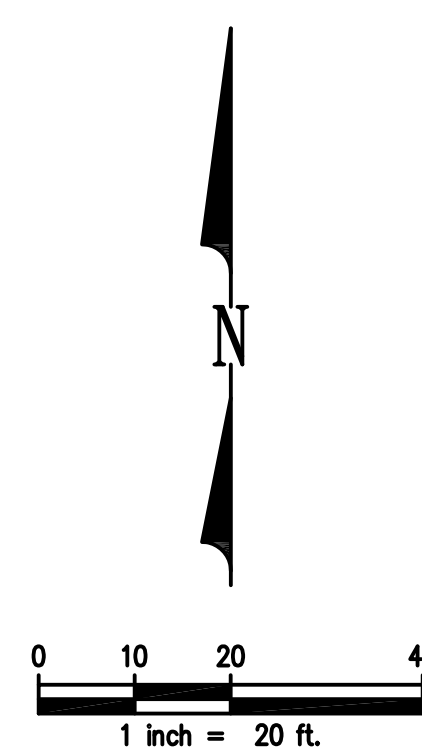

South Maitland Wetland: Stormwater Pond Y					
Upland Forest (UF): 0.16 ac					
Scientific Name	Common Name	Plant Material	On-center spacing (ft)	# of Plants	
Trees					
<i>Acer macrophyllum</i>	big leaf maple	2-gallon pots	12	14	
<i>Pseudotsuga menziesii</i>	Douglas fir	2-gallon pots	12	24	
<i>Thuja plicata</i>	western red cedar	2-gallon pots	12	10	
<i>Tsuga heterophylla</i>	western hemlock	2-gallon pots	12	24	
Shrubs					
<i>Acer circinatum</i>	vine maple	1-gallon pots	3', in clusters	13	
<i>Oenothera cerasiformis</i>	Indian plumb	1-gallon pots	3', in clusters	13	
<i>Rhamnus purshiana</i>	cascara	1-gallon pots	3', in clusters	13	
<i>Corylus cornuta</i>	beaked hazelnut	1-gallon pots	3', in clusters	11	
<i>Amelanchier alnifolia</i>	service berry	1-gallon pots	3', in clusters	11	
<i>Malus fusca</i>	western crabapple	1-gallon pots	3', in clusters	4	
<i>Symphoricarpos albus</i>	snowberry	1-gallon pots	3', in clusters	10	
<i>Ribes sanguineum</i>	red-flowering currant	1-gallon pots	3', in clusters	6	
<i>Gaultheria shallon</i>	salal	1-gallon pots	3', in clusters	6	
Herbs and Grasses					
Upland Dry Sun seed mix			Pounds (at 20#/Ac)	3 pounds	
Upland scrub-shrub (USS 1): 0.04 ac					
Scientific Name	Common Name	Plant Material	On-center spacing (ft)	# of Plants	
Shrubs					
<i>Acer circinatum</i>	vine maple	1-gallon pots	3', in clusters	5	
<i>Amelanchier alnifolia</i>	service berry	1-gallon pots	3', in clusters	4	
<i>Gaultheria shallon</i>	salal	1-gallon pots	3', in clusters	6	
<i>Ribes sanguineum</i>	red currant	1-gallon pots	3', in clusters	4	
<i>Oenothera cerasiformis</i>	Indian plumb	1-gallon pots	3', in clusters	6	
<i>Sambucus racemosa</i>	red elderberry	1-gallon pots	3', in clusters	6	
<i>Symphoricarpos alba</i>	snowberry	1-gallon pots	3', in clusters	7	
Herbs and Grasses					
Upland Dry Sun seed mix			Pounds (at 20#/Ac)	1 pound	
Confederous Palustrine Forest (PFO 1): 0.15 ac					
Scientific Name	Common Name	Plant Material	On-center spacing (ft)	# of Plants	
Trees					
<i>Populus balsamifera ssp. trichocarpa</i>	black cottonwood	2-gallon pots	12	58	
<i>Thuja plicata</i>	western red cedar	2-gallon pots	12	15	
<i>Pseudotsuga menziesii</i>	Douglas fir	2-gallon pots	12	28	
Shrubs					
<i>Sambucus racemosa</i>	red elderberry	1-gallon pots	3', in clusters	18	
<i>Rubus spectabilis</i>	salmonberry	1-gallon pots	3', in clusters	20	
<i>Acer circinatum</i>	vine maple	1-gallon pots	3', in clusters	20	
<i>Physocarpus opulifolius</i>	Pacific ninebark	1-gallon pots	3', in clusters	11	
Black cottonwood-Willow Palustrine Forest (PFO 2): 0.03 ac					
Scientific Name	Common Name	Plant Material	On-center spacing (ft)	# of Plants	
Trees					
<i>Populus balsamifera ssp. trichocarpa</i>	black cottonwood	2-gallon pots	12	10	
Shrubs					
<i>Salix lucida ssp. lasioandra</i>	Pacific willow	live stakes or 1-gallon pots	3', in clusters	4	
<i>Salix stictensis</i>	Sitka willow	live stakes or 1-gallon pots	3', in clusters	4	
<i>Rubus spectabilis</i>	salmonberry	1-gallon pots	3', in clusters	3	
Palustrine Scrub Shrub (PSS 1): 0.06 ac					
Scientific Name	Common Name	Plant Material	On-center spacing (ft)	# of Plants	
Shrubs					
<i>Rubus spectabilis</i>	salmonberry	1-gallon pots	3', in clusters	27	
<i>Salix lucida ssp. lasioandra</i>	Pacific willow	live stakes or 1-gallon pots	3', in clusters	30	
<i>Salix stictensis</i>	Sitka willow	live stakes or 1-gallon pots	3', in clusters	30	
<i>Lonicera involucrata</i>	black twinberry	1-gallon pots	3', in clusters	14	
Palustrine Persistent Emergent (PPE 1): 0.05 ac					
Scientific Name	Common Name	Plant Material	On-center spacing (ft)	# of Plants	
Herbs and Grasses					
<i>Carex obnupta</i>	slough sedge	plugs	12' in clusters of 4-5	30	
<i>Juncus effusus</i>	common rush	plugs	12' in clusters of 4-5	30	
<i>Scirpus microcarpus</i>	small-flowered bulrush	plugs	12' in clusters of 4-5	30	
Herbs and Grasses					
Herbaceous Wetland seed mix: Wet Detention Basin Seed Mix			Pound	1 pound	

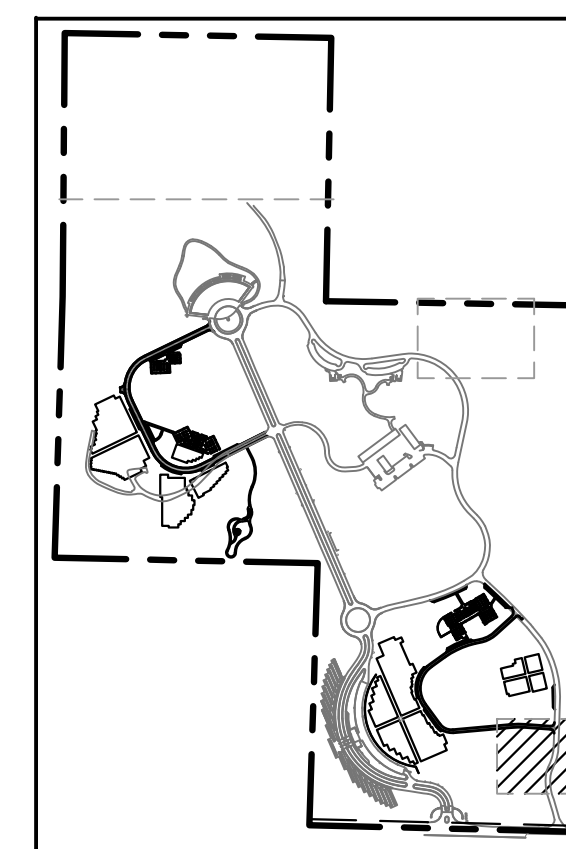

KEY PLAN
N.T.S.

[illegible]