


## KEYED NOTES

- (01) DUCTWORK SERVING AIR DEVICE FROM INTERSTITIAL SPACE ABOVE. REFER TO M104 FOR CONTINUATION (TYPICAL FOR ALL AIR DEVICES).
- (02) PROVIDE "TSI-PRESSURA" PRESSURE MONITORING PANEL AND INCORPORATE TO ALARM BACS IF THE ROOM BECOMES POSITIVELY PRESSURED. PROVIDE CONTROL VOLTAGE TRANSFORMER FOR MONITORING PANEL. COORDINATE EXACT LOCATIONS WITH ARCHITECT.
- (03) PROVIDE GREEN LIGHT AND RED LIGHT OUTSIDE OF ROOM AND INTERLOCK TO PRESSURE MONITORING PANEL TO VISUALLY ALARM STAFF IF THE PRESSURE OF THE ROOM BECOMES POSITIVE. COORDINATE LABELING OF THE LIGHTS WITH OWNER.  
GREEN SHALL SIGNIFY NORMAL OPERATION AND RED SHALL ALARM. COORDINATE EXACT LOCATIONS WITH ARCHITECT.
- (04) REBALANCE EXISTING DIFFUSERS TO NEW CFM SHOWN.
- (05) REMOVED.

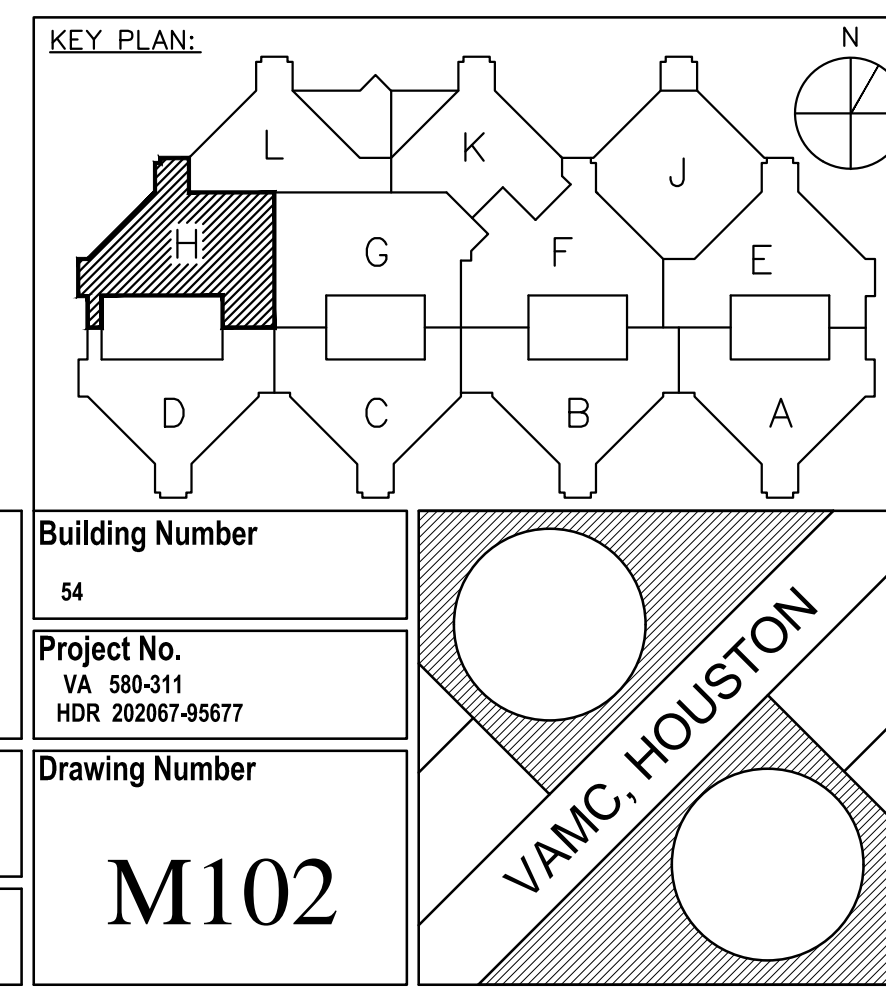

**HDR**  
Architecture, Inc.

10000 North Central Expressway, Suite 1000, Dallas, Texas 75243-2090  
Tel: 214/760-8000 Fax: 214/760-8001  
www.hdr.com

M102

VA FORM 08-6231