

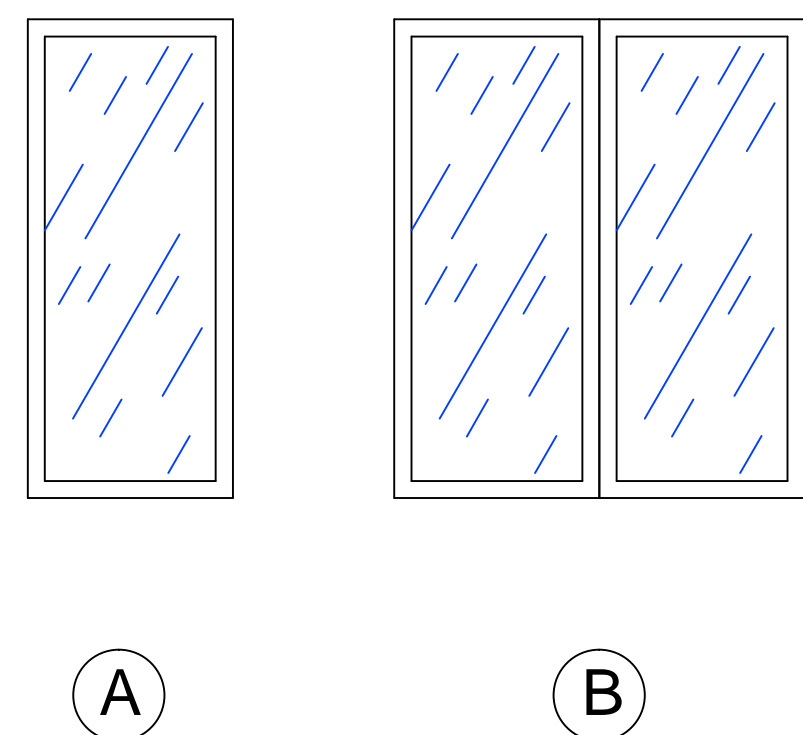


[illegible]

1. THE CONTRACTOR WILL BE RESPONSIBLE FOR FURNISHING ALL OF THE MATERIALS, LABOR, EQUIPMENT AND SUPERVISION NECESSARY FOR THE COMPLETION OF REMOVING OLD DOORS AND REINSTALLING NEW DOORS.
2. THE CONTRACTOR WILL BE RESPONSIBLE FOR TAKING EXACT MEASUREMENTS, FOR ALL MEASUREMENTS ARE APPROXIMATE.
3. ALL DOORS SHALL BE INSTALLED PLUMB, LEVEL AND FUNCTION PROPERLY AND LATCH SECURELY. ALL DOORS SHALL BE FINISHED ACCORDING TO THE DOOR SCHEDULE.
4. ALL NEWLY INSTALLED DOORS MUST BE MOUNTED SECURELY AND SHALL BE INSULATED AND SEALED PROPERLY AROUND THE PERIMETER OF THE FRAME.
5. DOOR HARDWARE WILL BE INSTALLED BY THE CONTRACTOR AND FUNCTION PROPERLY. THE HARDWARE SHALL BE ABLE TO ACCEPT A STANLEY BEST SEVEN PIN CORE. THE CORE WILL BE PROVIDED BY THE V.A.
6. THE CONTRACTOR SHALL KEEP THE WORK STATION CLEAN AND FREE FROM OBSTRUCTIONS AT ALL TIMES. UPON FINAL CLEAN-UP, THE CONTRACTOR SHALL REMOVE ALL DEBRIS, RUBBISH AND EXCESS MATERIAL FROM THE STATION.
7. ALL EXTERIOR DOOR FRAMES MUST HAVE A 1/2" ALUMINUM SADDLE THRESHOLD AND SET IN A BED OF SEALANT, VINYL WEATHER STRIPPING, NYLON BRUSH DOOR SWEEP AND A DOOR CAP.
8. SEE HARDWARE SPECS FOR COMPLETE HARDWARE INFORMATION. ALL PANIC HARDWARE SHALL BE LOCKABLE DUAL FUNCTION WITH A MORTIS STYLE LOCK.
9. ALL EXTERIOR DOORS WITH WINDOWS SHALL BE LOW-E DOUBLE PANE TEMPERED GLASS FILLED WITH ARGON GAS.
10. IT WILL BE THE CONTRACTORS RESPONSIBILITY TO PROTECT THE SURROUNDING WALLS, FLOORS AND CEILING AROUND THE DOOR OPENINGS. IF DAMAGE OCCURS, IT SHALL BE REPAIRED AT THE CONTRACTORS OWN EXPENSE.
11. ALL REMOVED DOORS AND HARDWARE ARE TO REMAIN AS VAMC PROPERTY AND BE STORED IN BUILDING # 79 UPON THEIR REMOVAL.
12. THIS PROJECT SHALL BE CONDUCTED IN SUCH A PHASE OF ONE ENTRY WAY AT A TIME. 100% COMPLETION IS REQUIRED BEFORE MOVING ON TO THE NEXT SCHEDULED DOOR.
13. REUSE AUTOMATIC DOOR OPENER FOR DOOR # 4.

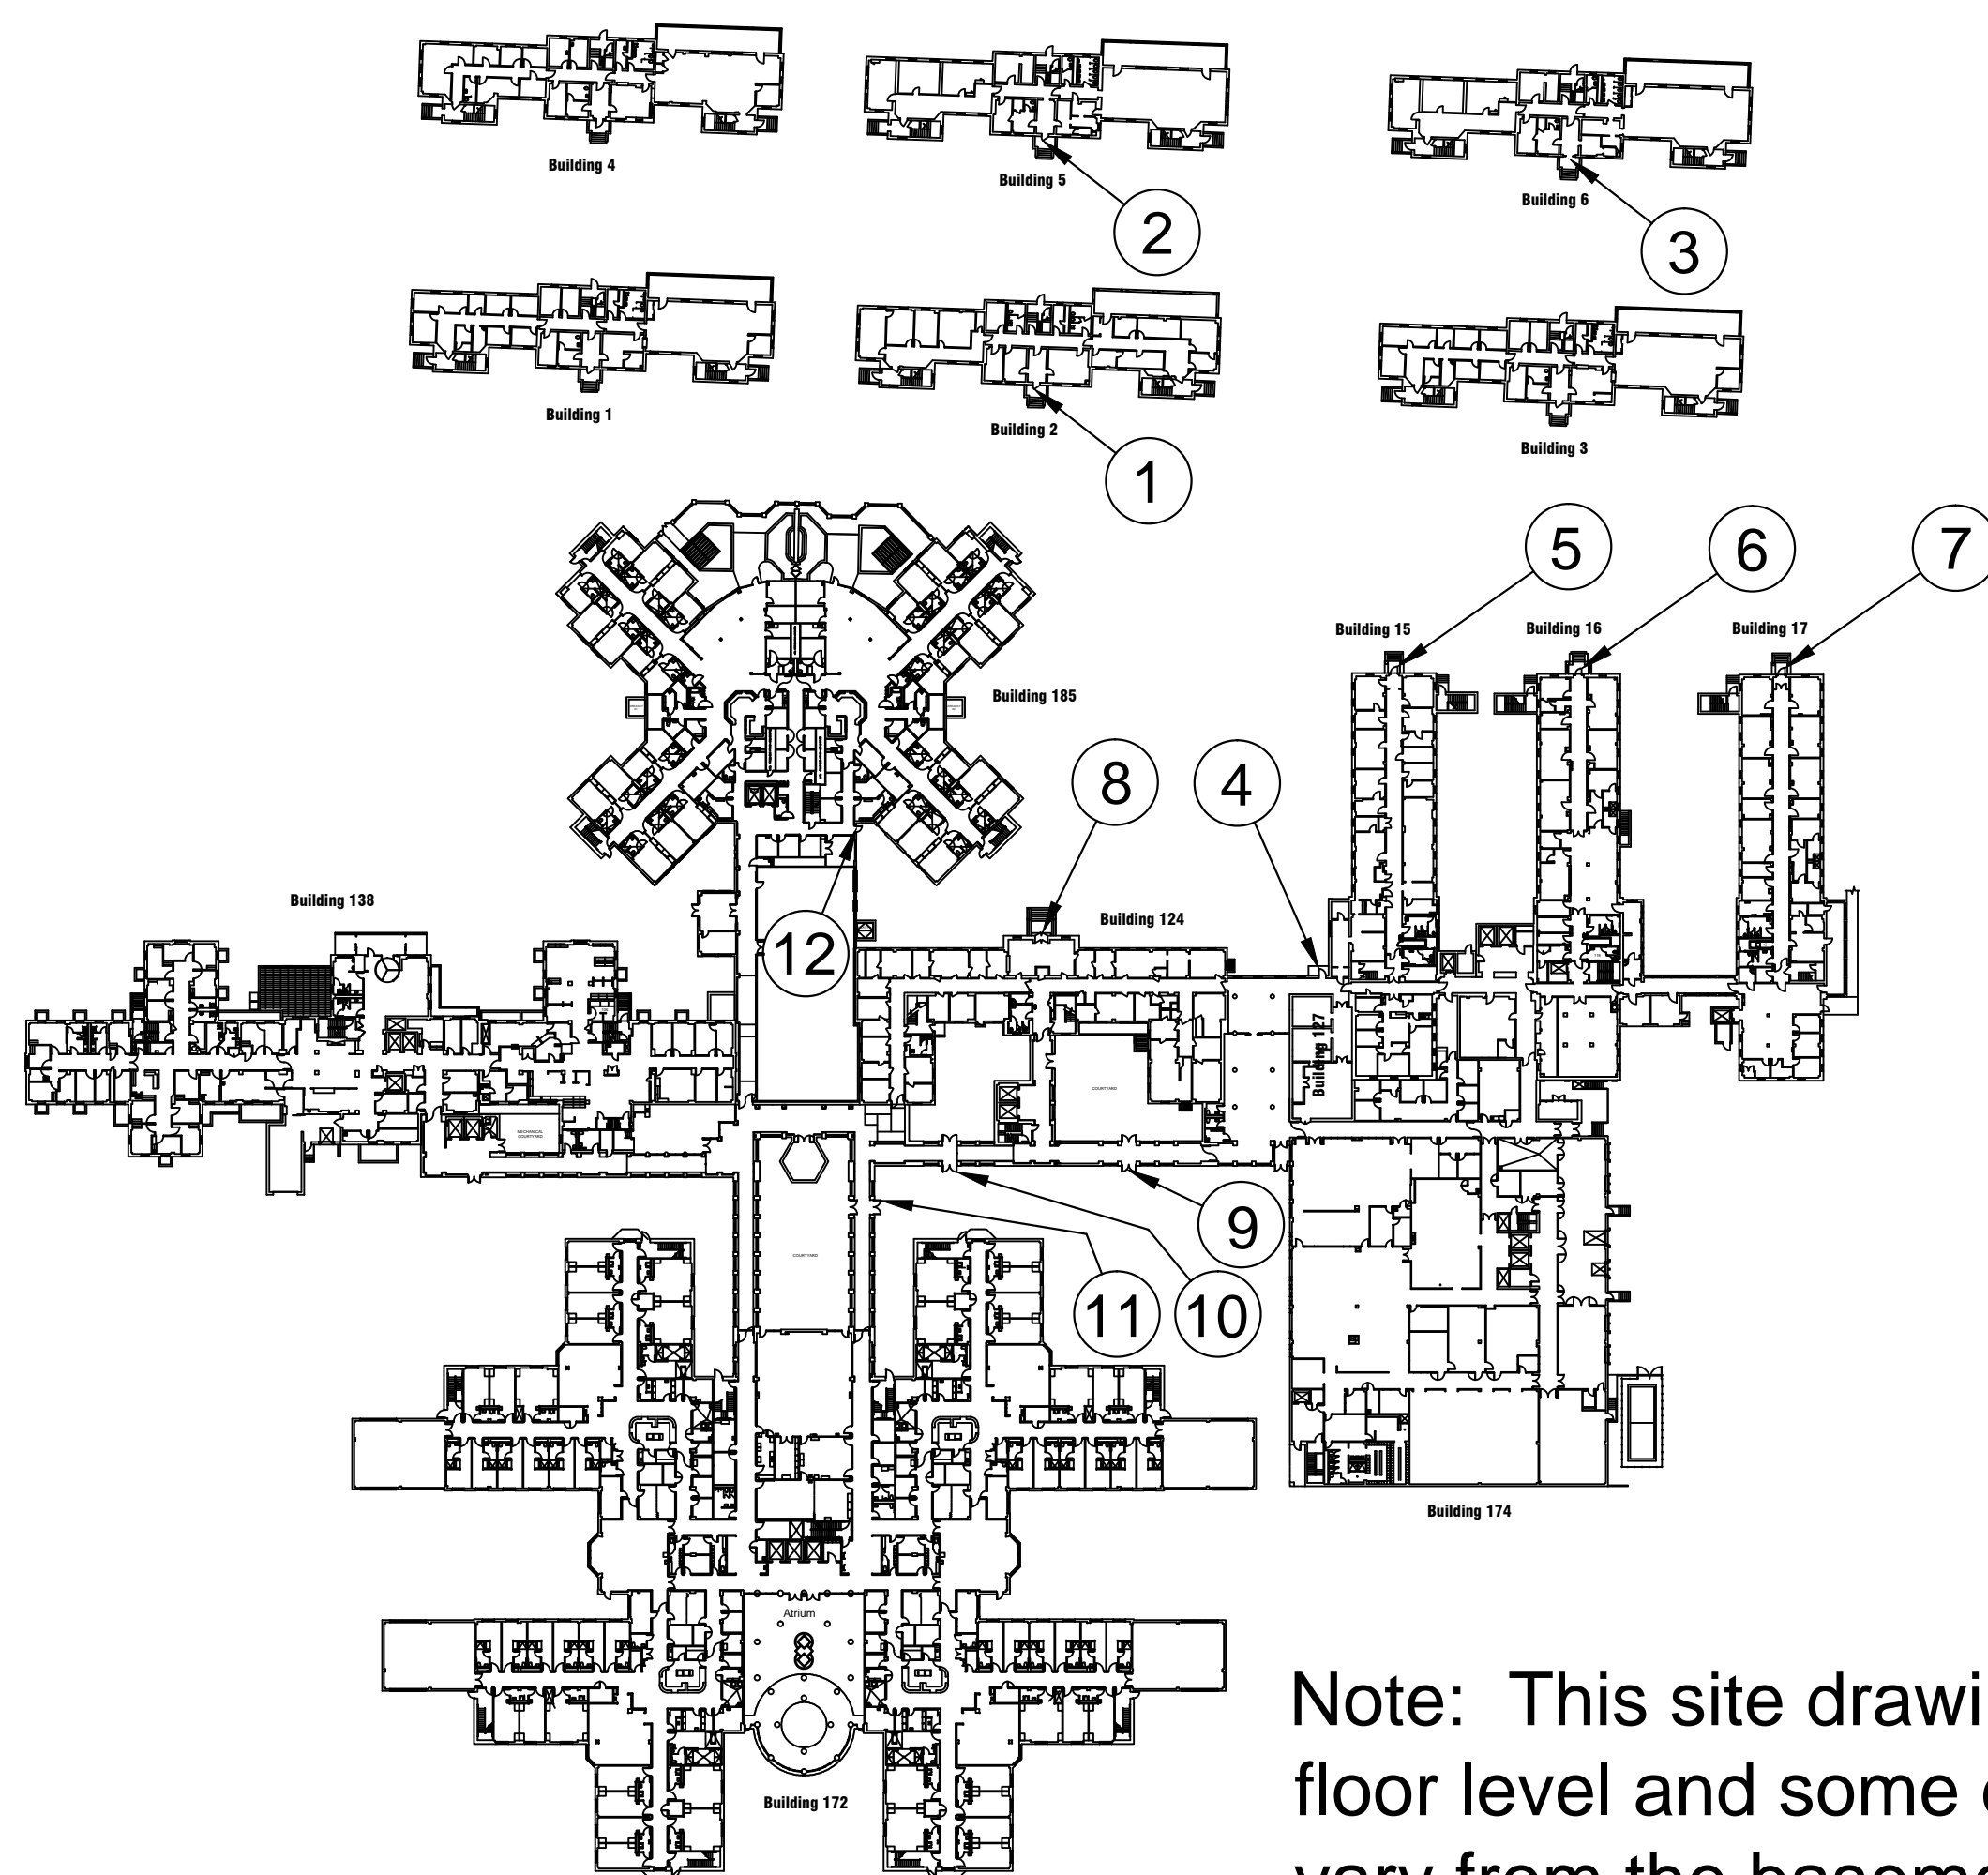

**FRAME TYPE:**

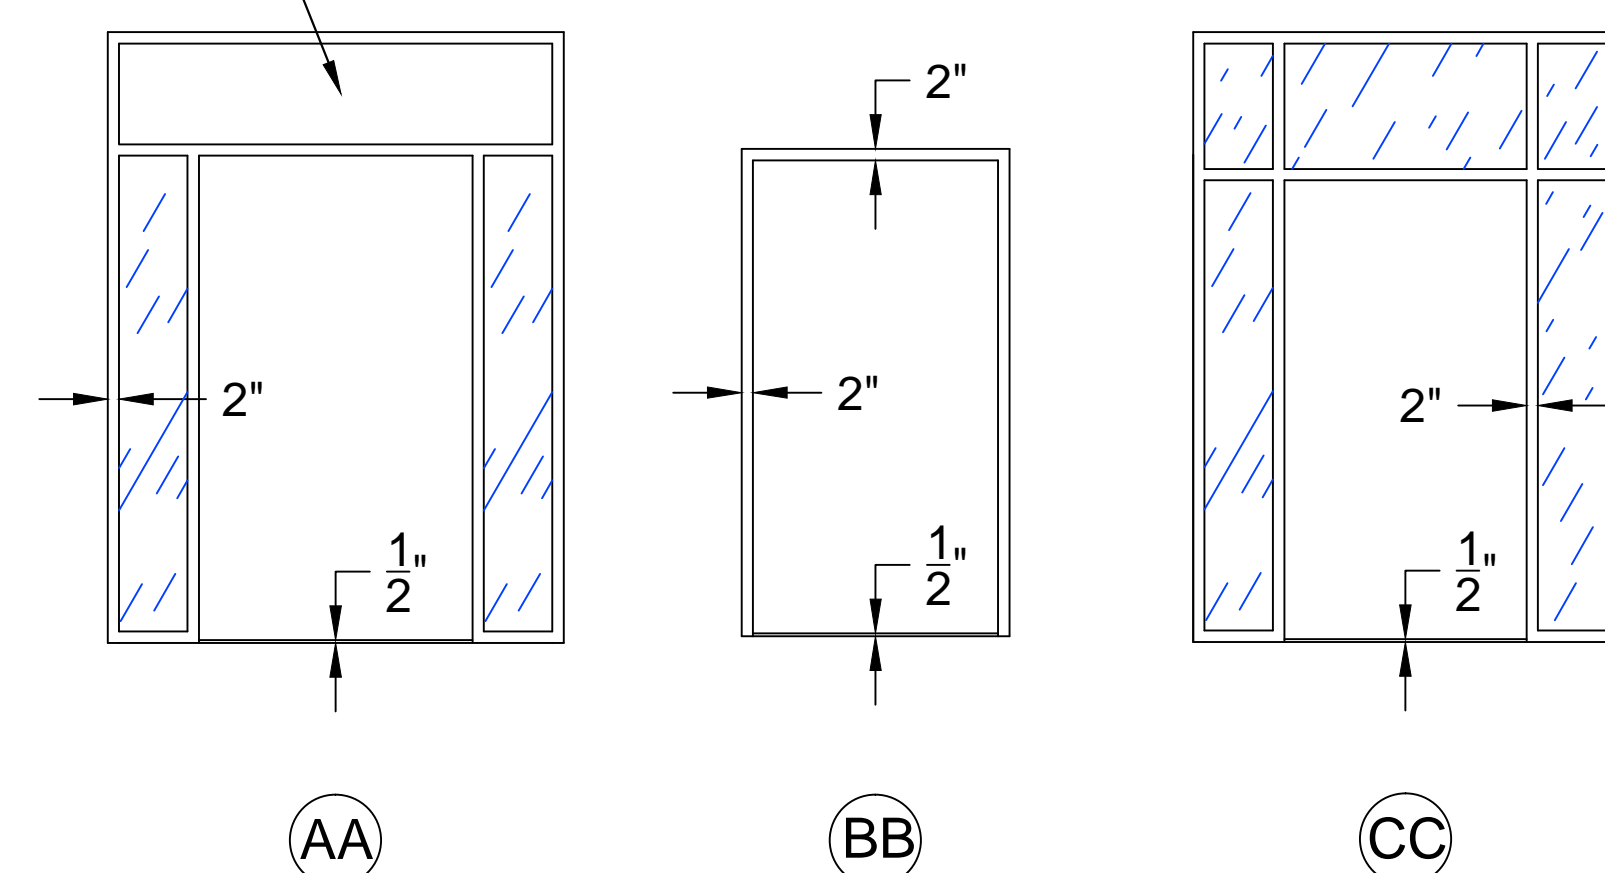

Note: This site drawing is of the 1st. floor level and some door locations vary from the basement and the 1st. floor. See schedule for details.

DOOR AND HARDWARE SCHEDULE														
DOOR	BUILDING	LEVEL	DOOR TYPE	SWING	WIDTH	HEIGHT	THICKNESS	MATERIAL	FINISH	HARDWARE	FRAME	FINISH	FRAME TYPE	REMARKS
1	2	1	A	LHR	74-1/2"	132"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	AA	Lock must except a 7 pin core.
2	5	1	A	LHR	74-1/2"	132"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	AA	Lock must except a 7 pin core.
3	6	1	A	LHR	74-1/2"	132"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	AA	Lock must except a 7 pin core.
4	15	1	A	LHR	46-1/2"	86"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	BB	Lock must except a 7 pin core.
5	15	1	A	LHR	64"	122"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	AA	Lock must except a 7 pin core.
6	16	1	A	LHR	64"	122"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	AA	Lock must except a 7 pin core.
7	17	1	A	LHR	64"	122"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	AA	Lock must except a 7 pin core.
8	124	1	A	LHR	66"	116"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	CC	Lock must except a 7 pin core.
9	172	1	B	RHR,LHR	87-1/2"	112"	1-3/4"	Aluminum	Polished	2	Aluminum	Polished	CC	No transom above door.
10	172	1	B	RHR,LHR	87-1/2"	112"	1-3/4"	Aluminum	Polished	2	Aluminum	Polished	CC	No transom above door.
11	172	1	B	RHR,LHR	87-1/2"	112"	1-3/4"	Aluminum	Polished	2	Aluminum	Polished	CC	No transom above door.
12	185	1	A	RHR	40-1/2"	96"	1-3/4"	Aluminum	Polished	1	Aluminum	Polished	BB	Lock must except a 7 pin core.

[illegible]