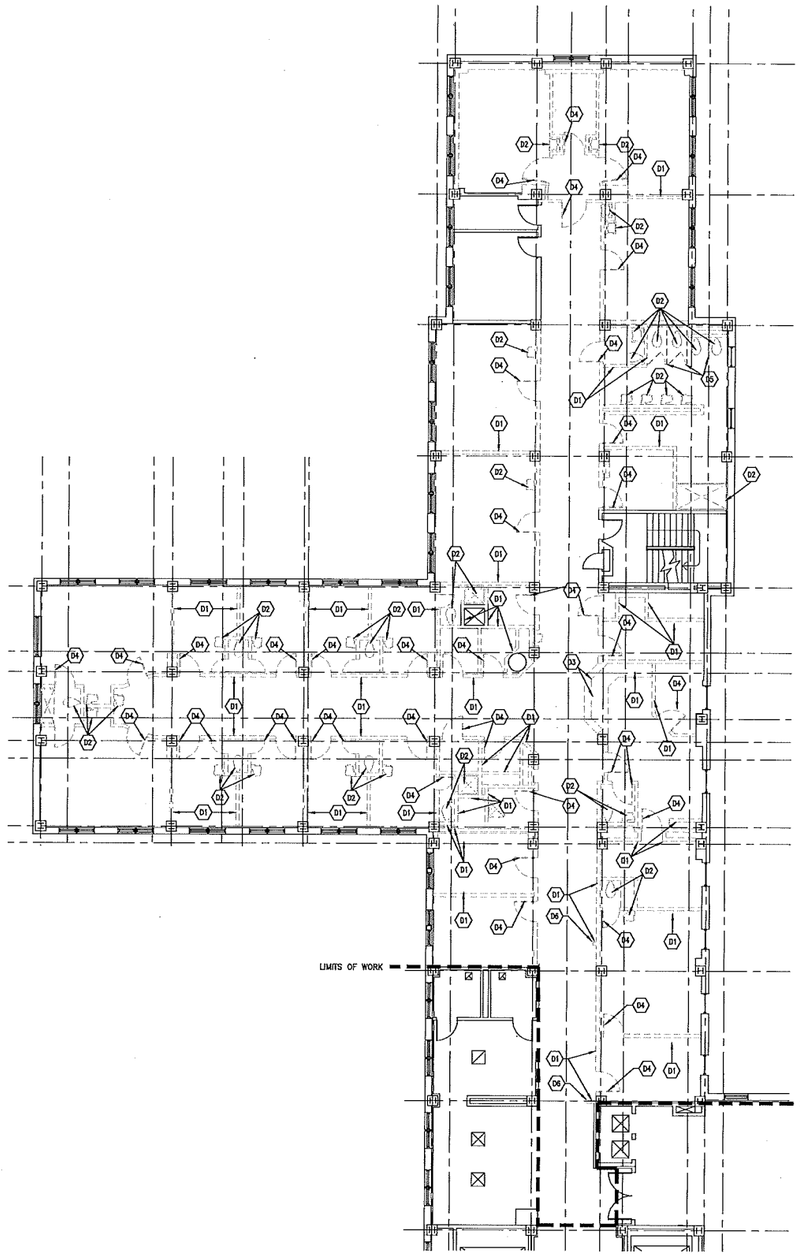

F1 DEMOLITION PLAN – 7C300/400
1/8"=1'-0"

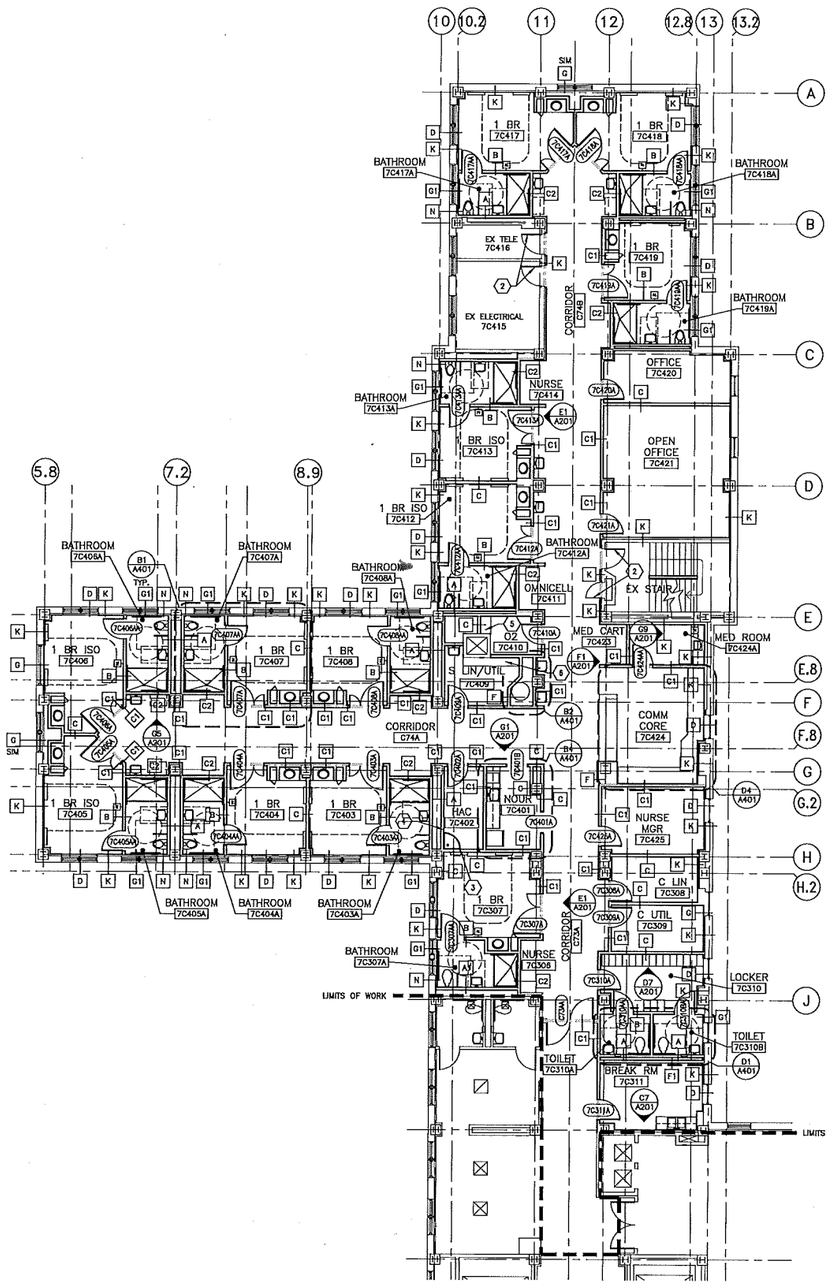

F5 NEW FLOOR PLAN – 7C300/400
1/8"=1'-0"

8' 4' 0 8' 16'
SCALE: 1/8"=1'-0"

DEMO NOTES

D1. EXISTING WALLS TO BE REMOVE.

D2. EXISTING PLUMBING FIXTURES TO BE REMOVED. CAP ALL ABANDON PIPES.

D3. REMOVE EXISTING COUNTERTOPS.

D4. REMOVE EXISTING DOORS AND FRAMES.

D5. REMOVE EXISTING TOILET PARTITIONS.

D6. REMOVE EXISTING DOOR FRAME.

KEY NOTES

1. EXISTING WALLS (PATCH & PAINT AS REQUIRED)
2. EXISTING DOORS – REFINISH AND PROVIDE NEW HARDWARE TO MATCH ADJACENT NEW DOORS.
3. MOP SINK RE: PLUMBING C2/A501
4. MOP SINK RACK RE: E2/A501
5. EIGHT 18" DEEP ADJUSTABLE SHELVES, FULL HEIGHT.
6. TWO WIRE SHELVES ON BRACKETS AT 34" A.F.F. AND 68" A.F.F.

GENERAL NOTES

G1. ALL DIMENSIONS ARE FROM FACE OF FINISH TO FACE OF FINISH.

G2. NEW WALLS ARE 5/8" GYPSUM BOARD EACH SIDE OVER 3 5/8" 20 GA METAL STUDS @ 16" O.C. WITH SOUND BATTS, EXTEND WALL 6" ABOVE CEILING UNLESS NOTED OTHERWISE.

G3. THE LOCATION OF MANY PARTITIONS ARE SET BY THEIR RELATIONSHIP TO AN EXISTING COLUMN OR WALL. SEE SHEET A301 FOR TYPICAL FURRING ILLUSTRATIONS.

G4. INSTALL SHEET MEMBRANE WATER PROOFING IN ALL AREAS OF NEW CERAMIC TILE FLOORS AT BATHROOMS.

G5. ALL ABANDONED PLUMBING PIPES SHALL BE CAPPED BELOW THE FINISH FLOOR SLAB.

G6. REMOVE EXISTING CEILINGS IN DEMOLITION AREAS. (NOT IN ELECTRICAL 7C415 AND TELEPHONE 7C418)

LEGEND

EXISTING TO REMAIN

EXISTING TO BE REMOVED

NEW CONSTRUCTION

ONE HOUR FIRE WALL

BUILDING 2 KEY PLAN

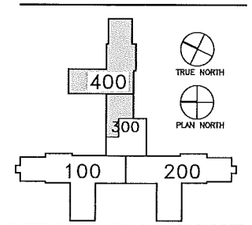

100% CONSTRUCTION ISSUE

Revisions	Date

FE RATIO ENGINEERING Inc
2201 N Collins, Suite 293
Arlington, Texas 76011-2568
(817) 461-2337 Fax: (817) 461-1029
F-1156
MECHANICAL • ELECTRICAL • PLUMBING
FEI PROJECT # 12037

MPI Architecture ■ Planning ■ Interior Design
4949 Addison Circle ■ Addison, Texas 75001
MPI Project No.: 8130501

Seal

Seal
11/13/14

Drawing Title: 7TH FLOOR – C300/400 DEMO & NEW FLOOR PLAN

Approved: Area Project Manager

Project Title: VA Dallas– Patient Privacy UFAS–Phase 7

Building Number: 2 | Checked: DJD | Drawn: EB

Location: 4500 S. Lancaster Rd. Dallas, Texas 75216

Date: 11/13/14

Project No.: 549-11-906

Drawing No.: A101

Dwg. of

VA NORTH TEXAS HEALTH CARE SYSTEM

VANTHCS Dallas, Texas

VA FORM 08-6231A, JAN 1990

Computer Filename: File: J:\MI Interiors\8130501 VA Dallas - Bldg 2 - 7C300 Ipatient Survey\VA_C7130OR-7C300_A101.dwg Release: 18.0 (LMS Tech)
Plot: 11/13/2014 10:10:24 AM by Mark Hutchins Drawing Setup: Name=Arch D, Size=24.00in x 36.00in, Scale=1.0000 Plotting Scale: 1=1'-0"