
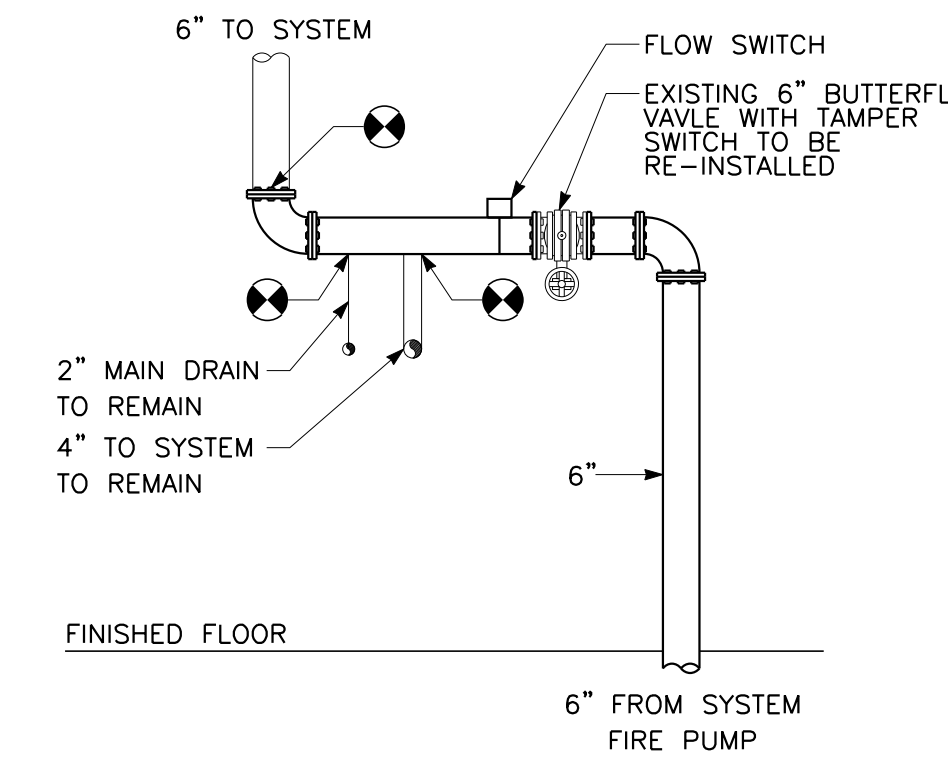
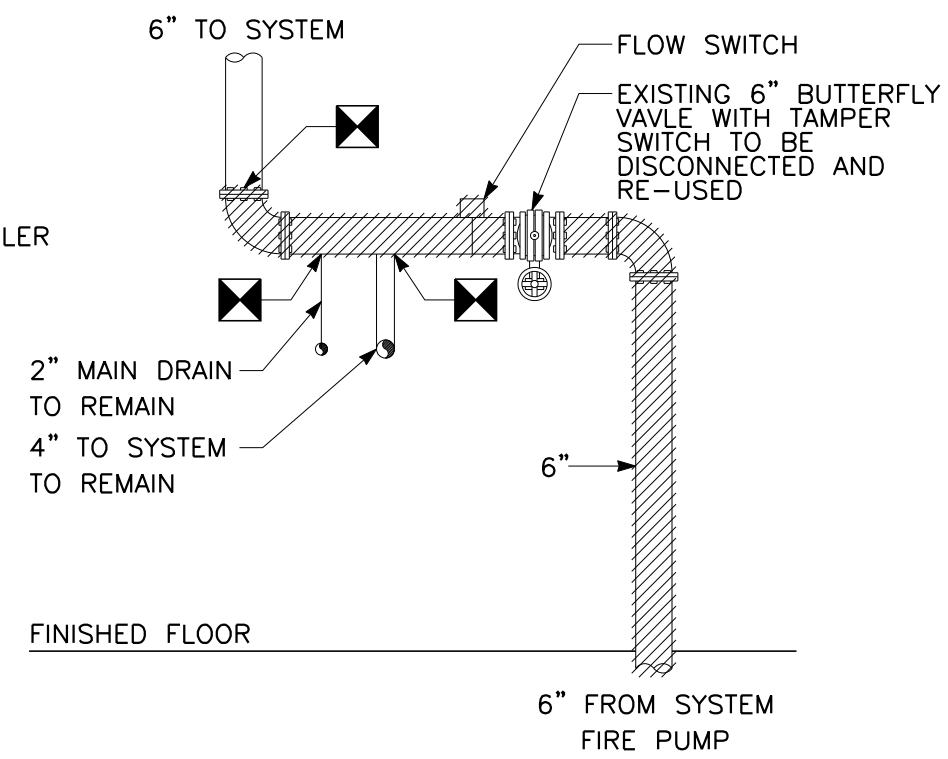




three inches = one foot  
one and one-half inch = one foot  
one inch = one foot  
three-quarters inch = one foot  
three-quarters inch = one foot  
one-half inch = one foot  
one-half inch = one foot  
three-eighths inch = one foot  
one-quarter inch = one foot  
one-eighth inch = one foot

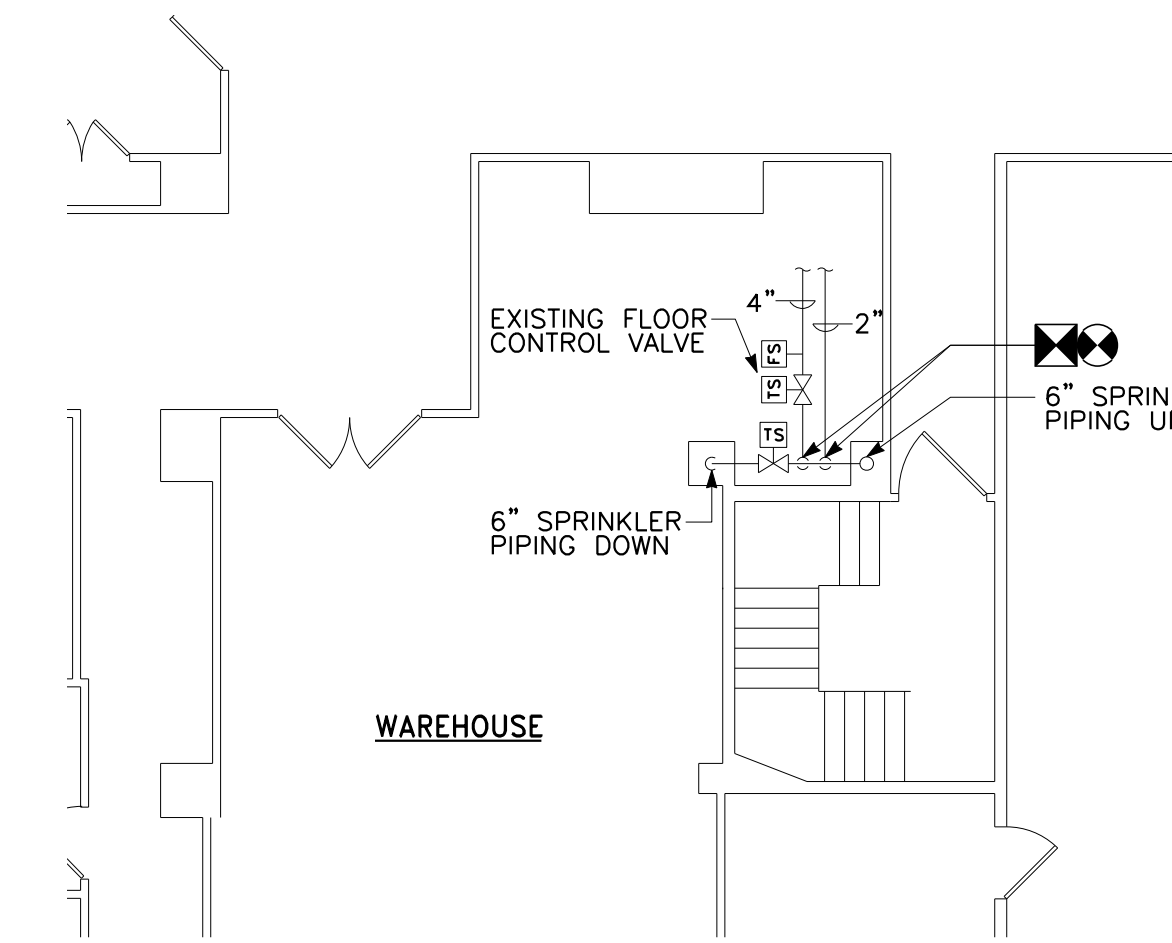

PARTIAL BASEMENT FLOOR PLAN AND  
ALARM CHECK VALVE ARRANGEMENT – WING 'C' – FIRE PROTECTION

1/8" = 1'-0"



1

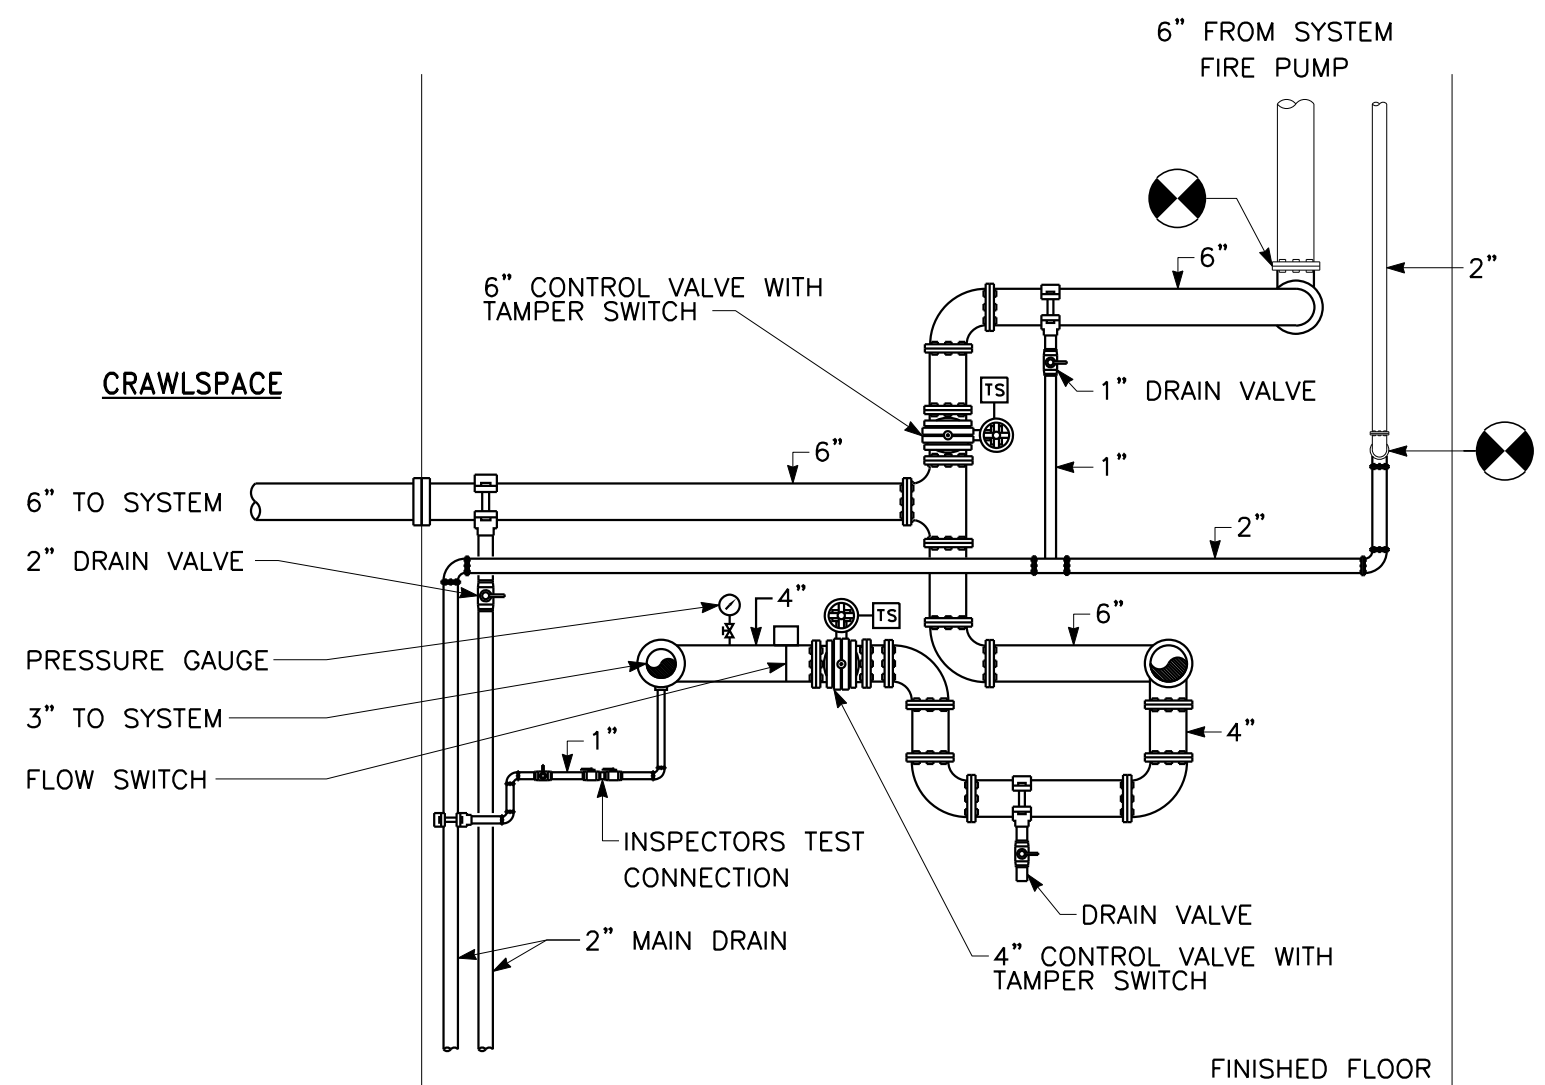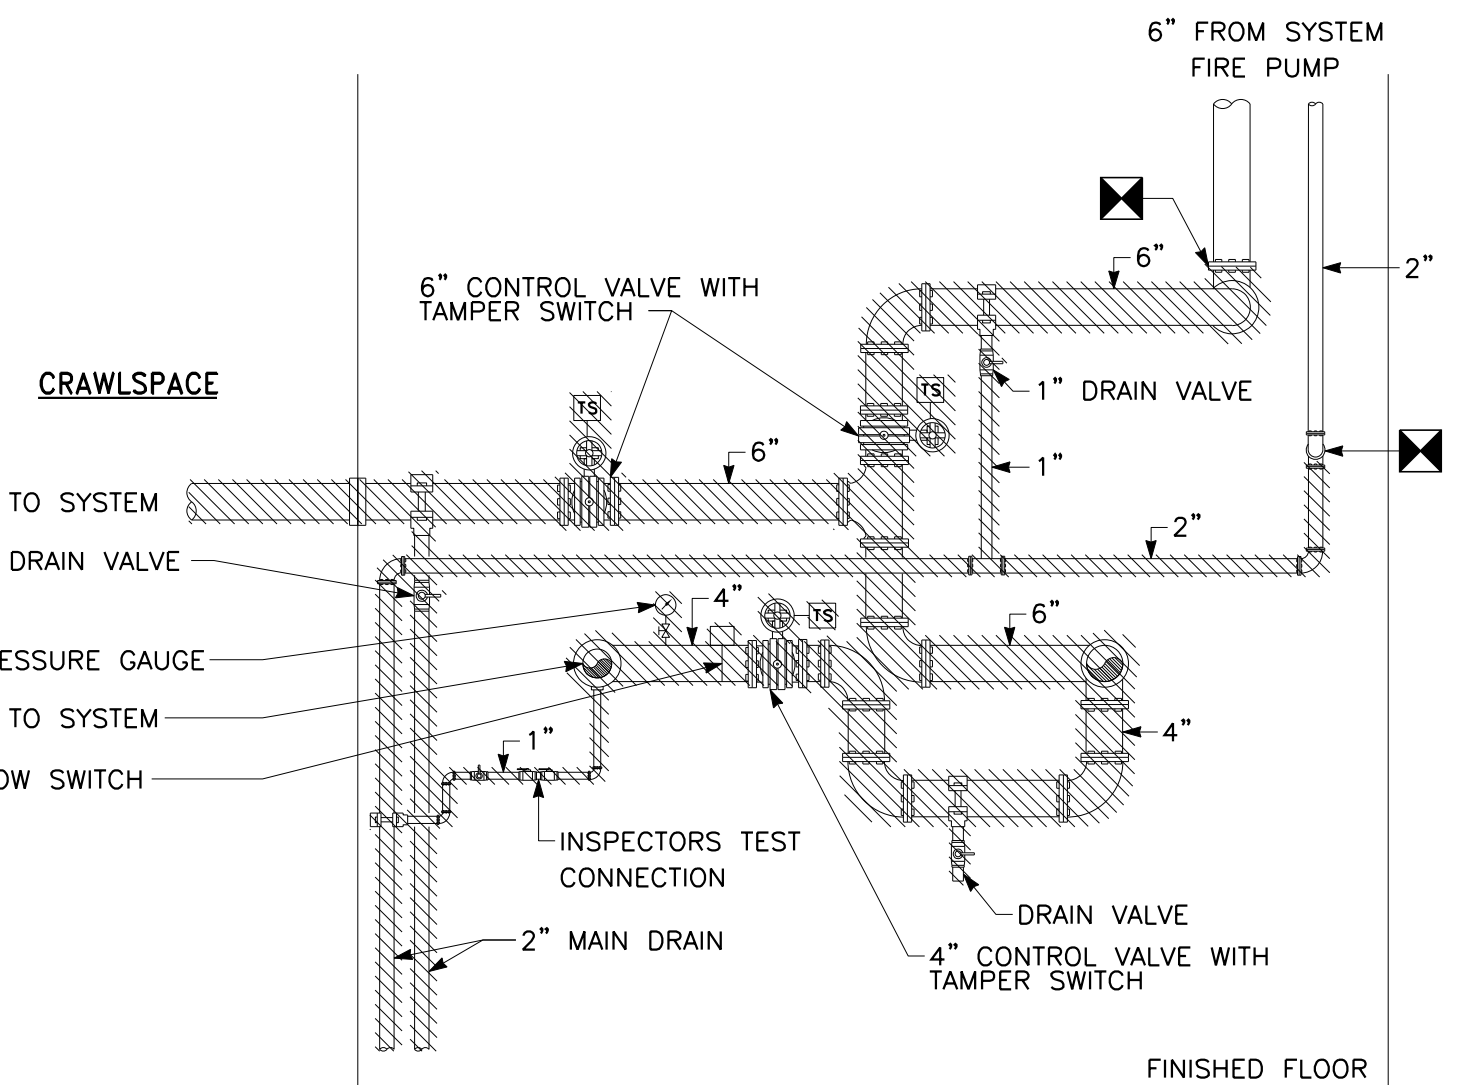

PARTIAL SUB-BASEMENT  
ALARM CHECK VALVE ARRANGEMENT – CORE – FIRE PROTECTION

1/8" = 1'-0"




2

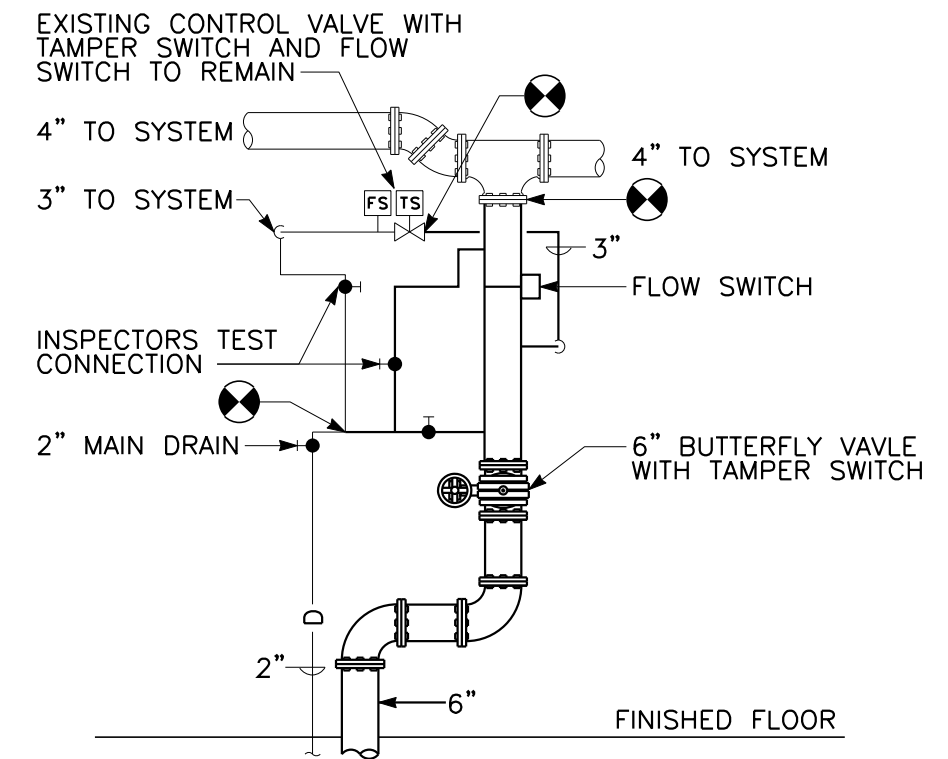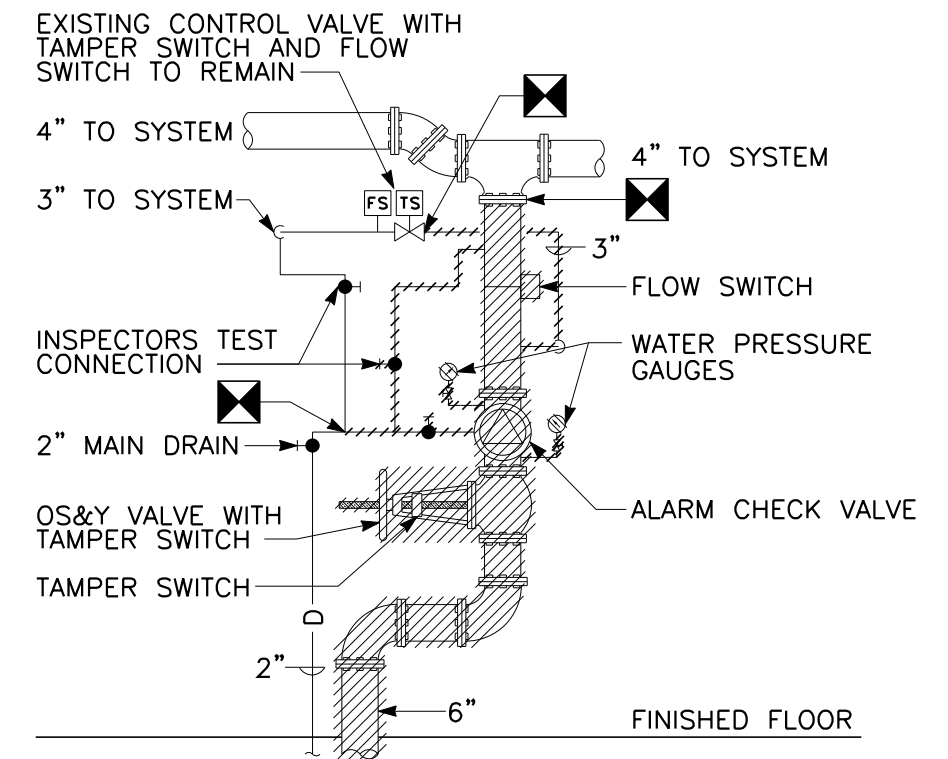

PARTIAL BASEMENT FLOOR PLAN AND  
ALARM CHECK VALVE ARRANGEMENT – WING 'C' – FIRE PROTECTION

1/8" = 1'-0"

3

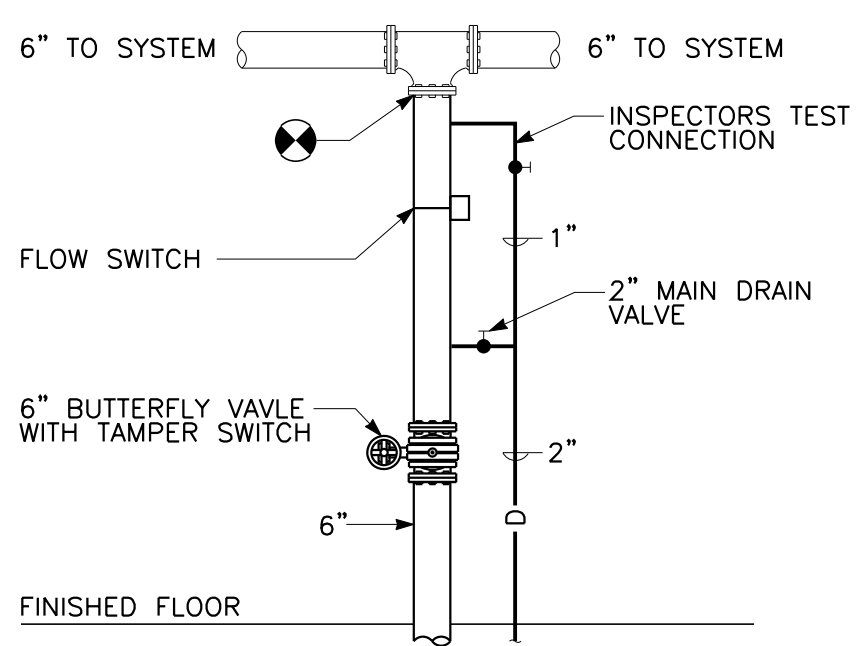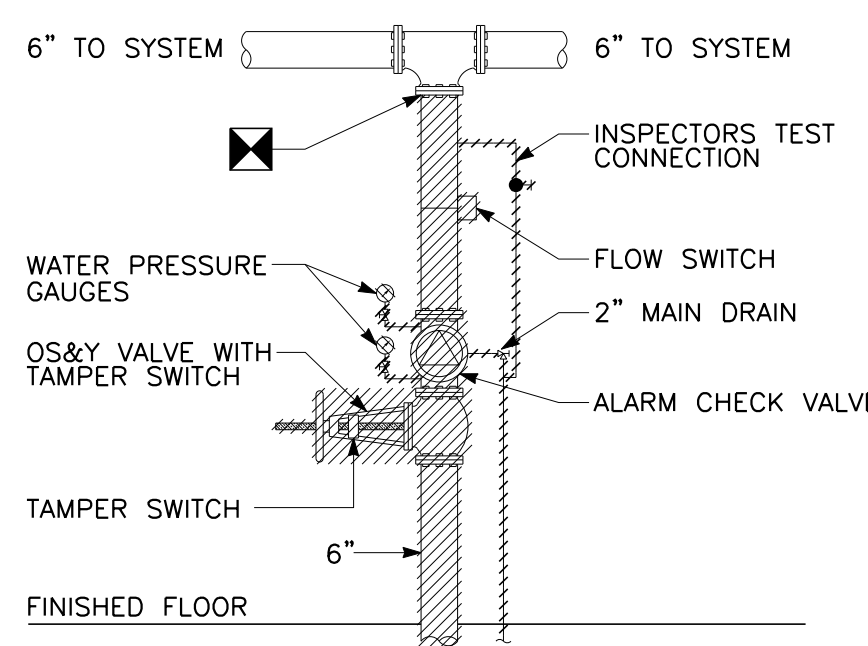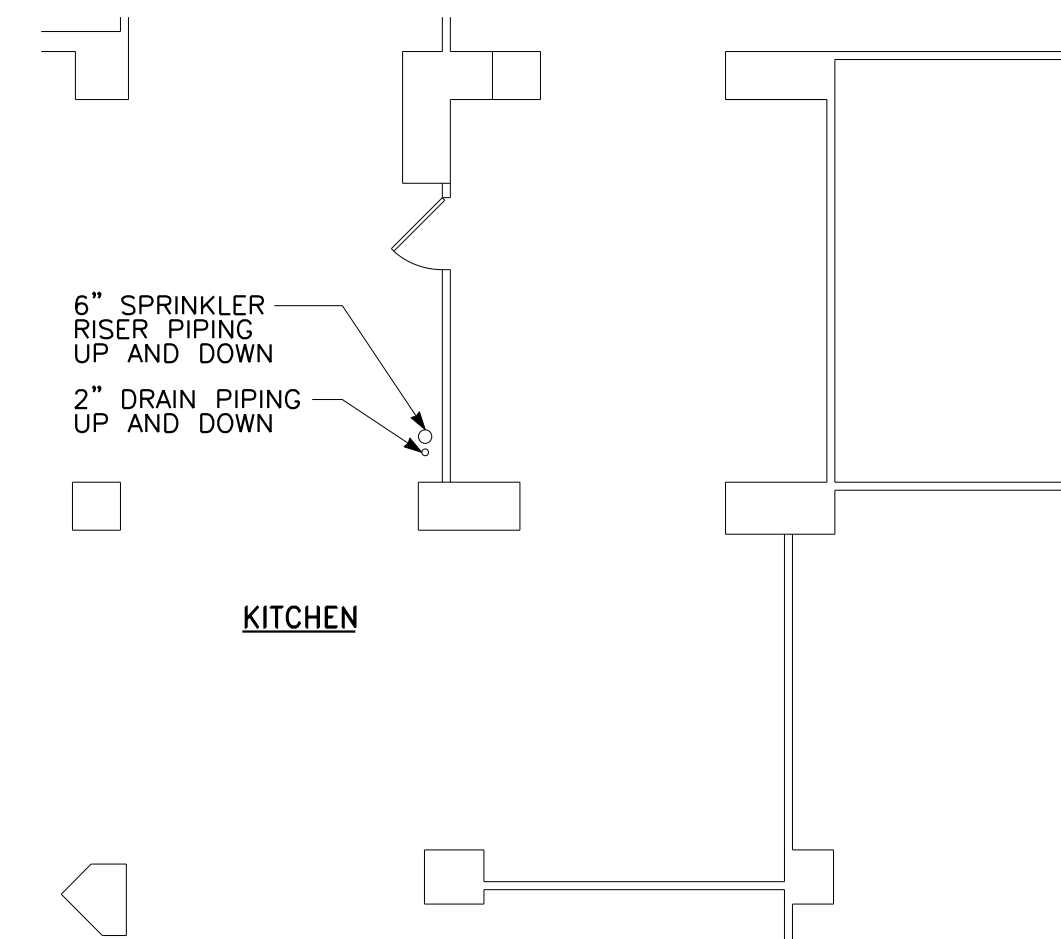

PARTIAL BASEMENT FLOOR PLAN AND  
ALARM CHECK VALVE ARRANGEMENT – CORE – FIRE PROTECTION

1/8" = 1'-0"

4

GENERAL NOTES:


- NEW SPRINKLER MAIN PIPING SHALL BE RUN PARALLEL TO EXISTING UNLESS OTHERWISE INDICATED. EXISTING SPRINKLER MAIN PIPING SHALL REMAIN IN PLACE AND ACTIVE UNTIL SHUTDOWN AND CHANGE OVER IS SCHEDULED.
- ALL PIPE HANGERS SHALL BE SUPPORTED FROM THE STRUCTURAL CONCRETE SLAB ATTACHMENT TO CONCRETE ENCASED STEEL BEAMS IS STRICTLY PROHIBITED.
- SYSTEM SHUT-DOWNS ARE LIMITED TO 8 HOUR INTERVALS WITH NO EXCEPTIONS. COORDINATE CLOSELY WITH THE OWNER AND FOLLOW ALL OWNER SHUT-DOWN REQUIREMENTS AND PROCEDURES.

REMOVAL NOTES:

- DISCONNECT AND REMOVE SPRINKLER MAIN PIPING BACK TO POINT INDICATED. PREPARE PIPING FOR RECONNECTION.
- DISCONNECT AND REMOVE VALVE WITH TAMPER AND FLOW SWITCH IN THEIR ENTIRETY. EXISTING FIRE ALARM SYSTEM MONITORING MODULE AND ASSOCIATED WIRING TO REMAIN.
- FIRE ALARM DEVICES SHALL BE DISABLED FROM THE FIRE ALARM SYSTEM TO ALLOW FOR THE DISCONNECTION OF SYSTEM WIRING AND REMOVAL OF TAMPER AND/OR FLOW SWITCH DEVICES.

DRAWING NOTES:

- CONNECT SPRINKLER MAIN PIPING TO EXISTING PIPING PREVIOUSLY PREPARED FOR RECONNECTION.
- PROVIDE VALVE WITH TAMPER AND FLOW SWITCH. RECONNECT TAMPER AND FLOW SWITCHES TO EXISTING FIRE ALARM SYSTEM MONITORING MODULE.
- RE-CONNECT SYSTEM WIRING TO NEW DEVICE AS INDICATED UPON COMPLETION OF INSTALLATION. EXTEND SYSTEM WIRING AS NECESSARY TO NEW DEVICE. SPlicing OF WIRES IS NOT ACCEPTABLE. PROVIDE NEW WIRING TO MAKE CONNECTION COMPLETE. PROVIDE ANY AND ALL ELECTRICAL WORK AND MATERIALS TO EXTEND SYSTEM WIRING. PROVIDE SYSTEM TESTING AND VERIFICATION OF DEVICE CONNECTION AND NOTIFICATION UPON COMPLETION OF EACH DEVICE.

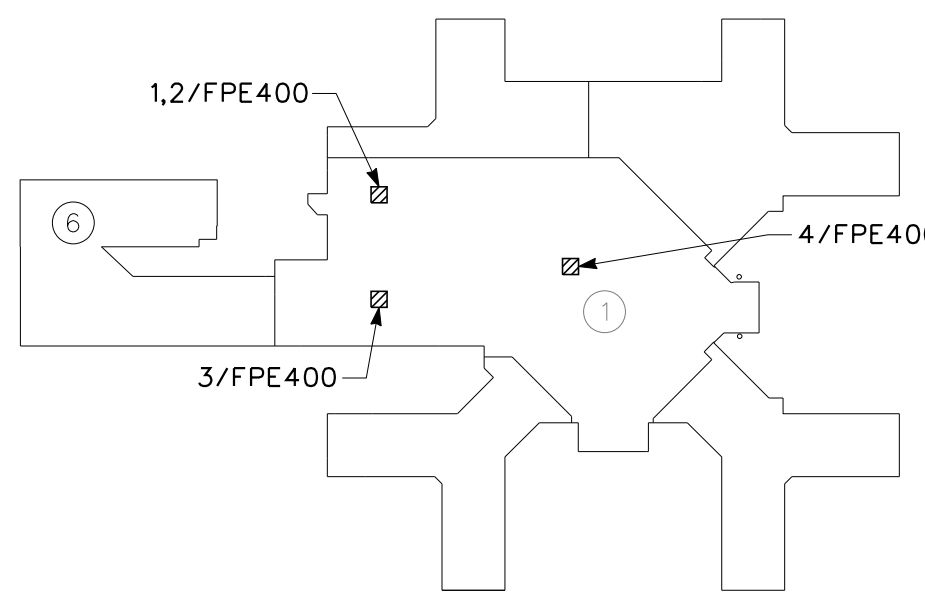

KEY PLAN  
NO SCALE

CONSTRUCTION DOCUMENTS	07/01/11
90% SUBMISSION	06/10/11
60% SUBMISSION	12/10/10
Revisions	Date

VA WESTERN NEW YORK HEALTHCARE SYSTEM 3495 BAILEY AVENUE BUFFALO, NEW YORK 14215
--

Architect JOHN SHAFIUCAS ARCHITECTS P.C. 1260 SWEET HOME ROAD AMHERST, NY 14228 PH: 716/636/5000 FX: 716/636/1008 JOB #: 0608 Engineering Consultant IBC ENGINEERING, P.C. 2495 MAIN ST., SUITE 318 BUFFALO, NY 14214 PH: 716/836/2315 FX: 716/836/2319 IBC JOB #: 10572
---

stamp
-------

CARDIOLOGY MANAGER	DATE	ENGINEERING MANAGER	DATE
INFECTION CONTROL	DATE	CARELINE MANAGER	DATE
SAFETY OFFICER	DATE	CHIEF OF STAFF	DATE

Drawing Title	
PARTIAL BASEMENT FLOOR PLANS BUILDINGS No. 1 & 6	
MEDICAL CENTER DIRECTOR	DATE
ASSOCIATE MEDICAL CENTER DIRECTOR	DATE

Project Title		
REPLACE SPRINKLER MAINS		
Building Number 1 AND 6	Checked DDR	Drawn KGP
Location V.A.M.C. BUFFALO, NEW YORK		

Date DECEMBER 10, 2010
Station No. 528
10-107-FPE400

