


three inches = one foot  
one and one-half inch = one foot  
one inch = one foot  
three-quarters inch = one foot  
one-half inch = one foot  
three-eighths inch = one foot  
one-quarter inch = one foot  
one-eighth inch = one foot

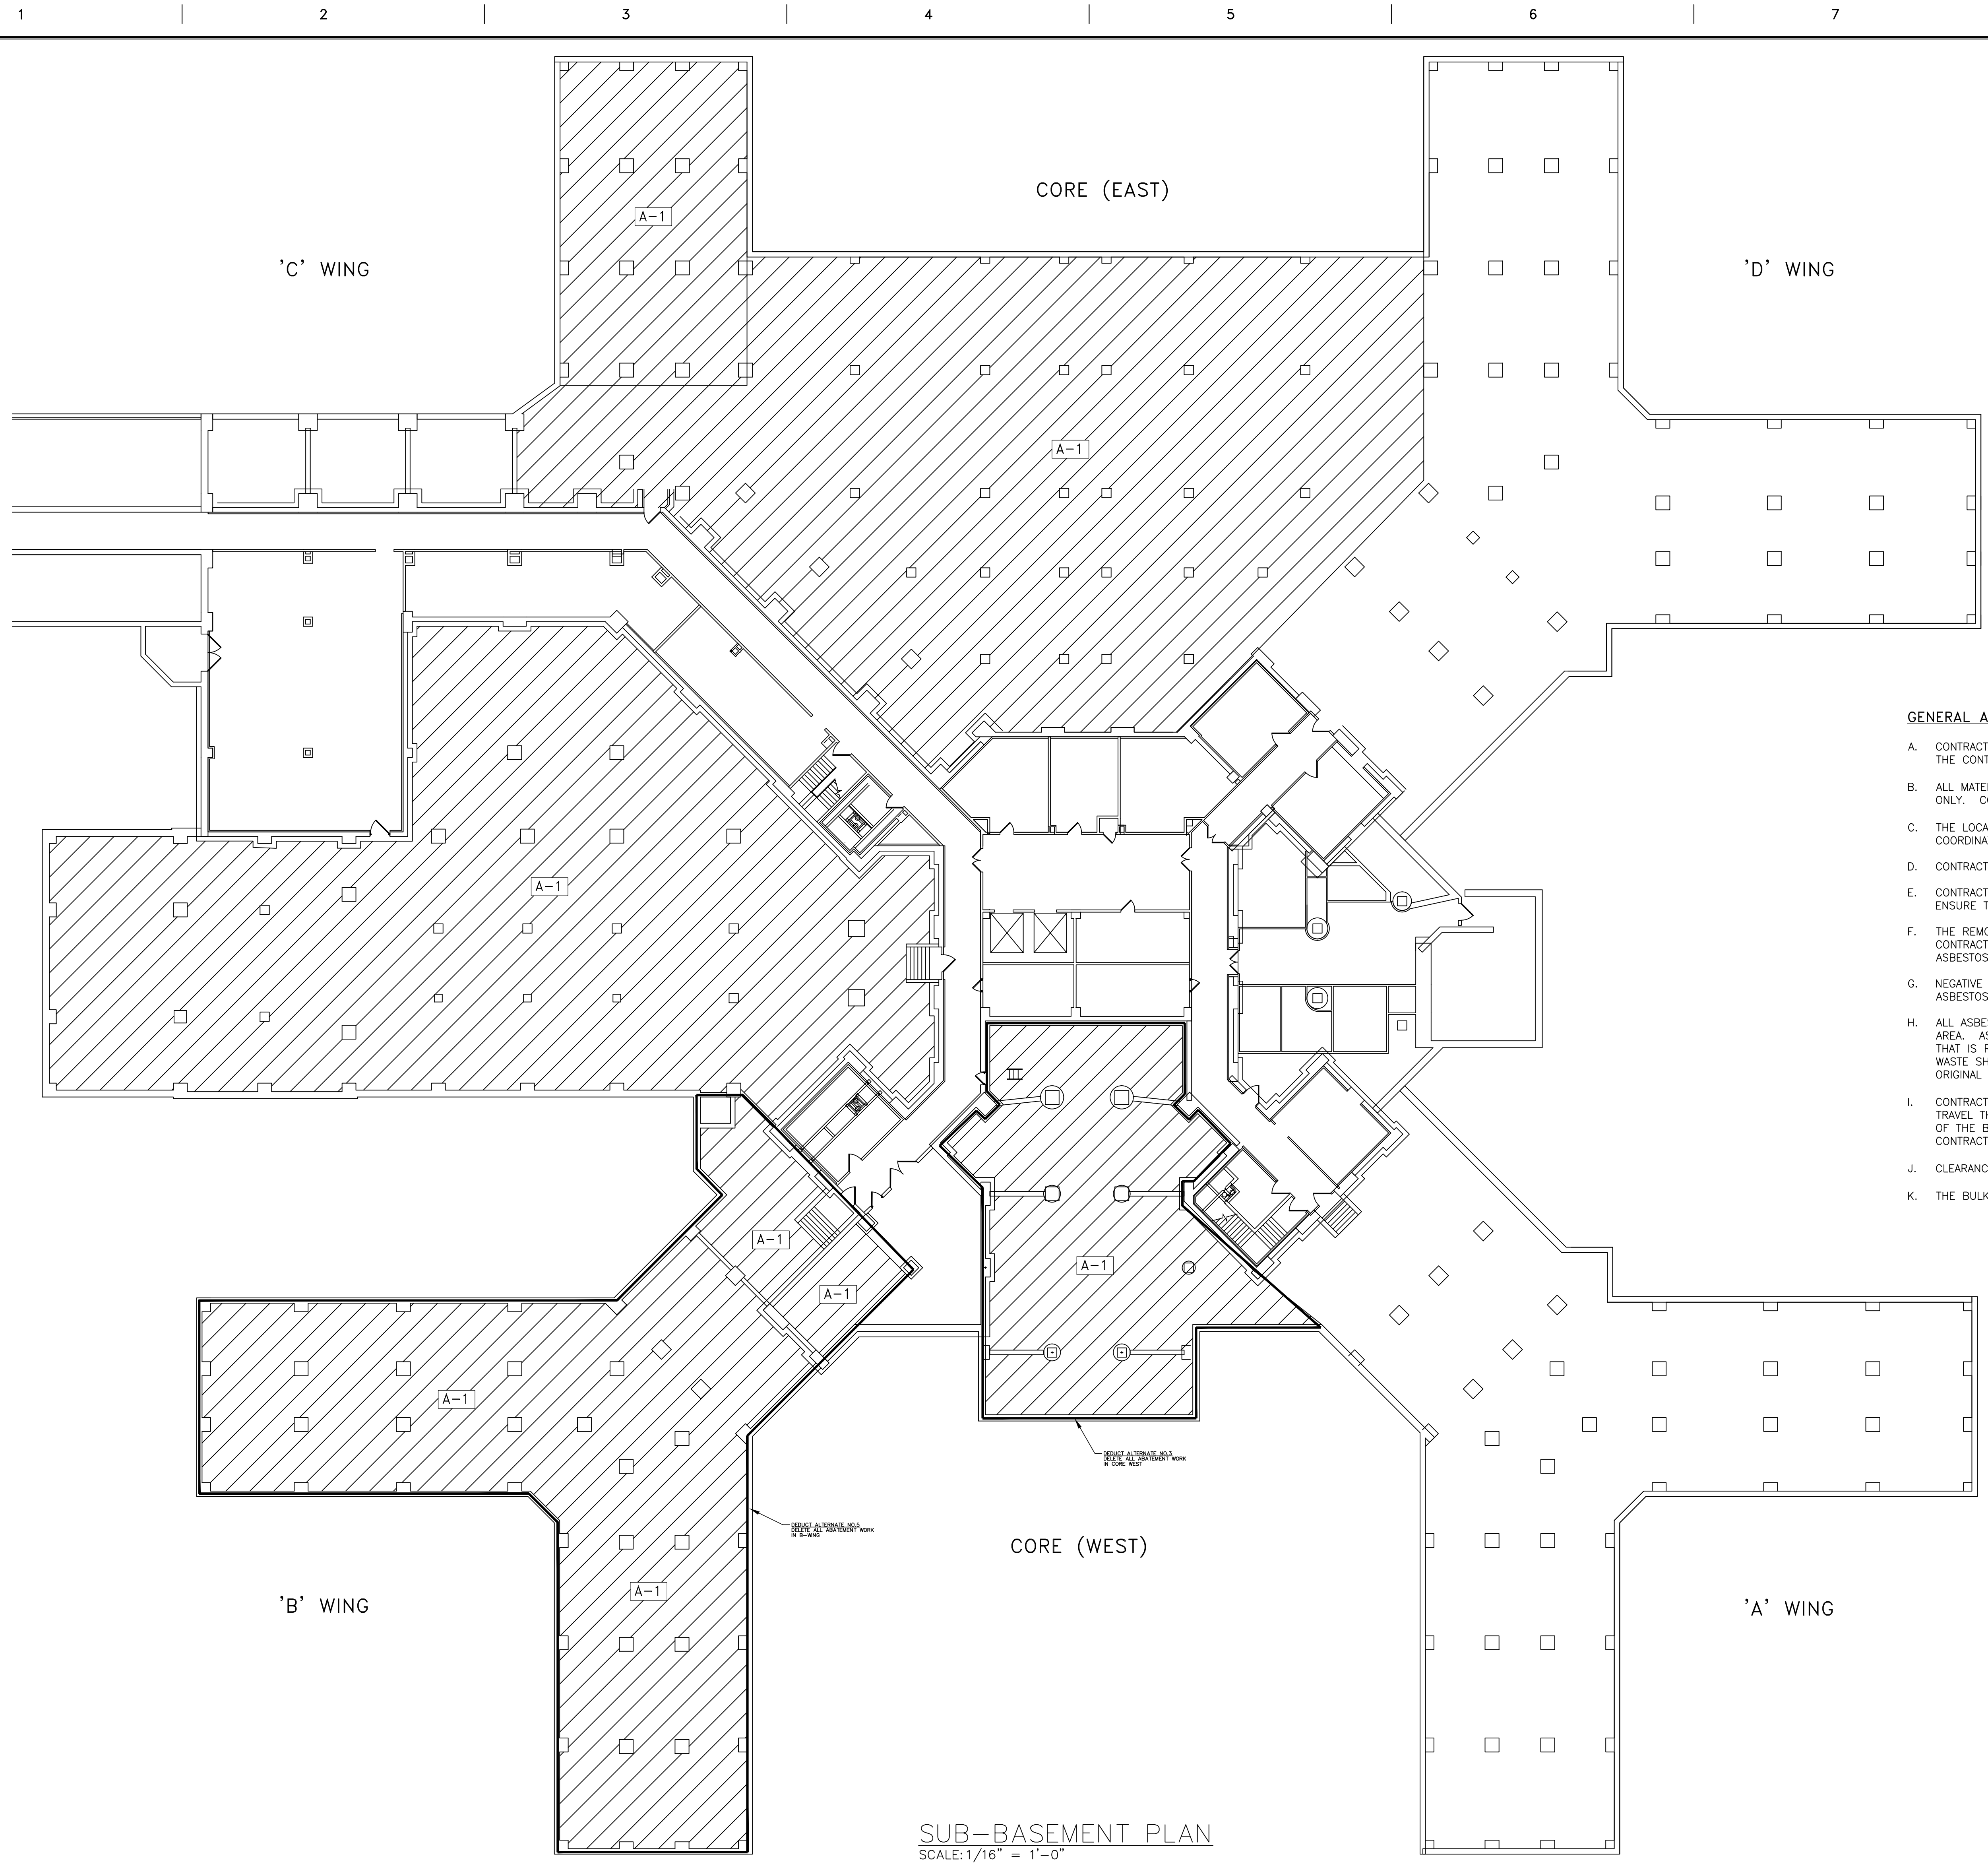

**ASBESTOS ABATEMENT NOTES**

A-1 CONTRACTOR SHALL REMOVE AND PROPERLY DISPOSE OF ALL THE SOIL IN THE AREAS INDICATED. THERE IS ASBESTOS DEBRIS COMMINGLED WITH THE SOIL. THE SOIL SHALL BE REMOVED A MINIMUM OF 6 INCHES IN DEPTH ACROSS THE ENTIRE SURFACE AREA. AFTER THE 6 INCHES OF SOIL HAS BEEN REMOVED, THE VA REPRESENTATIVE SHALL VISUALLY INSPECT THE AREA AND COLLECT BULK SAMPLES OF THE SOIL. IF THE SOIL IS STILL CONTAMINATED WITH ASBESTOS DEBRIS, CONTRACTOR SHALL REMOVE A MINIMUM OF 2 ADDITIONAL INCHES OF SOIL ACROSS THE ENTIRE SURFACE AREA. THIS PROCESS SHALL CONTINUE UNTIL BULK SAMPLES DO NOT INDICATE THE PRESENCE OF ASBESTOS.

**ASBESTOS DRAWING NOTES**

A. CONTRACTOR WILL BE RESPONSIBLE FOR ESTABLISHING A CONTAINMENT AREA TO SEPARATE THE WORK AREA FROM THE REMAINDER OF THE CRAWLSPACE AREA(S). A MINIMUM OF 2 LAYERS OF 6 MIL POLY SHEETING SHALL BE USED FOR THE BARRIERS.

B. PER REGULATIONS, CONTRACTOR SHALL ATTACH A DECONTAMINATION ENCLOSURE TO THE WORK AREA.

C. CONTRACTOR SHALL BE RESPONSIBLE FOR PROTECTING ALL PIPES, CONDUITS, ETC. THAT TRAVEL THROUGH THE REGULATED WORK AREA(S). ANY DAMAGE TO THESE COMPONENTS AS A RESULT OF THE CONTRACTOR'S ACTIONS SHALL BE THE RESPONSIBILITY OF THE CONTRACTOR.

**GENERAL ASBESTOS NOTES**

A. CONTRACTOR SHALL PERFORM ALL WORK IN STRICT ACCORDANCE WITH ALL APPLICABLE REGULATIONS, GUIDELINES AND THE CONTRACT DOCUMENTS.

B. ALL MATERIAL MEASUREMENTS AND/OR QUANTITIES AND LOCATIONS ARE APPROXIMATE AND FOR GENERAL ORIENTATION ONLY. CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFICATION OF EXISTING CONDITIONS PRIOR TO BIDDING.

C. THE LOCATION OF ANY SITE STORAGE OF MATERIAL, EQUIPMENT, AND WASTE TRAILER/DUMPSTER SHALL BE COORDINATED WITH AND APPROVED BY THE VAMC.

D. CONTRACTOR IS RESPONSIBLE FOR ALL TOOLS, EQUIPMENT, AND SUPPLIES.

E. CONTRACTOR IS RESPONSIBLE FOR KEEPING THE WORK AREA IN A CLEAN AND SAFE CONDITION. CONTRACTOR SHALL ENSURE THAT UNCERTIFIED PERSONNEL OR UNAUTHORIZED VISITORS DO NOT ENTER ACTIVE WORK AREAS AT ANY TIME.

F. THE REMOVAL OF ANY ASBESTOS-CONTAINING MATERIAL SHALL BE PERFORMED BY A LICENSED ASBESTOS ABATEMENT CONTRACTOR. REFER TO SPECIFICATION SECTION 028211 FOR ADDITIONAL REQUIREMENTS FOR THE REMOVAL OF ASBESTOS-CONTAINING MATERIALS.


G. NEGATIVE PRESSURE SHALL BE ESTABLISHED INSIDE THE WORK AREA PRIOR TO THE DISTURBANCE OF ANY ASBESTOS-CONTAINING MATERIAL.

H. ALL ASBESTOS-CONTAINING MATERIAL SHALL BE PROPERLY PACKAGED PRIOR TO BEING REMOVED FROM THE WORK AREA. ASBESTOS WARNING LABELS SHALL BE APPLIED TO THE ASBESTOS WASTE BAGS. ALL ASBESTOS MATERIAL THAT IS REMOVED FROM THE WORK AREA SHALL BE ACCOMPANIED BY A WASTE SHIPMENT RECORD. THE COMPLETED WASTE SHIPMENT RECORD MUST BE PROVIDED TO THE VAMC AS PART OF THE CLOSEOUT DOCUMENTATION. ALL ORIGINAL WASTE SHIPMENT RECORD MUST BE PROVIDED WITHIN 35 DAYS OF THE WASTE LEAVING THE SITE.

I. CONTRACTOR SHALL CLEAN ALL AREAS OUTSIDE THE WORK AREA AND ANY AREAS WHERE CONTRACTOR'S PERSONNEL TRAVEL THROUGH THE BUILDING, INCLUDING ELEVATORS USED TO TRANSPORT MATERIALS AND WASTE INTO AND OUT OF THE BUILDING. THESE AREAS SHALL BE LEFT IN A CONDITION AS CLEAN AS OR CLEANER THAN WHEN THE CONTRACTOR ARRIVED ON SITE.

J. CLEARANCE AIR SAMPLES WILL BE PERFORMED BY TRANSMISSION ELECTRON MICROSCOPY (TEM).

K. THE BULK SAMPLES OF THE SOIL WILL BE ANALYZED BY POLARIZED LIGHT MICROSCOPY (PLM) CARB 435 METHOD.

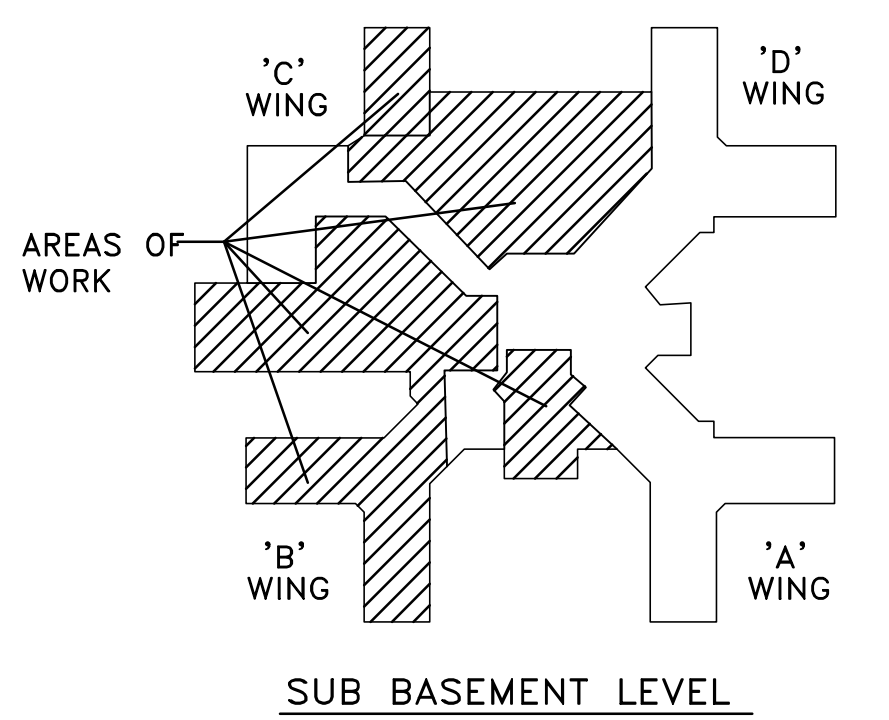

Architect JOHN SHAFILUCAS ARCHITECTS P.C. 1260 SWEET HOME ROAD AMHERST, NY 14228 PH: 716/636/5000 FX: 716/636/1008 JOB #: 0608	Engineering Consultant WATTS ARCHITECTURE & ENGINEERING, P.C. 95 PERRY ST., SUITE 300 BUFFALO, NY 14203 PH: 716/206/5100 FX: 716/206/5199 WATTS JOB #: 10056	stamp	CARDIOLOGY MANAGER DATE ENGINEERING MANAGER DATE MEDICAL CENTER DIRECTOR DATE ASSOCIATE MEDICAL CENTER DIRECTOR DATE INFECTION CONTROL DATE CARELINE MANAGER DATE CHIEF OF STAFF DATE SAFETY OFFICER DATE	Drawing Title ASBESTOS ABATEMENT PLAN Project Title REPLACE SPRINKLER MAINS Building Number 1 AND 6 Checked GA Drawn NK Location V.A.M.C. BUFFALO, NEW YORK	Date DECEMBER 10, 2010 Station No. 528 10-107-AA100	Office of Facilities Department of Veterans Affairs
--	--	-------	--	--	---	--