





- GENERAL NOTES:
- A. NEW SPRINKLER MAIN PIPING SHALL BE RUN PARALLEL TO EXISTING UNLESS OTHERWISE INDICATED. EXISTING SPRINKLER MAIN PIPING SHALL REMAIN IN PLACE AND ACTIVE UNTIL SHUTDOWN AND CHANGE OVER IS SCHEDULED.
 - B. ALL PIPE HANGERS SHALL BE SUPPORTED FROM THE STRUCTURAL CONCRETE SLAB. ATTACHMENT TO CONCRETE ENCASED STEEL BEAMS IS STRICTLY PROHIBITED.
 - C. SYSTEM SHUT-DOWNS ARE LIMITED TO 8 HOUR INTERVALS WITH NO EXCEPTIONS. COORDINATE CLOSELY WITH THE OWNER AND FOLLOW ALL OWNER SHUT-DOWN REQUIREMENTS AND PROCEDURES.
 - D. COORDINATE ALL FIRE ALARM WORK WITH THE OWNER AND SIMPLEX.

- REMOVAL NOTES:
- 1 DISCONNECT AND REMOVE SPRINKLER MAIN PIPING BACK TO POINT INDICATED. PREPARE PIPING FOR RECONNECTION.
 - 2 DISCONNECT AND REMOVE VALVE WITH TAMPER AND FLOW SWITCH IN THEIR ENTIRETY. EXISTING FIRE ALARM SYSTEM MONITORING MODULE AND ASSOCIATED WIRING TO REMAIN.
 - 3 DISCONNECT AND REMOVE SPRINKLER MAIN PIPING LOCATED TIGHT TO CEILING IN ITS ENTIRETY BACK TO POINT INDICATED.
 - 4 DISCONNECT AND REMOVE SPRINKLER MAIN PIPING LOCATED WITHIN PIPING UTILITY RACK IN ITS ENTIRETY BACK TO POINT INDICATED.
 - 5 DISCONNECT AND REMOVE SPRINKLER MAIN PIPING UP TO AND INCLUDING INDICATING CONTROL VALVE WITH TAMPER AND FLOW SWITCH LOCATED WITHIN THE ROOM ABOVE ON THE BASEMENT LEVEL. EXISTING FIRE ALARM SYSTEM MONITORING MODULE AND ASSOCIATED WIRING TO REMAIN. REFER TO DETAIL 2/FPE101.
 - 6 DISCONNECT AND REMOVE 2" DRAIN PIPING IN ITS ENTIRETY.
 - 7 FIRE ALARM DEVICES SHALL BE DISABLED FROM THE FIRE ALARM SYSTEM TO ALLOW FOR THE DISCONNECTION OF SYSTEM WIRING AND REMOVAL OF TAMPER AND/OR FLOW SWITCH DEVICES.


- DRAWING NOTES:
- 1 CONNECT SPRINKLER MAIN PIPING TO EXISTING PIPING PREVIOUSLY PREPARED FOR RECONNECTION.
 - 2 PROVIDE VALVE WITH TAMPER AND FLOW SWITCH. RECONNECT TAMPER AND FLOW SWITCHES TO EXISTING FIRE ALARM SYSTEM MONITORING MODULE.
 - 3 SPRINKLER MAIN PIPING TO BE RUN WITHIN PIPING UTILITY RACK. PIPING UTILITY RACK TO BE MODIFIED ACCORDINGLY TO ACCOMMODATE NEW PIPING.
 - 4 PROVIDE SPRINKLER MAIN PIPING UP TO THE ROOM ABOVE LOCATED ON THE BASEMENT LEVEL. PROVIDE INDICATING CONTROL VALVE WITH TAMPER AND FLOW SWITCH AND CONNECT TO EXISTING SPRINKLER MAIN PIPING WITHIN THIS ROOM. RECONNECT TAMPER AND FLOW SWITCHES TO EXISTING FIRE ALARM SYSTEM MONITORING MODULE. REFER TO DRAWING 2/FPE101.
 - 5 RE-CONNECT SYSTEM WIRING TO NEW DEVICE AS INDICATED UPON COMPLETION OF INSTALLATION. EXTEND SYSTEM WIRING AS NECESSARY TO NEW DEVICE. SPLICING OF WIRES IS NOT ACCEPTABLE. PROVIDE NEW WIRING TO MAKE CONNECTION COMPLETE. PROVIDE ANY AND ALL ELECTRICAL WORK AND MATERIALS TO EXTEND SYSTEM WIRING. PROVIDE SYSTEM TESTING AND VERIFICATION OF DEVICE CONNECTION AND NOTIFICATION UPON COMPLETION OF EACH DEVICE.

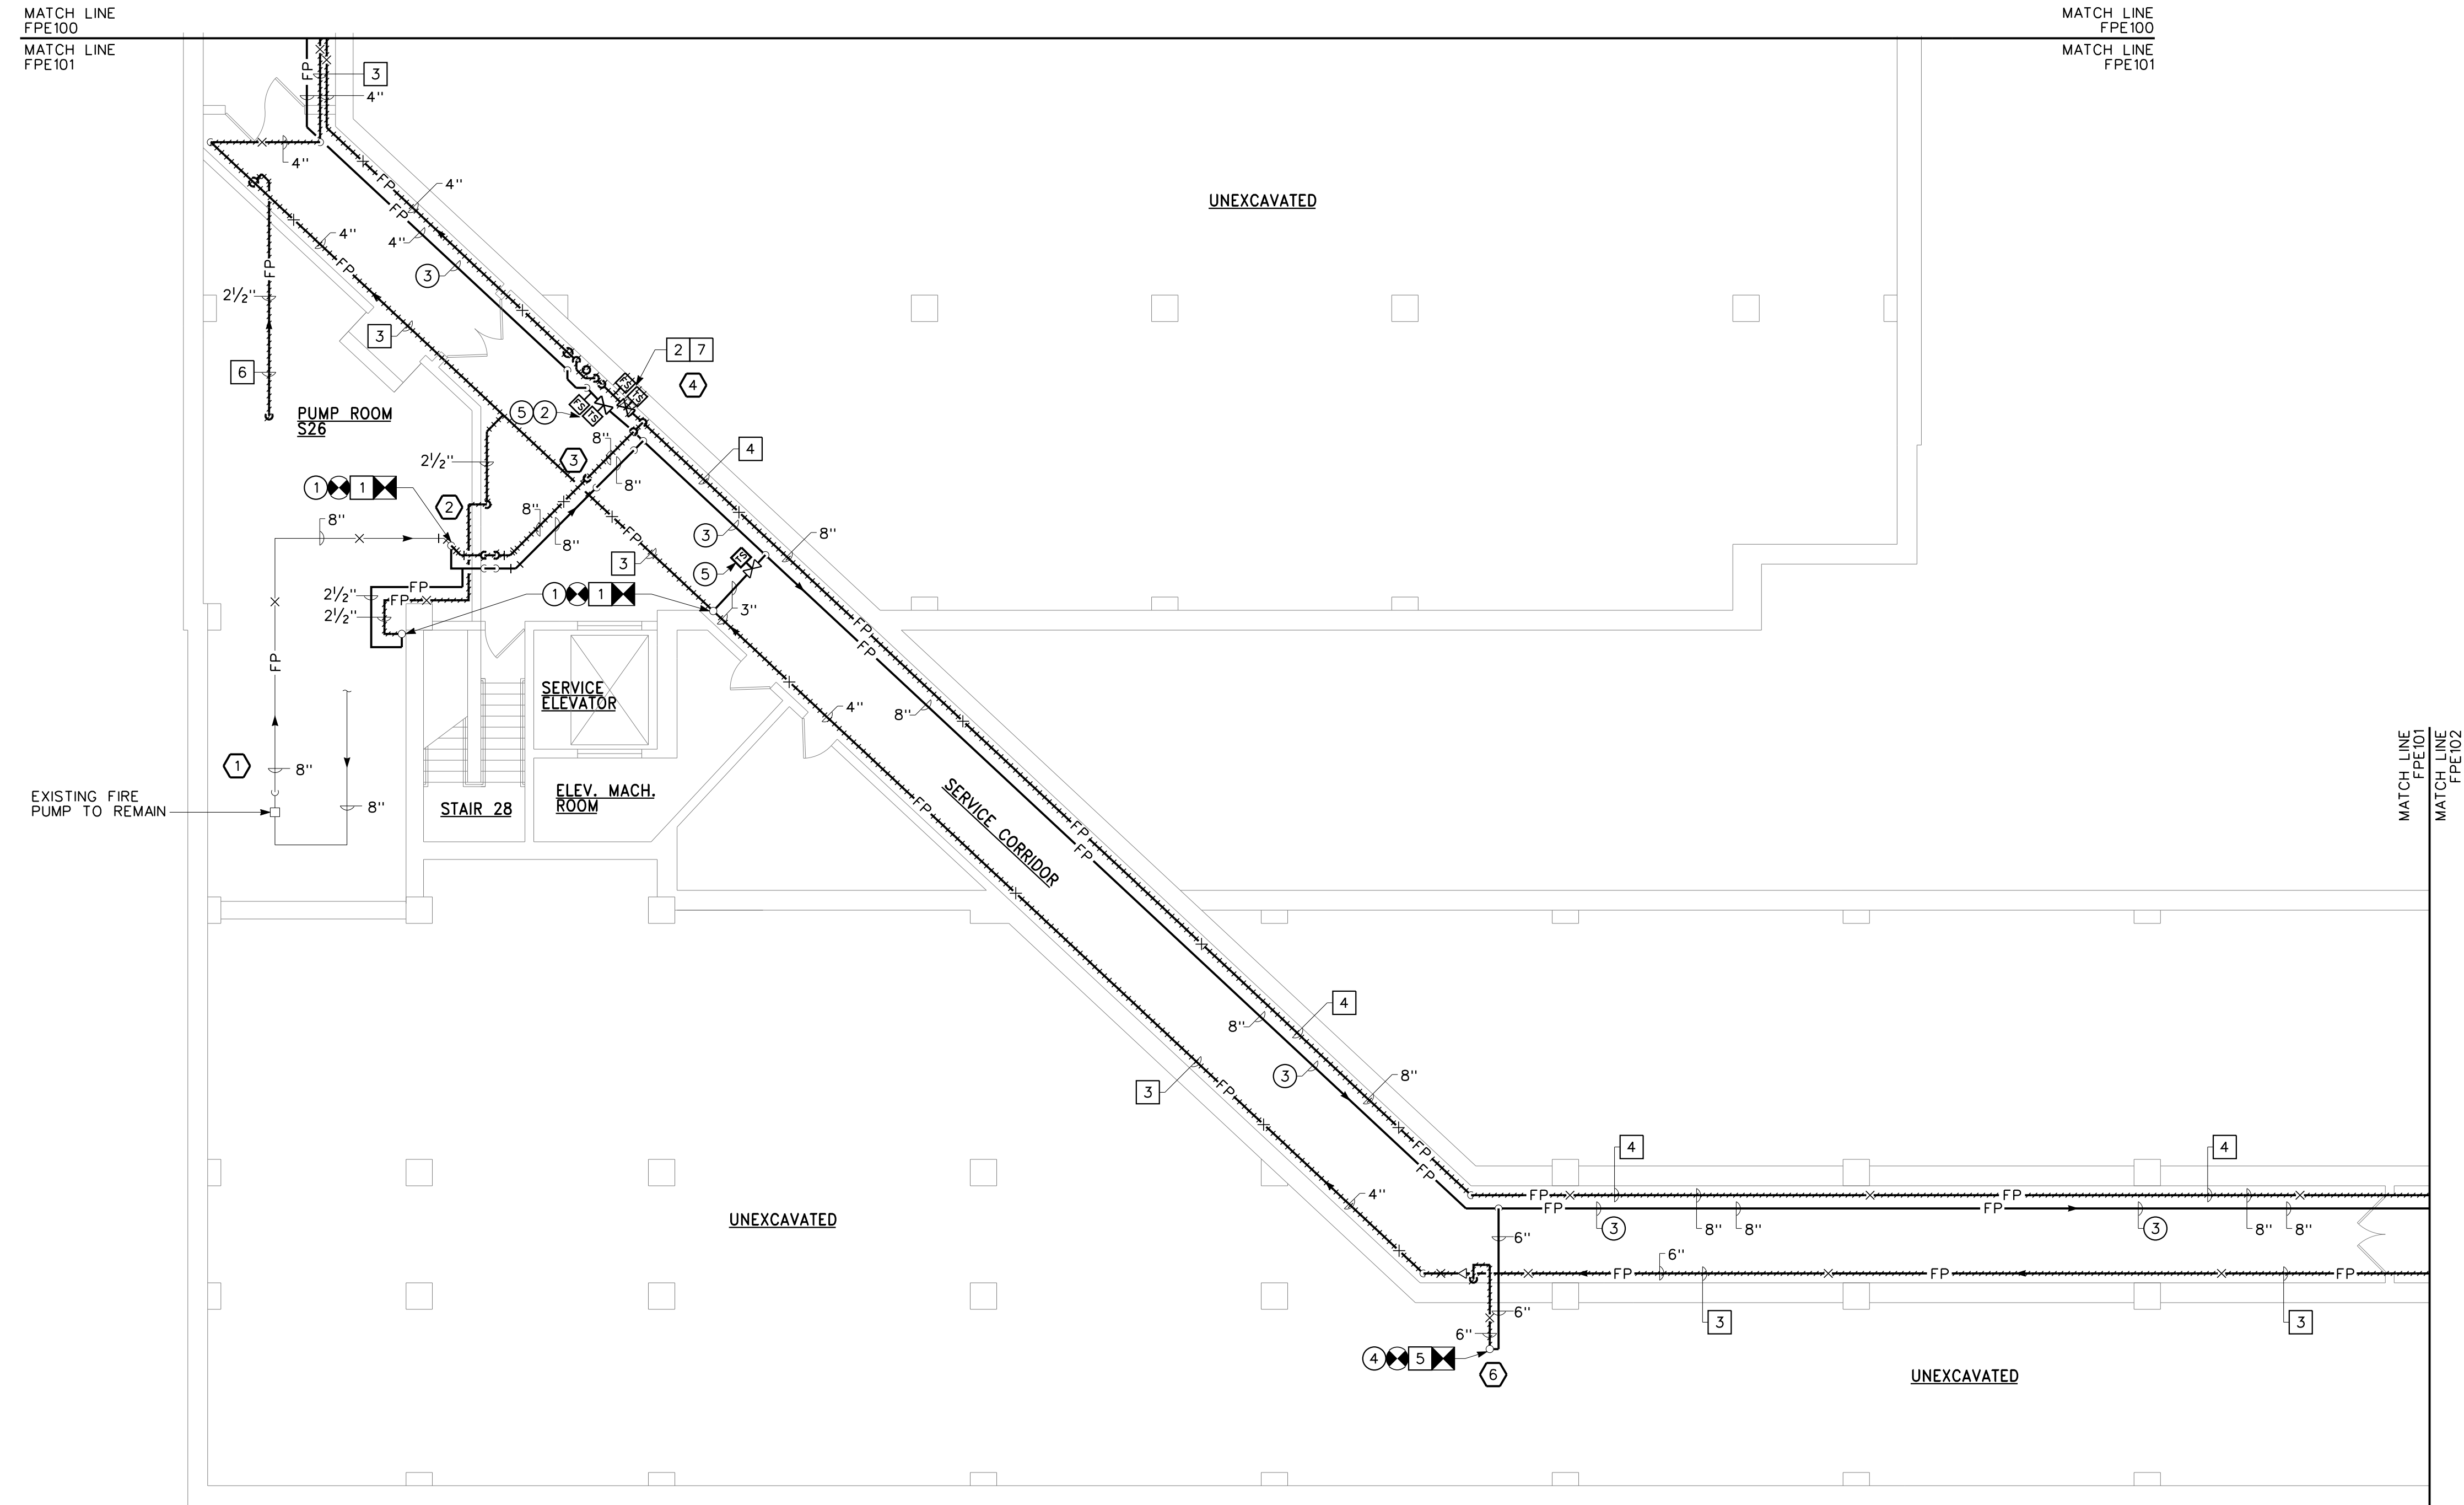

PARTIAL SUB-BASEMENT FLOOR PLAN – BUILDING No. 6 – FIRE PROTECTION 1
1/8" = 1'-0"

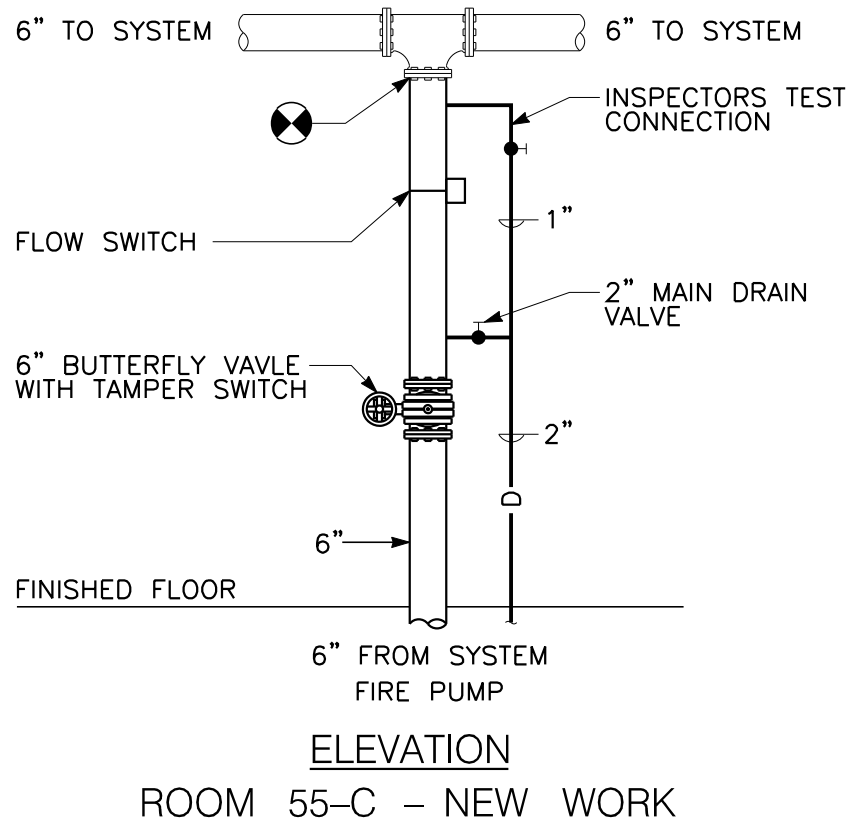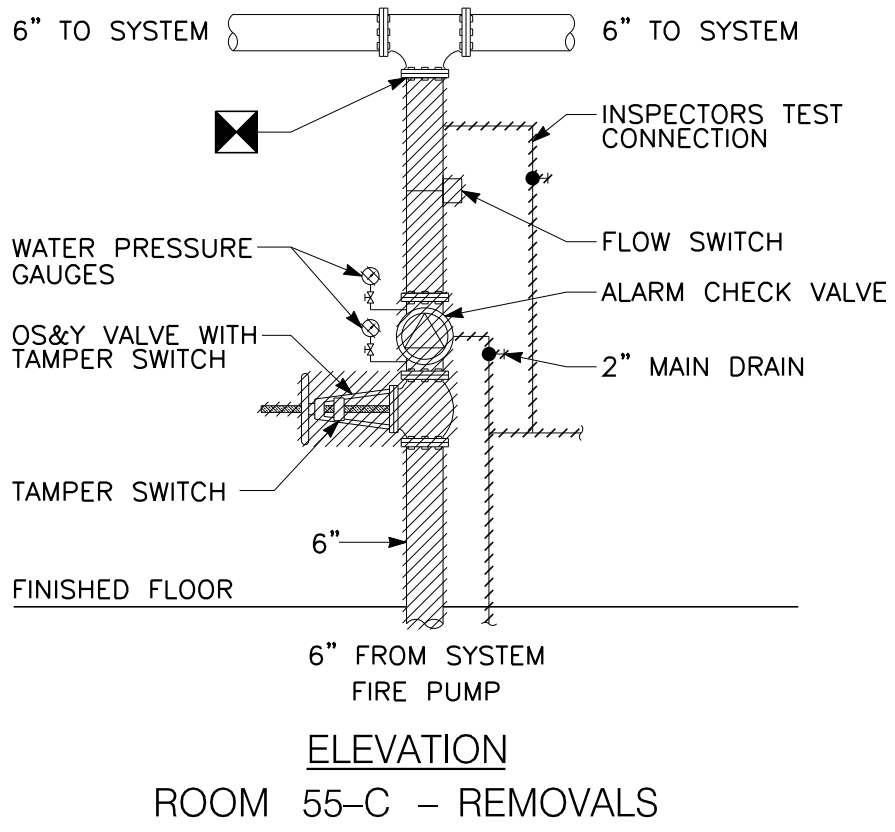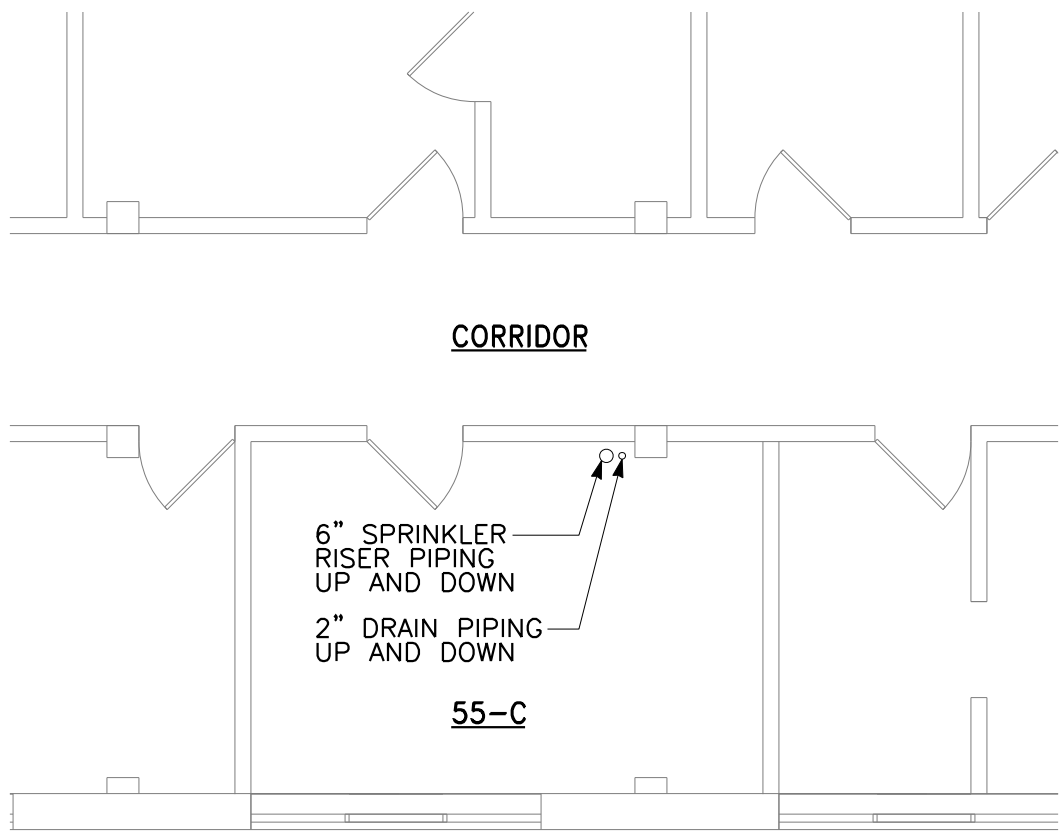

PARTIAL BASEMENT FLOOR PLAN AND ALARM CHECK VAVLE ARRANGMENT– BUILDING No. 6 – FIRE PROTECTION 2
1/8" = 1'-0"

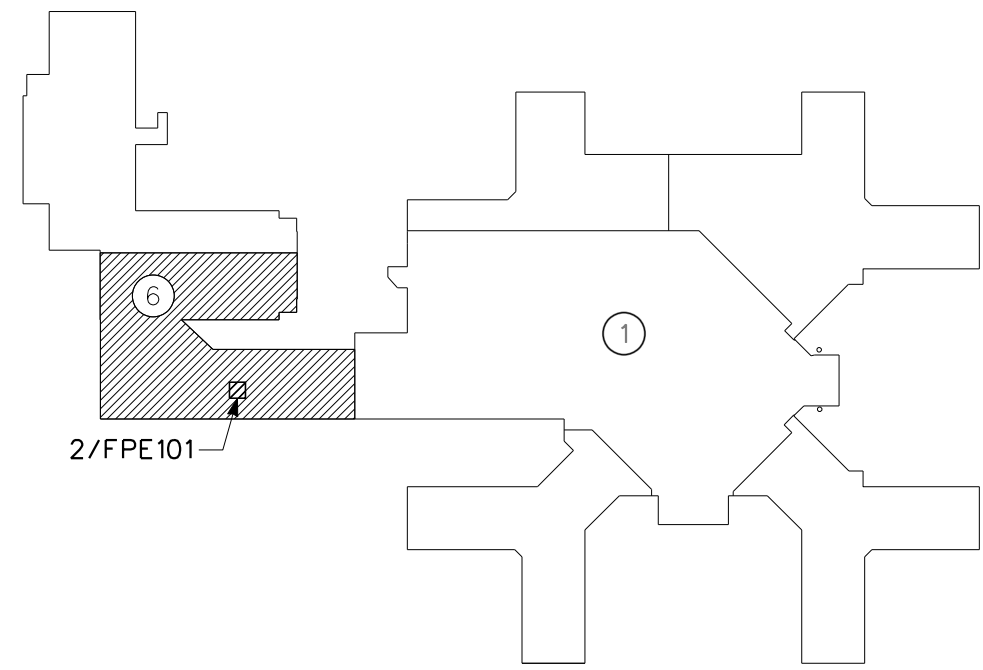

KEY PLAN
NO SCALE

CONSTRUCTION DOCUMENTS	07/01/11
90% SUBMISSION	06/10/11
60% SUBMISSION	12/10/10
Revisions	Date

VA WESTERN NEW YORK HEALTHCARE SYSTEM
3495 BAILEY AVENUE
BUFFALO, NEW YORK 14215

Architect
JOHN SHAFIUCAS ARCHITECTS P.C.
1260 SWEET HOME ROAD
AMHERST, NY 14228
PH: 716/636/5000
FX: 716/636/1008
JOB #: 0608

Engineering Consultant
IBC ENGINEERING, P.C.
2495 MAIN ST., SUITE 318
BUFFALO, NY 14214
PH: 716/836/2315
FX: 716/836/2319
IBC JOB #: 10572

stamp

CARDIOLOGY MANAGER	DATE	ENGINEERING MANAGER	DATE
INFECTION CONTROL	DATE	CARELINE MANAGER	DATE
SAFETY OFFICER	DATE	CHIEF OF STAFF	DATE

Drawing Title	
PARTIAL SUB-BASEMENT FLOOR PLAN – BUILDING No. 6	
MEDICAL CENTER DIRECTOR	DATE
ASSOCIATE MEDICAL CENTER DIRECTOR	DATE

Project Title		
REPLACE SPRINKLER MAINS		
Building Number	Checked	Drawn
1 AND 6	DDR	KGP
Location		
V.A.M.C. BUFFALO, NEW YORK		

Date	DECEMBER 10, 2010
Station No.	528
10-107-FPE101	

