

# **Kansas City Department of Veterans Affairs**

## **Exterior Parking Sign Replacements**

Due to site construction, there's a need to update some of the parking lots and modify the staff and patient parking locations.

### ***Requirements:***

Sign Type G3

Quantity 5 (different programming/copy for each, see below)

Specifications:

#### **PART A**

Specs: 2" Bleed body frame including two .110 aluminum panel and no reveal

Size: 36"h x 36"w

Color: Matthews Blue (All sides except top)  
Matthews Silver (Top)

Copy: Line 1a/b

Size: 3" centered

Font: Helvetica Regular (HRC)

Color: White Gloss 208

Lines 4a/b & 5a/b

Size: 2 5/8" centered

Font: Helvetica Regular (HRC)

Color: White Gloss 208

#### **PART B**

Specs: Layered Surface Applied Vinyl Squares w/copy

Copy: Line 2a/b (Squares)

Size: 16" centered (outer square)

14 7/8" centered (inner square)

Font: NA

Color: See Symbol Page for Square Color

Line 3a/b (Copy)

Size: 10" centered

Font: Helvetica Regular (HRC)

Color: Scotchlite Reflective White 280-10

#### **PART C**

Specs: 2" Post & Cap assembly

Size: Height TBD

Color: Matthews Blue (Semi-Gloss paint finish)

#### **PART D** (quantity 2 of 3 parts)

Specs: 1/2" thick PVC or Aluminum Accent Trim

Size: 3/4"h x TBD w

Color: Silver 150

Note: Accent Trim to Hang 1/16" above top edge of sign

Accent Trim to Hang 1/16" below bottom edge of sign

#### **PART E**


Specs: 3" Post & Cap assembly

Size: Height TBD

Color: Matthews Silver (Semi-Gloss paint finish)

#### **NOTE**

Part C to be attached to Parts A & B with concealed fasteners

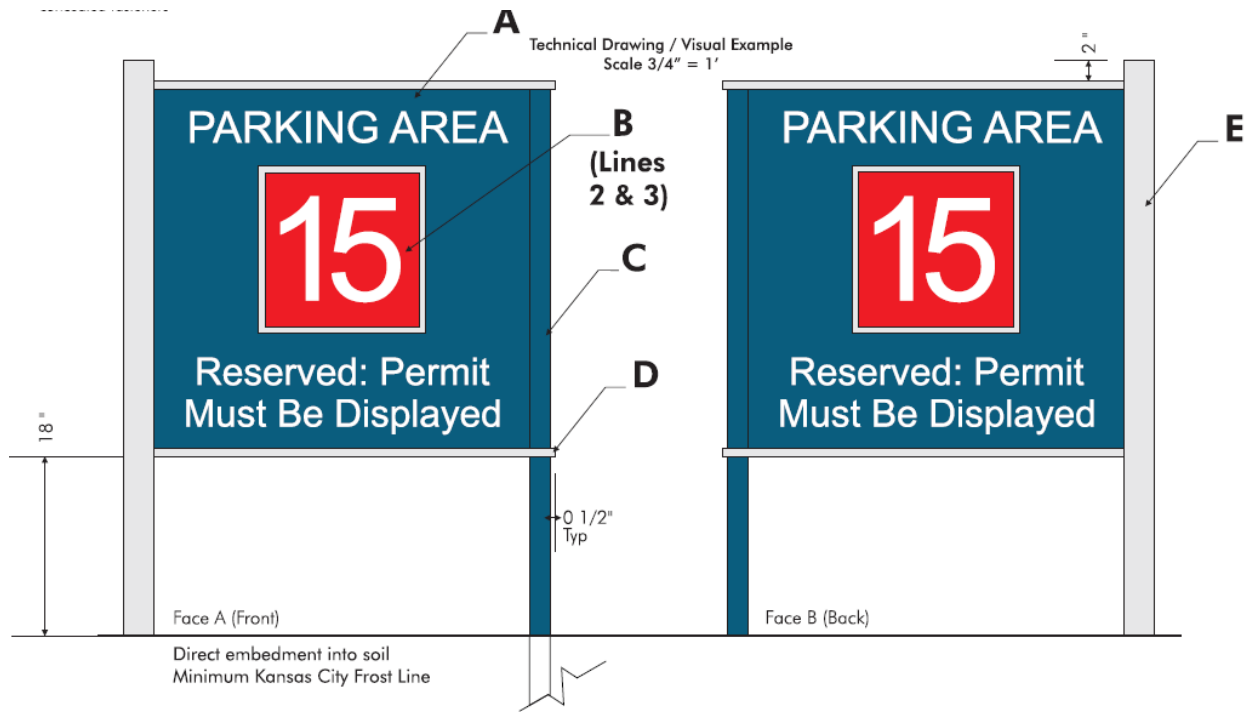

1) Sign Location E163 – Replace sign back to original programming

		<b>E163</b>	G.3		X/4
				1a PARKING AREA	
				2a (sym GOLD)	
				3a 1	
				4a (sym HCP) Parking &	
				5a Wheelchair Lift Vehicles	
				1b PARKING AREA	
				2b (sym GOLD)	
				3b 1	
				4b Upper Area	
				5a	

2) Sign Location E164 – Replace sign back to original programming

		<b>E164</b>	G.3		X/4
				1a PARKING AREA	
				2a (sym SQ GOLD)	
				3a 1	
				4a (sym HCP) Parking	
				5a	
				1b PARKING AREA	
				2b (sym SQ GOLD)	
				3b 1	
				4b Lower Area	
				5a	

### 3) Sign Location E191 – Replace sign

rev 2/23/09		<b>E191</b>	G.3			X/4	Will need to look at relocating sign from its current location to ensure it's visible from both lanes of traffic in roadway due to new solar panel "car port" like structures.
				1a	PARKING AREA		
				2a	(sym BLUE)		
				3a	3		
				4a	Patient <b>Parking</b>		
				5a			
				1b	PARKING AREA		
				2b	(sym BLUE)		
				3b	3		
				4b	Patient <b>Parking</b>		
				5a			


### 4) Sign Location E196 – Replace sign

		<b>E196</b>	G.3			X/4	No "S" after Patient
				1a	PARKING AREA		
				2a	(sym BLUE)		
				3a	3		
				4a	Patient <b>Parking</b>		
				5a			
				1b	PARKING AREA		
				2b	(sym BLUE)		
				3b	3		
				4b	(sym AR LF) Shuttle Stop		
				5a			

### 5) NEW SIGN LOCATION – Near E180/E178


		<b>NEAR E180/ E178</b>	G.3			X/4	
				1a	PARKING AREA		
				2a	(sym BLUE)		
				3a	3		
				4a	Patient <b>Parking</b>		
				5a			
				1b	PARKING AREA		
				2b	(sym BLUE)		
				3b	3		
				4b	Patient <b>Parking</b>		
				5a			

Quantity 2  
Specifications:

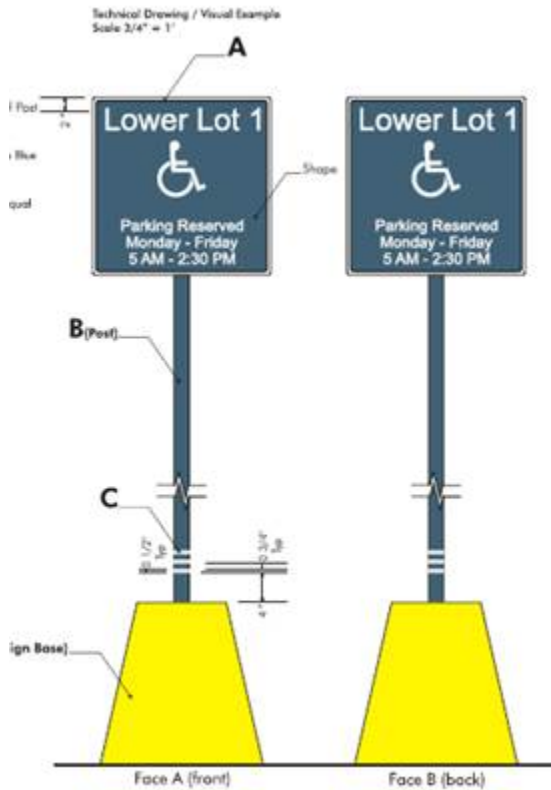

- 6) NEW SIGN LOCATION, FACES ONLY – areas with circles and X's, back of lot 3 near shuttle stop  
Reuse 2 freestanding signs shown above that are located in lower lot 1. Modify with NEW face.

Face Copy-  
PARKING AREA  
(sym BLUE)  
3  
Patient **Parking**

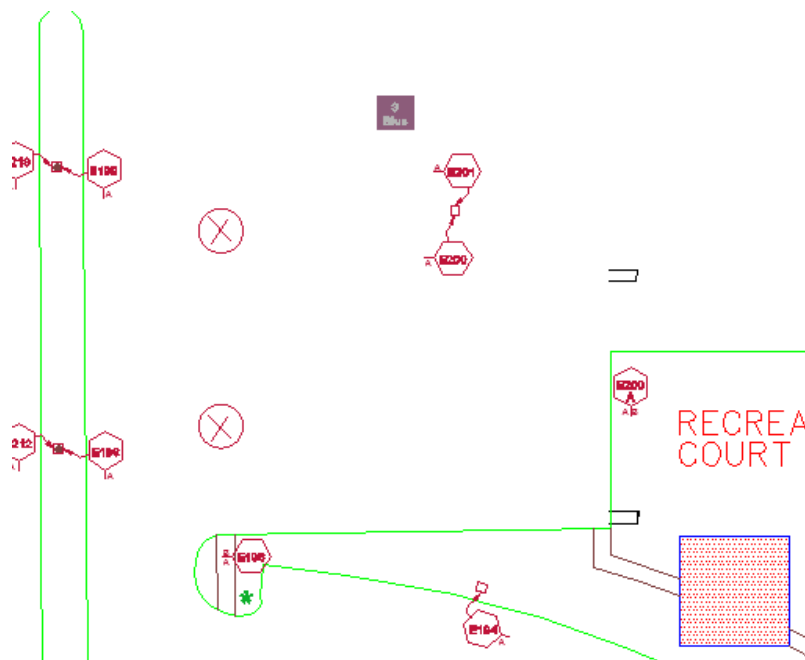

- 7) 2x Vinyl Copy like in photo below for Warrensburg and Belton CBOC. I would like to include the (sym) HAZ hazard symbol next to Not An Emergency Facility that one of our outpatient clinics has next to it. It's scaled appropriately (same height) with the rest of the text.



- 8) Y in the Emergency is missing. Provide a red in color "Y" to match existing window signage



- 1) Remove existing signs that are being replaced/moving as indicated and required.
- 2) Install new signs.
- 3) Install all signs direct embedment into soil a minimum of the area Frost Line.
- 4) A reputable local servicing company must be available for any offer for warranty and repair work as needed.

***Delivery***

Delivery and installation of the product at the Kansas City VA Medical Center is required. Upon arrival of the product, the install should begin with unloading product of the truck.

***Operating Constraints***

The installation team will have to attend a Kansas City VA Medical Center safety course which is held every Tuesday at 7am. Each member of the installation team will need to provide a valid ID to the VA Interior Design prior to attending the safety course. This will give the installation crew the necessary current badge they must wear to perform the work in our medical facility.