


Drawing File: \\Projects\1313 Renovate Radiology & SPS - VA Shreveport\Drawings\Renovate Radiology & SPS - VA Shreveport\Sheets\G004 BID ALTERNATES.dwg
Plotted by: hared
Plotted Date: Jul 20, 2015 - 3:46pm
G

A three inches = one foot
B one one-half inches = one foot
C one inch = one foot
D three-quarters inch = one foot
E one-half inch = one foot
F three-eighths inch = one foot
G one-quarter inch = one foot
H one-eighth inch = one foot

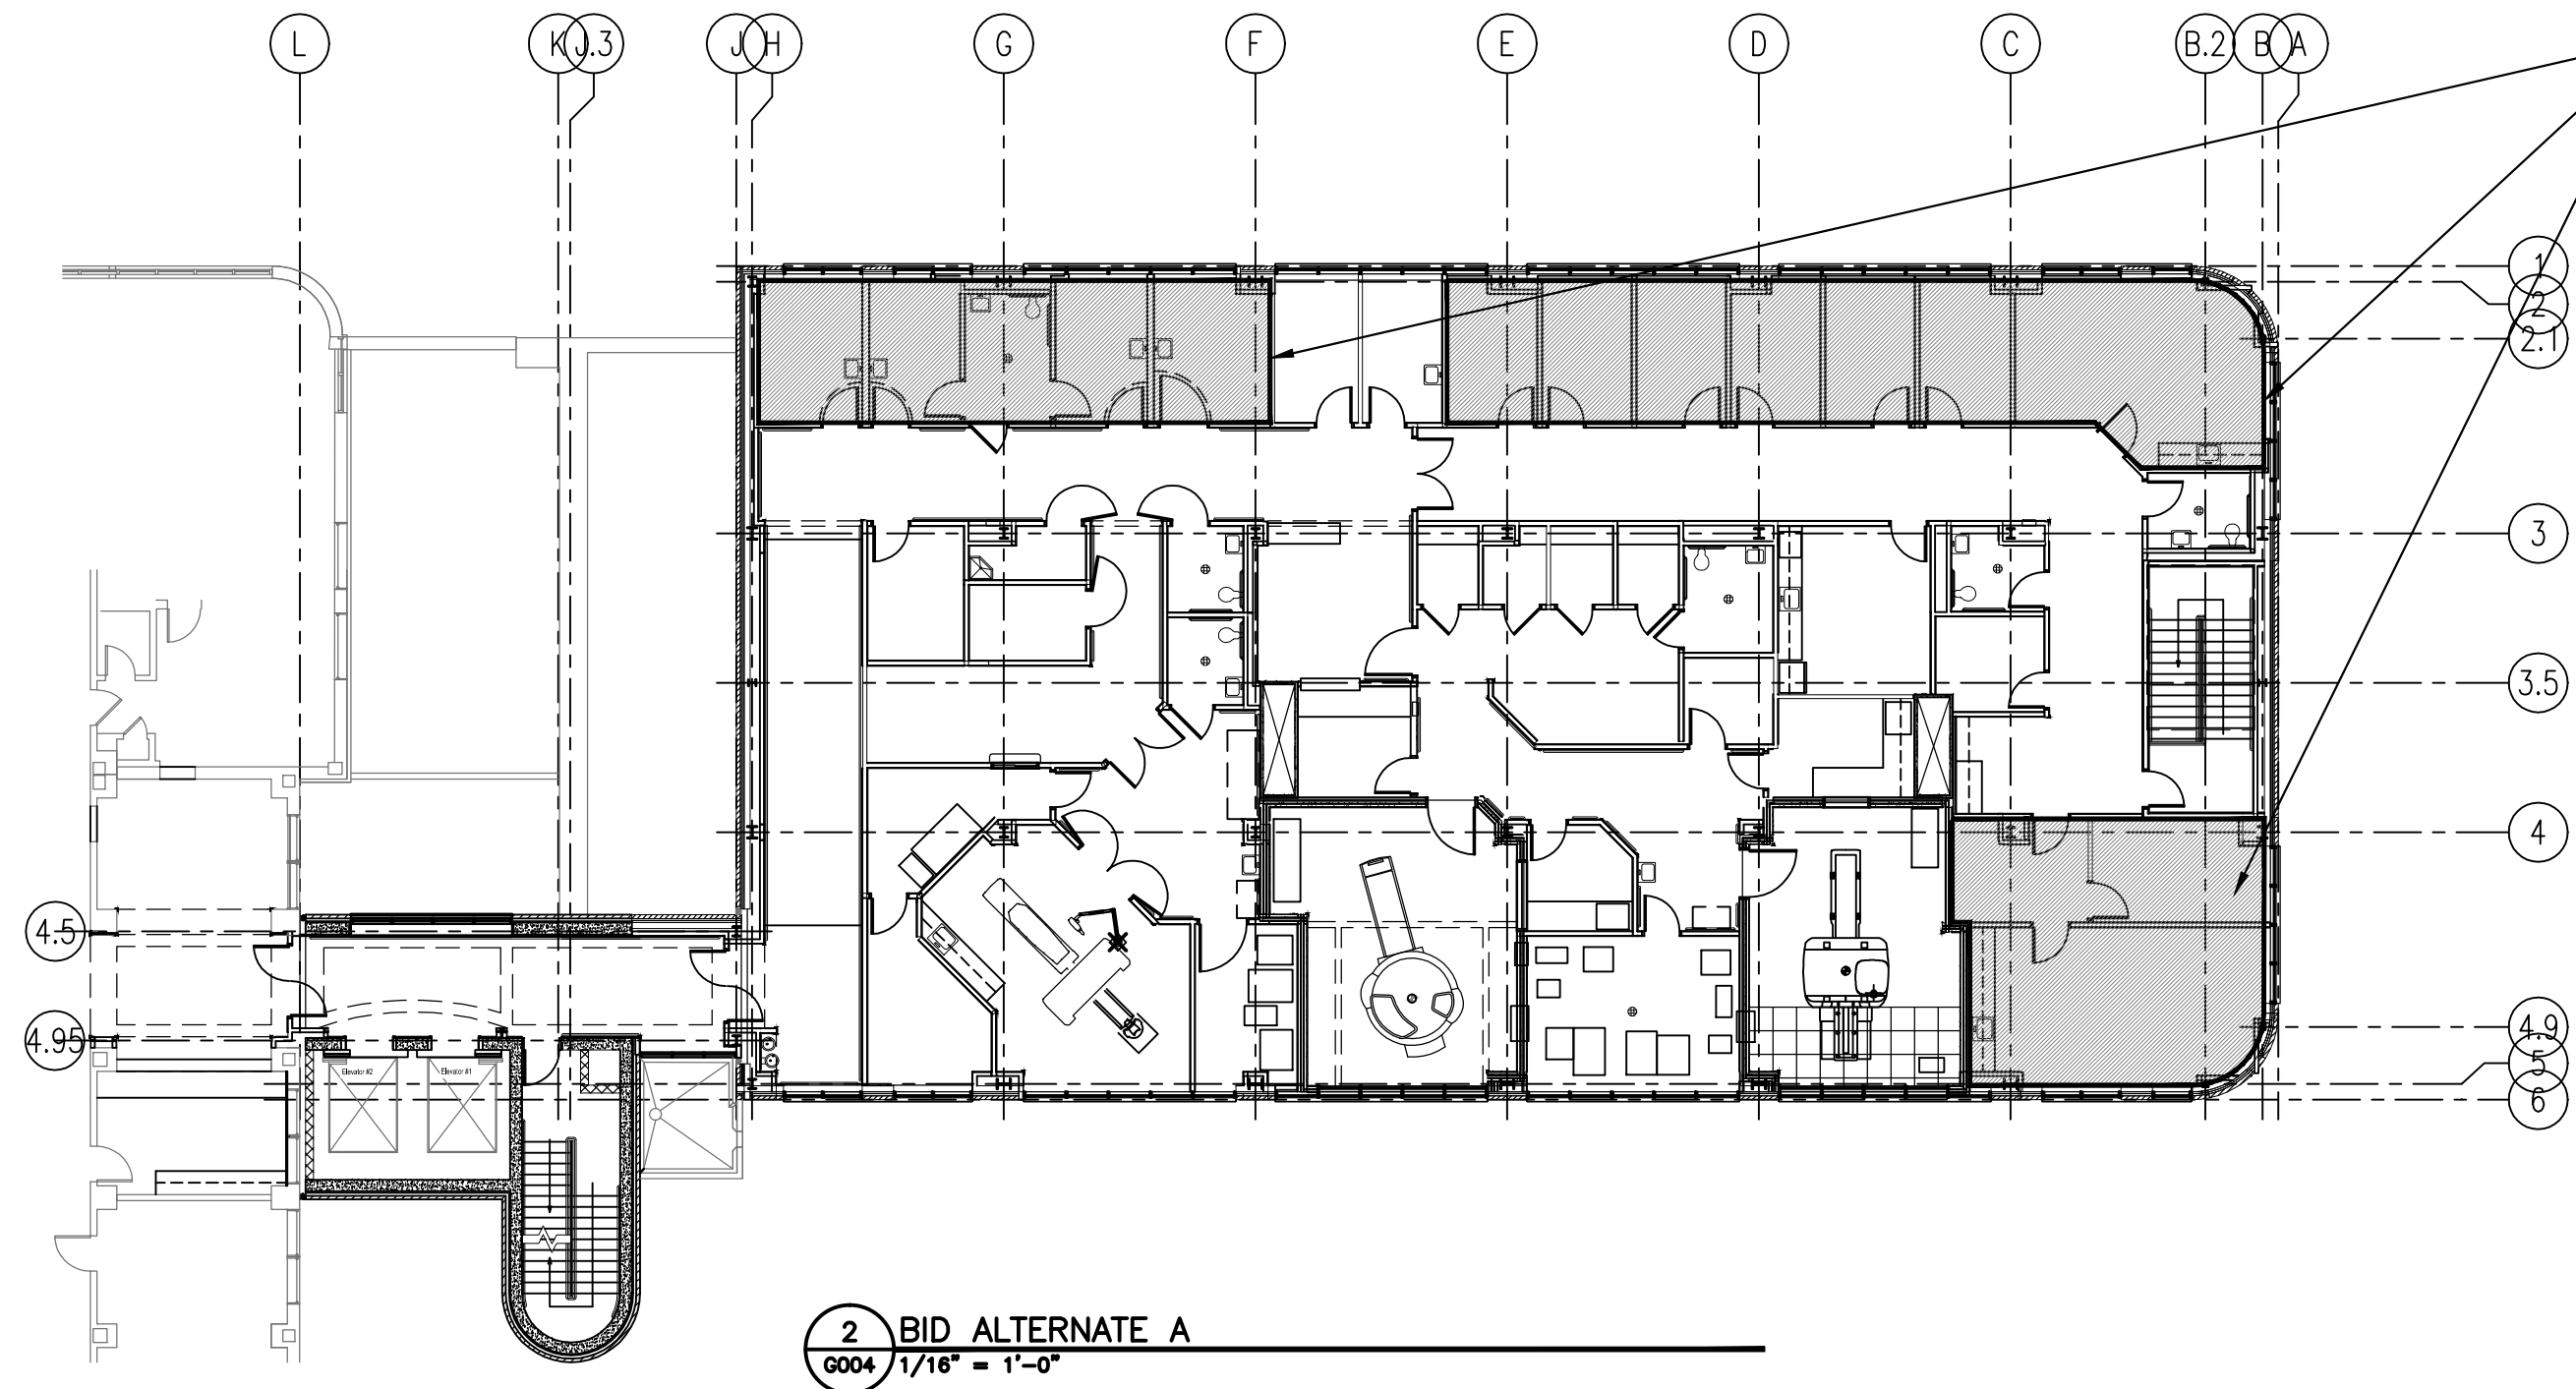


BID ALTERNATE A:
DELETE ALL INTERIOR PARTITIONS, DOORS AND FINISHES WITHIN HATCHED AREA. PROVIDE ONLY TYPE G4 DEMISING PARTITION AND MINIMUM SPRINKLERS AND LIGHTS TO MEET CODE. PROVIDE ONE DOOR PER AREA.

BID ALTERNATE A NOTE:

DELETE ALL MECHANICAL WORK IN THIS SHADED AREA. THIS INCLUDES THE FOLLOWING: VARIABLE VOLUME BOXES VAV-408, VAV-407, VAV-405, VAV-404, VAV-403, VAV-402, VAV-419, VAV-420, AND VAV-421. HOWEVER, VAV-406 SHALL BE INSTALLED FOR SUPPLY AIR FOR CLEAN UTILITY-450 AND VAV-401 FOR TOILET-441. END CAP MAIN SUPPLY DUCT 16X14 AFTER VAV-417. END CAP 24X14 RETURN DUCT DOWN STREAM OF ELECTRICAL ROOM 435. END CAP 20X18 RETURN DUCT SERVING SPACES US 1-453, US 2-455, US 3-456, AND TOILET-454 NORTH OF 38X18 MAIN RETURN DUCT. IN SPACE CLEAN UTILITY-450 AND SOIL HOLD-449 THIS SHALL INCLUDE CONTROLS, DIFFUSERS/GRILLES, PIPING, RETURN AND SUPPLY DUCTWORK.

DELETE ALL ELECTRICAL WORK SHOWN ON NEW WORK PLANS AND REPLACE WITH MINIMUM (4) TYPE "D" FIXTURES AND (1) LIGHT SWITCH ADJACENT DOORWAY AT EACH SEPARATE LOCATION. PROVIDE (1) DUPLEX RECEPTACLE IN EACH SEPARATE LOCATION. ALL BRANCH CIRCUITING ENTERING AND LEAVING BID ALTERNATE AREA SHALL BE TERMINATED AT JUNCTION BOX, ABOVE ACCESSIBLE CEILING AND BRANCH CIRCUIT LABELED FOR FUTURE INSTALLATIONS. COORDINATE ALL ELECTRICAL INSTALLATIONS NOT INCLUDED IN BID ALTERNATE ARE IN PROPER WORKING ORDER AT COMPLETION OF WORK.

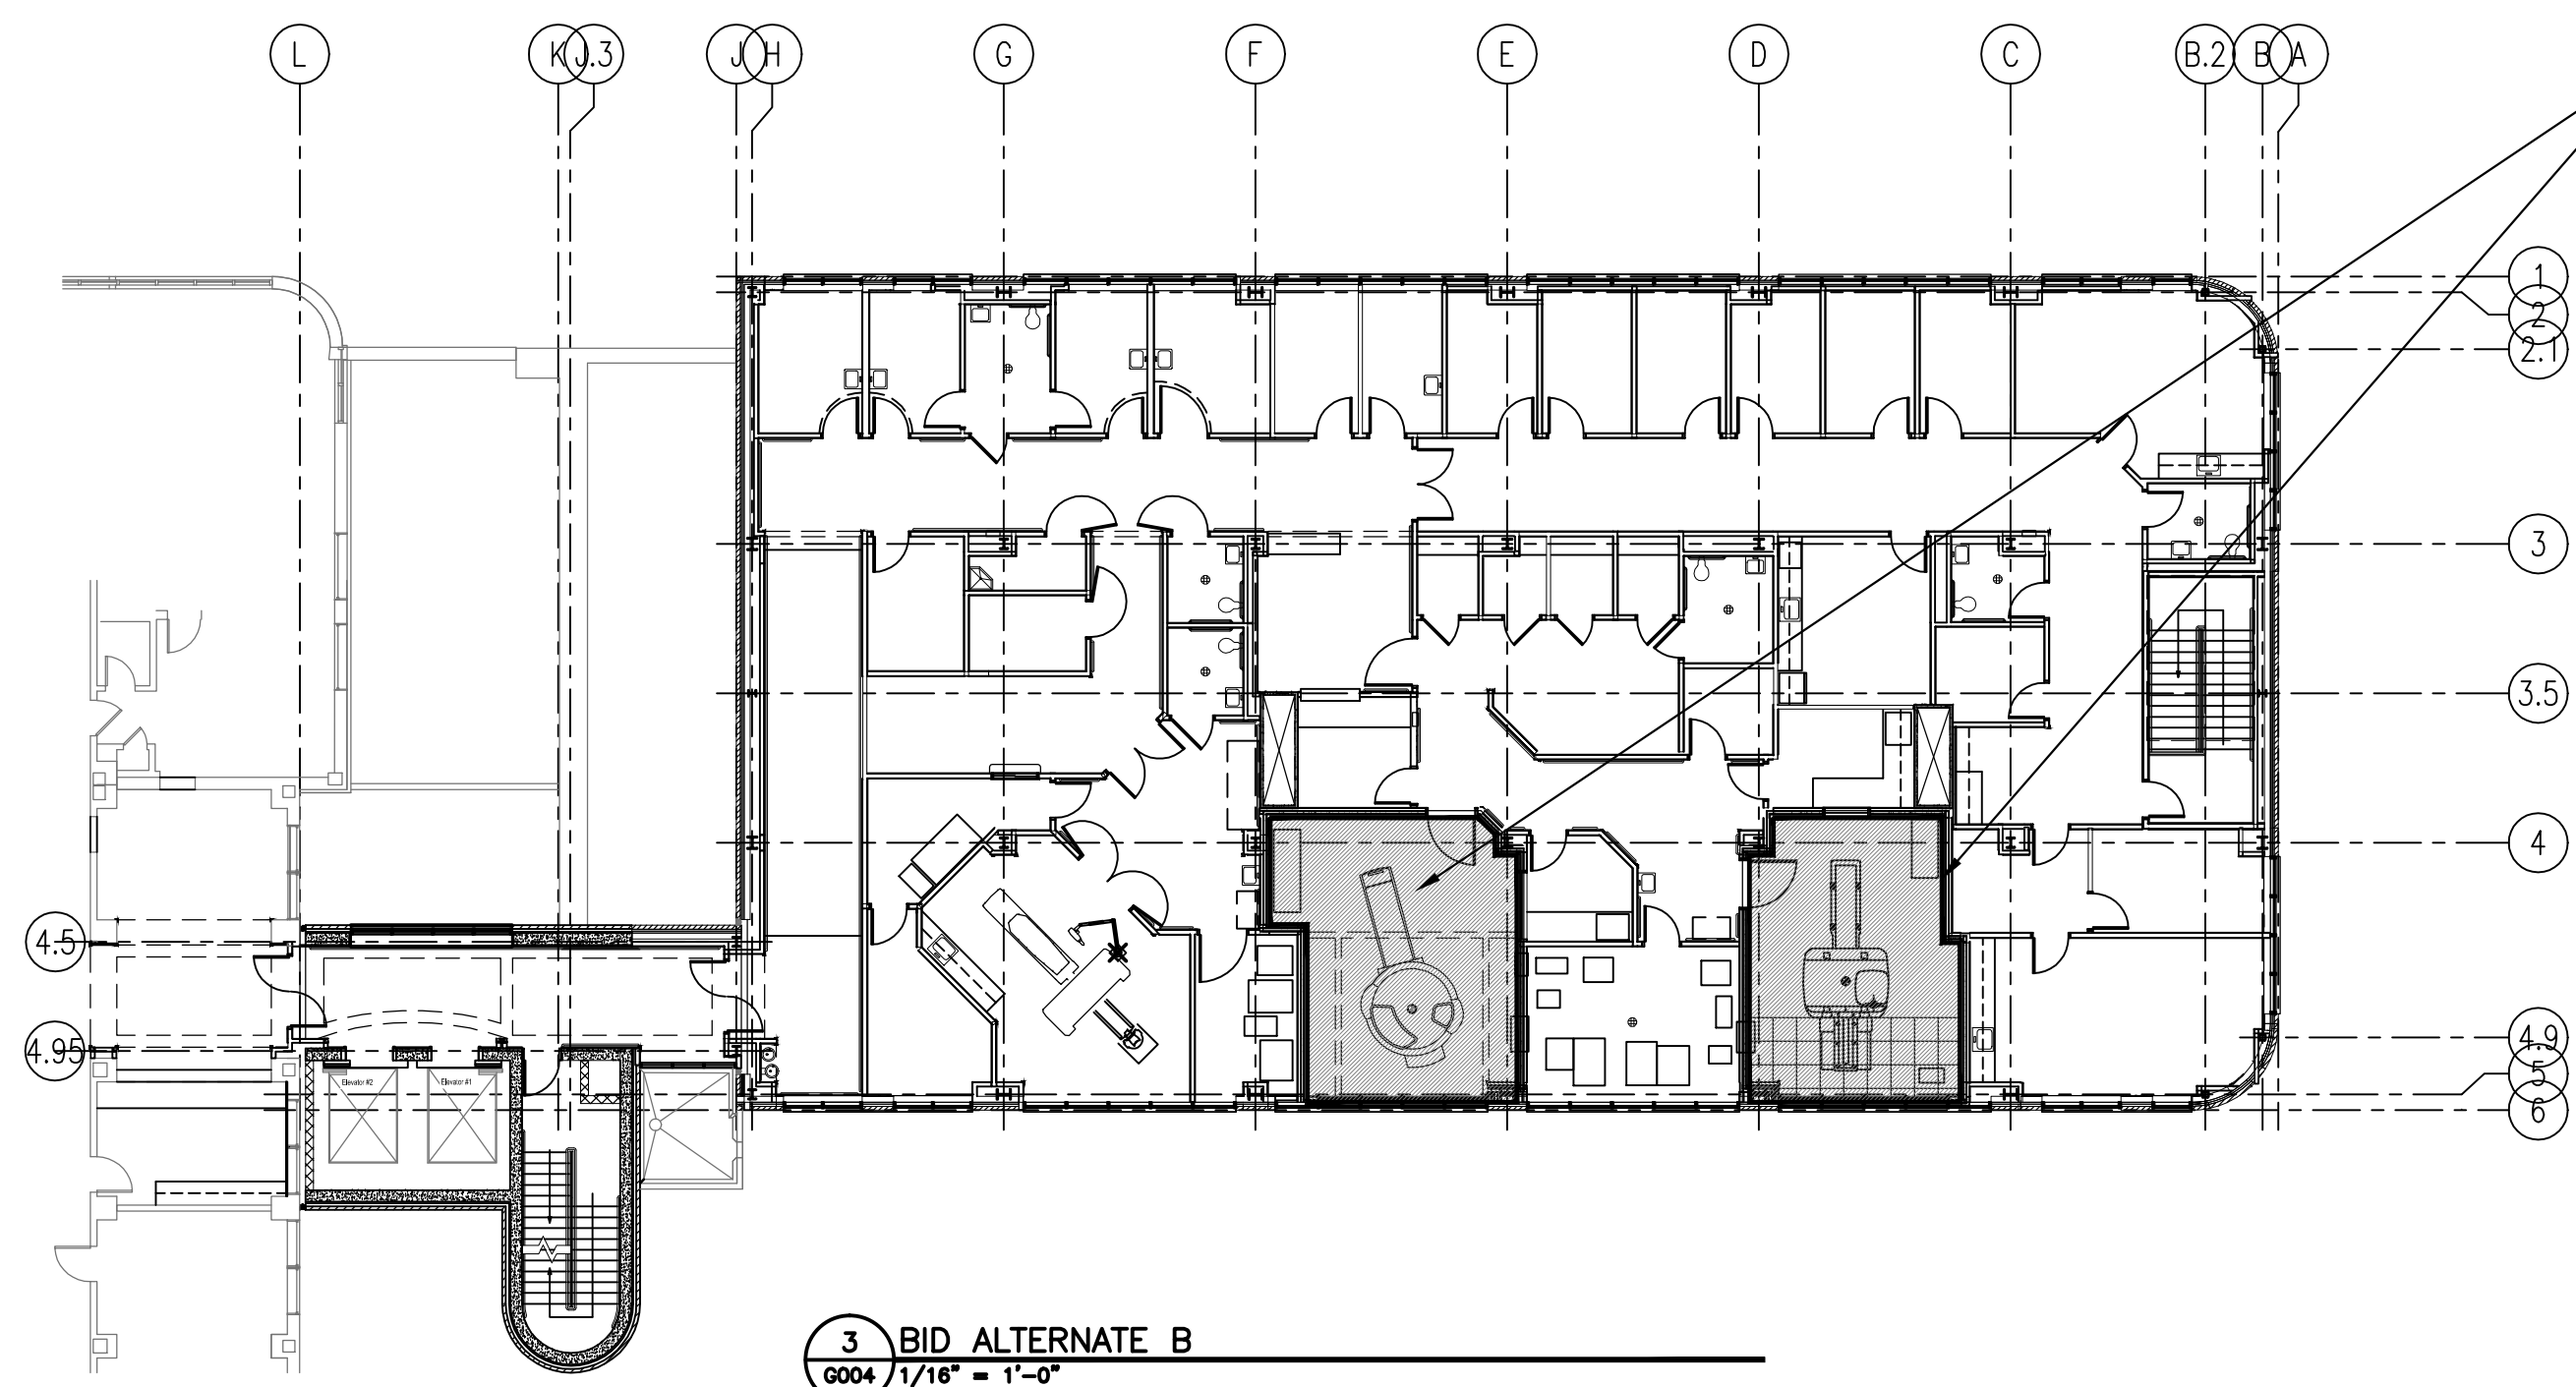


BID ALTERNATE B:
DELETE RF SHIELDING IN WALLS, FLOOR AND CEILING AND ALL INTERIOR FINISHES WITHIN HATCHED AREA. PROVIDE ONLY TYPE G4 DEMISING PARTITION AND MINIMUM SPRINKLERS AND LIGHTS TO MEET CODE. PROVIDE ONE NON-SHIELDED DOOR PER ROOM.

BID ALTERNATE B NOTE:

DELETE ALL MECHANICAL WORK IN THIS SHADED AREA. THIS INCLUDES THE FOLLOWING: VARIABLE VOLUME BOXES VAV-424, VAV-428, EMERGENCY EXHAUST FANS EF-1-4SRF-6 AND EF-1-4SRF-7. THIS SHALL INCLUDE CONTROLS, DIFFUSERS/GRILLES, PIPING, RETURN, EXHAUST, AND SUPPLY DUCTWORK.

DELETE ALL ELECTRICAL WORK SHOWN ON NEW WORK PLANS AND REPLACE WITH MINIMUM (4) TYPE "D" FIXTURES AND (1) LIGHT SWITCH ADJACENT DOORWAY AT EACH SEPARATE LOCATION. PROVIDE (1) DUPLEX RECEPTACLE IN EACH SEPARATE LOCATION. ALL BRANCH CIRCUITING ENTERING AND LEAVING BID ALTERNATE AREA SHALL BE TERMINATED AT JUNCTION BOX, ABOVE ACCESSIBLE CEILING AND BRANCH CIRCUIT LABELED FOR FUTURE INSTALLATIONS. COORDINATE ALL ELECTRICAL INSTALLATIONS NOT INCLUDED IN BID ALTERNATE ARE IN PROPER WORKING ORDER AT COMPLETION OF WORK. ALL OTHER ELECTRICAL WORK ASSOCIATED WITH MRI INSTALLATION TO REMAIN IN SCOPE.

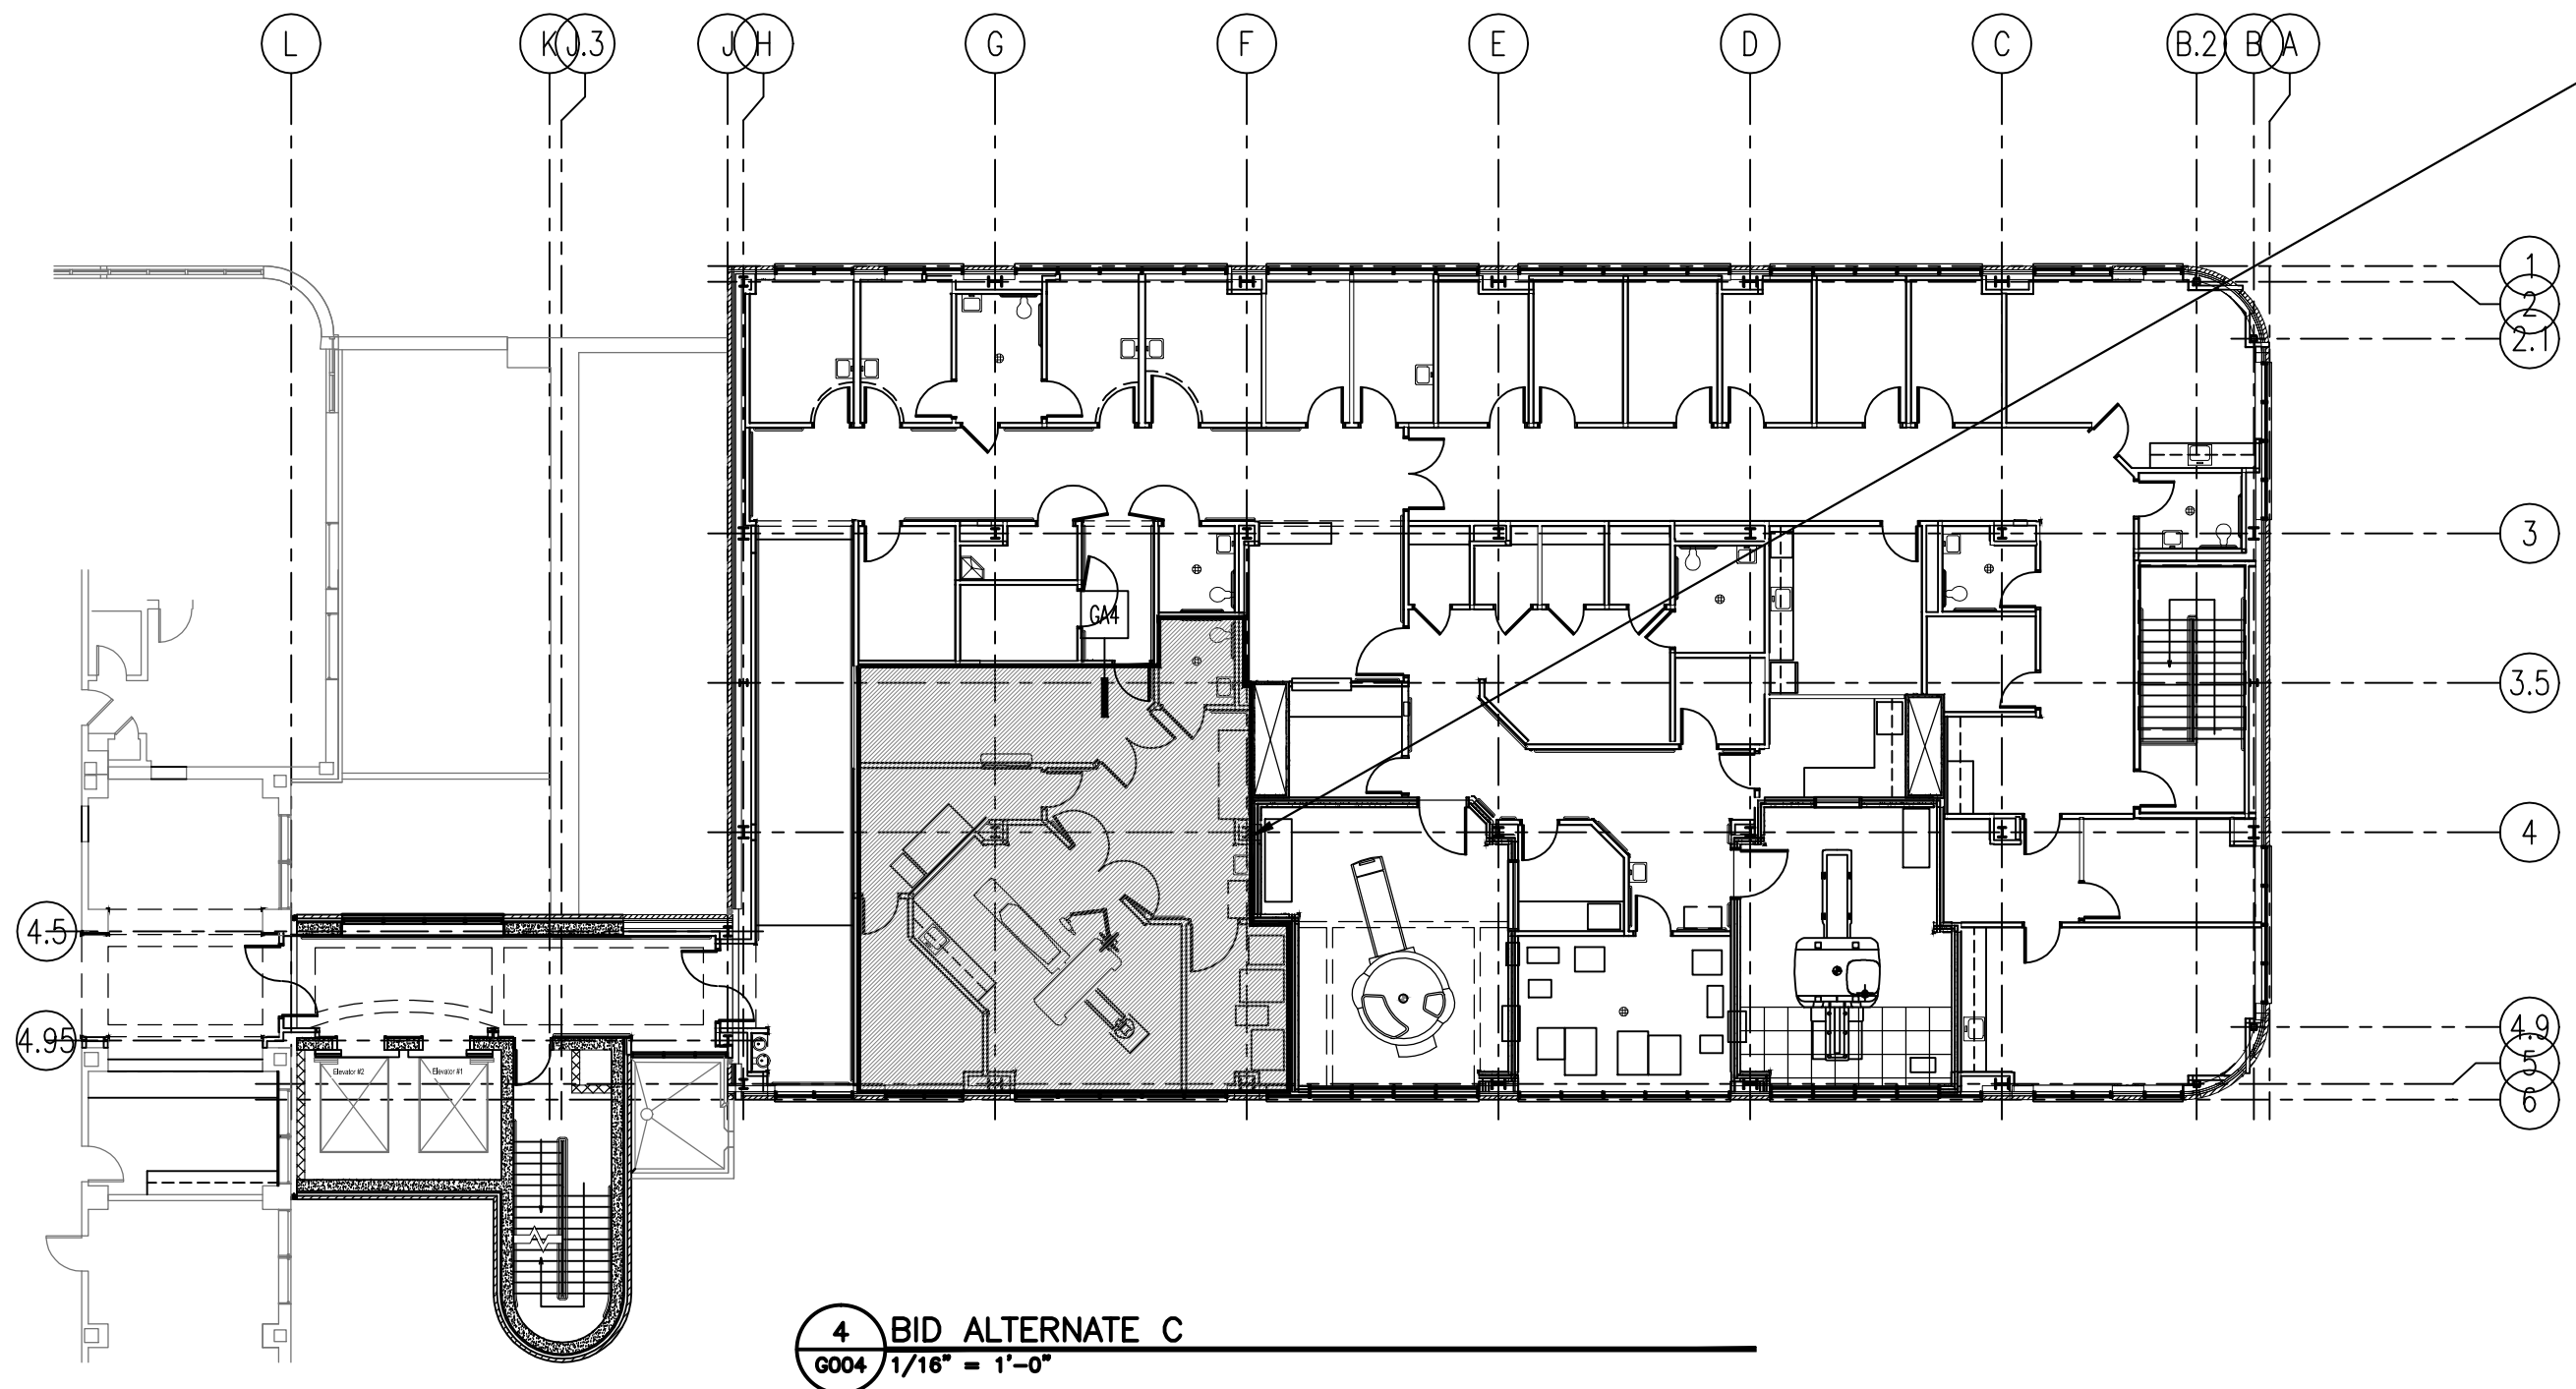


BID ALTERNATE C:
DELETE ALL INTERIOR PARTITIONS, DOORS AND FINISHES WITHIN HATCHED AREA. PROVIDE ONLY TYPE G4 DEMISING PARTITION AND DOOR AS SHOWN. PROVIDE MINIMUM SPRINKLERS AND LIGHTS TO MEET CODE.

BID ALTERNATE C NOTE:

DELETE ALL MECHANICAL WORK IN THIS SHADED AREA. THIS INCLUDES THE FOLLOWING: VARIABLE VOLUME BOXES VAV-410, VAV-429, VAV-430, AND VAV-431. END CAP 28X18 MAIN SUPPLY TRUNK INSTALL AN END CAP AFTER LAST TAKE-OFF FROM VAV-428. AFTER VAV-412 END CAP 14X8 SUPPLY. AFTER TAKE-OFF FROM TOILET 414, INSTALL 10" DIAMETER DUCT END CAP. EXHAUST DUCT FROM EF-1-4SRF-5 END CAP 12X12 AFTER LAST 6" DIAMETER TAKE-OFF FROM SPACE HAC-404. RETURN DUCT FROM AH-1-4SRF-3, INSTALL 44X14 END CAP AFTER 20X12 TAKE-OFF. THIS SHALL INCLUDE CONTROLS, DIFFUSERS/GRILLES, PIPING, RETURN AND SUPPLY DUCTWORK.

DELETE ALL ELECTRICAL WORK SHOWN ON NEW WORK PLANS AND REPLACE WITH MINIMUM (6) TYPE "D" FIXTURES AND (1) LIGHT SWITCH ADJACENT DOORWAY AT EACH SEPARATE LOCATION. PROVIDE (1) DUPLEX RECEPTACLE IN EACH SEPARATE LOCATION. ALL BRANCH CIRCUITING ENTERING AND LEAVING BID ALTERNATE AREA SHALL BE TERMINATED AT JUNCTION BOX, ABOVE ACCESSIBLE CEILING AND BRANCH CIRCUIT LABELED FOR FUTURE INSTALLATIONS. COORDINATE ALL ELECTRICAL INSTALLATIONS NOT INCLUDED IN BID ALTERNATE ARE IN PROPER WORKING ORDER AT COMPLETION OF WORK.

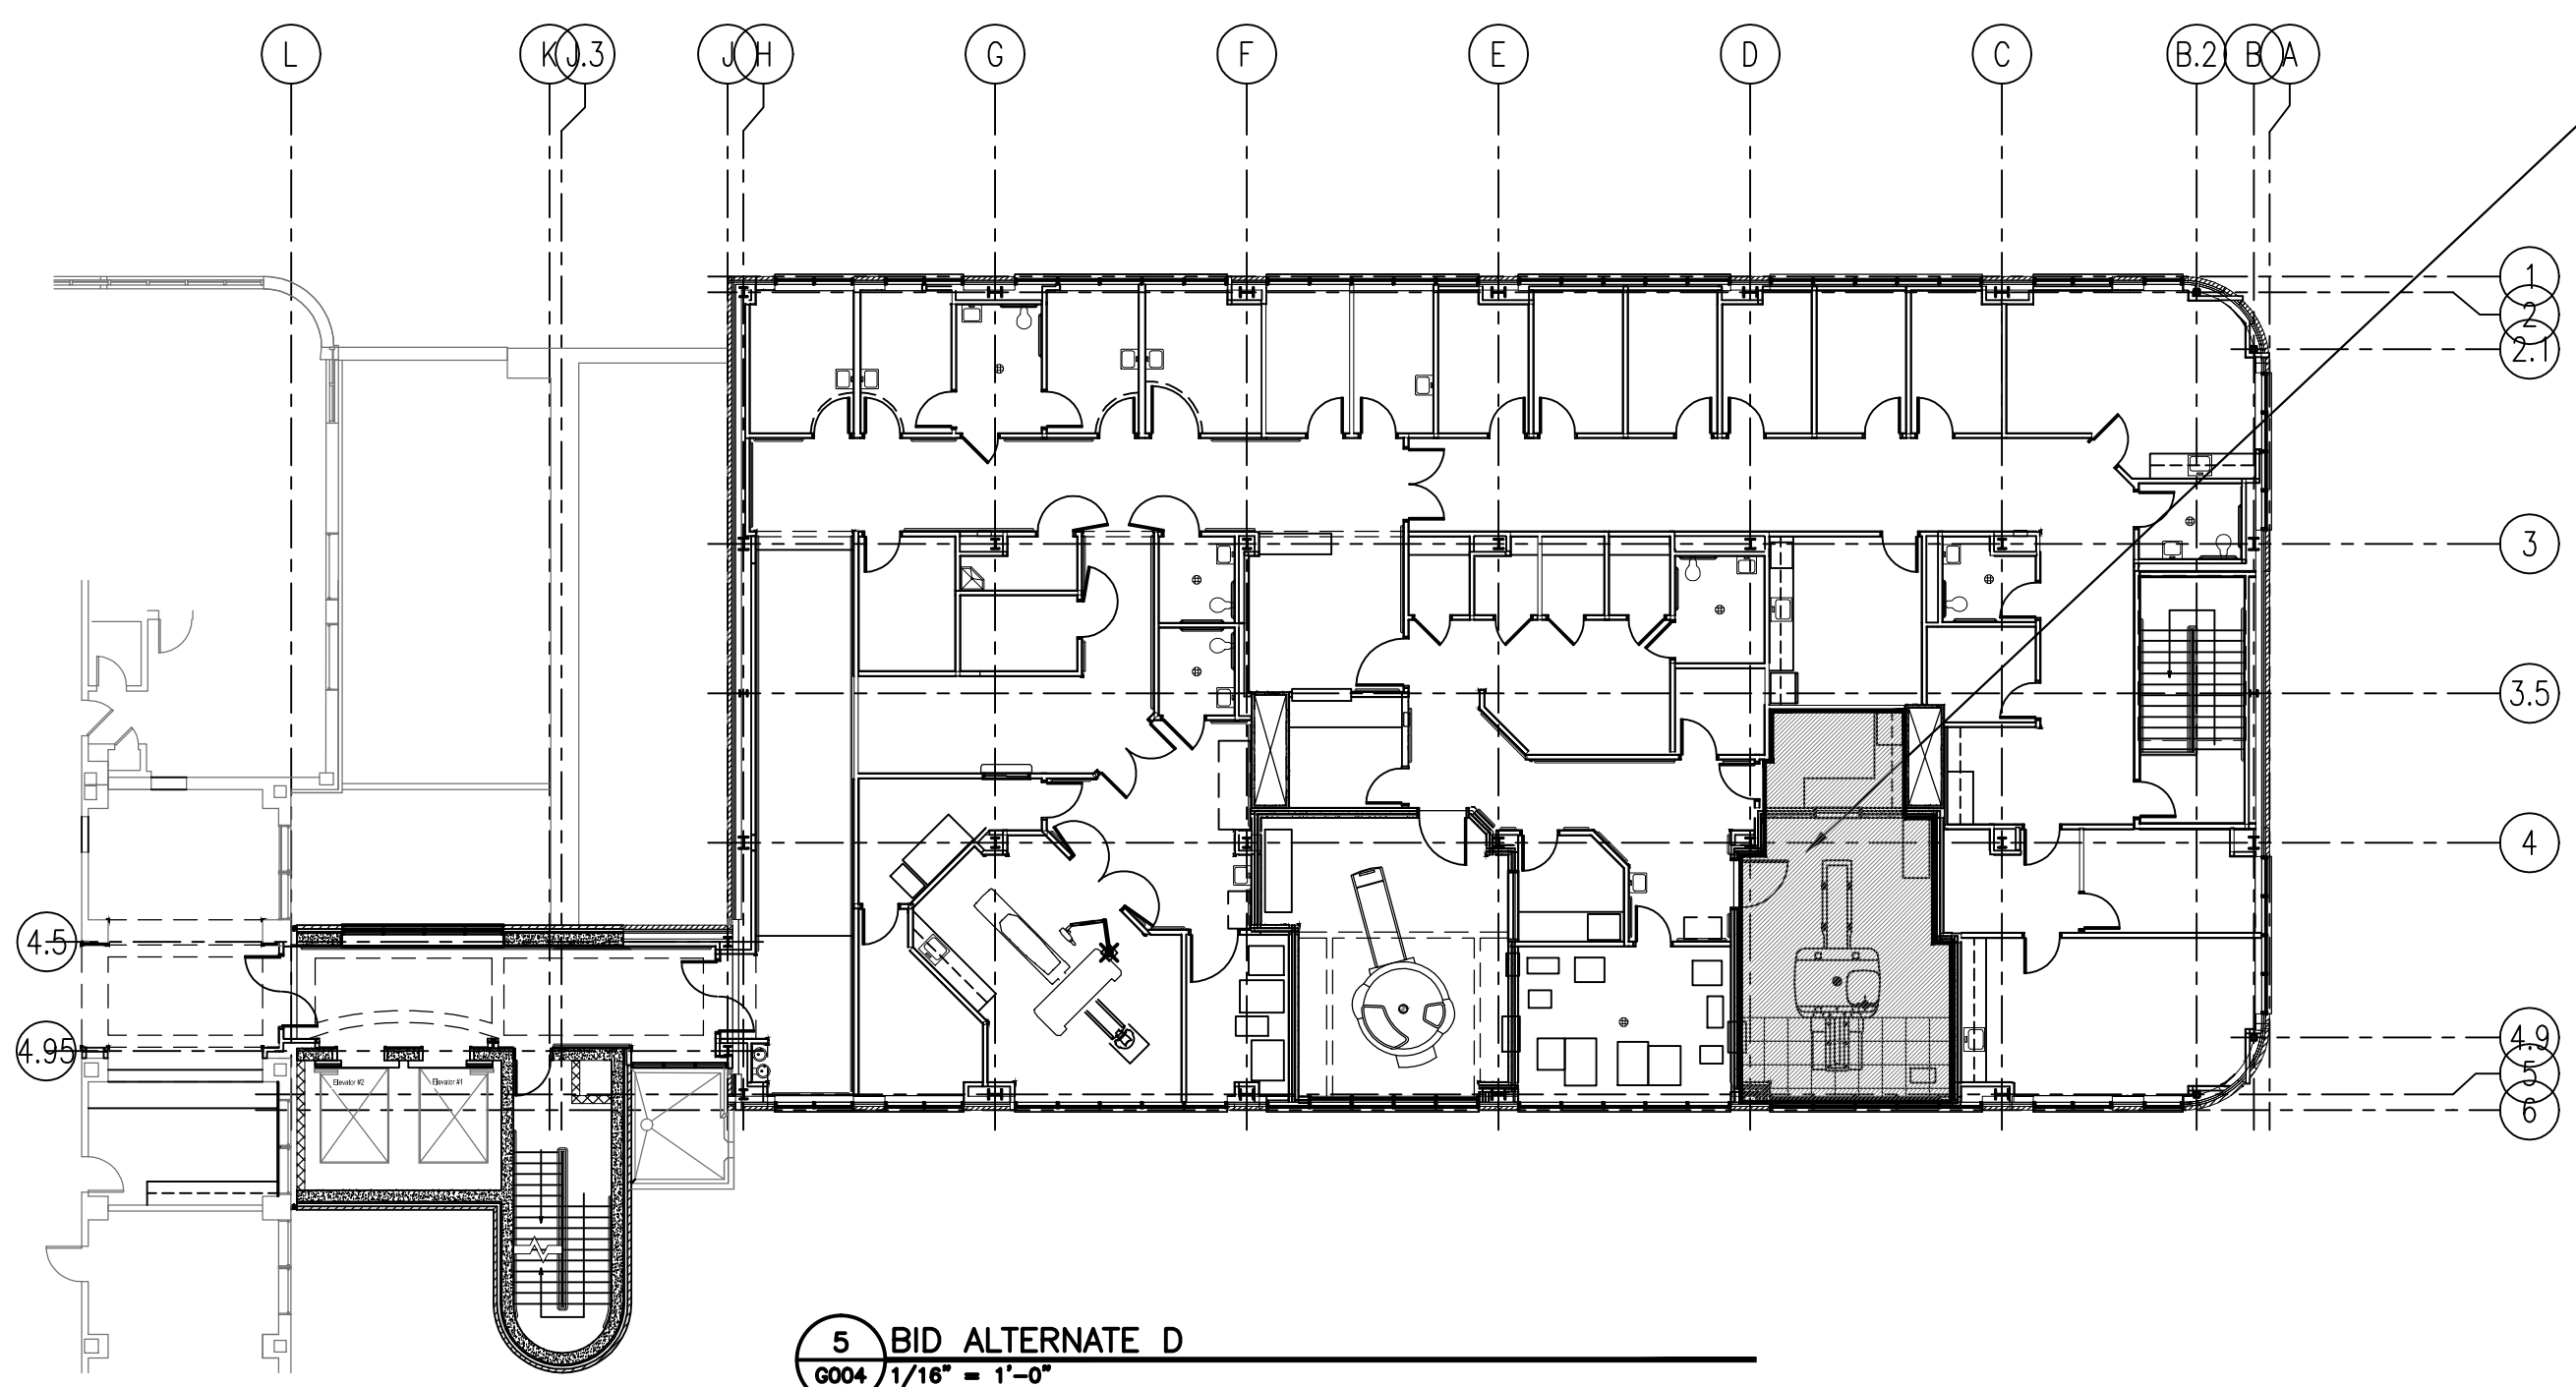

BID ALTERNATE D:
DELETE ALL INTERIOR PARTITIONS, DOORS AND FINISHES WITHIN HATCHED AREA. DELETE ALL RF SHIELDING IN WALLS, FLOOR AND CEILING WITHIN HATCHED AREA. PROVIDE ONLY TYPE G4 DEMISING PARTITION AND MINIMUM SPRINKLERS AND LIGHTS TO MEET CODE.

BID ALTERNATE D NOTE:

DELETE ALL MECHANICAL WORK IN THIS SHADED AREA. THIS INCLUDES THE FOLLOWING: VARIABLE VOLUME BOXES VAV-424 AND VAV-423, AND EMERGENCY EXHAUST FANS EF-1-4SRF-6. AFTER LAST TAKE-OFF IN CORRIDOR 423 PROVIDE 8" DIAMETER END CAP FOR DUCT PREVIOUSLY ROUTED TO CONTROL ROOM 429. PROVIDE 16" DIAMETER END CAP FOR DUCT PREVIOUSLY ROUTED TO MRI SCAN 428. THIS SHALL INCLUDE CONTROLS, DIFFUSERS/GRILLES, PIPING, RETURN, EXHAUST, AND SUPPLY DUCTWORK.

DELETE ALL ELECTRICAL WORK SHOWN ON NEW WORK PLANS AND REPLACE WITH MINIMUM (4) TYPE "D" FIXTURES AND (1) LIGHT SWITCH ADJACENT DOORWAY. PROVIDE (1) DUPLEX RECEPTACLE. ALL BRANCH CIRCUITING ENTERING AND LEAVING BID ALTERNATE AREA SHALL BE TERMINATED AT JUNCTION BOX, ABOVE ACCESSIBLE CEILING AND BRANCH CIRCUIT LABELED FOR FUTURE INSTALLATIONS. COORDINATE ALL ELECTRICAL INSTALLATIONS NOT INCLUDED IN BID ALTERNATE ARE IN PROPER WORKING ORDER AT COMPLETION OF WORK.

ALTERNATE NOTES

1. THIRD FLOOR TO BE CONSTRUCTED AS SHOWN IN ALL ALTERNATES.
2. EXTERIOR SKIN, STRUCTURE AND ROOF TO BE CONSTRUCTED AS SHOWN IN ALL ALTERNATES.
3. SPRAY-ON FIREPROOFING AND ALL OTHER LIFE-SAFETY REQUIRED WORK TO BE PROVIDED WITHIN AREAS OF ALTERNATES.

FINAL SUBMITTAL

Revisions:	Date	CONSULTANTS:		ARCHITECT:  590 Means Street NW, Suite 200 Atlanta, GA 30318 404.214.9774	Drawing Title: BID ALTERNATES A-D Approved: Project Director	Project Title: EXPAND RADIOLOGY AND SPS OVERTON BROOKS VAMC Location: SHREVEPORT, LA Date: 07-20-2015 Checked: XX Drawn: XX	Project Number: 667-083 Building Number: 1 Drawing Number: G004 Dwg. 05 of 160	OFFICE OF CONSTRUCTION AND FACILITIES MANAGEMENT  U.S. Department of Veterans Affairs
------------	------	--------------	---	--	--	---	--	---