

Specification for Training Sessions:


Details:

- Provide two training sessions to Police Department personnel at Northport VAMC, on techniques and tactics for the rapid assembly, use, deployment and storage of the Portable Movable Barrier System.
- Provide two training sessions to Police Department personnel in the use of the stationary CMU storage areas for the Portable Movable Barrier System.
- Provide two training sessions to Police Department personnel at the Northport VAMC in the proper techniques and tactics for the deployment of two Portable Speed Bumps 20' each

The contractor must identify and provide appropriate documentation to demonstrate that the personnel who will be providing the training sessions on the proper utilization of the Portable Movable Barrier System and the Portable Speed Bumps, possess:

Certification from a state or federal law enforcement Instructor Development Course (IDC) certifying their successful completion from the course; and

Certification from an authorized provider that they have completed an OSHA Safety Standards 30-hour course in construction in accordance with 29CFR1926.

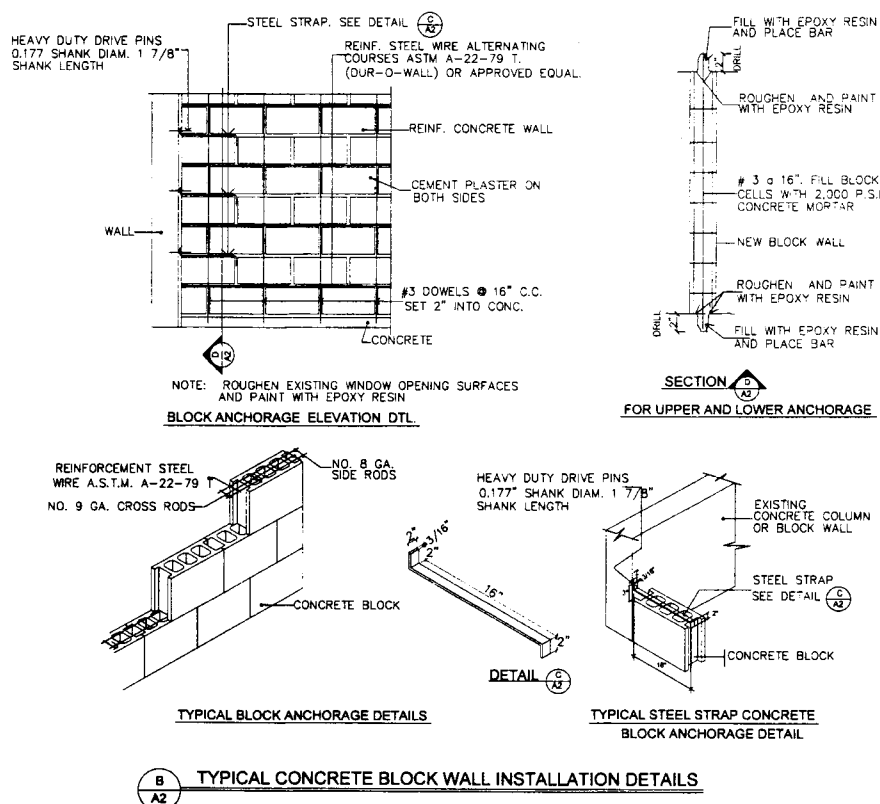

Specification for construction of CMU Storage areas:

Details:

- Construct two 4' X 6' CMU covered storage areas with 3" pour concrete foundation pad at two locations near the main gate and near the rear gate for the onsite storage of the Portable Movable Barrier System.
- Construction of the storage areas will be done in accordance with the drawing specification.

