

APPROXIMATE TIE-IN LOCATION

APPROXIMATE LOCATION OF POTENTIAL PIPE EXPOSURE SPANNING STORM WATER RUN-OFF




CONSTRUCTION NOTES:


1. CONTRACTOR SHALL VERIFY ALL DIMENSIONS AND LOCATE ALL EXISTING UTILITIES IN CONSTRUCTION AREA BEFORE CONSTRUCTION.
2. CONTRACTOR SHALL INSTALL NEW 6" POLY GAS LINE. THIS LINE SHALL TIE INTO EXISTING 6" POLY GAS LINE THAT FEEDS FACILITY AND CONNECT TO OKLAHOMA NATURAL GAS (ONG) METER THAT WILL BE LOCATED NEAR EXISTING REGULATORS.
3. ONG SHALL INSTALL NEW GAS METER AND COMPONENTS TO BE NEAR EXISTING REGULATORS. GAS METER AND REGULATORS SHALL BE SET ON MAINTENANCE CONCRETE PAD AND CONTRACTOR SHALL ENCLOSE REGULATORS AND GAS METER WITH CHAIN-LINK FENCE.
4. CONTRACTOR SHALL BURY NEW GAS LINE IN 36" DEEP AND 24" WIDE TRENCH. PIPE SHALL REST ON A MINIMUM OF 12" OF SAND AND BE COVERED WITH A MINIMUM OF 12" OF SAND.
5. CONTRACTOR MAY NEED TO SPAN EXISTING STORM WATER RUN-OFF BY EXPOSING GAS LINE ABOVE GRADE. ANY AND ALL EXPOSED GAS LINE SHALL BE ENCASED IN 8" STEEL PIPE SLEEVE AND PROPERLY STABILIZED BY ENGINEERED SUPPORTS TO AVOID ANY SHIFTING WITH SOILS DUE TO EROSION AND NATURAL DISPLACEMENT.
6. CONTRACTOR SHALL REPLACE ANY DISTURBED EROSION PROTECTION.
7. CONTRACTOR SHALL AIR PRESSURE TEST FOR 2 HOURS AT 40 PSI THE GAS LINE FROM THE SHUT-OFF VALVE AT BUILDING #6 TO THE SHUT-OFF VALVE AT THE BOILER BUILDING.
8. CONTRACTOR SHALL INSTALL A TRACER WIRE AND SAFETY TAPE ABOVE GAS LINE IN TRENCH.

PROPOSED LOCATION OF NEW 6" GAS LINE

CAP THE GAS LINE AT REGULATOR LOCATION

NEW GAS METER AND NEW GAS LINE CONNECTION

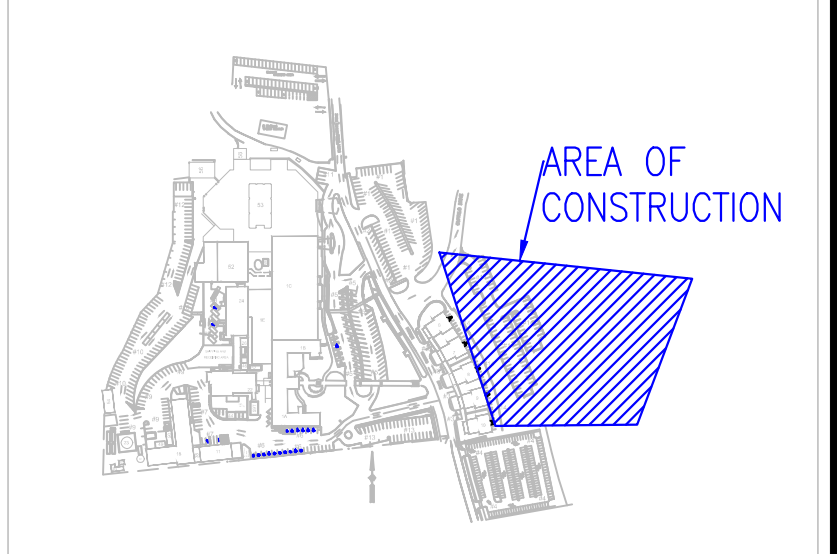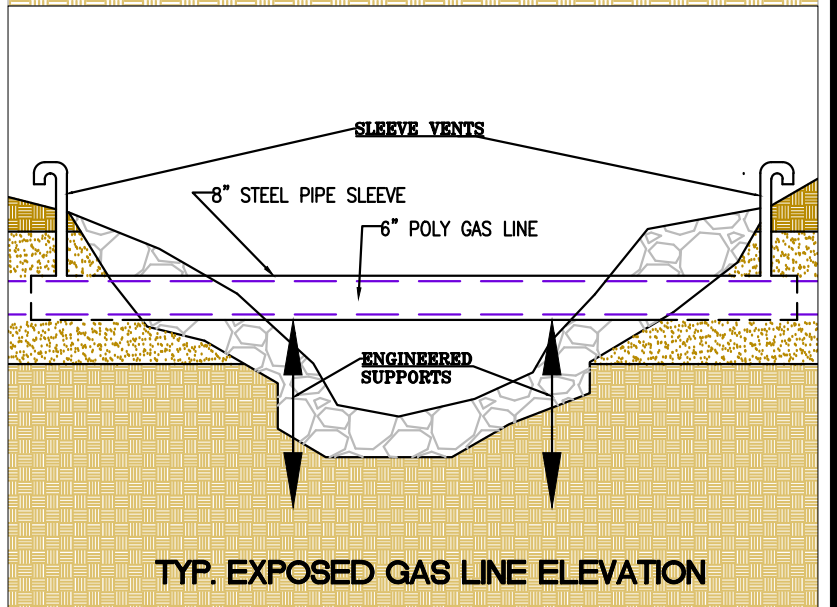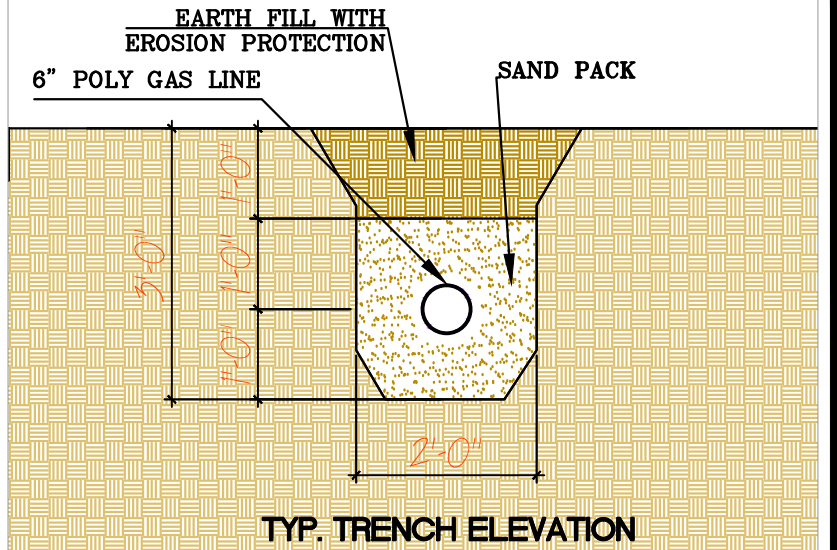

REVISIONS:	DATE:	 Dept. of Veterans Affairs Medical Center 1011 Honor Heights Drive Muskogee, OK. 74401				APPROVED: Infection Control Nurse-Lydia Snyder	APPROVED: Medical Center Director-Brian A. Hawkins	DRAWING TITLE		PROJECT TITLE		DATE	DEPARTMENT OF VETERANS AFFAIRS
						APPROVED: Safety Manager-Charles Herrier	APPROVED: Associate Director-Bryan Matthews	CONSTRUCTION PLAN		MAIN GAS LINE		AUG. 6, 2011	
						APPROVED: President A.F.C.E. 2250-Jeff Cowan	APPROVED: Chief of Staff-Karen H. Gribbin	PROJECT NO. 623-12-108		CONTRACT NO.		SCALE NTS	
							APPROVED: Chief Engineering Service-Jordan W. Dunsire	BUILDING NO.		AUTOCAD FILE NAME		DRAWING NO. S-2	
										LOCATION JACK C. MONTGOMERY VA MEDICAL CENTER		DWG. 2 OF 2	