


Overall Elevation View: Right - Shipping splits indicated by bold outline. - Measurements in inches


For maneuvering purposes, include 1.125 inches to each ship split length for overlapping panel flange. Flange will not add to overall installed unit length sh

Pos #	Module	Length	Weight
1	Air mixing section	48 1/8	729.77
2	Filter section	19 1/8	495.40
3	Coil section	10	397.47
4	Access section	14 1/8	262.22
5	Coil section	19 1/8	1663.58
6	Access section	14 1/8	262.22
7	Coil section	48 1/8	1200.35
8	Access section	48 1/8	514.00
9	Fan section	55 5/8	2000.00
10	Filter section	40 1/8	866.00
11	Discharge plenum	28 1/8	510.47
			Installed Unit Weight 8901.49 lbs

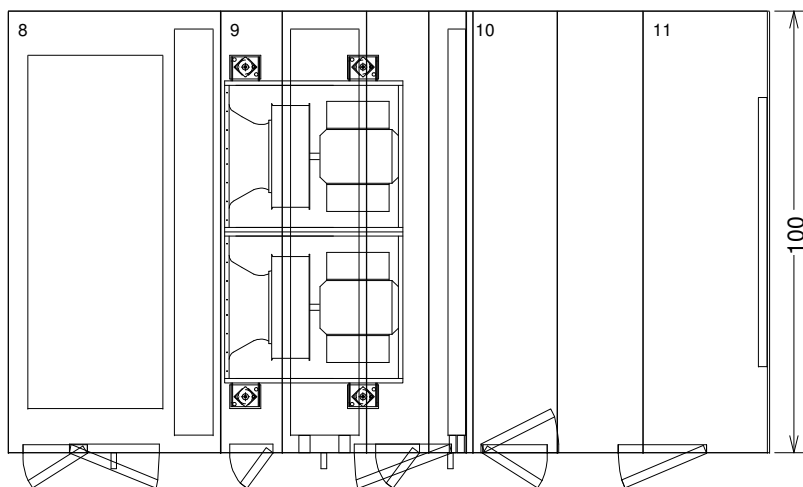

Basic Overall Plan View: Top - Measurements in inches

OPENING AND DIMENSIONS MAY VARY FROM CONTRACT DOCUMENTS / RETURN OF APPROVED DRAWINGS CONSTITUTES ACCEPTANCE OF THESE VARIANCES / NOT TO SCALE

Unit size: 35	Job Name: VA Gainesville Project	Unit Casing: 2in Double Wall	 TRANE® Performance Climate Changer™ Air Handlers
Product group: Indoor unit	Actual airflow: 13700 cfm	Proposal Number:	
Integral base frame: 6in. integral base frame	Sales Office: Tampa Main Office	Tags: AHU-SPD ALT	
Paint: Unpainted/field painted outdoor		Rigging/Installed Weight: 8554.0 lb/ 8901.5 lb	