


DEDUCT ALTERNATE 3

LEGEND

- EXISTING ASBESTOS TILE FLOORING TO BE ABATED.
- EXISTING ASBESTOS SHEET FLOORING COVERED BY CARPET. REMOVE CARPET AND ABATE SHEET FLOORING.
- NEW SOLID VINYL 18"x18" TILE FLOORING TO BE INSTALLED IN THIS AREA. ANTIC STONE PATTERN OR EQUAL. COLOR TBD. REPLACE EXISTING 6" BASE WITH NEW 6" BASE.
- NEW CARPET TO BE INSTALLED IN THIS AREA. REPLACE EXISTING 4" BASE WITH NEW 4" BASE.
- NEW SOLID VINYL 18"x18" TILE FLOORING TO BE INSTALLED IN THIS AREA. ANTIC STONE PATTERN OR EQUAL. COLOR TBD. REPLACE EXISTING 6" BASE WITH NEW 6" BASE.

NOTES

- 1. ABATE EXISTING ASBESTOS CONTAINING FLOORING AND MASTIC IN ACCORDANCE WITH SPECIFICATION SECTION 02 82 13.19. REMOVE EXISTING BASE.
- 2. REMOVE EXISTING CARPET AND BASE AND ABATE EXISTING ASBESTOS CONTAINING FLOORING AND MASTIC IN ACCORDANCE WITH SPECIFICATION SECTION 02 82 13.19.
- 3. INSTALL NEW CARPET AND BASE IN THIS AREA.
- 4. INSTALL NEW TILE FLOORING AND BASE IN THIS AREA.
- 5. INSTALL NEW NON-SKID TILE ON RAMPS. ARMSTRONG 12" x 12" SAFETY ZONE OR EQUAL. COLOR TBD.

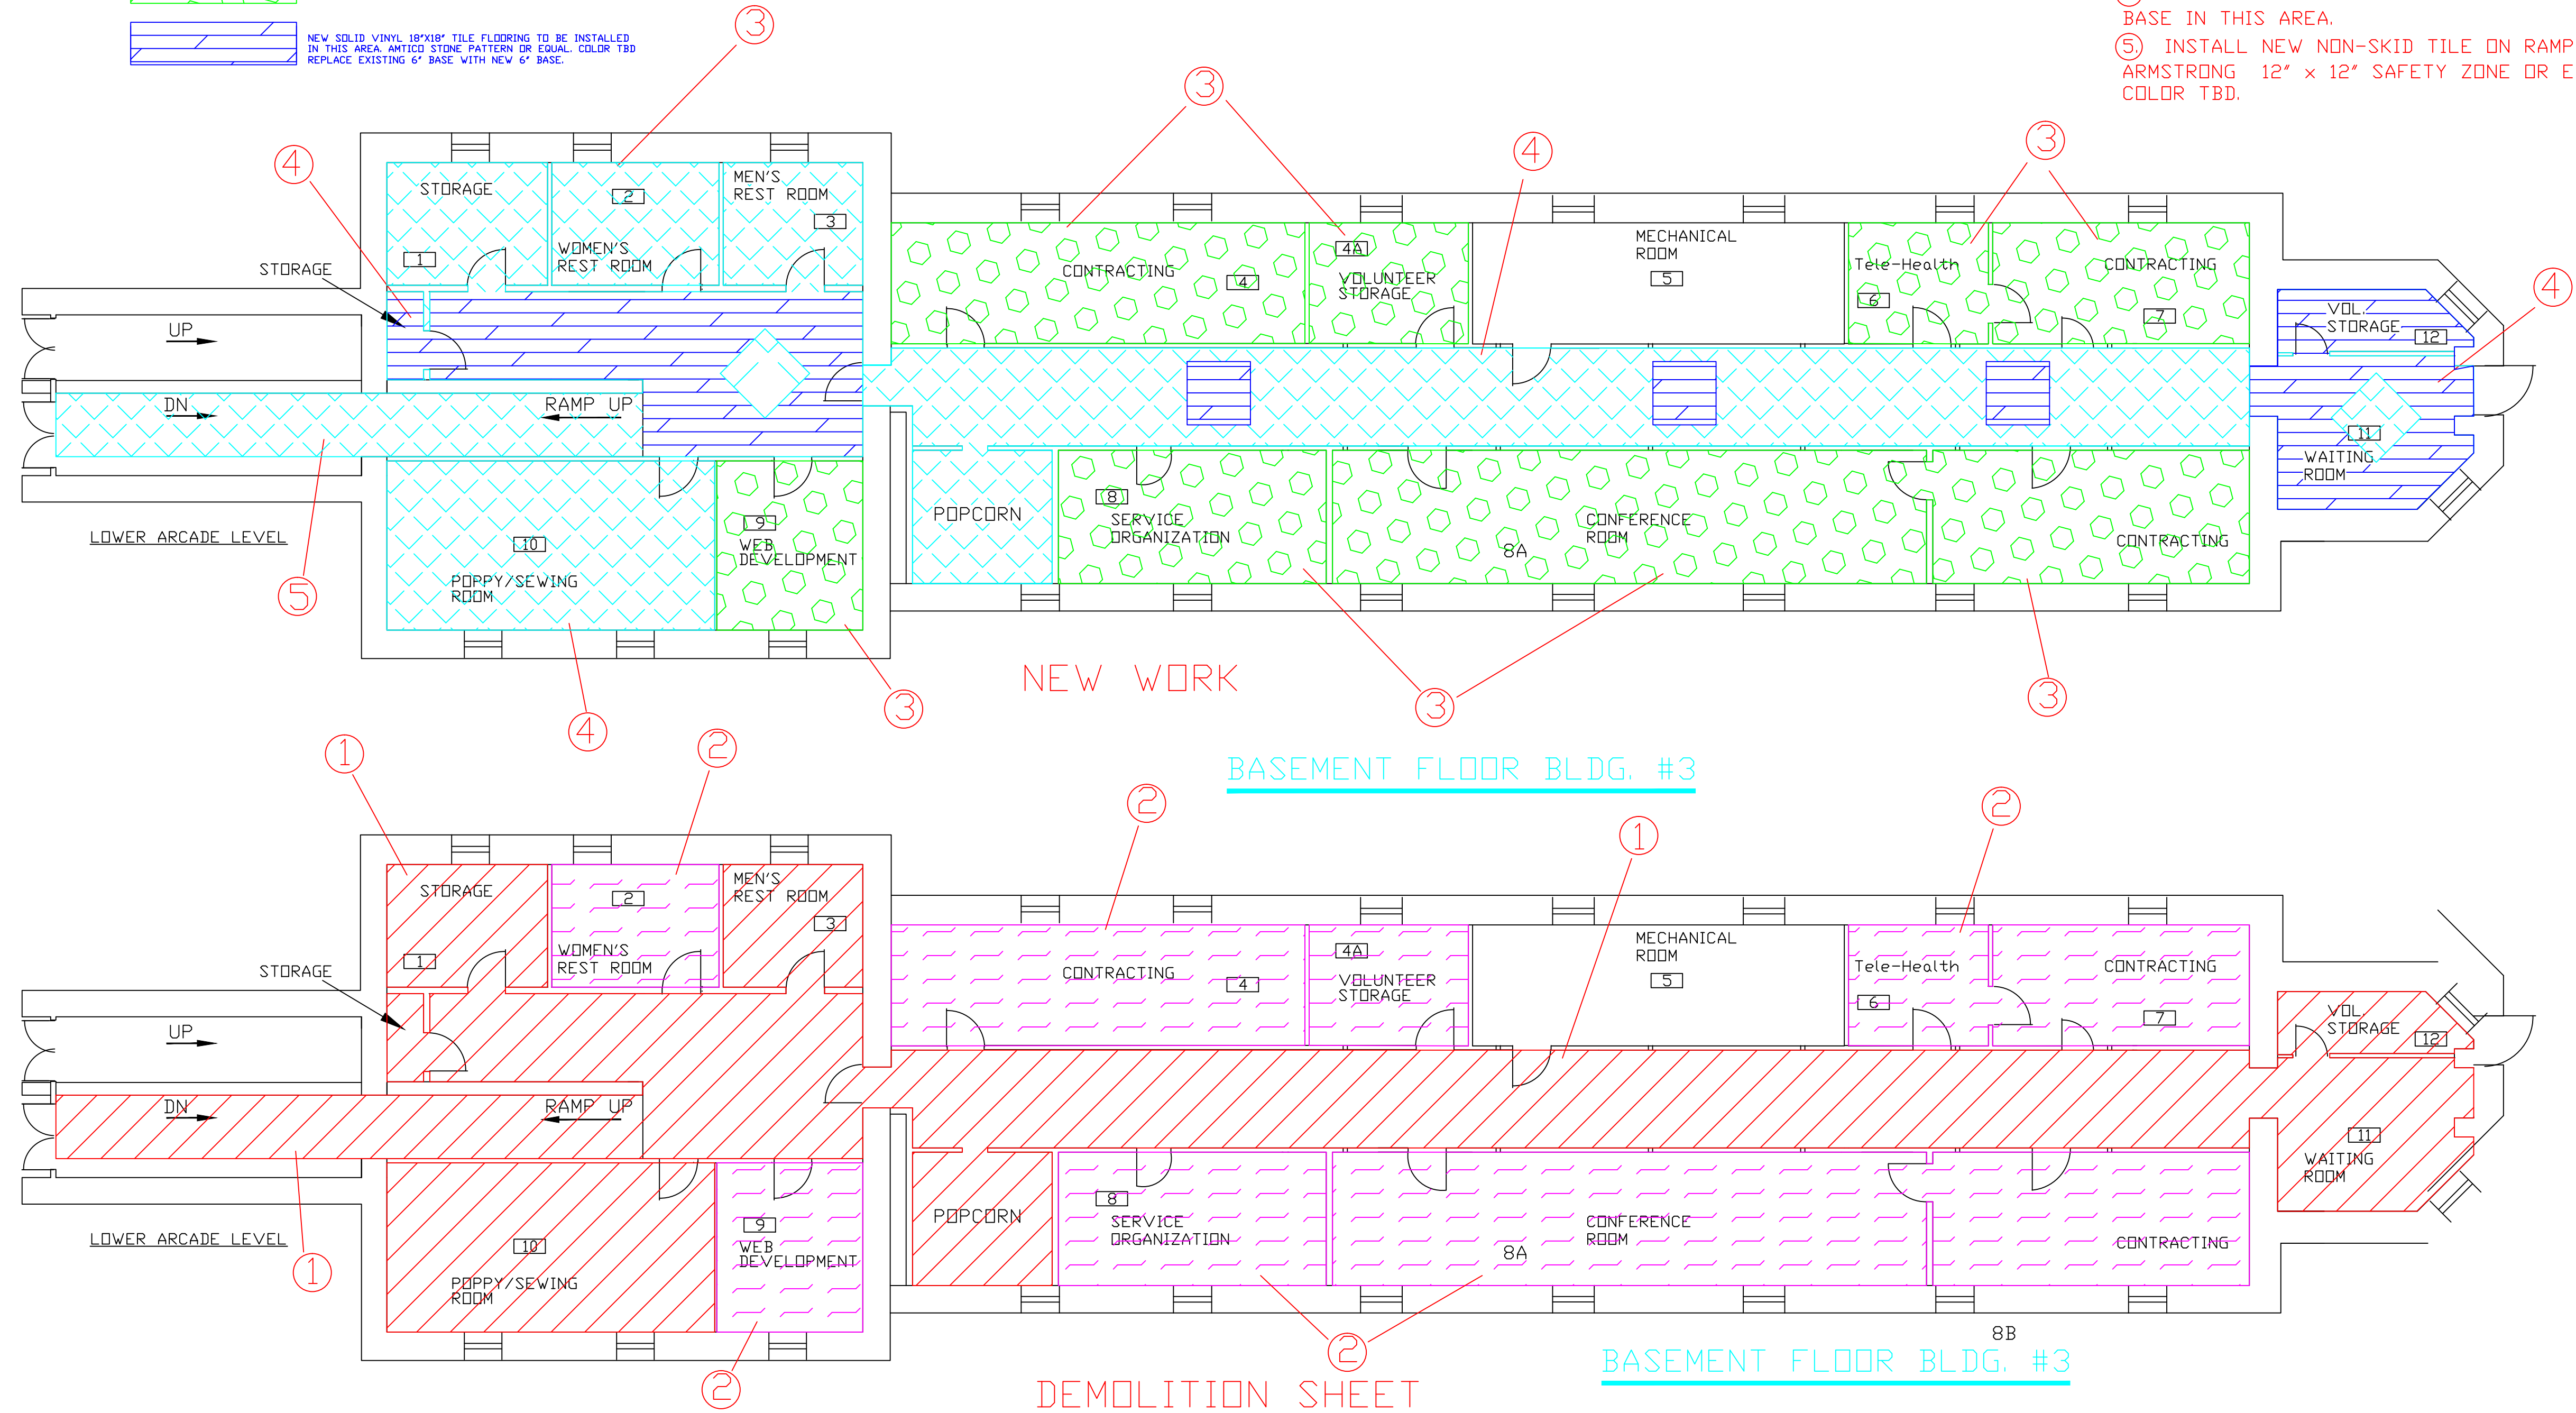

REVISIONS	DATE	TRUE NORTH PLAN NORTH	Drawing Scale 1/8" = 1'	Plot Scale 1/8" = 1'	Drawing Title BUILDING 3 BASEMENT	Project Title REPLACE FLOORING PHASE 1	Project No. 568-12-201	Office of Facilities Management Department of Veterans Affairs	
					Approved: Division Chief	Location V.A. MEDICAL CENTER HOT SPRINGS, SD	Building Number 3		DRAWING NO. A1
					Approved: Service Director	Date 11/25/2011	Checked DS	Drawn DS	Dwg. 2 Of 11