

three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one eighth inch = one foot
one quarter inch = one foot
one eighth inch = one foot

1

2

3

4





5

6

7

8

9

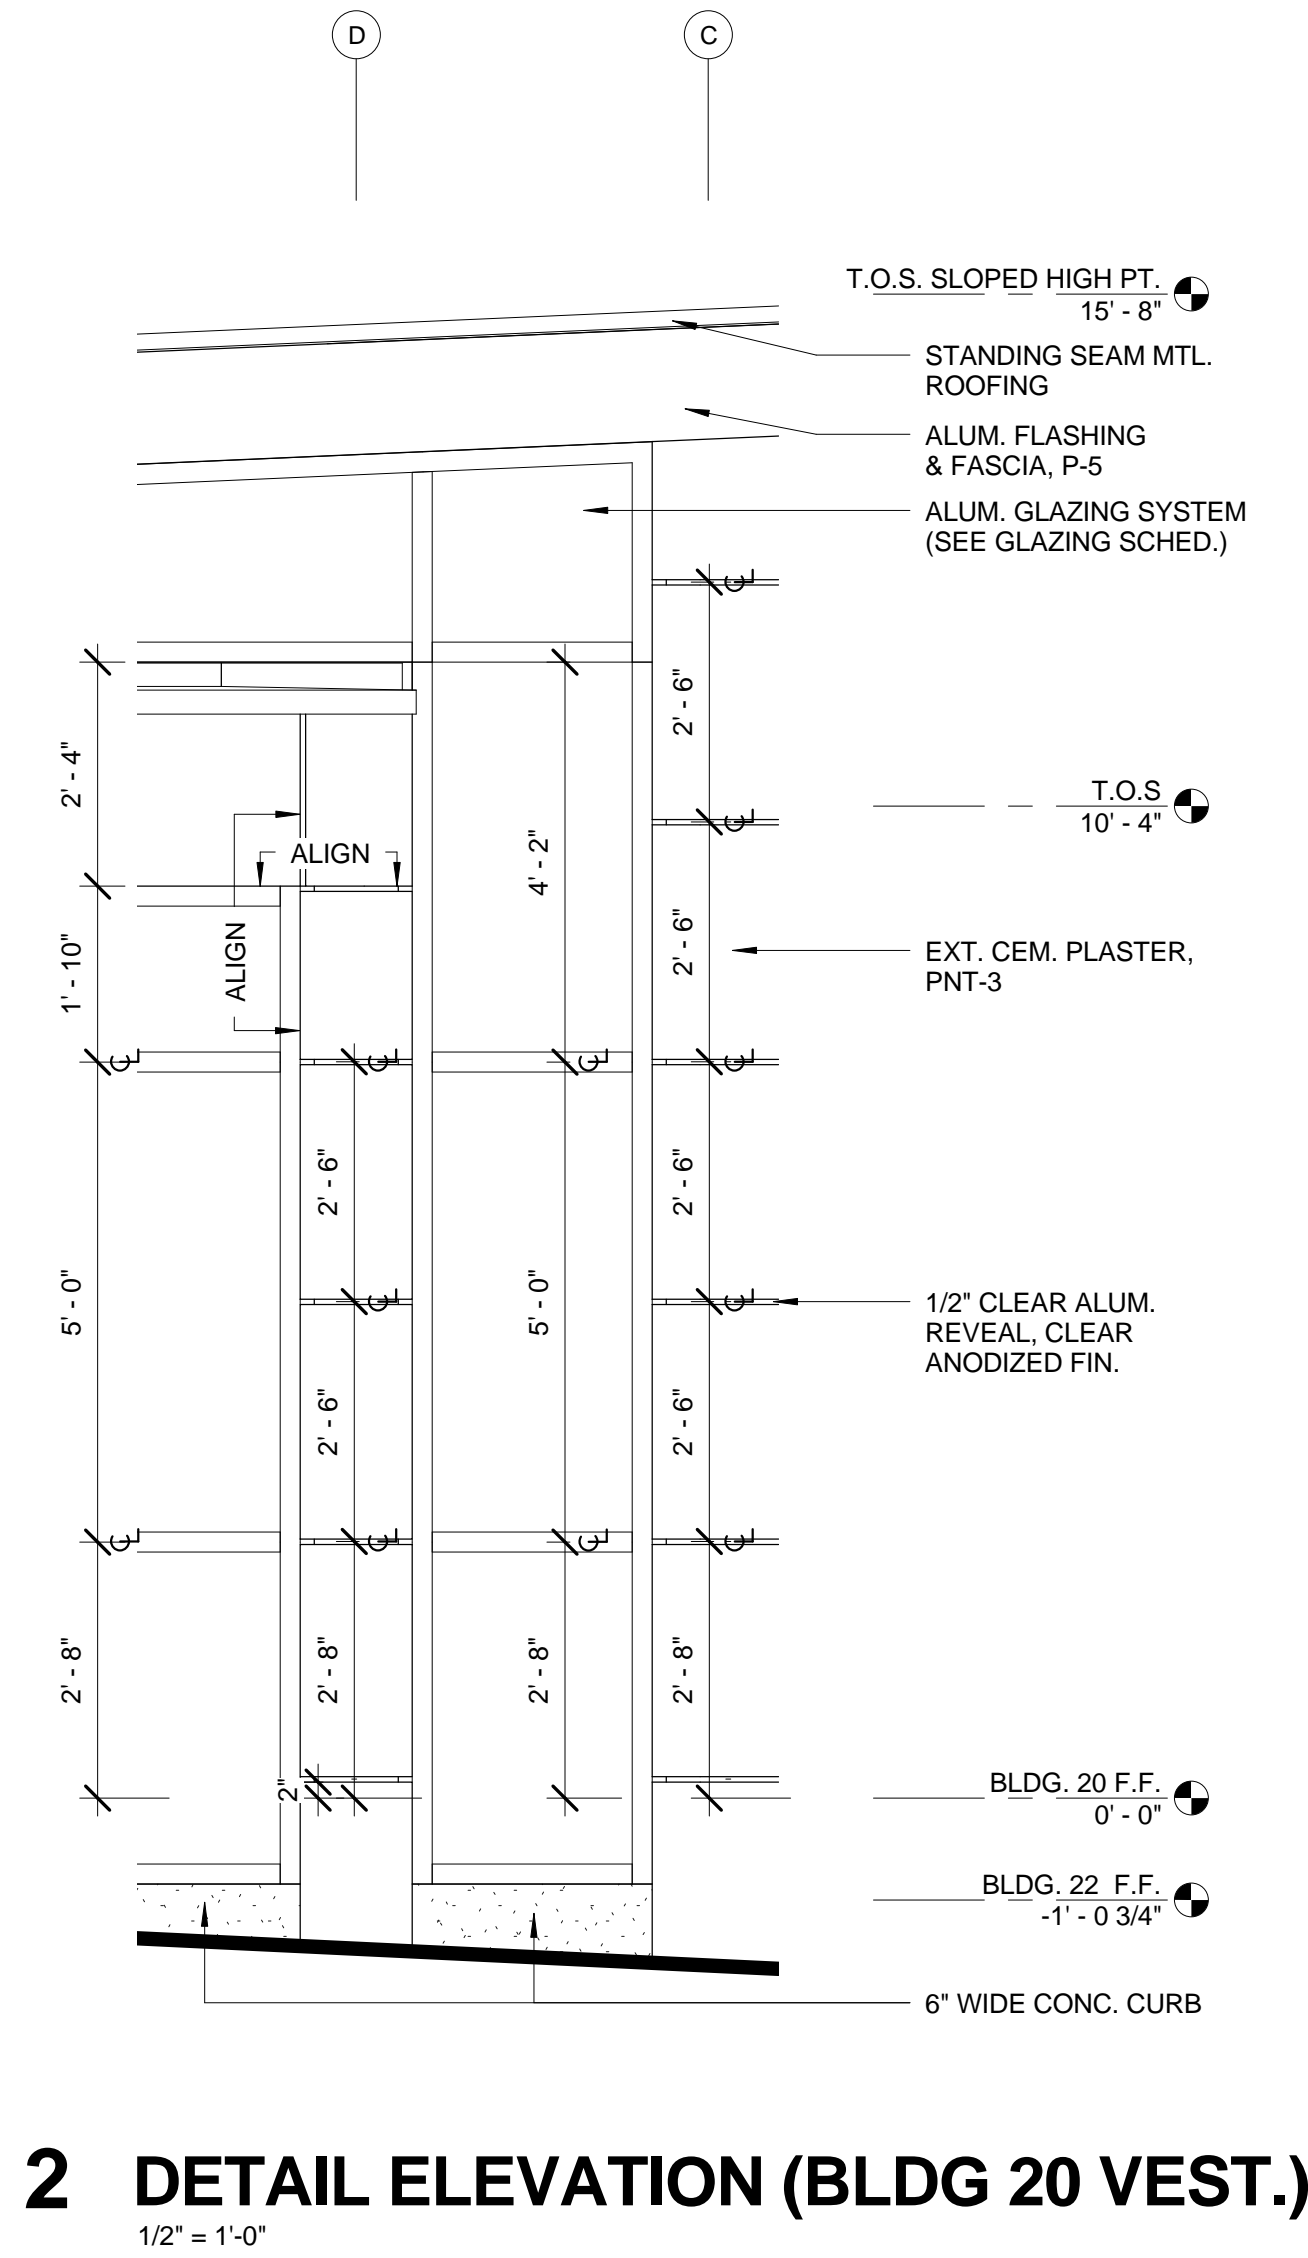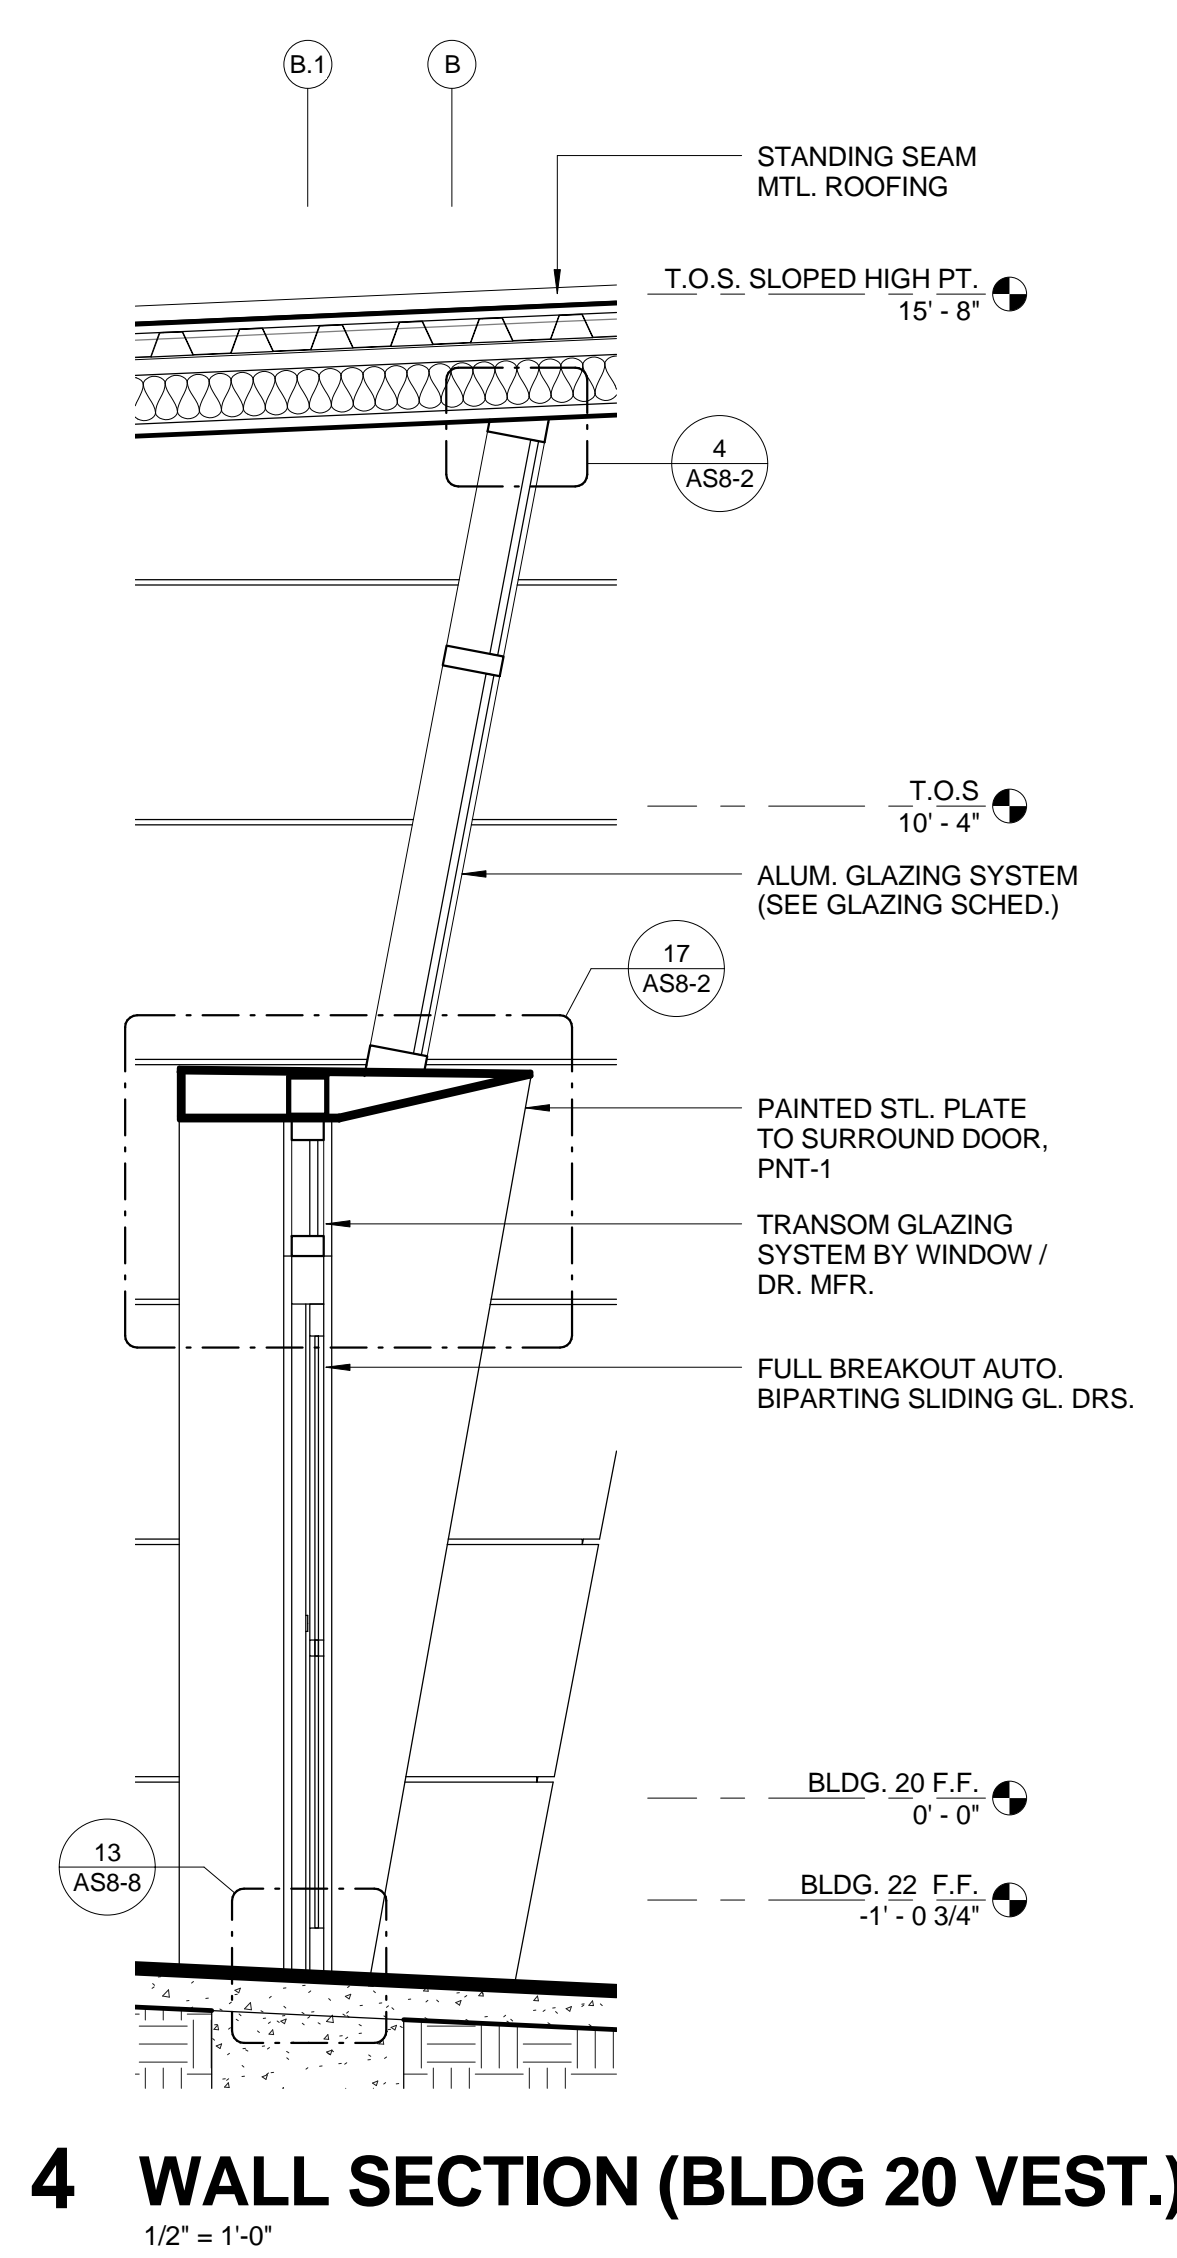
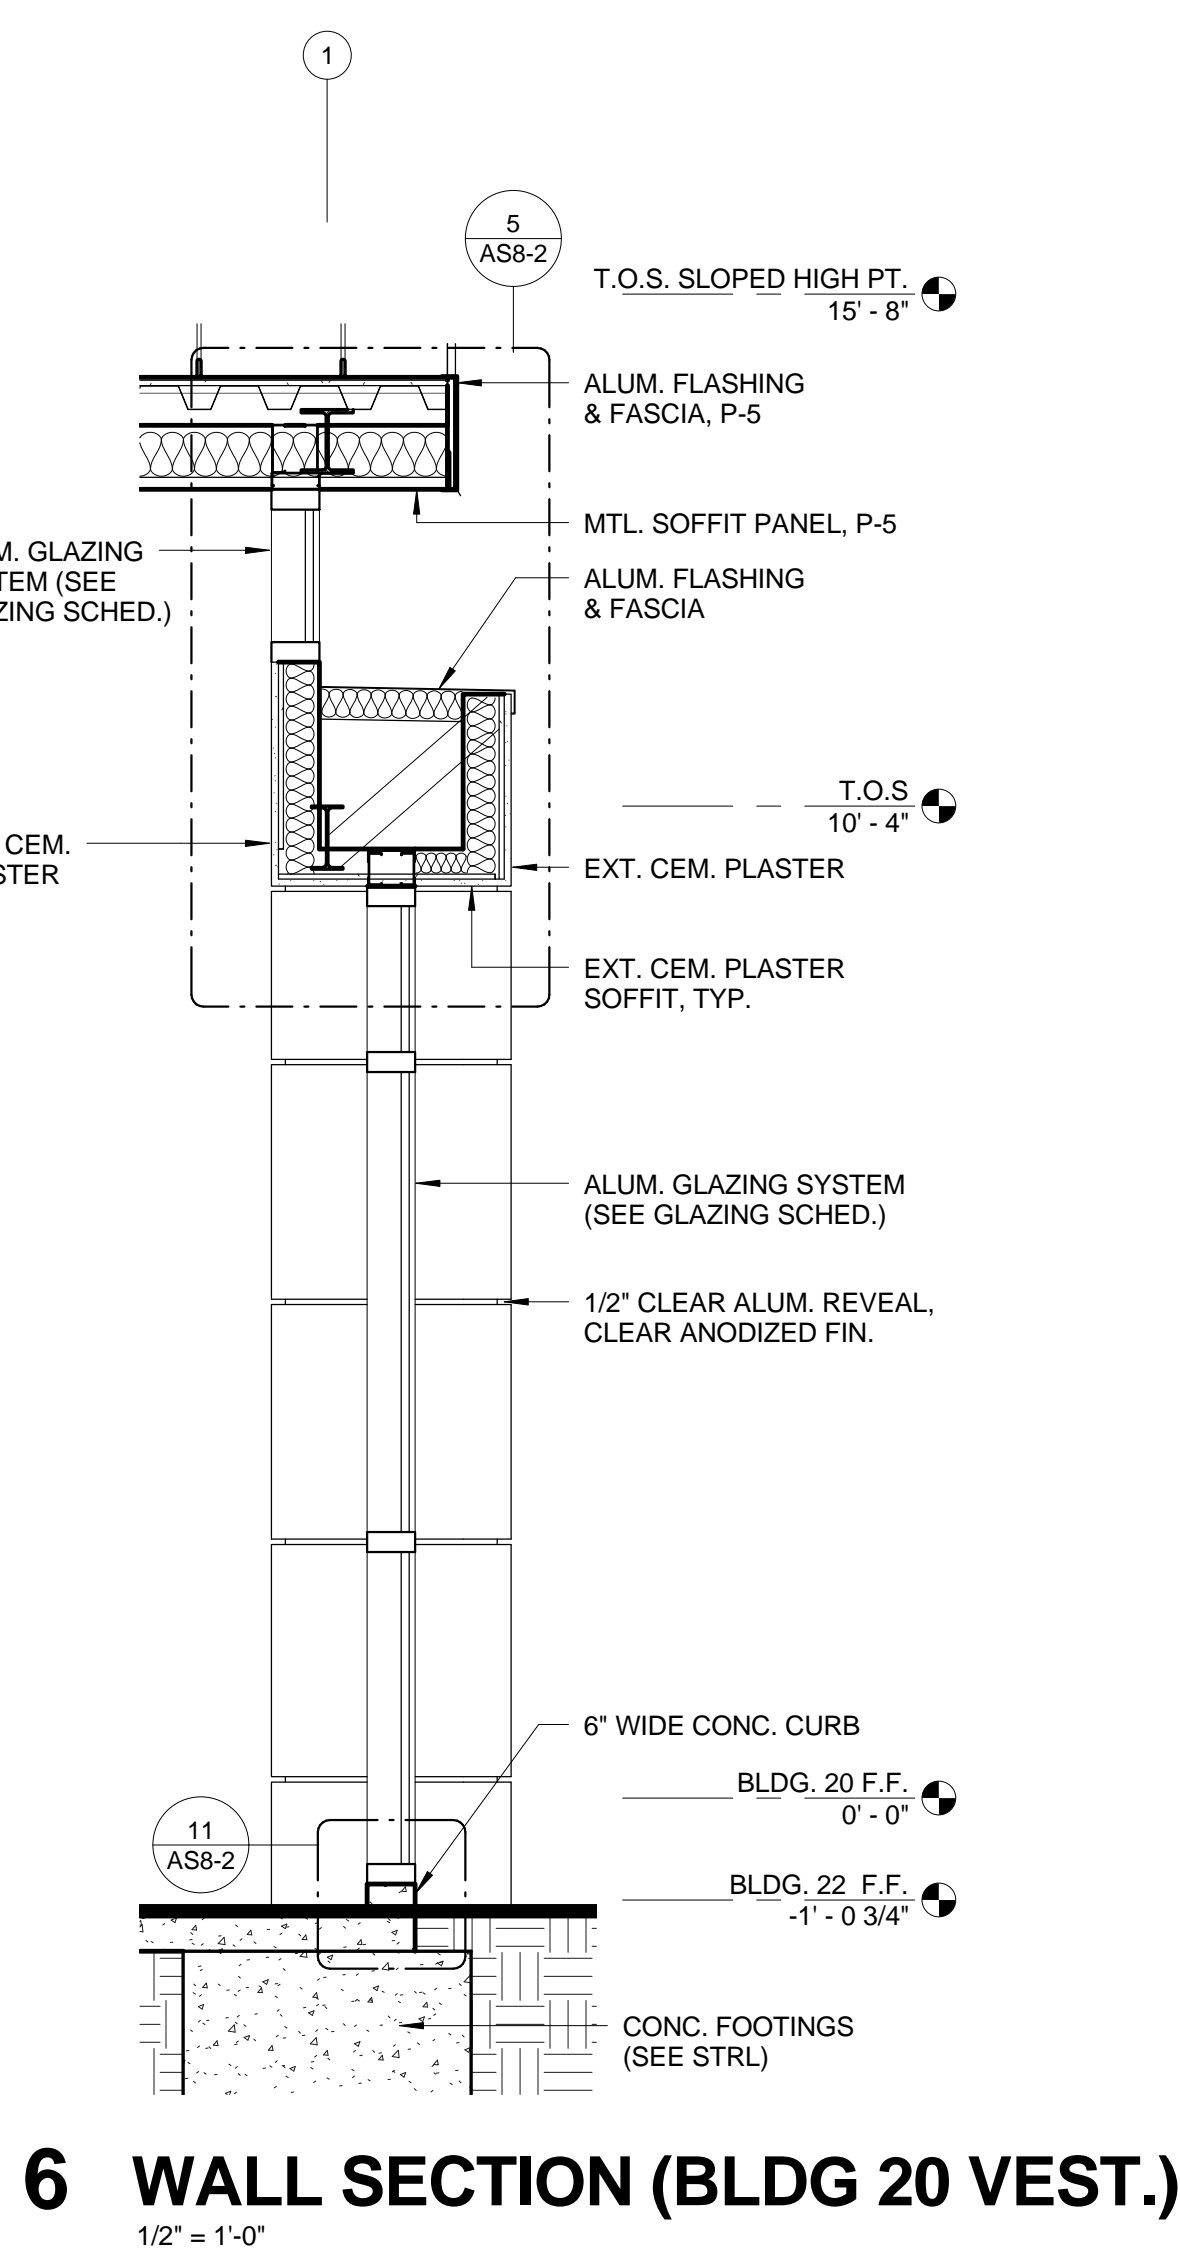
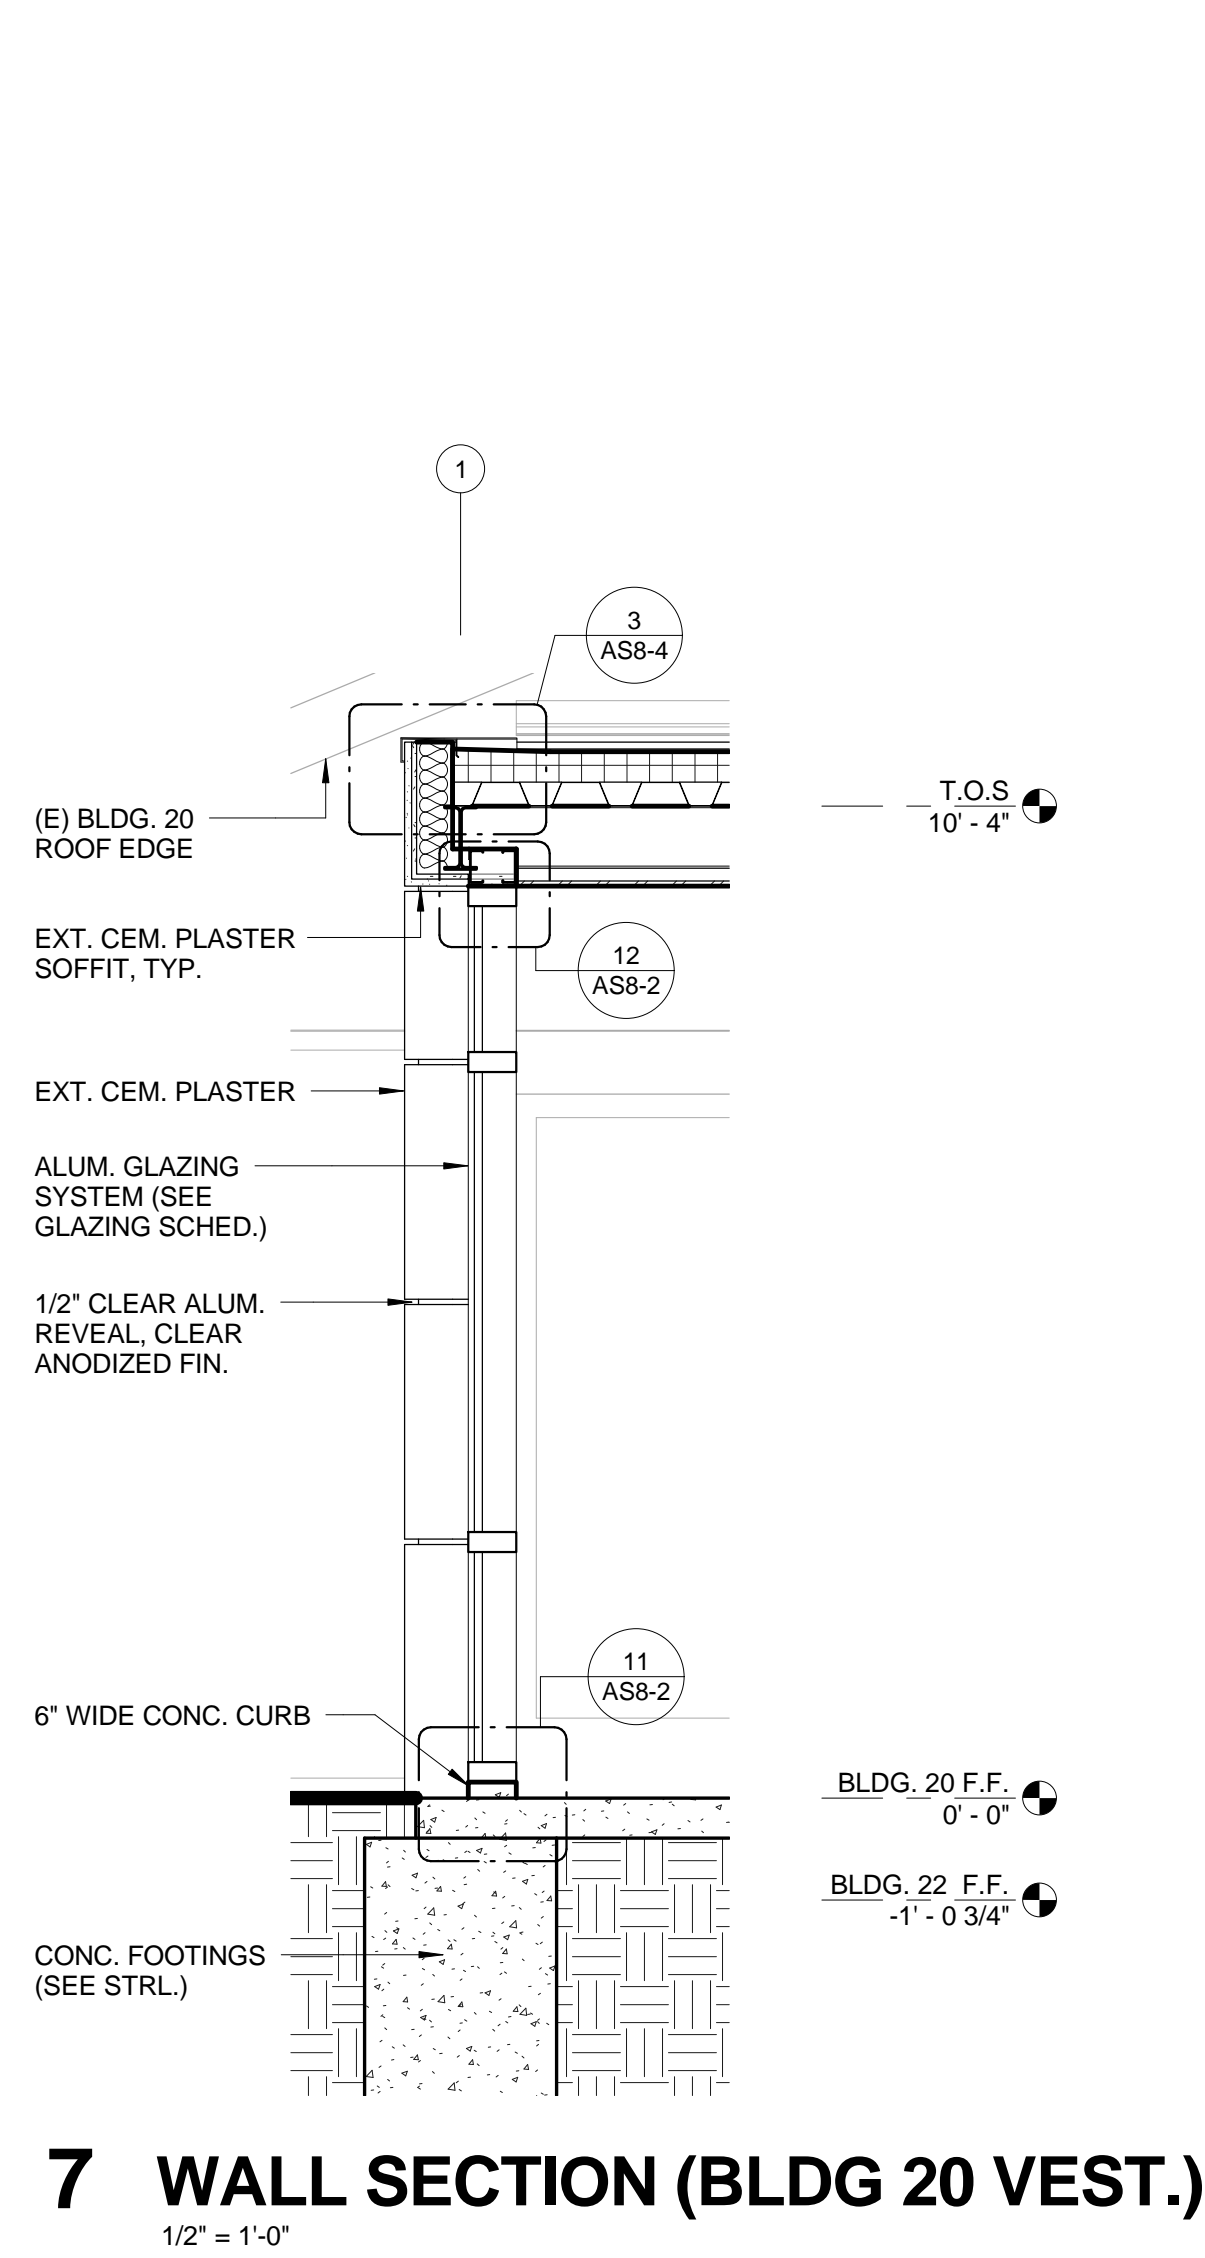


7 WALL SECTION (BLDG 20 VEST.)
1/2" = 1'-0"

6 WALL SECTION (BLDG 20 VEST.)
1/2" = 1'-0"

4 WALL SECTION (BLDG 20 VEST.)
1/2" = 1'-0"

2 DETAIL ELEVATION (BLDG 20 VEST.)
1/2" = 1'-0"

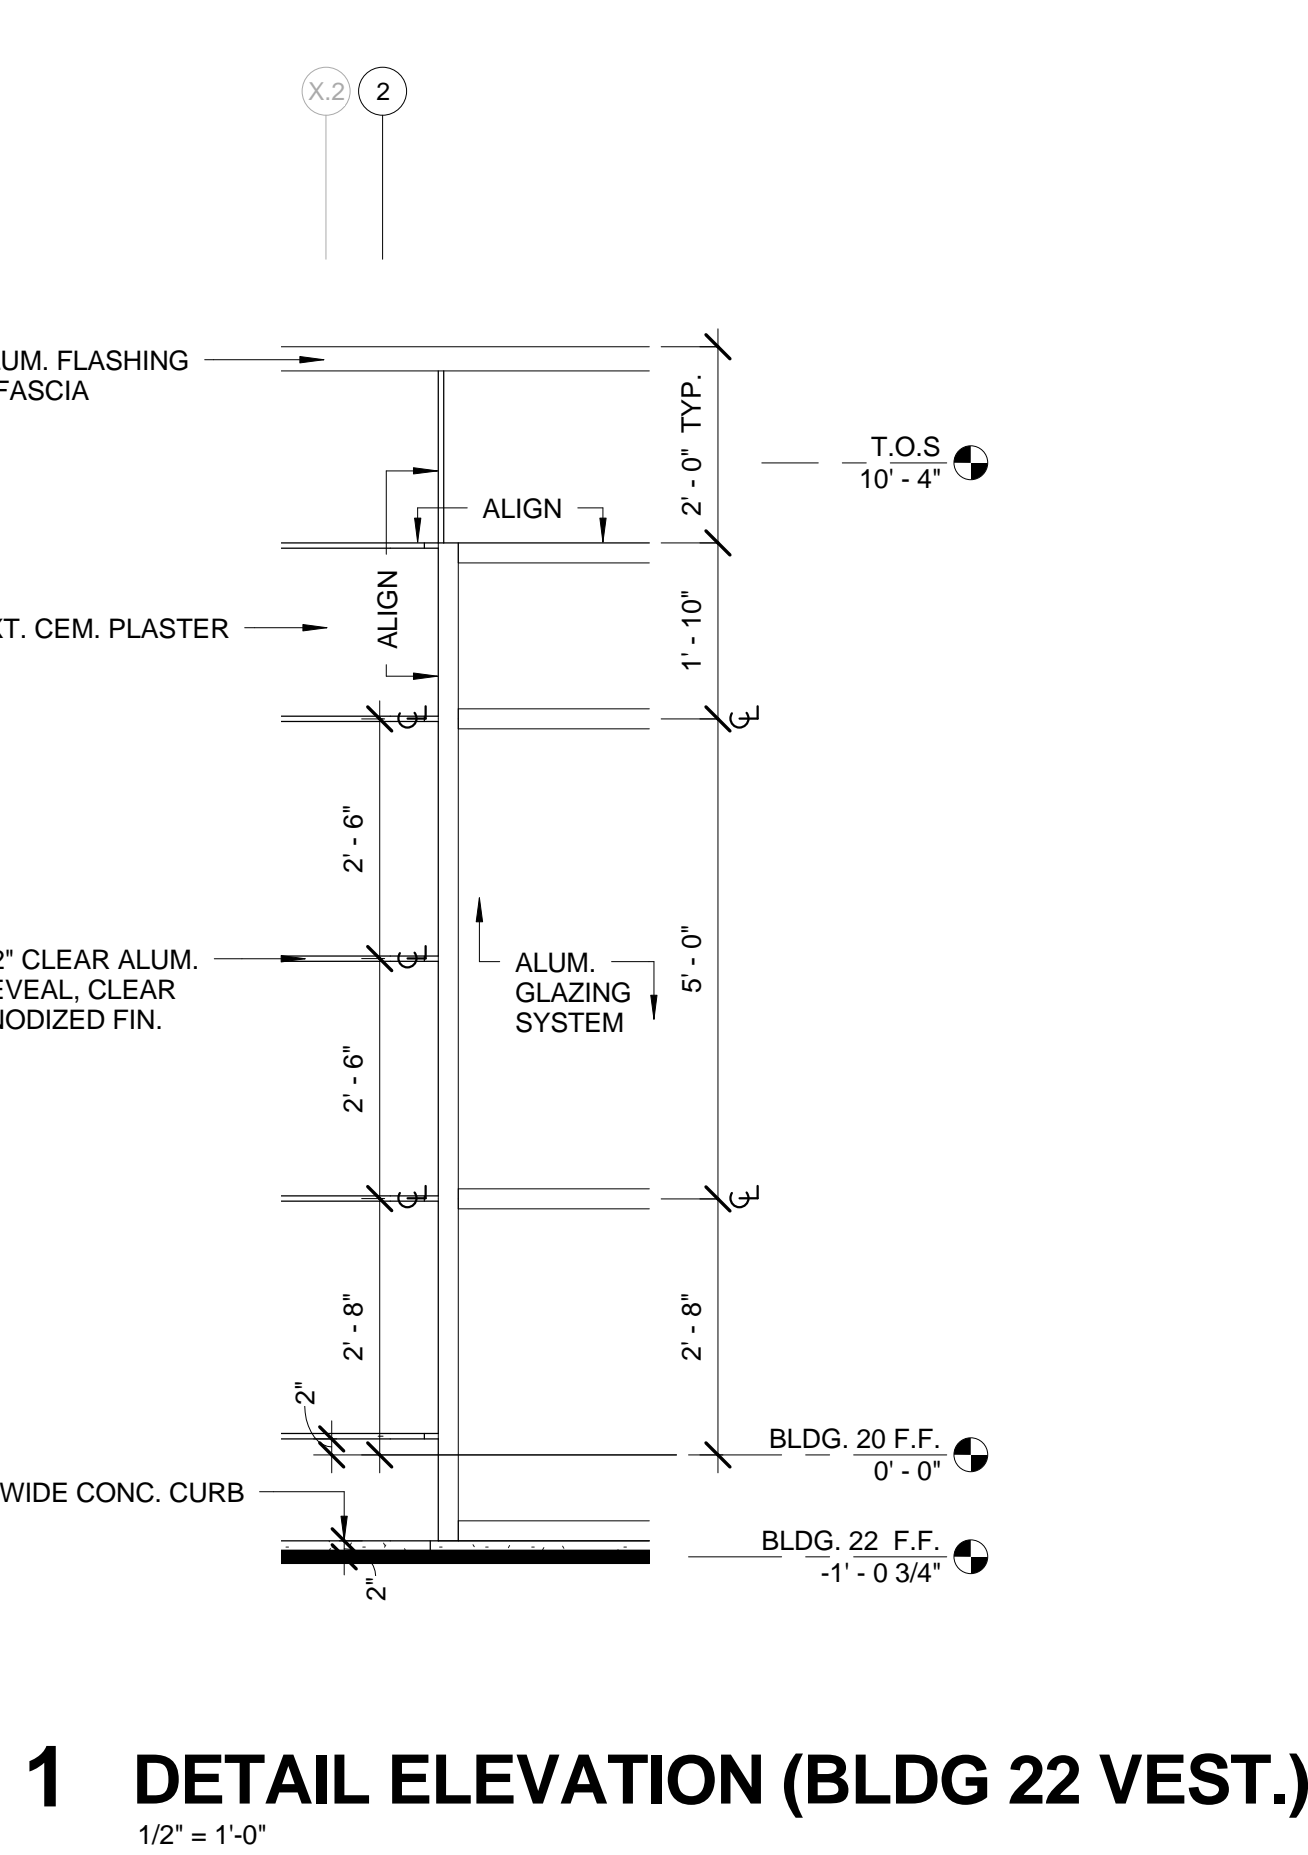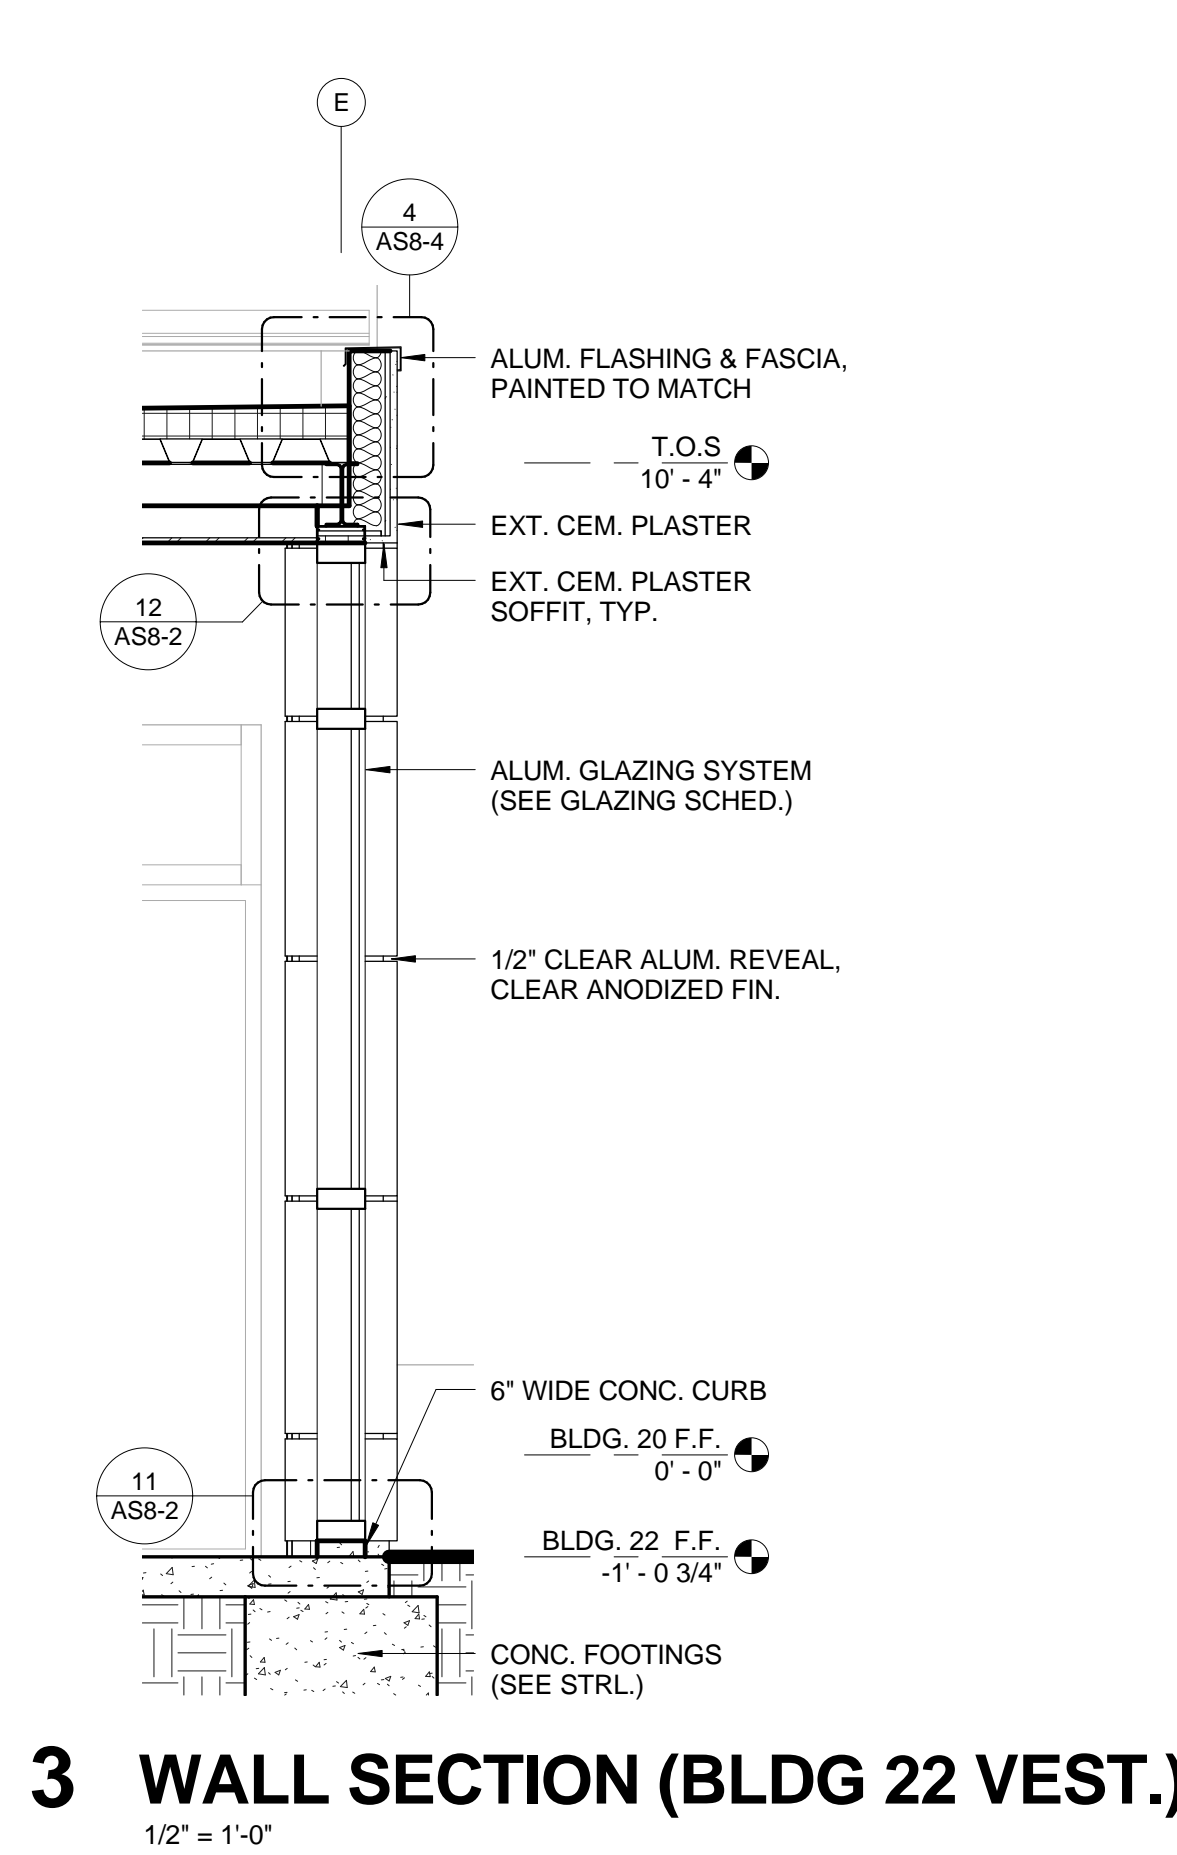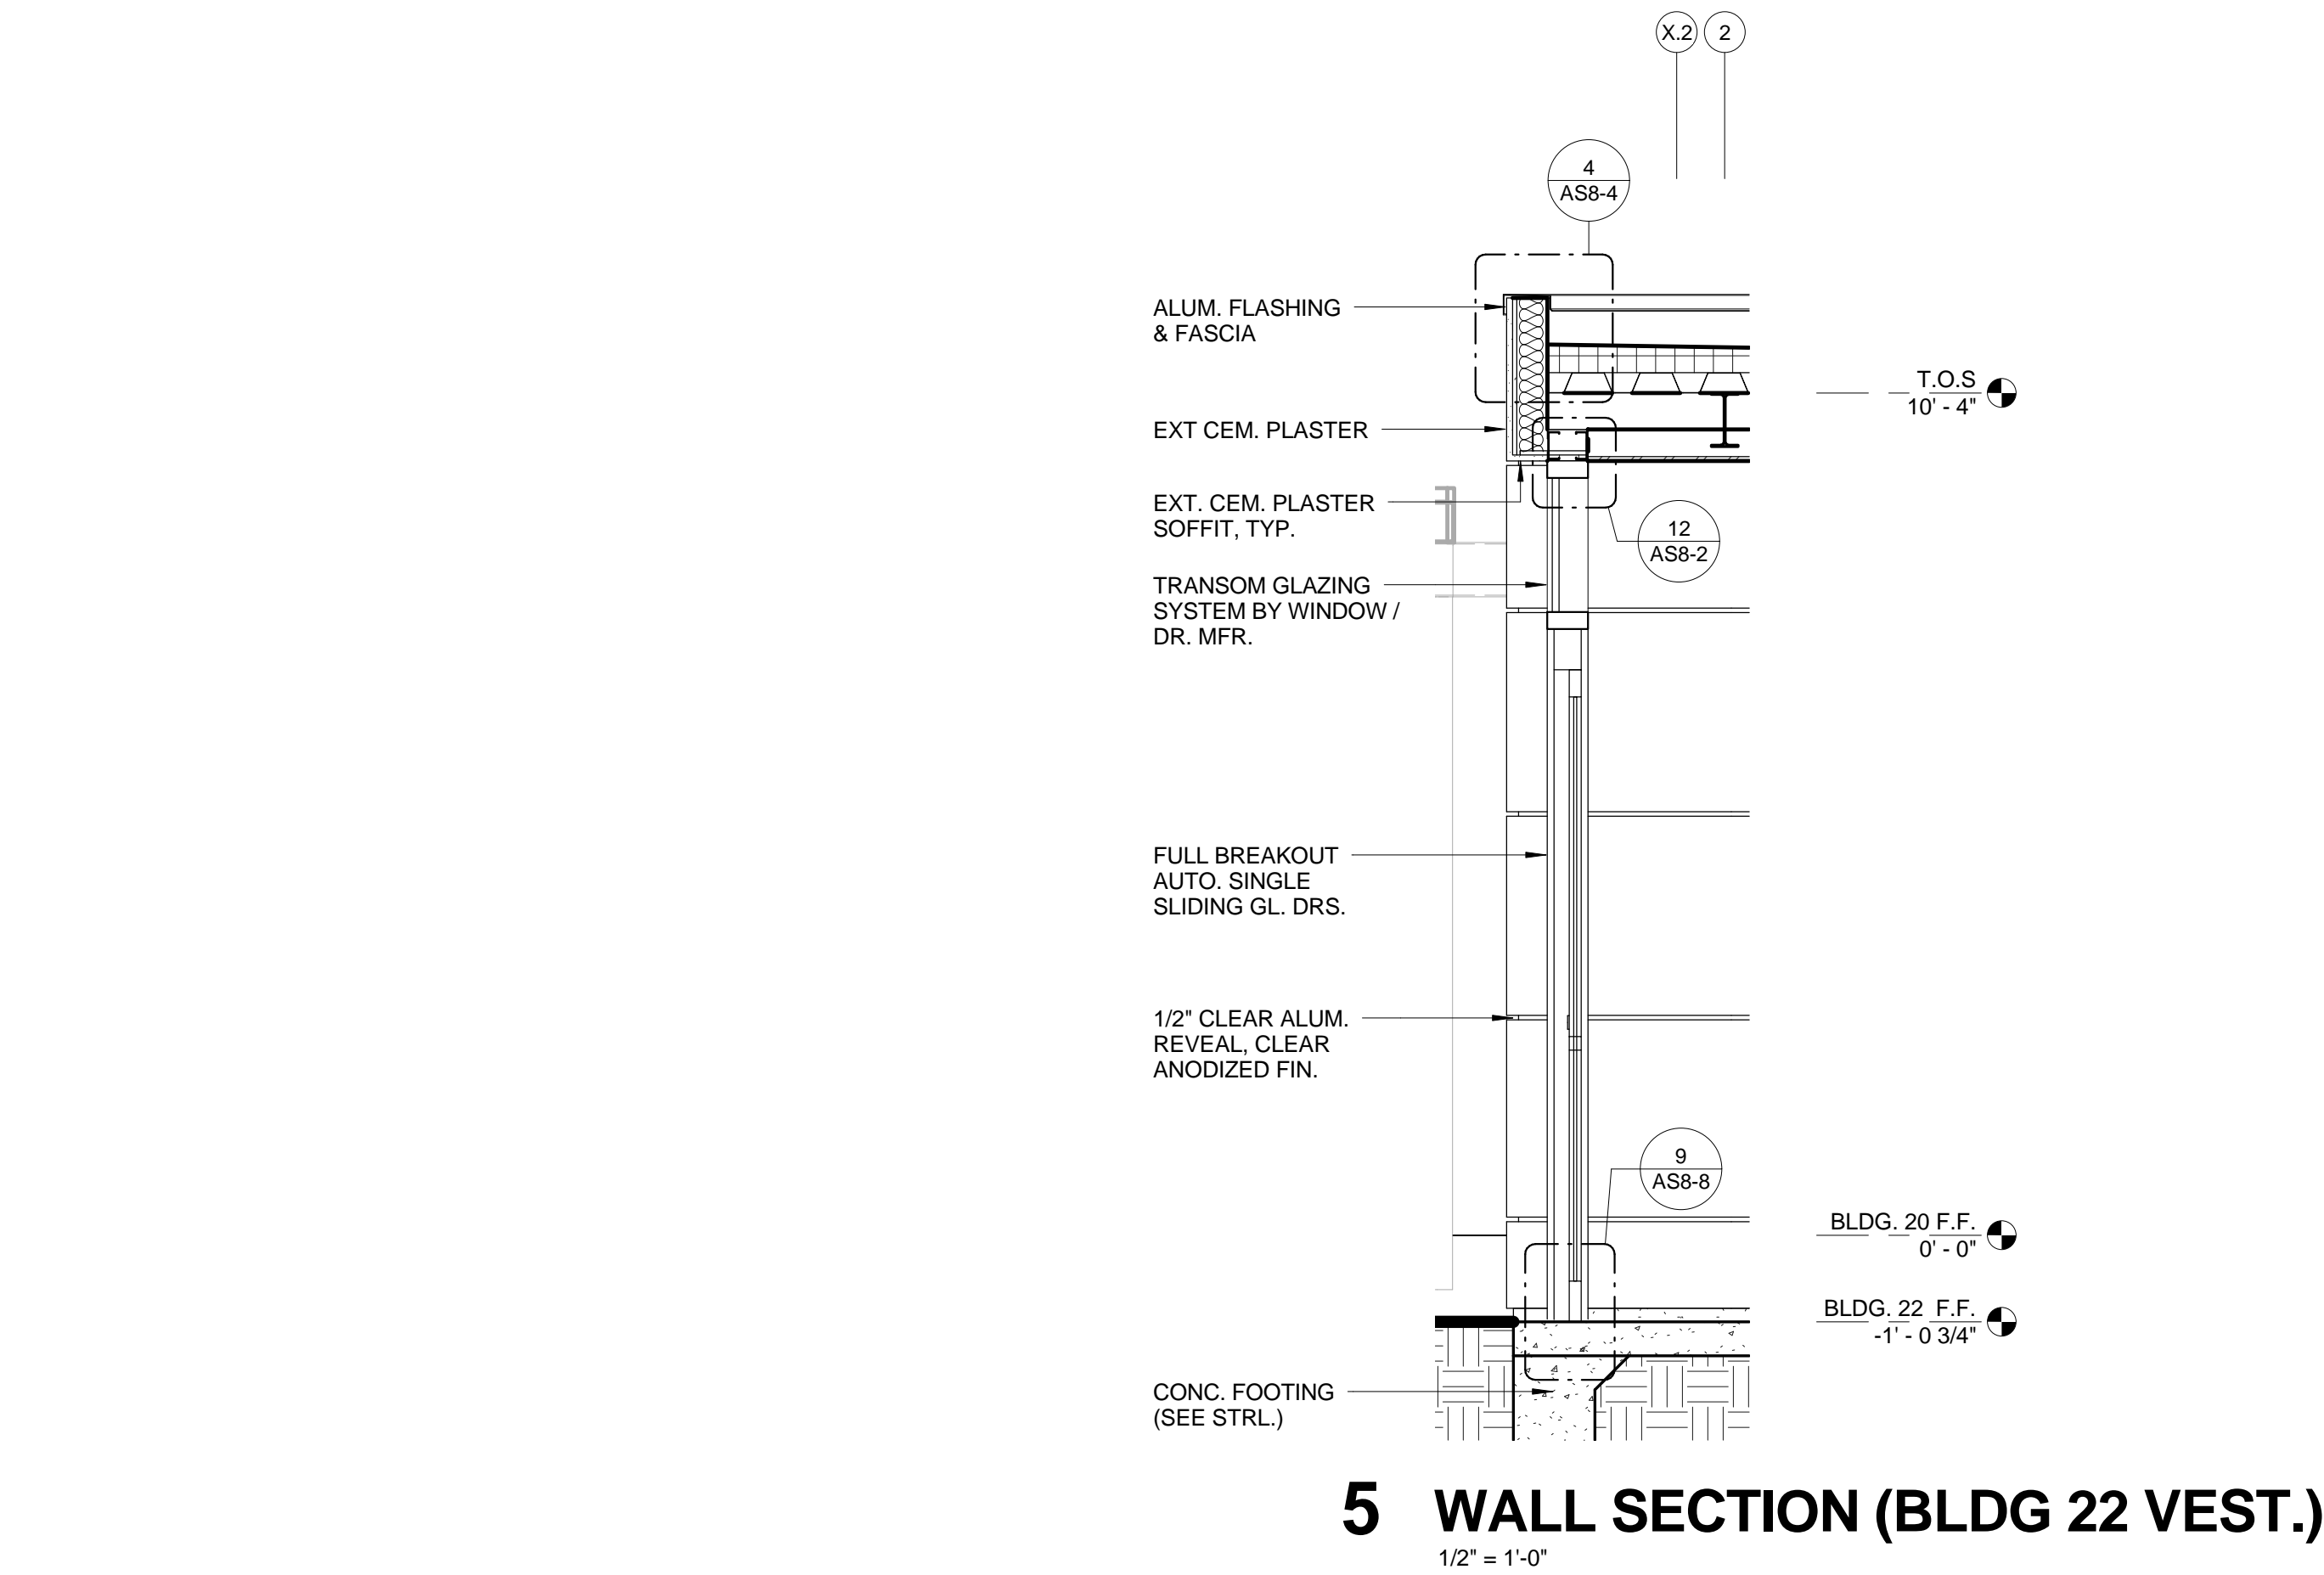

5 WALL SECTION (BLDG 22 VEST.)
1/2" = 1'-0"

3 WALL SECTION (BLDG 22 VEST.)
1/2" = 1'-0"

1 DETAIL ELEVATION (BLDG 22 VEST.)
1/2" = 1'-0"

- GENERAL NOTES**
- PATCH TO MATCH EXISTING PARTITIONS, CEILING AND FLOORING DAMAGED BY NEW CONSTRUCTION WORK WITHIN OR OUTSIDE THE PROJECT AREA. PATCH WORK SHALL MATCH EXISTING ADJACENT AREA IN CONSTRUCTION, MATERIALS, COLORS, FIRE-RESISTIVE RATINGS AND FINISHES.
 - CLEAN ALL INTERIOR AND EXTERIOR SURFACES OF EXISTING EXTERIOR WINDOW FRAME AND GLAZING WITHIN THE PROJECT AREA.
 - EXISTING COLUMN SPACINGS SHOWN ARE APPROXIMATE AND ARE FOR REFERENCE ONLY. CONTRACTOR SHALL OBTAIN THESE DIMENSIONS BY FIELD MEASUREMENT.
 - ACTUAL CONDITIONS MAY DIFFER FROM DRAWINGS. FIELD VERIFY ALL EXISTING CONDITIONS AND CHECK THAT DESIGN DIMENSIONS WORK WITHIN FIELD CONDITIONS BEFORE CONSTRUCTION.
 - REMOVE EXISTING ROOFING WHERE REQUIRED BY NEW WORK. PATCH ROOFING TO MATCH EXISTING ROOFING IN CONSTRUCTION, SYSTEM, TYPE, MATERIAL, FIRE-RESISTIVE RATING, FINISH AND COLOR. ROOFING PATCH WORK SHALL BE PERFORMED BY ROOFING MANUFACTURER'S CERTIFIED INSTALLER AND ROOFING PATCH WORK SHALL NOT ALTER OR VOID EXISTING WARRANTY CONTRACT OF EXISTING ROOFING SYSTEM.
 - PROVIDE THERMAL INSULATION ALONG ALL EXTERIOR WALLS, TYPICAL U.O.N. INSULATION SHALL START FROM SLAB TO UNDERSIDE OF STRUCTURE.
 - WHERE FLOOR FINISH CHANGES BETWEEN TWO ROOMS, TRANSITION SHALL OCCUR AT CENTER OF DOOR, U.O.N.
 - ADJUST FURRING SPACE AS NECESSARY TO CLEAR ANY PIPES OR CONDUITS WITHIN THE FURRED SPACE. PROVIDE 1/2" MINIMUM CLEARANCE BETWEEN PIPES/CONDUITS AND THE BACK OF GYPSUM BOARD, U.O.N.
 - ALL WALLS EXTERIOR CEMENT PLASTER U.O.N. ALL EXTERIOR CEMENT PLASTER WALLS COATED WITH P-2 U.O.N.
 - ALL ALUMINUM FLASHING & FASCIA COATED WITH P-2 U.O.N.

CONSTRUCTION DOCUMENTS BID SET	06.10.2011
Revisions:	Date

CONSULTANTS:		
STRUCTURAL E&A ENGINEERS 20505 E. VALLEY BLVD. SUITE 110 WALNUT, CA 91789-2705 TEL: (909) 598-9045 FAX: (909) 598-8585	MECHANICAL & PLUMBING SJ ENGINEERS 300 FRANK OGAWA PLAZA, SUITE 308, OAKLAND, CA 94612 TEL: (510) 763-7475 FAX: (510) 832-1507	ELECTRICAL FWA INC. 330 FRANKLIN STREET, OAKLAND, CA 94612 TEL: (510) 882-7376 FAX: (510) 763-7033

ARCHITECT/ENGINEERS:	
MEI architecture + interiors	239 9TH STREET, Suite 201 SAN FRANCISCO, CA 94103 T: (415) 882-7376 F: (415) 882-7339 www.meiarchitects.com

Drawing Title DETAIL ELEVATIONS AND WALL SECTIONS (BLDGs 20 & 22 VEST.)	Approved: Project Director
---	----------------------------

Project Title ENTRANCE VESTIBULES AND COVERED WALKWAY AT BLDGS. 20 AND 22	Date JUNE 10, 2011	Checked MMC	Drawn KJS
---	-----------------------	----------------	--------------

Project Number 612-10-066	Building Number BLDGs. 20 & 22	Drawing Number AS8-1
-------------------------------------	--	--------------------------------

Office of Facilities Management	Department of Veterans Affairs
--	--------------------------------