
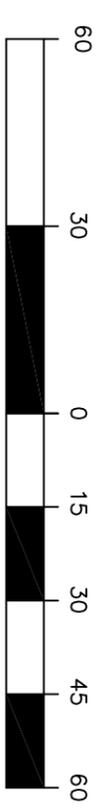


GENERAL NOTES:

- The new committal shelter design shall be a traditional shelter having a minimum 30'x30' roof-line and a minimum 40'x40' pad size. The committal shelter shall be of brick construction and the colors shall match the new columbarium. It shall be the DBAE's decision whether the new committal shelter will be in the footprint of the existing committal shelter. Positive drainage shall be achieved in the new design.
- The final design shall include landscaping, and sod, and other aspects as mentioned in the S.O.W.
- All site furnishings (benches trash receptacles) shall be galvanized and powder coated.
- The service medallions representing the 5 branches of military service shall be installed on the committal shelter wall facing the audience.
- The shelter shall be orientated so the audience is facing a burial area.
- The roof-line of the shelter shall extend beyond the columns, in order to protect a bigger audience.
- Existing utilities shall be used to power the new MP3 Player (for tap music), and two ceiling fans (there are no lights at the shelter however provide one GFI in the storage area).

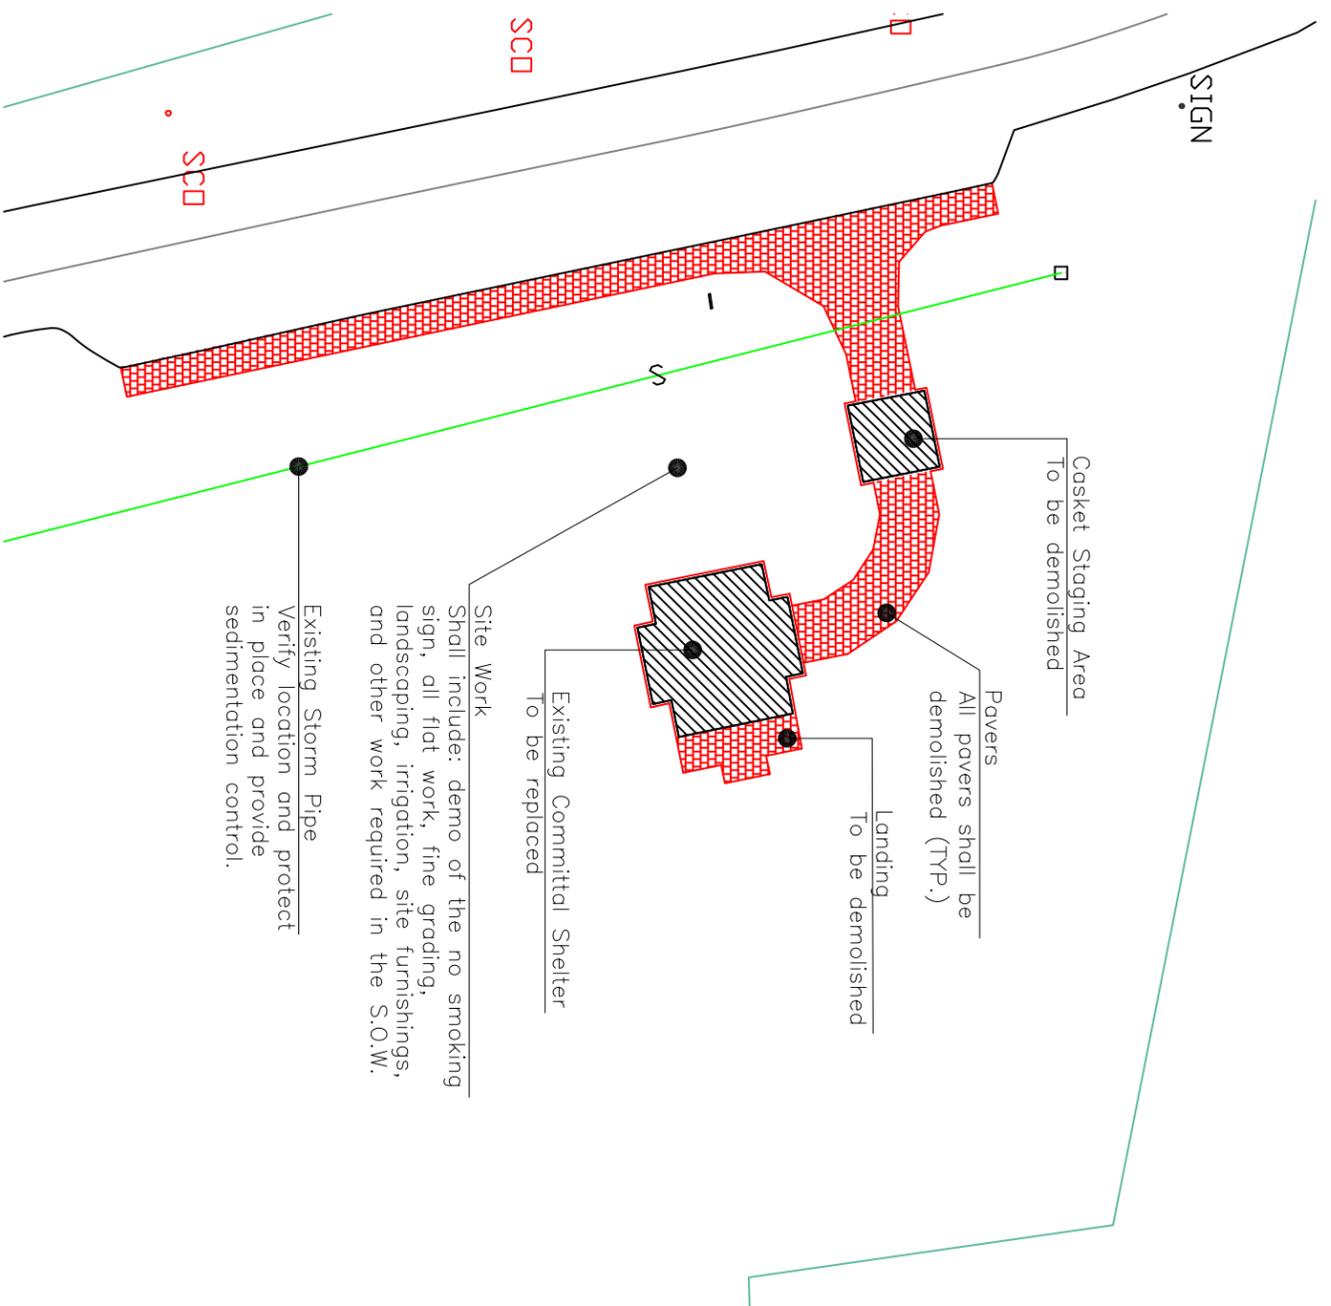

Revisions	Date

Drawing Title Overall Site Plan Enlargement		Project Title Replace Committal Shelter Request for Proposal		Date DEC 15, 2011
Approved: Director Office of Construction Management		Building Number	Checked PO	Drawn JLM
Approved: MSN Director		Location Biloxi National Cemetery Biloxi, Mississippi	Drawing No. RFP3 3 of 5	