




BUILDING 2 - CENTER ROOF RIGHT SIDE

Demolition Notes

1. Antenna Tower, Wiring and Concrete Blocks to be removed and disposed of off station.

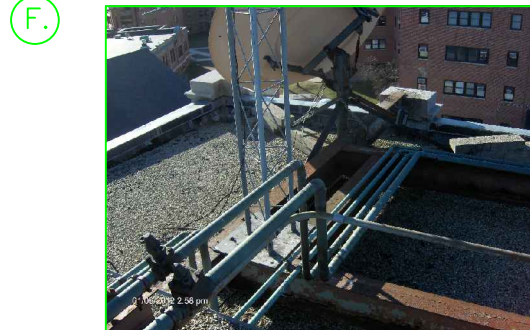

BUILDING 2 - REAR LOWER ROOF ADJACENT TO PARKING LOT

Demolition Notes

1. Antenna Tower, Wiring, Concrete Blocks and Satellite Dish to be removed and disposed of off station




BUILDING 2 – REAR LOWER ROOF LEFT SIDE

Demolition Notes


1. See General Note Number 4 – This Sheet.

General Notes


1. All dimensions are approximate; contractor shall verify all dimensions and exact locations before commencement of work.
2. Provide dust protection for demolition and construction in all areas of work in accordance with ICCP Permitting.
3. All work shall be completed in accordance with construction phasing as indicated in Phasing Notes, VA Scope of Work, VA Specifications and VA Drawings.
4. All existing "Bird Shields" to be removed, reallocated and/or replaced as needed.

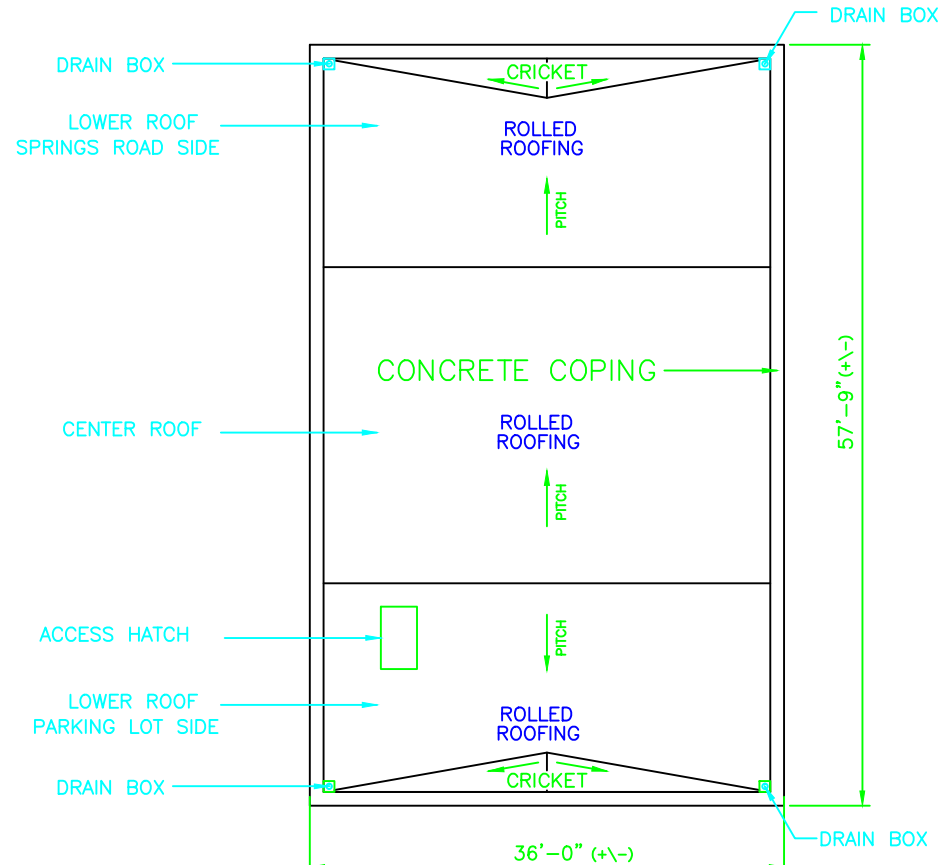

BUILDING 2 – HIGH ROOF PLAN
NOT TO SCALE

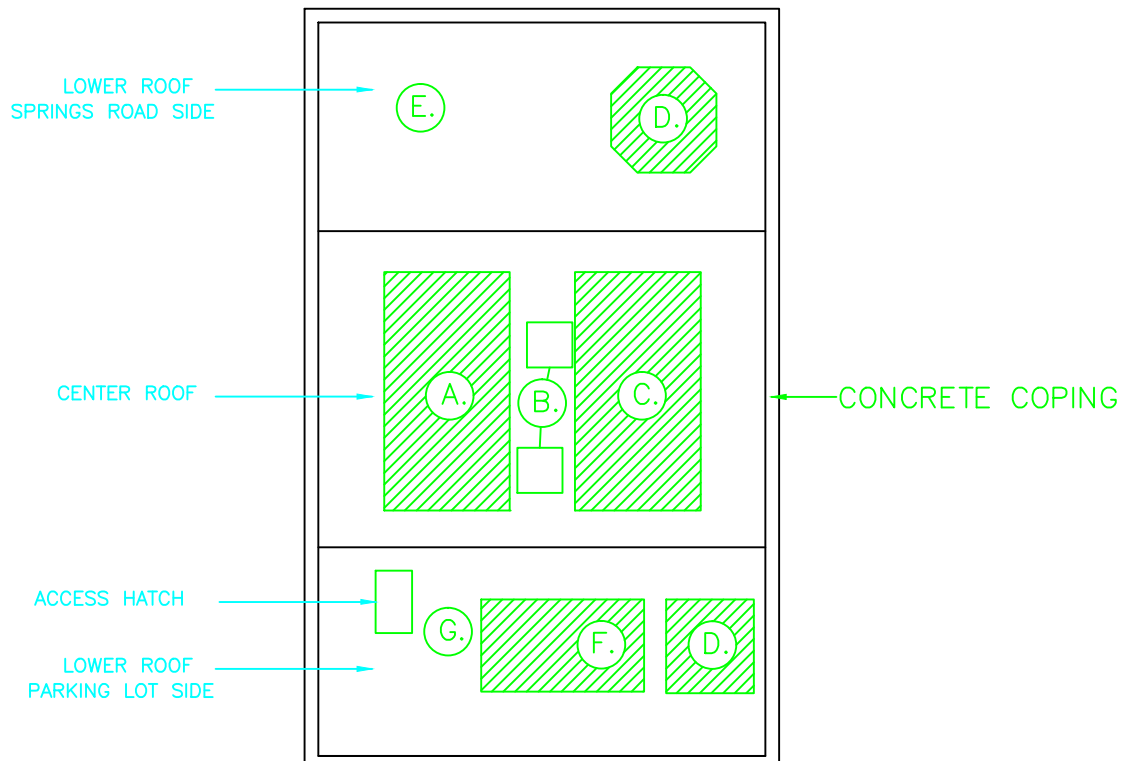

BUILDING 2 – HIGH ROOF PLAN
NOT TO SCALE

Revisions	Date		Professional Seal			Drawing Title	Project Title			Date		
						BUILDING 2 MEZZANINE ROOFING PLAN	REPLACE ROOFS			01/23/2012		
						Approved: Michael Reppucci—Project Mgr.	Building Number	Checked	Drawn	Project No.		
							2	MR	PL	518-11-025		
						Approved: Joshua Farber—Service Chief	Location: Edith Nourse Rogers Memorial Veterans Hospital 200 Springs Road Bedford, MA 01730			Drawing No.		
						4 OF 5						

