



BUILDING 16 FIRST FLOOR
1/8" = 1'-0"

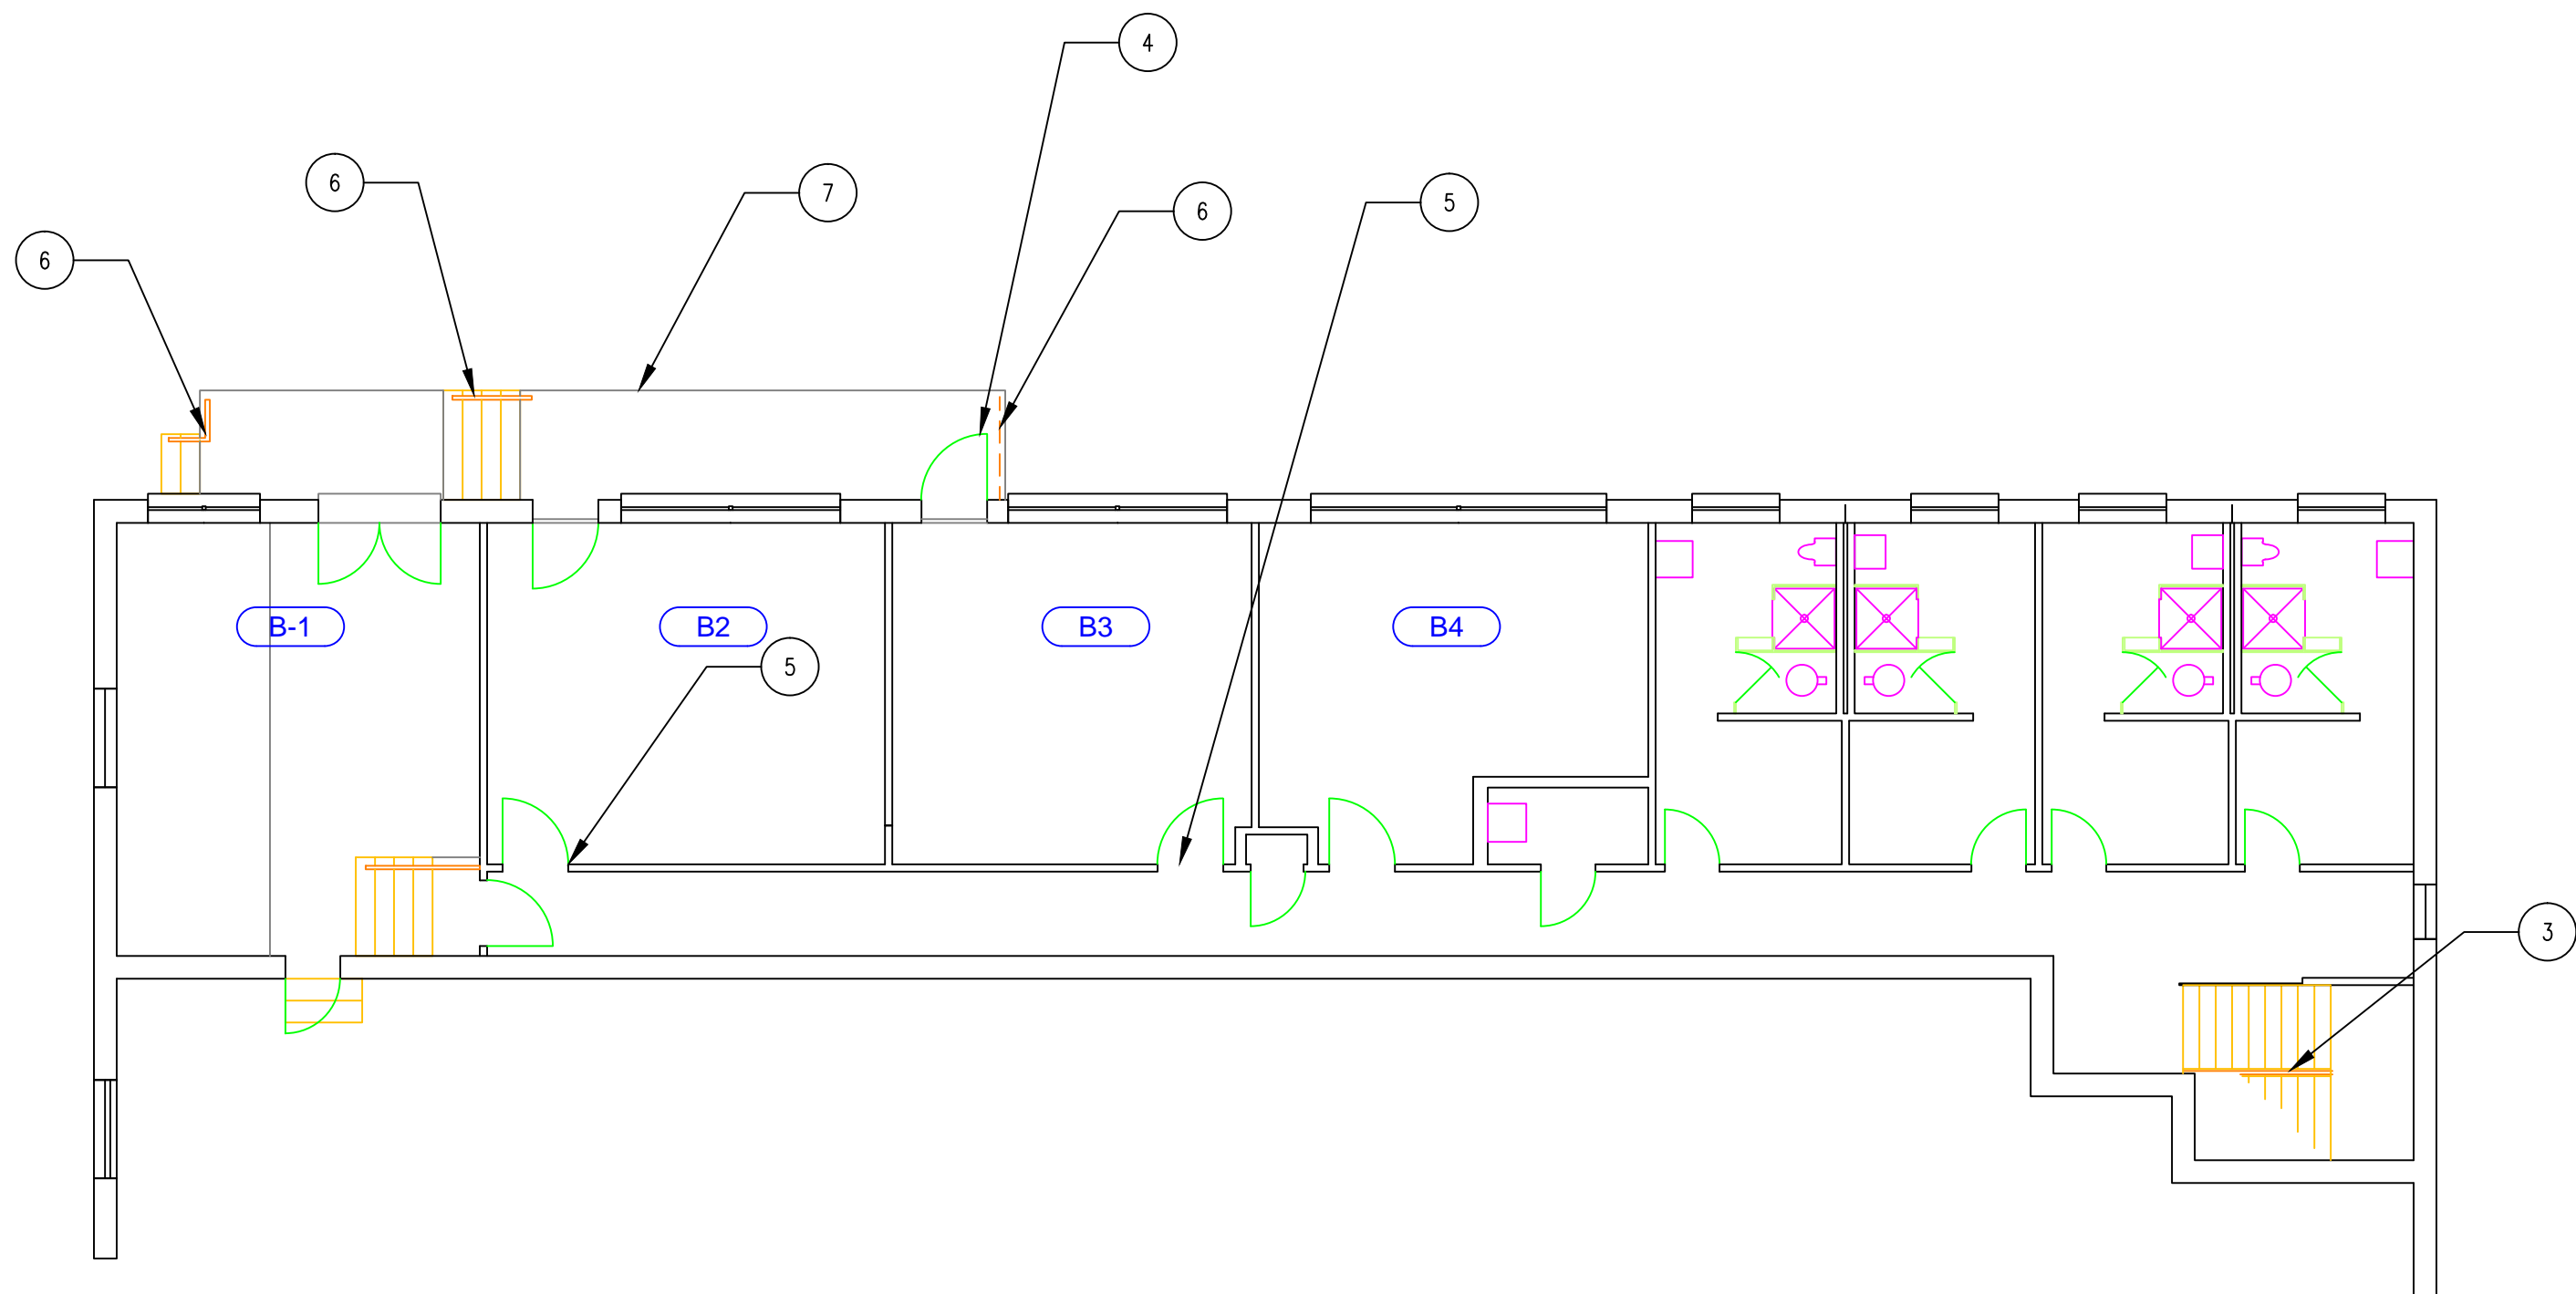


BUILDING 16 GROUND FLOOR
1/8" = 1'-0"

NOTES:


1. REMOVE EXISTING METAL 1 1/4" x 1 1/4" CORNER GUARDS FROM COLUMNS. THREE OF THE COLUMNS HAVE 4 METAL CORNER GUARDS AND ONE COLUMN HAS 6. THESE ARE OF VARIOUS LENGTHS. THESE CONTAIN LEAD PAINT AND SHOULD BE DISPOSED OFF STATION AS REQUIRED BY VA AND STATE REQUIREMENTS. INSTALL NEW METAL CORNER GUARDS EQUAL TO THE ONE REMOVED.
2. REMOVE EXISTING LEAD PAINTED LADDER MOUNTED ON WALL. INSTALL NEW LADDER WITH SAFETY CAGE. NEW LADDER TO MEET ALL REQUIREMENTS OF O.H.S.A. CODE 1910.27.
3. REMOVE EXISTING 2" DIAMETER LEAD PAINTED METAL HANDRAIL AND INSTALL NEW 1 1/2" Ø METAL HANDRAIL AS PER DETAIL ON THIS SHEET. INSTALL NEW HANDRAIL WITH FLANGE AND BOLT TO FLOOR AND WALLS WITH 4 - 3/8" X 3/8" X 2 1/2" S.S. BOLTS AND MECHANICAL FASTENERS. PAINT NEW HANDRAIL AS REQUIRED BY SPECIFICATIONS.
4. REMOVE EXISTING DOOR FRAME AND METAL DOOR AND DISPOSE OFF STATION. THESE ARE PAINTED WITH LEAD PAINT SO DISPOSE AS REQUIRED BY VA AND STATE REQUIREMENTS. INSTALL NEW METAL FRAME AND METAL DOOR WITH WIRE REINFORCED WINDOW (SEE DETAIL THIS SHEET). INSTALL ALL NEW HINGES, DOOR CLOSER AND REUSE EXISTING LOCKSET SALVAGED FROM DOOR.
5. REMOVE EXISTING DOORS AND FRAMES FROM ROOMS B2 AND B3 AND DISPOSE OFF STATION. THESE FRAMES HAVE LEAD PAINT AND ARE TO BE DISPOSED OFF STATION AS PER VA AND STATE REQUIREMENTS. INSTALL NEW METAL FRAME AND DOORS TO MATCH EXISTING. EACH NEW DOOR TO HAVE 18" x 18" LOVERED GRILL IN BOTTOM OF DOOR. INSTALL NEW HINGES AND REINSTALL EXISTING LOCKSET AND OTHER HARDWARE FROM EXISTING DOOR.
6. REMOVE EXISTING HANDRAILS THAT CONTAIN LEAD PAINT AND DISPOSE OFF VA PROPERTY AS PER VA AND STATE REQUIREMENTS INDICATE. INSTALL NEW 1 1/2" Ø METAL HANDRAIL EQUAL TO HEIGHT AND LENGTH OF EXISTING. PAINT NEW RAILS AS REQUIRED BY SPECS.
7. REMOVE EXISTING METAL DOCK BUMPERS. THIS METAL PIECE CONTAINS LEAD PAINT AND SHALL BE DISPOSED OFF STATION AS VA AND STATE REQUIREMENTS. PATCH EXISTING HOLES FROM REMOVED BUMPER GUARDS.
8. PAINT ALL INSIDE WALLS OF THE LAUNDRY AREA. THIS AREA IS INDICATED BY DASHED LINE ON PLAN.
9. INSTALL 6 MIL PLASTIC WALL FROM CEILING AROUND S.S. TABLE SO THE THE WORKERS CAN WORK IN THAT AREA DOING THEIR DAILY JOBS. THE VA EMPLOYEES WILL BE RELOCATED DURING THE ABATEMENT PHASE OF THE PROJECT.
10. THE CONTRACTOR TO TO PROVIDE PLASTIC COVERING FOR ALL ITEMS IN THE AREA DURING WORK.

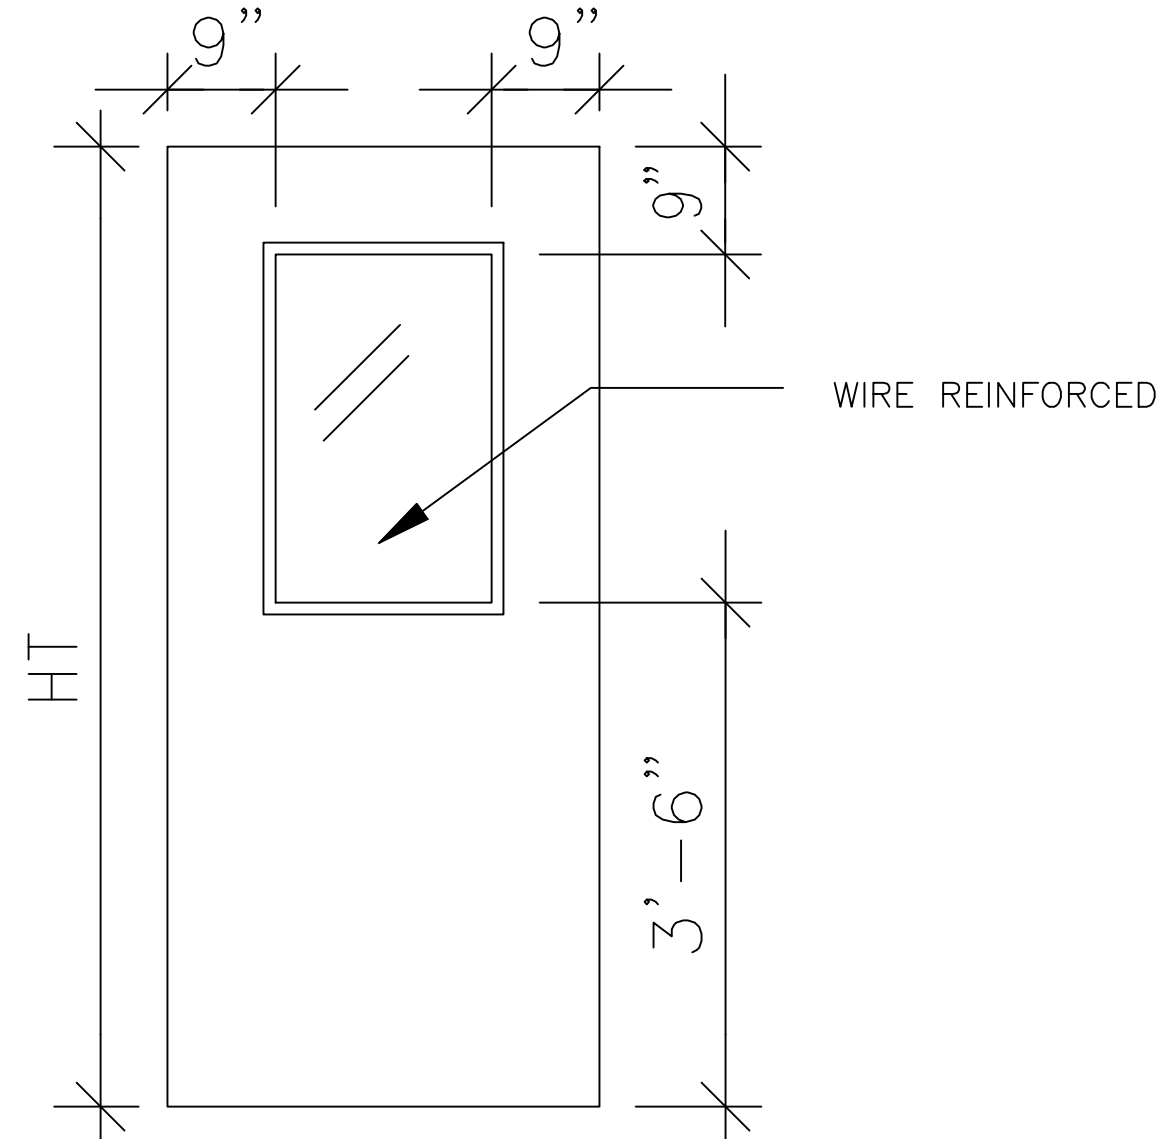

DETAIL OF EXTERIOR METAL DOOR
NTS

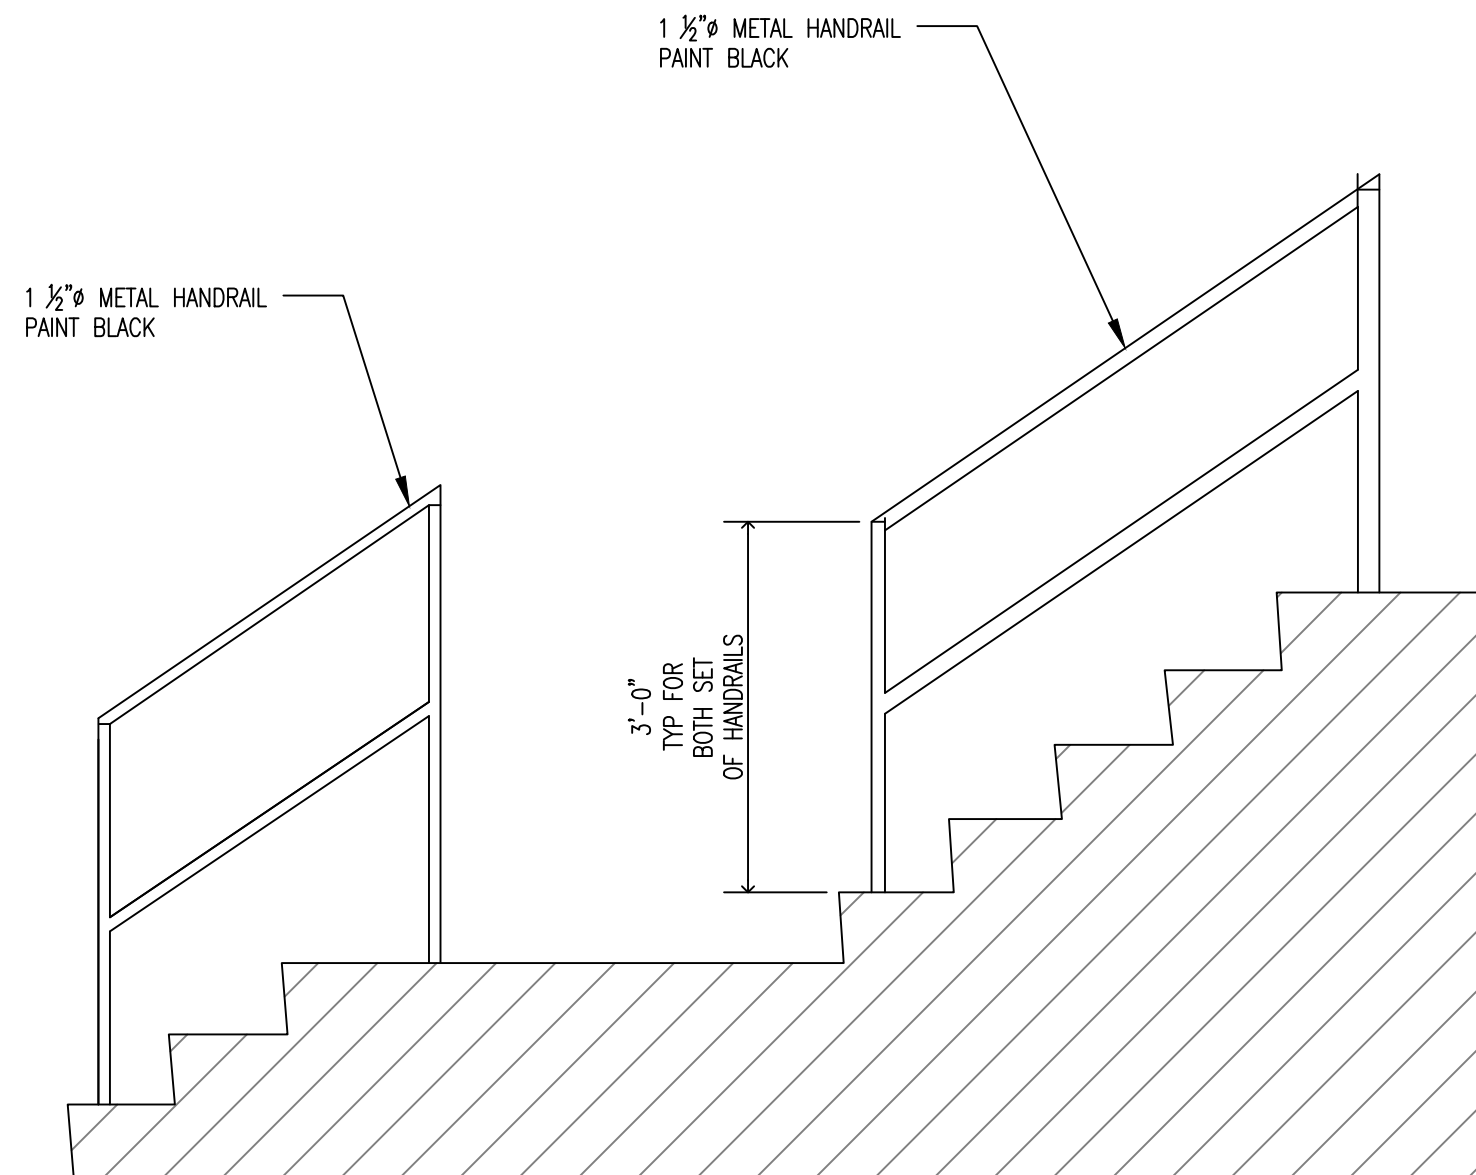

GROUND FLOOR DOCK HANDRAILS
NTS

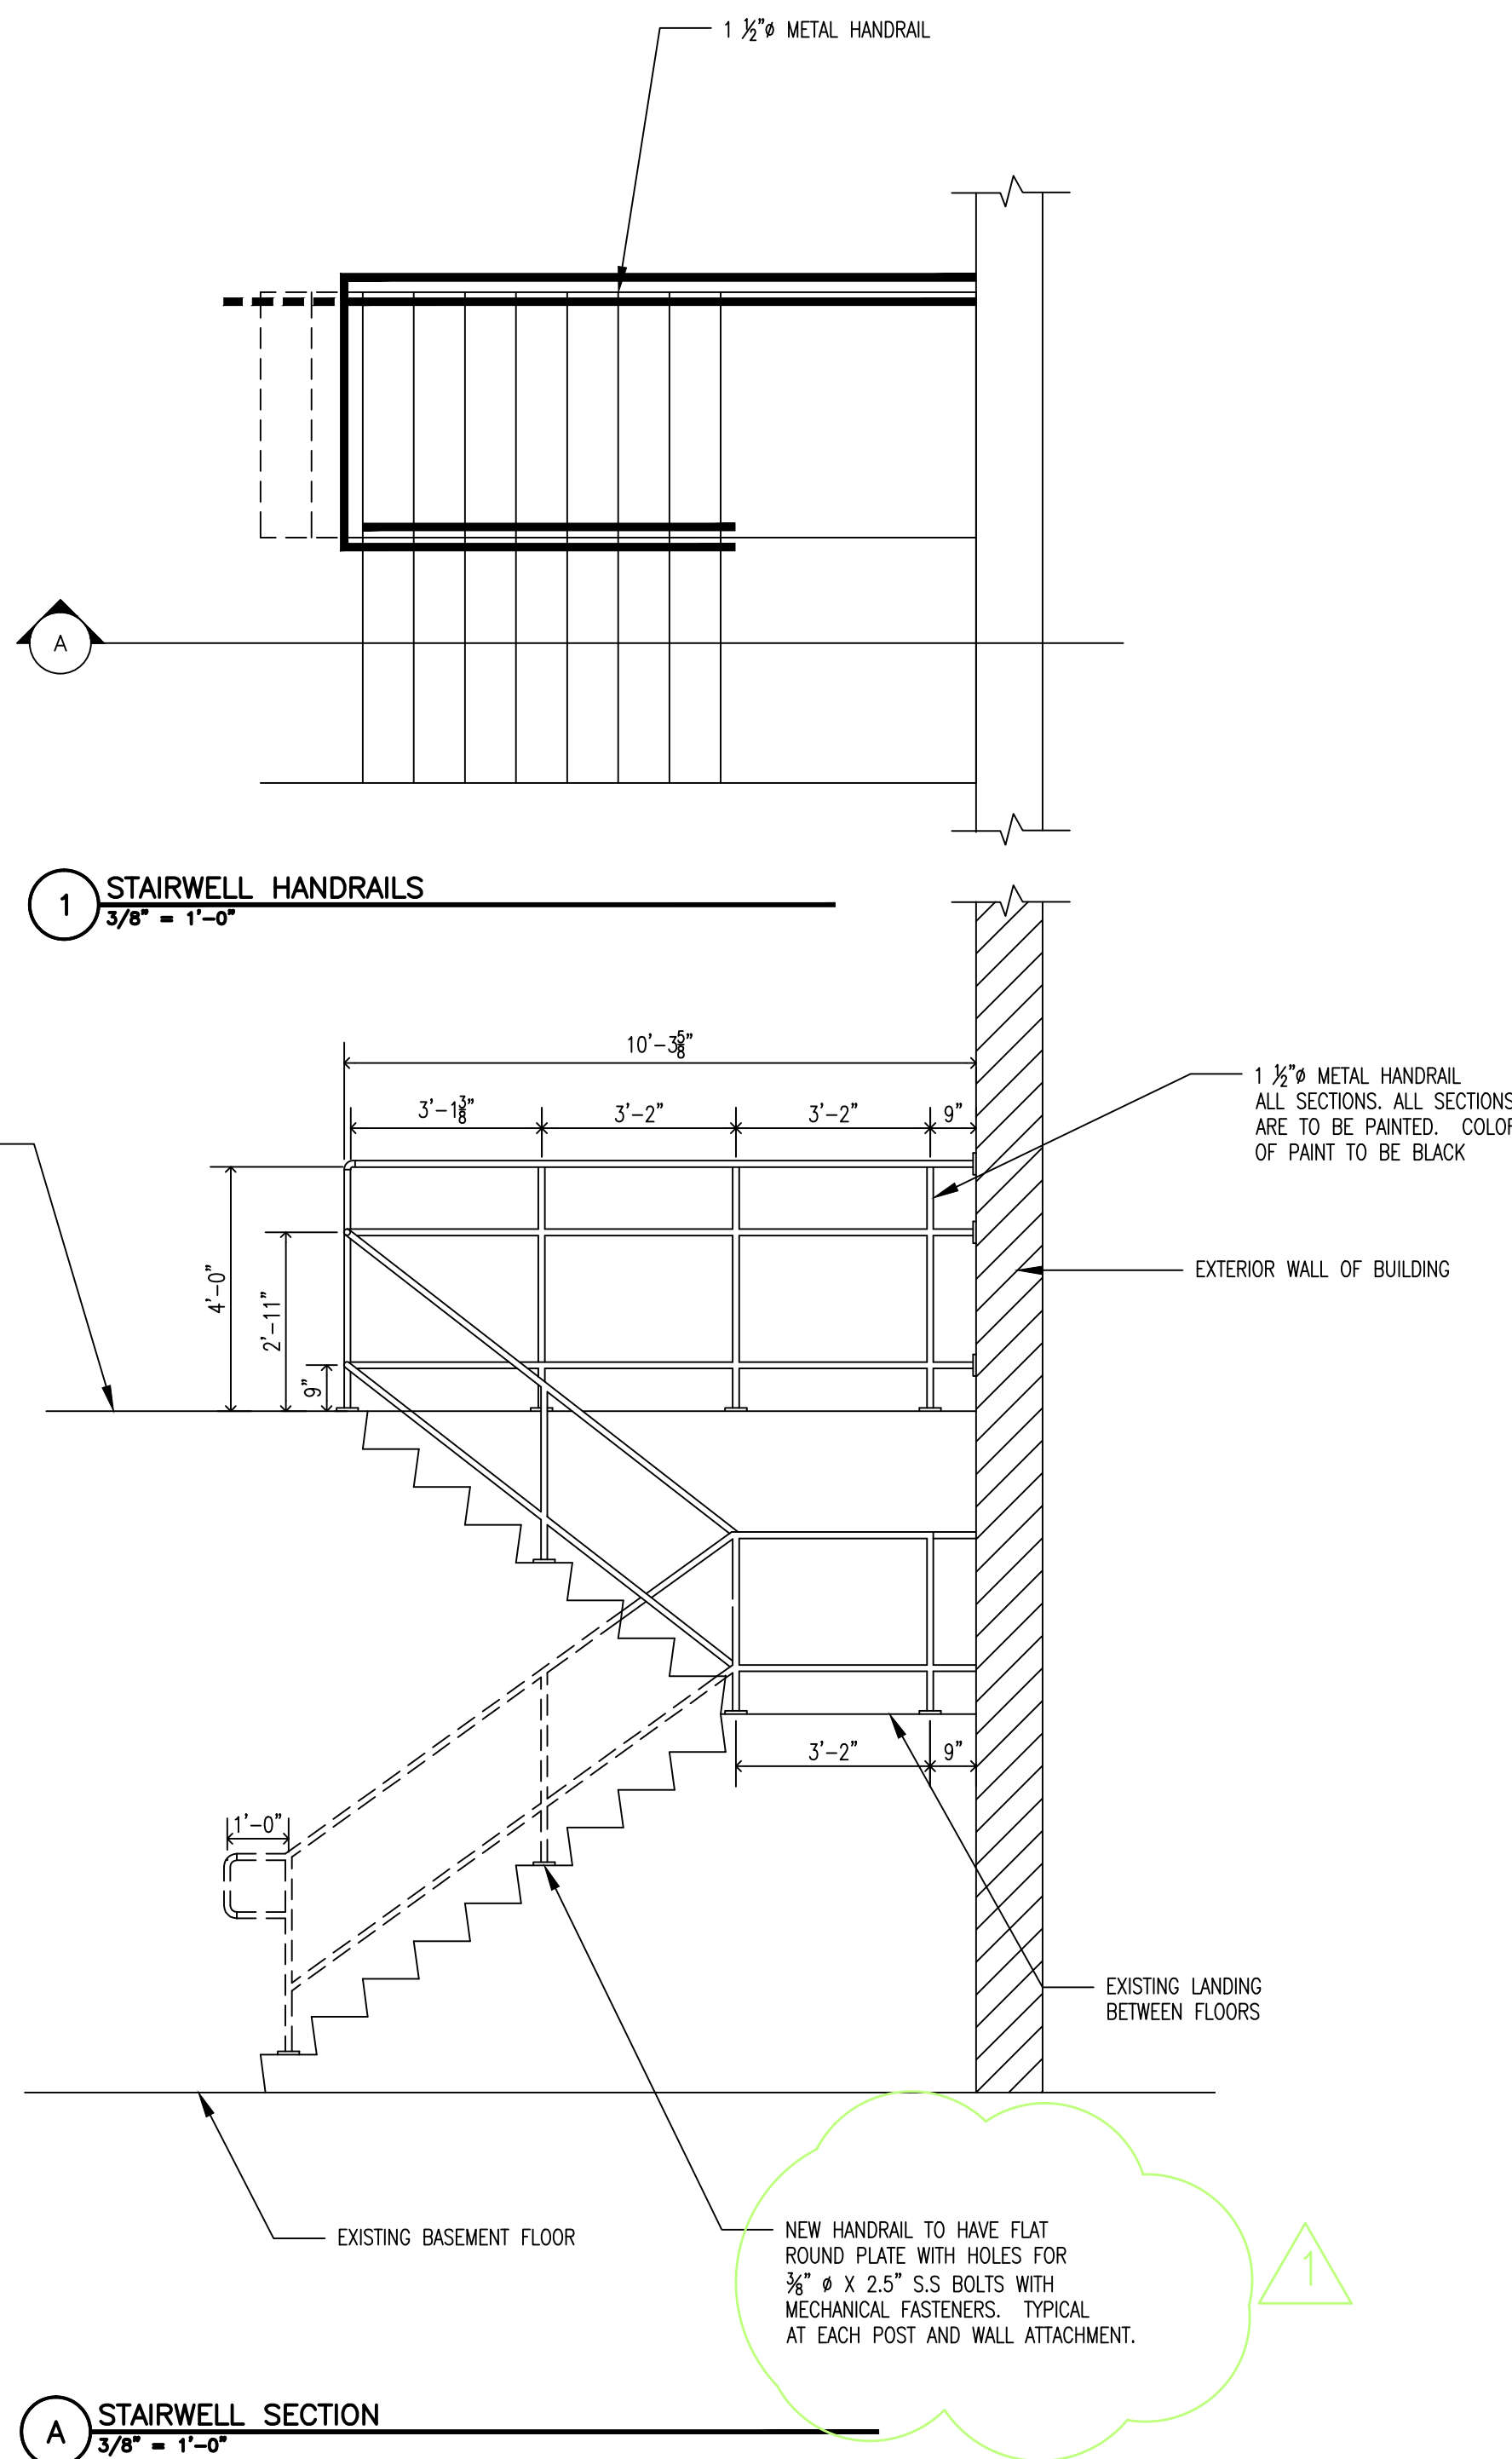

STAIRWELL SECTION
3/8" = 1'-0"



EXISTING STAIRWELL



EXISTING STAIRWELL



EXISTING STAIRWELL



EXISTING INTERIOR DOOR




EXISTING EXTERIOR DOOR



EXISTING EXTERIOR DOOR



EXISTING REAR HANDRAIL

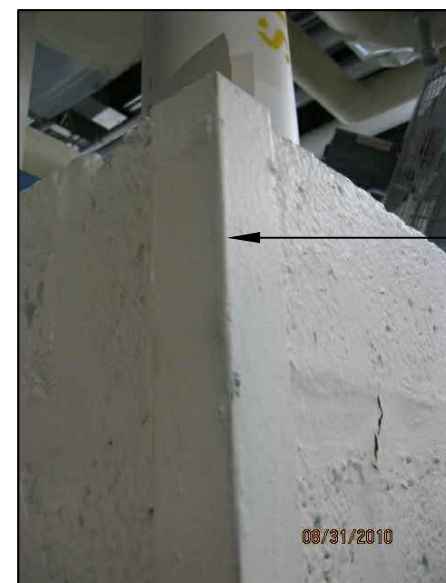

TYPICAL CORNER GUARD

GENERAL NOTES:

- CONTRACTOR TO REMOVE AND STORE ALL BUILDING MAINTENANCE SUPPLIES THAT ARE STORED ON SHELVES IN B16 1ST FLOOR. MOVE SHELVES THAT ARE LOCATED AROUND PERIMETER OF WALL IN THAT AREA SO THE WINDOWS CAN BE REMOVED AND INSTALLED. CONTRACTOR TO PROVIDE STORAGE TRAILERS FOR THE MATERIAL REMOVED AND STORED.
- NO WORK IS TO BE STARTED UNTIL ALL SUBMITTALS ARE RECEIVED AND APPROVED.

1. REVISED THE NOTE ON SHT 1 FROM STAIRS TO HANDRAIL
Revision Date

3-7-12
Date

RECOMMEND APPROVAL

REQUESTER	Date	CHIEF OF SERVICE	Date	CHIEF OF STAFF	Date
ASSOC. DIR. PATIENT CARE SVC.	Date	ASSOC. DIR. for OPERATIONS	Date		Date
APPROVAL BY:	Date				
MEDICAL CENTER DIRECTOR					

Drawing Title
PLAN, NOTES DETAILS FOR
HANDRAILS, LADDERS ETC...

Approved: Safety Manager/M&O Supervisor

Approved: Chief of Facilities Management Svr.

Project Title
HAZARDOUS MATERIAL
ABATEMENT B16 (FCA)

Building Number
BUILDING 16

Checked
GLM

Location
W.G.(BIII) Hefner Medical Center
1601 Brenner Ave.
Salisbury NC 28144

Date
7-22-2010

Project No.
659-11-229

DRAWING NO.

1R

DWG. 1 OF 7



Department of
Veterans Affairs