

AREAS SAMPLED JANUARY 2003  
NON-ASBESTOS-CONTAINING MATERIALS


12FT01	12'x12' TAN WITH BROWN FLOOR TILE AND MASTIC
12FT02	12'x12' WHITE WITH BLACK FLOOR TILE AND MASTIC
12FT03	12'x12' GRAY FLOOR TILE AND MASTIC
12FT04	12'x12' WHITE WITH GRAY FLOOR TILE AND MASTIC
12FT05	12'x12' GRAY WITH WHITE FLOOR TILE AND MASTIC
2SC01	2'x2' SMOOTH CEILING TILE
2SC02	2'x2' WORMHOLE/PINHOLE CEILING PANEL
PW01	PLASTER WALL
PC01	PLASTER CEILING
GW01	DRYWALL JOINT COMPOUND
V01	VIBRATION DAMPER
CB01	BLACK COVEBASE MASTIC
PI02	PIPE INSULATION
WC01	WINDOW CAULKING
SD01	SOIL INSULATION DEBRIS

SAMPLE IDENTIFICATION

9-WC01-EXTERIOR-01 NON-ASBESTOS-CONTAINING MATERIAL

Homogenous Area	Sample Number	Sample Description	Locations	Results
Crawlspace	7-16-C-01	Soil	Crawlspace	ND
	7-16-C-02	Soil	Crawlspace	ND
	7-16-C-03	Soil	Crawlspace	ND
Duct	28-16-I-01	Insulation and Wrap	RM 101 & 104	ND
	28-16-I-02		RM 101 & 104	30% CH-Insulation

BULK AND SOIL SAMPLE LOCATIONS  
BUILDING 16 - GROUND FLOOR AND 1ST FLOOR  
VA MEDICAL CENTER  
SALISBURY, NORTH CAROLINA

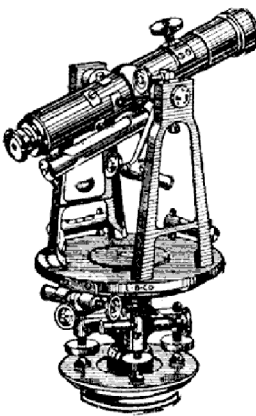

**HGS ENGINEERING, INC.**  
1121 NOBLE STREET  
ANNISTON, ALABAMA 36201