

Product Specifications

Refrigerated Self-Service Case 32"D



MODEL SHOWN: B4732



- | | |
|--------------------------------|--------------------------------|
| <input type="checkbox"/> B3632 | 36-5/8"L x 32-1/4"D x 82-1/4"H |
| <input type="checkbox"/> B4732 | 47-5/8"L x 32-1/4"D x 82-1/4"H |
| <input type="checkbox"/> B5932 | 59-5/8"L x 32-1/4"D x 82-1/4"H |
| <input type="checkbox"/> B7132 | 71-5/8"L x 32-1/4"D x 82-1/4"H |
| <input type="checkbox"/> B8832 | 88-3/8"L x 32-1/4"D x 82-1/4"H |

Lengths include end panels

STANDARD FEATURES

- Breeze~E (Type-II) w/ EnergyWise s/c refrigeration
- Compressor air lower front intake and upper front discharge.
Front panel cannot be blocked
- Condensate pan (self-contained refrig. only)
- Flat upper front panel & header
- Integrated average product temperature of 40°F or less
- One year parts & labor; 5 year compressor warranty
- Removable deck pans provide complete access to evaporator coil & refrigeration connections
- Shelving removable and adjustable on 1" centers
- Solid back panel, black
- T-8 top light


Features	Standard	Options
EXTERIOR COLOR	<input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction	<input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction <input type="checkbox"/> Stainless steel (includes lower front panel)
INTERIOR COLOR	<input type="checkbox"/> Black	<input type="checkbox"/> Stainless steel
LWR LOUVERED FRNT PANEL COLOR	<input type="checkbox"/> Painted - Black	<input type="checkbox"/> Stainless steel (w/stainless ext. only)
BASE	<input type="checkbox"/> Casters (n/a with remote)	<input type="checkbox"/> Levelers <input type="checkbox"/> Seismic levelers (Q4695)
END PANEL LEFT	<input type="checkbox"/> Full end panel w/mirror interior (metal edge matches interior color)	<input type="checkbox"/> Cutaway ends with vinyl edging (vinyl matches interior color) <input type="checkbox"/> No end panel (for same case to case connect)
END PANEL RIGHT	<input type="checkbox"/> Full end panel w/mirror interior (metal edge matches interior color)	<input type="checkbox"/> Case to case acrylic end (not required w/ sync defrost cycles) <input type="checkbox"/> Cutaway ends with vinyl edging (vinyl matches interior color) <input type="checkbox"/> No end panel (for same case to case connect) (requires sync defrost cycles)
SHELVING	<input type="checkbox"/> Metal shelves, non-lighted	<input type="checkbox"/> Metal shelves, lighted (LED 4200K) <input type="checkbox"/> Metal shelves, lighted (T-8)
ELECTRICAL CONNECT	<input type="checkbox"/> 6' power cord (base exit)	<input type="checkbox"/> 6' power cord (top exit)
REFRIGERATION	<input type="checkbox"/> Breeze~E (Type-II) w/ EnergyWise s/c refrigeration	<input type="checkbox"/> Breeze~E (Type-II) w/ EnergyWise s/c refrigeration (w/ floor drain) <input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd. <input type="checkbox"/> 1 Remote w/thermostat, solenoid & TXV
MISCELLANEOUS		<input type="checkbox"/> Roll-down security cover, locking (Requires two end panels (full or cutaway) per case) <input type="checkbox"/> Second year parts & labor warranty (excludes compressor) <input type="checkbox"/> Synchronized defrost cycles (w/ connect of same case models w/o case to case acrylic panel)
ACCESSORIES		<input type="checkbox"/> Clean Sweep® coil cleaner (n/a w/remote) <input type="checkbox"/> Night curtain, retractable, non-locking <input type="checkbox"/> Price tag moulding (matches interior color)

Option Notes: 1 - See tech spec for remote load reqmts


Product Specifications

Intended Environment: Type II - Designed to operate in ambient conditions of 80°F and 60% relative humidity unless noted otherwise in system information below.		
Zone	Intended Product To Be Displayed	Integrated Prod Temp ° F
All	Packaged refrigerated products	40

PLAN VIEW

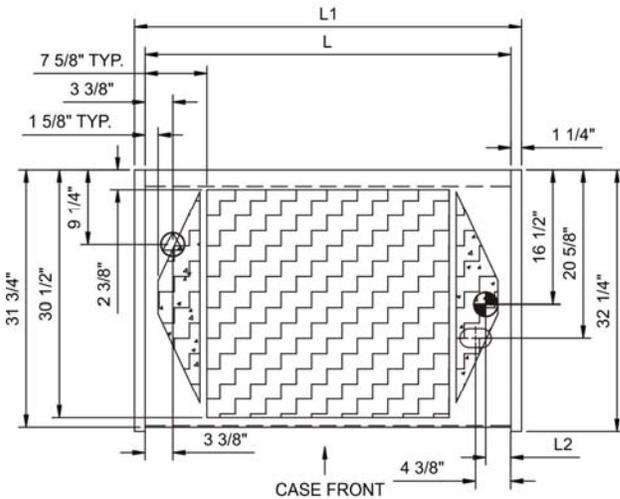

SIDE VIEW

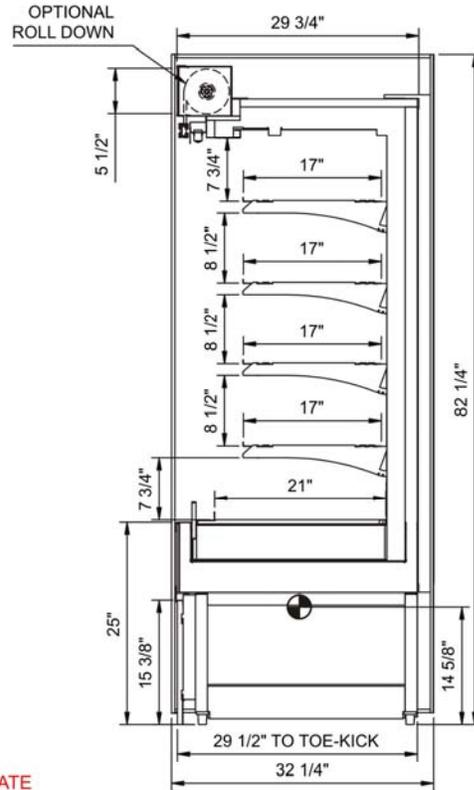

NOTE: ALL DIMENSIONS APPROXIMATE

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- REFRIGERATION LINE CONNECTION.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 1/2\"/>
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

Model Technical Specifications															
Model	L"	L1"	L2"	System Circuit Volts		Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	BTUH	Ship Wt	
B3632	N/A	36.63	3.13	Remote(Type I)	Circuit #1	110-120	1	60	1.13	99	2+G	Leads Multiple	20.00	4100	950
				Remote(Type II)	Circuit #1	110-120	1	60	1.13	99	2+G	Leads Multiple	20.00	5000	
				Self-Contained	Circuit #1	110-120	1	60	16.00	1,463	N/A	5-20P or L5-20P	N/A	N/A	
B4732	N/A	47.63	3.13	Remote(Type I)	Circuit #1	110-120	1	60	1.47	139	2+G	Leads Multiple	20.00	5650	1,150
				Remote(Type II)	Circuit #1	110-120	1	60	1.47	139	2+G	Leads Multiple	20.00	6850	
				Self-Contained	Circuit #1	208-240	1	60	10.16	1,908	2+G	6-20P or L6-20P	N/A	N/A	
B5932	N/A	59.63	3.13	Remote(Type I)	Circuit #1	110-120	1	60	2.12	188	2+G	Leads Multiple	20.00	6650	1,250
				Remote(Type II)	Circuit #1	110-120	1	60	2.12	188	2+G	Leads Multiple	20.00	8150	
				Self-Contained	Circuit #1	208-240	1	60	11.90	2,286	2+G	6-20P or L6-20P	N/A	N/A	
B7132	N/A	71.63	3.13	Remote(Type I)	Circuit #1	110-120	1	60	2.36	238	2+G	Leads Multiple	20.00	8150	1,350
				Remote(Type II)	Circuit #1	110-120	1	60	2.36	238	2+G	Leads Multiple	20.00	9975	
				Self-Contained	Circuit #1	208-240	1	60	16.00	1,263	2+G	6-20P or L6-20P	N/A	N/A	
B8832	N/A	88.38	3.13	Remote(Type I)	Circuit #1	110-120	1	60	3.13	306	2+G	Leads Multiple	20.00	12275	1,550
				Remote(Type II)	Circuit #1	110-120	1	60	3.13	306	2+G	Leads Multiple	20.00	15100	
				Self-Contained	Circuit #1	208-240	1	60	20.38	3,083	2+G	6-30P or L6-30P	N/A	N/A	

*** Does not include electric defrost on freezer models.

Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) End panels must be tightly joined or kept at least 6" away from any structure to prevent condensation.
- 5) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).
- 6) Tile floors, low ceilings, or small rooms will increase noise level.

Regulatory Approvals:	
All Models	Accordance with AHRI Std 1200 ETL Listed to UL 471 ETL Listed to CAN/CSA 22.2 No. 120 ETL Sanitation to NSF 7

