

RENOVATE 432 B & C, B-76 FOR EXAM ROOM

PROJECT NO. 528A6-12-619SL

V.A. MEDICAL CENTER
BATH, NEW YORK 14810


LIST OF DRAWINGS

DRAWING NO.	SYMBOL	SHEET	TITLE
VAMC-528A6-1734	T-1	1 OF 3	COVER SHEET
VAMC-528A6-1734	A-1	2 OF 3	PARTIAL FLOOR PLAN, DETAILS AND NOTES
VAMC-528A6-1734	A-2	2 OF 3	SECTIONS, DETAILS AND NOTES


ABBREVIATIONS AND SYMBOLS

AB	ANCHOR BOLT	EA	EACH	MAT	MATERIAL	T	TOILET
AC	AIR CONDITIONING	EL	ELEVATION	MAX	MAXIMUM	T/	TOP OF
ACT	ACOUSTICAL CEILING TILE	ELEC	ELECTRIC	MECH	MECHANICAL	TH	THICK/ THICKNESS
ADDL	ADDITIONAL	ELEV	ELEVATION	MFGR	MANUFACTURER	T&G	TONGUE & GROOVE
ADJ	ADJUSTABLE	EQ	EQUAL	MH	MAN HOLE	TOP	TOP OF FOOTING
APP	ABOVE FINISH FLOOR	EW	EACH WAY	MIN.	MINIMUM	TOS	TOP OF STEEL
ALT	ALTERNATE	EXT	EXTERIOR	MO	MASONRY OPENING	TOW	TOP OF WALL
AL	ALUMINUM	EXG	EXISTING	MTL	METAL	TYP	TYPICAL
ARCH	ARCHITECTURAL			NIC	NOT IN CONTRACT	UNO	UNLESS NOTED OTHERWISE
ASPH	ASPHALT			NTS	NOT TO SCALE		
BD	BOTTOM of	PBGL	FIBERGLASS				
BD	BOARD	FD	FLOOR DRAIN				
BL	BUILDING LINE	PFE	FINISH FLOOR ELEVATION				
BLDG	BUILDING	FIN	FIN	OC	ON CENTER	VB	VAPOR BARRIER
BLK	BLOCK	FLR	FLOOR	OHD	OVERHEAD DOOR	VCT	VINYL COMPOSITION TILE
BLKG	BLOCKING	FT	FOOTING	OPNG	OPENING	VERT	VERTICAL
BP	BEARING PLATE	FR	FAMILY ROOM	PL	PLATE		
BR	BEDROOM	FTG	FOOTING	PSF	POUNDS PER SQUARE FOOT	W	WIDE/ WIDTH
BSMT	BASEMENT			PSI	POUNDS PER SQUARE INCH	WI	WITH
BTWN	BETWEEN	GC	GENERAL CONTRACTOR	PT (D)	PAINT (ED)	WC	WATER CLOSET
BRG	BEARING	GL	GLASS	PWD	PLYWOOD	WD	WOOD
		GWB	GYPSUM WALL BOARD	RA	RETURN AIR	WIND	WINDOW
		GP	GYPSUM	RD	ROOF DRAIN	WWM	WELDED WIRE MESH
CB	CATCH BASIN			REF	REFERENCE		EXISTING WALLS
CC	CENTER TO CENTER	H	HIGH	REINF	REINFORCING		NEW PARTITIONS
CDM	CEMENT	HC	HOLLOW CORE	REQD	REQUIRED		ITEMS TO BE DEMOLISHED
CJ	CONSTRUCTION JOINT or CONTROL JOINT	HDR	HEADER	RH	RIGHT HAND		
CLG	CEILING	HDW	HARDWARE	RM	ROOM		
CMU	CONCRETE MASONRY UNIT	HGT	HEIGHT	RO	ROUGH OPENING		
COL	COLUMN	HM	HOLLOW METAL	RS	ROUGH SAWN		
COMP	COMPACTED	H.P.	HIGH POINT	SC	SOLID CORE		
CONC	CONCRETE	HR	HORIZONTAL	SCWD	SOLID CORE WOOD DOOR		
CONST	CONSTRUCTION	H.R.	HANDRAIL	SD	SMOKE DETECTOR		
COORD	COORDINATE	HW	HOT WATER	SF	SQUARE FEET		
CPT	CARPET	INS	INSULATION	SFLR	SUB-FLOOR		
CKS	COURSE	INT	INTERIOR	SIM	SIMILAR		
CT	CERAMIC TILE	SL	SLOPE	SOG	SLOPE ON-GRADE		
		JAN.	JANITORIAL	SPEC	SPECIFICATIONS		
		JST	JOIST	STL	STEEL		
		JT	JOINT	STR	STRUCTURAL		
		K	KITCHEN	SV	SHEET VINYL FLOORING		
		LF	LINEAR FEET				
		LH	LEFT HAND				
		LJC	LOCATION				
		LVL	LAMINATED VENEER LUMBER				


DETAIL MARKER

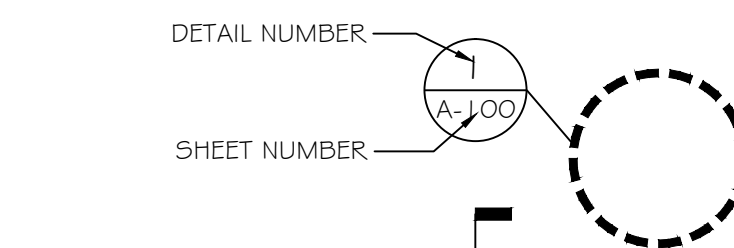


SECTION MARKER

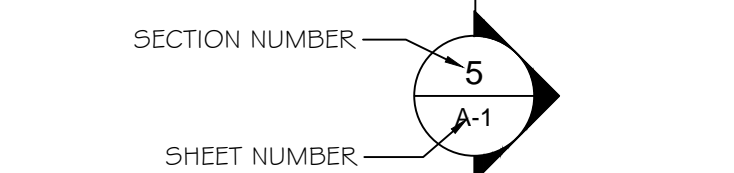


BUILDING SECTION MARKER

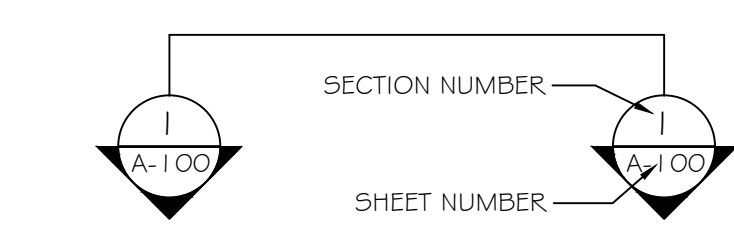


INTERIOR ELEVATION MARKER

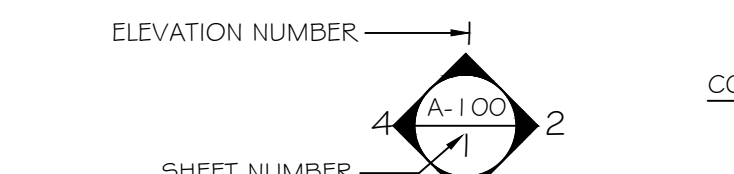



WINDOW AND LOUVER TAG

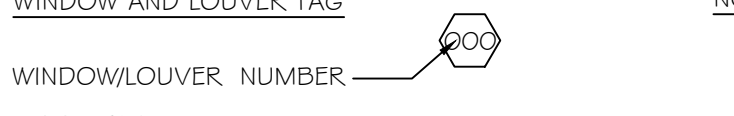

DOOR NUMBER

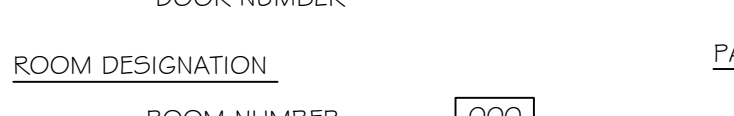


ROOM DESIGNATION

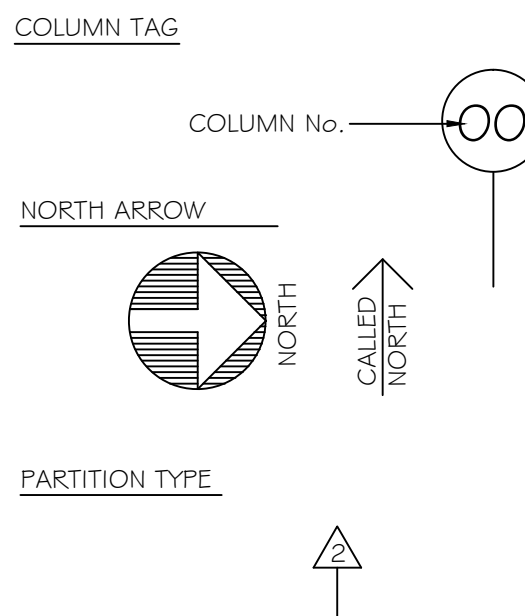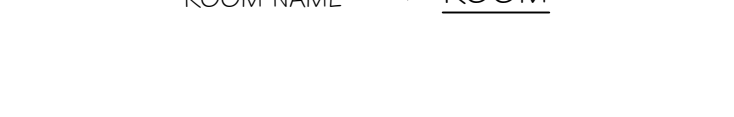

BUILDING SCHEDULE

3	EQUIPMENT STORAGE
4	LUMBER SHED
5	ENGINEERING STORAGE
6	STUDENT HOUSING
7	ENGINEERING OFFICE
8	DAY TREATMENT CENTER
9	FIRE DEPARTMENT & GARAGE
10	GARAGES, VEH. REPAIR, MASONRY STORAGE
11	CARPENTER SHOP
12	LAUNDRY/PRINT SHOP/SHIP
13	VOLUNTEER SERVICES
14	SEWER - PUMP HOUSE
15	MAIN DINING ROOM & KITCHEN & POST OFFICE
16	LYPHOSTERY SHOP/MUSEUM
17	SECTION 4 - ADMINISTRATION
18	BOLLE PLANT
19	GERIATRIC OFFICES & HOME BASED SOCIAL WORK
20	SECTION 5 - IT
21	SECTION 6 - CATERING/ADMINISTRATION
22	VIS. RET. WAITING OFFICE/CHAIRMAN SERVICE OFFICE
23	MAIN CHAPEL
24	HUMAN RESOURCES, CONTRACTING
25	HONOUR GUARD
26	POLICE
27	QUARTERS
28	QUARTERS
29	THREE CAR GARAGE
30	QUARTERS
31	QUARTERS
32	THREE CAR GARAGE
33	ENGINEERING SHOPS & STORAGE-PAINT, ELEC. & PLUMB.
34	HOSPITAL
35	SECTION 2 - CLC
36	BRIDGE
37	UNDERGROUND RESERVOIR
38	COMPENSATED WORK THERAPY
39	INCINERATOR - NOT USED
40	SEWAGE TREATMENT PLANT - NOT USED
41	RECREATION & LIBRARY
42	FIELD HOUSE - FLAG POLE
43	PARADE GROUND - FLAG POLE
44	BLEACHERS - EAST
45	BLEACHERS - NORTH
46	COVERED PICNIC AREA
47	SMOKE WAREHOUSE
48	SECTION 1 - DOMICILIARY
49	CATERING BAY
50	HEAVY EQUIPMENT STORAGE
51	BMC STORAGE BUILDING
52	RAISED PLATFORM
53	GAZEO
54	METER HOUSE
55	GAZE HOUSE
56	GREEN HOUSE
57	INBOUND YARD
58	FIELD HOUSE STORAGE
59	REPAIR HSE. STORAGE
60	ANNEX PLATFORM
61	SMOKING SHELTER (B24)
62	SMOKING SHELTER (B35)
63	SMOKING SHELTER (B60)
64	NATIONAL CEMETERY SERVICE

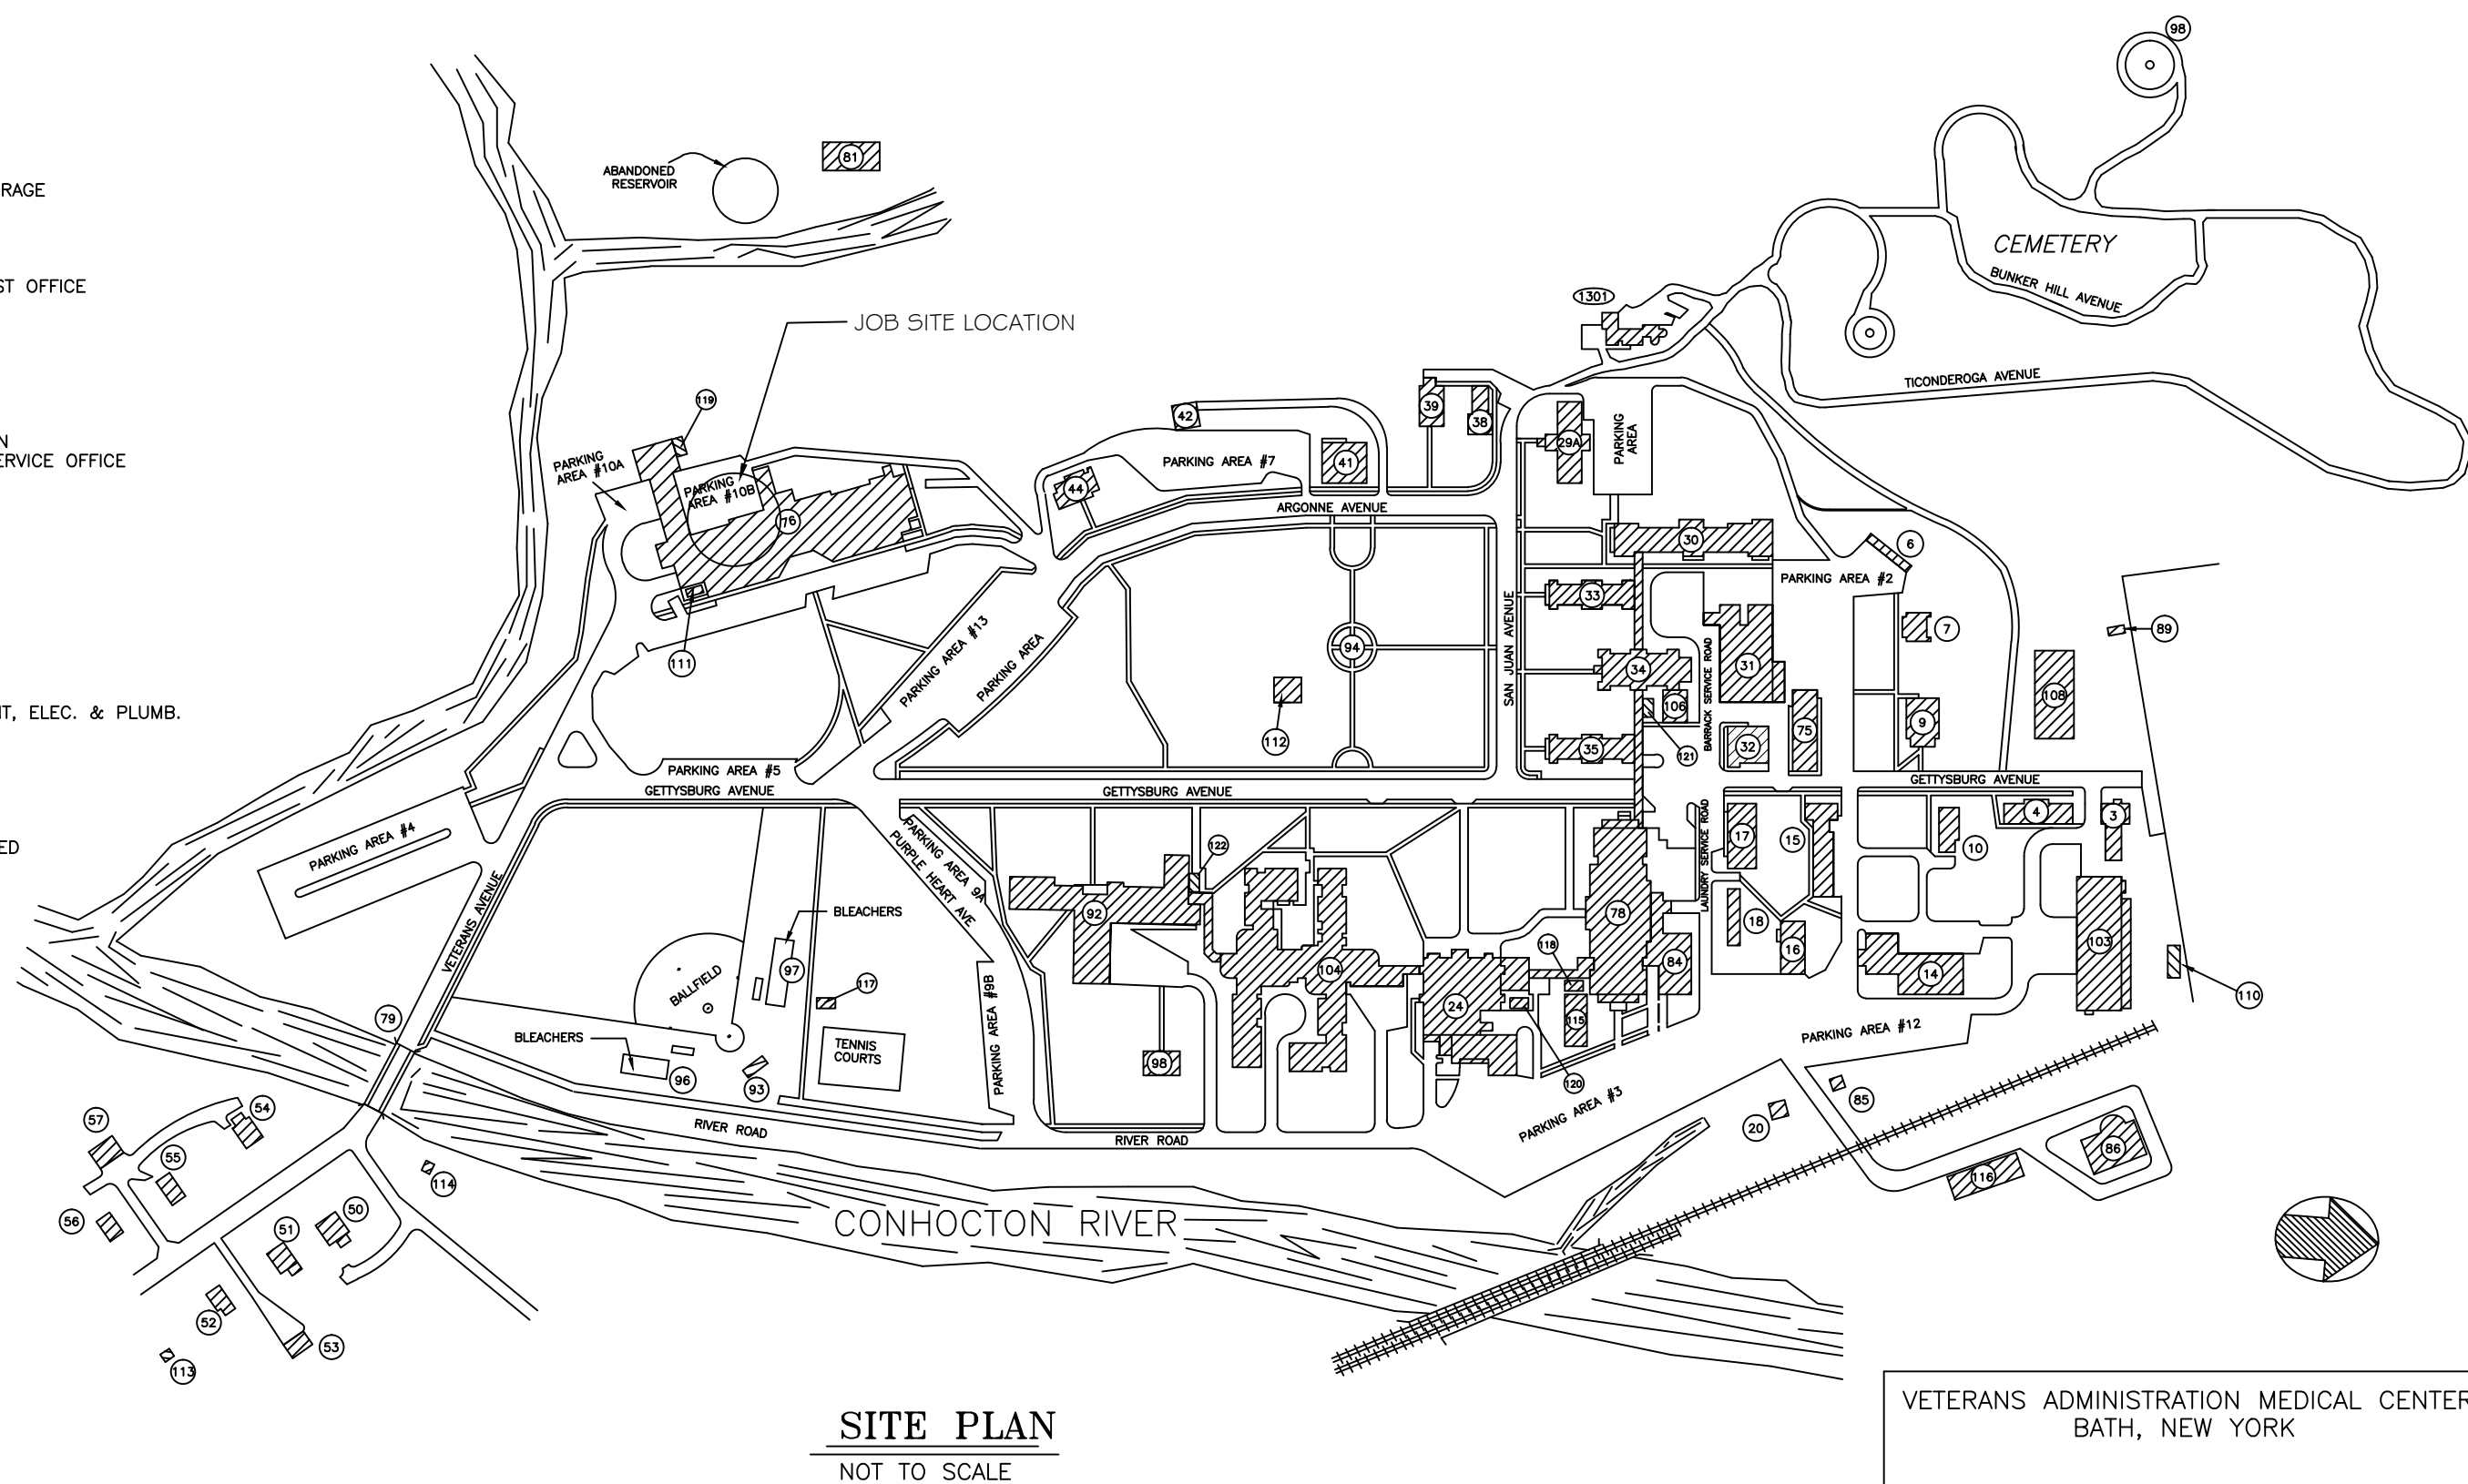


SITE PLAN

NOT TO SCALE

VETERANS ADMINISTRATION MEDICAL CENTER
BATH, NEW YORK


STATION PLOT PLAN

Revisions	Date			ALL WORK TO BE IN ACCORDANCE WITH N.F.P.A., NATIONAL, STATE AND CITY CODES & O.S.H.A.	Approved: A.F.G.E. Date	Approved: Fire Chief Date	Approved: Energy Engineer Date	Drawing Title COVER SHEET	Project Title RENOVATE 432 B & C, B-76 FOR EXAM ROOM	Date 02-14-12	Project No. 528A6-12-619SL	Drawing No. 76	Checked JAY	Drawn SDP	Location BATH, NEW YORK	Dwg. 1 Of 3	A.V.
				Approved: Logistics Manager. Date	Approved: Interior Designer Date	Approved: Safety Officer Date	Approved: M&R Foreman Date										
				Approved: Infection Control Mgr. Date	Approved: Info. Sys. Date	Approved: GEMS Coordinator Date	Approved: Women's Health Mgr Date										
				Approved: Chief Security Date	Approved: Associate Director Date	Approved: Careline Manager Date	Approved: Date										

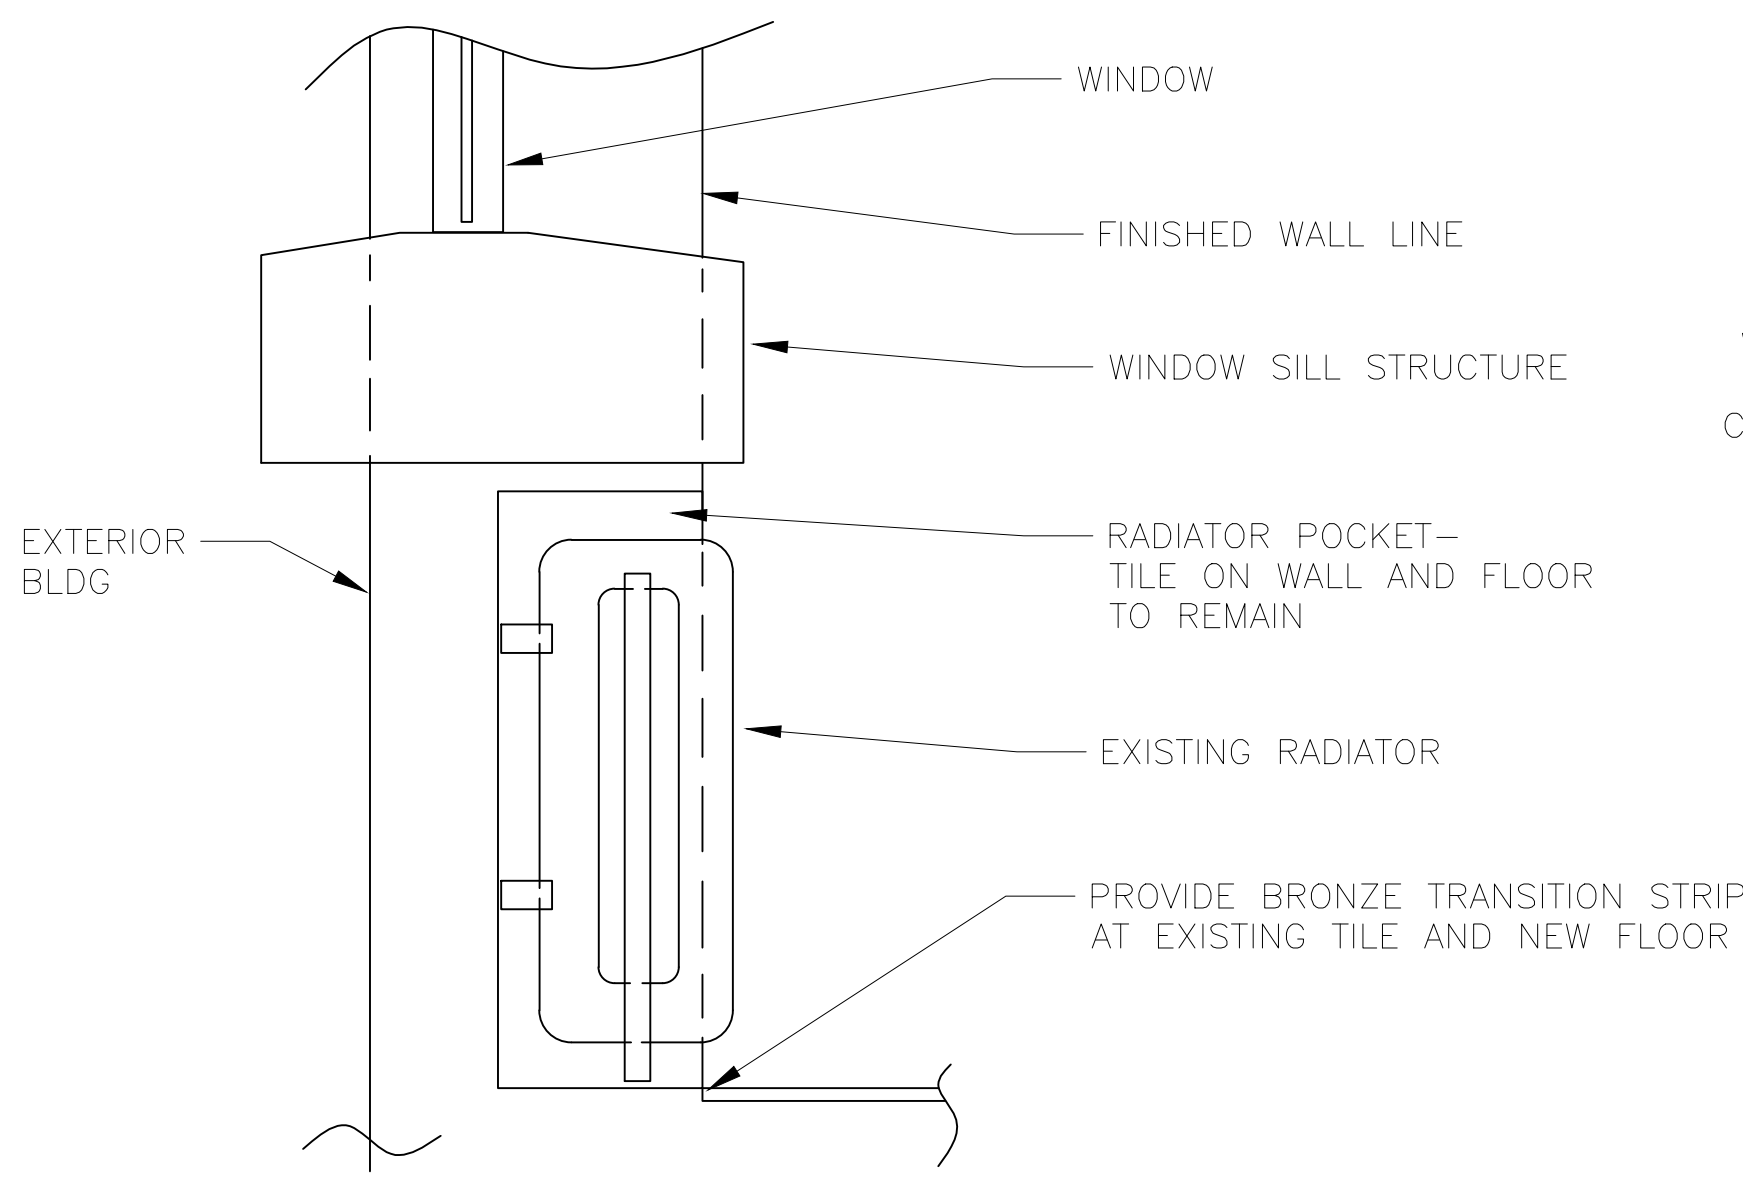

5 WALL DETAIL
A2 SCALE: NTS

- DETAIL NOTES:
- DO NOT REMOVE THE TILE WITHIN RADIATOR POCKET. REMOVE MOSAIC FLOOR TILE TO EVEN FINISHED WALL.
 - PROVIDE BRONZE TRANSITION STRIP AT EDGE AT EXISTING TILE AND NEW FLOOR.

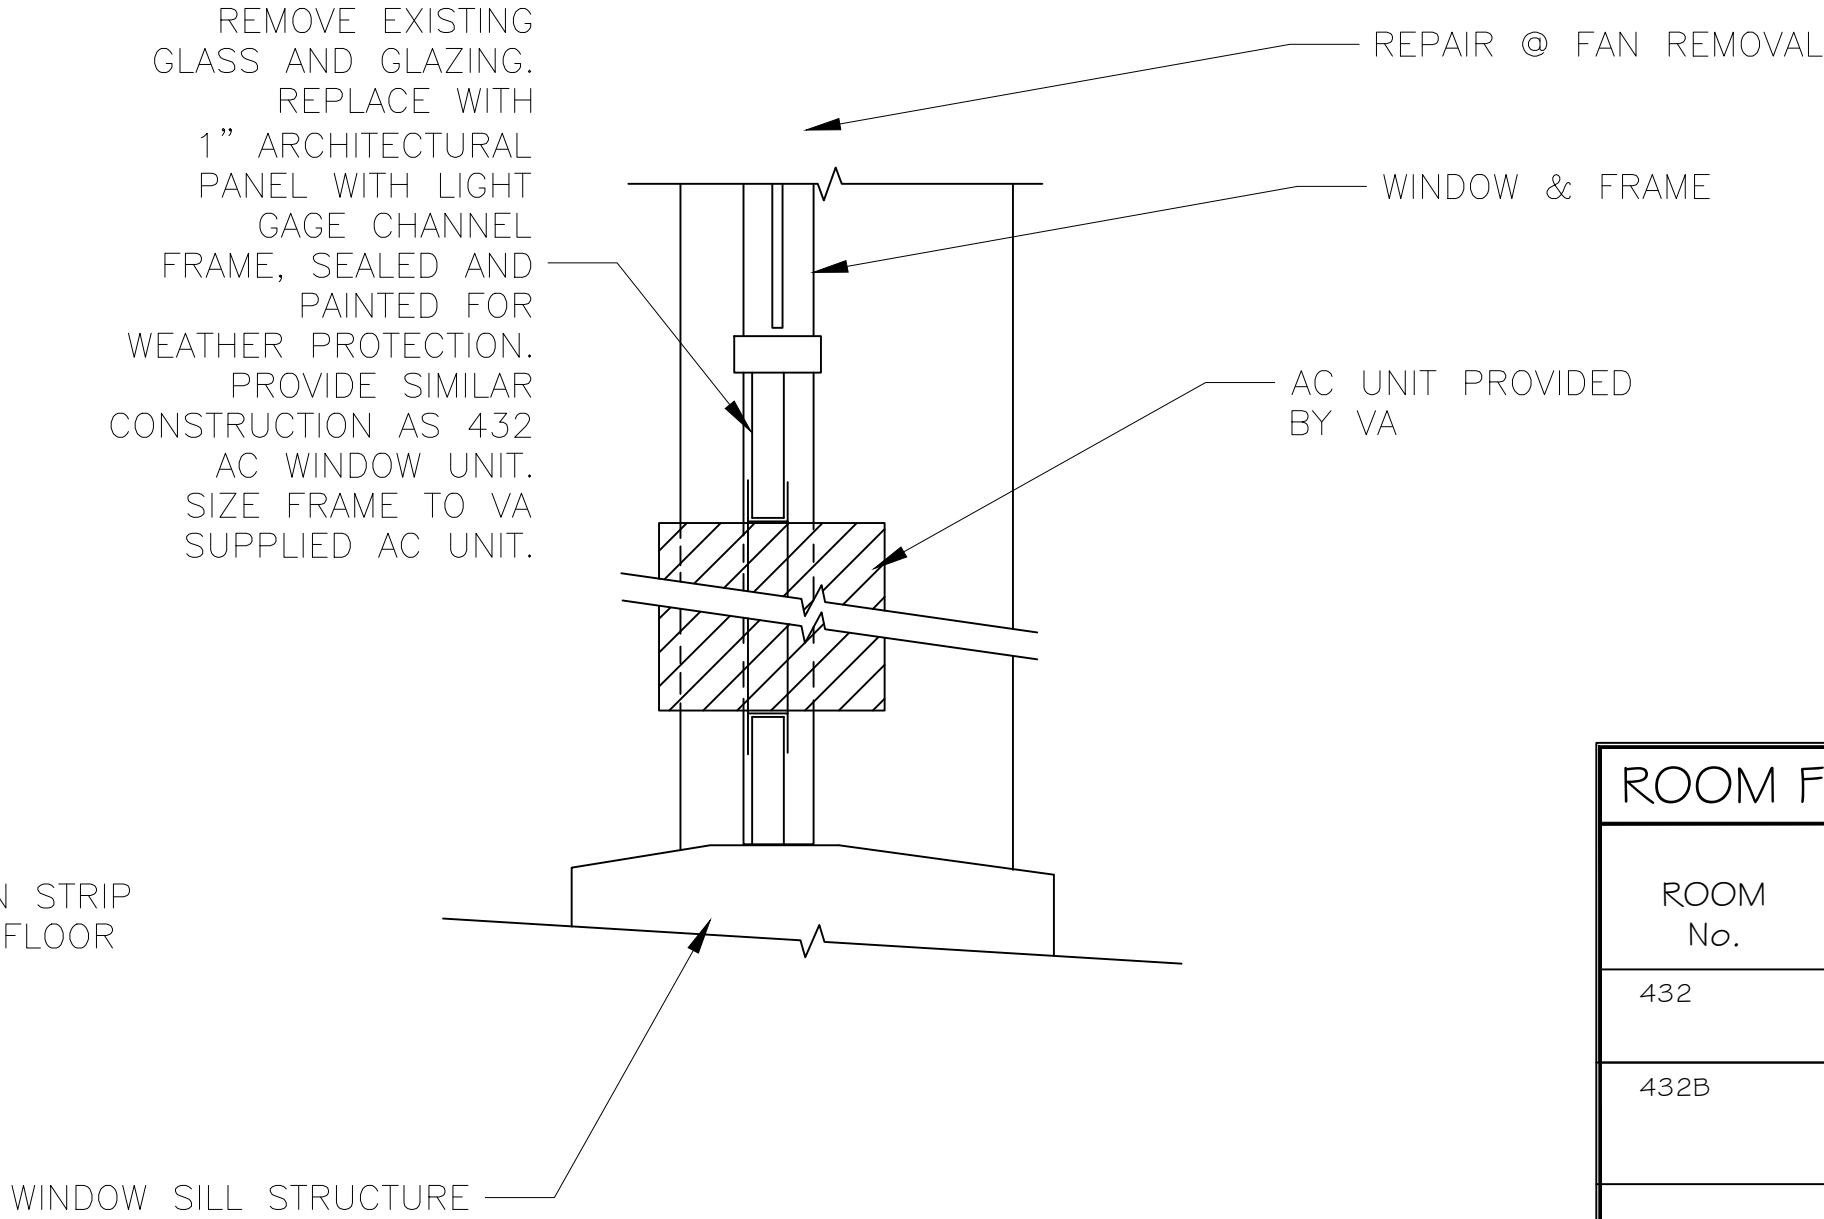

4 WINDOW DETAIL
A2 SCALE: NTS

- DETAIL NOTES:
- PROVIDE 1" ARCHITECTURAL PANEL, WEATHER STRIPPING, "GLAZING", RUBBER GASKETS AS REQUIRED TO MATCH EXISTING CONSTRUCTION OF ROOM 432 WINDOW.
 - SUPPLY LARGER UNIT WITH BRACE SUPPORTS SIMILAR TO EXISTING LARGE UNITS IN B-76.

ROOM FINISH SCHEDULE																
ROOM No.	ROOM NAME	FLOOR		BASE		WALLS								CEILING		REMARKS
		MAT.	COLOR	MAT.	COLOR	NORTH		EAST		SOUTH		WEST		MAT.	NOTES	
432	EXAM	EXIST CERAMIC	MATCH EXIST.	COVE BASE CB1	MATCH EXIST.	EXIST GYP NEW GYP	EXIST PT	EXIST GYP	EXIST PT	EXIST GYP	PT MATCH EXISTING	EXIST GYP	EXIST PT	EXIST. SUSPENDED CEILING	NO NOTES	NOTE # 1 & 2
432B	EXAM	SHEET VINYL CV-1	SEE SCHED	COVE BASE CB2	MATCH EXIST.	EX GYP & TILE	PT 1	EXIST GYP	PT 1	EXIST GYP	PT 1 NEW TILE @ SINK	EXIST GYP	PT 1 & NEW TILE @ SINK	EXIST. SUSPENDED CEILING	REPLACE BROKEN WITH NEW MATCHING TILES	NOTE # 1 & 2 CERAMIC TILE SHALL BE CT-1

NOTES: 1. PATCH EXISTING FLOORING, BASE, ACT. CEILINGS & ALL FINISHES TO REMAIN THAT ARE DISTURBED DUE TO REMOVALS AND/OR NEW CONSTRUCTION. NEW MATERIAL & FINISHES TO MATCH EXISTING ADJACENT MATERIAL & FINISHES.
2. COLOR AND FINISH SCHEDULE CAN BE OBTAINED FROM BATH VA INTERIOR DESIGNER. ALL PAINTS ARE TO BE MIXED BY VA PERSONNEL PER VA POLICY. A FINISHED SCHEDULE PROVIDED BY THE INTERIOR DESIGNER MUST BE PRESENTED BY THE CONTRACTOR TO THE VA PAINT SHOP PRIOR TO MIXING PER POLICY.

DOOR, FRAME AND HARDWARE SCHEDULE

DOOR #	LOCATION	DOOR			HARDWARE		FRAME				DETAIL			REMARKS
		SIZE	MAT'L	FINISH	TYPE	SET No.	DEPTH	MAT'L	FINISH	TYPE	SILL	HEAD	JAMB	
432B	EXAM 432B	3'-6"x7'-0"	WD	STAIN	A	1	Wall Thick	HM	FT2	1	1A/A2	1C/A2	1B/A2	3/4 HOUR RATED DOOR


NOTES: 1. CONTRACTOR SHALL VERIFY WALL AND PARTITION THICKNESSES PRIOR TO ORDERING/INSTALLING NEW DOORS AND DOOR FRAMES TYP.
2. COLOR AND FINISH SCHEDULE CAN BE OBTAINED FROM BATH VA INTERIOR DESIGNER. ALL PAINTS ARE TO BE MIXED BY VA PERSONNEL PER VA POLICY. PROVIDE PAINT SHOP WITH DOCUMENTATION FOR PROCESSING PAINT. DOCUMENTATION WILL BE PROVIDED BY INTERIOR DESIGN TO COTR.
3. FOR INFORMATION REGARDING FINISHES SEE SPECIFICATIONS.
4. REAPPLICATION OF PRIMER FOR METAL DOOR FRAMES IS RECOMMENDED PRIOR TO PAINT BEING APPLIED.

HARDWARE SETS

SET #1	
LOCK	BEST 93K-7-AB-15D-53- (FINISH TO MATCH EXISTING TO FLOOR)
FINISH	G12, TRIM L2 LU55 RAD LWM (LOCKABLE)
CYLINDER	N/A
HINGES	STANLEY FBS 131 4 5/8x4 1/2, FINISH: BRASS; 3 EACH
ACCESS	SILENCERS (IVES 20R)
DOOR STOP	FLOOR (IVES)
CLOSER	SARGENT 351 CPS


INTERIOR LOOSE LINTEL SCHEDULE

WALL THICKNESS	MASONRY OPENING	
	UP TO 4'-0"	MIN. 4" BEARING EACH END
5"	WT 4 x 6S*	
8"	2 JL 4 x 3 1/2 x 1/4 (LLV)	
12"	2 JL 5 x 3 1/2 x 3/8 (LLH)	
24"	4 JL JL 5 x 3 1/2 x 3/8 (LLH) w/ 25" PLATE	

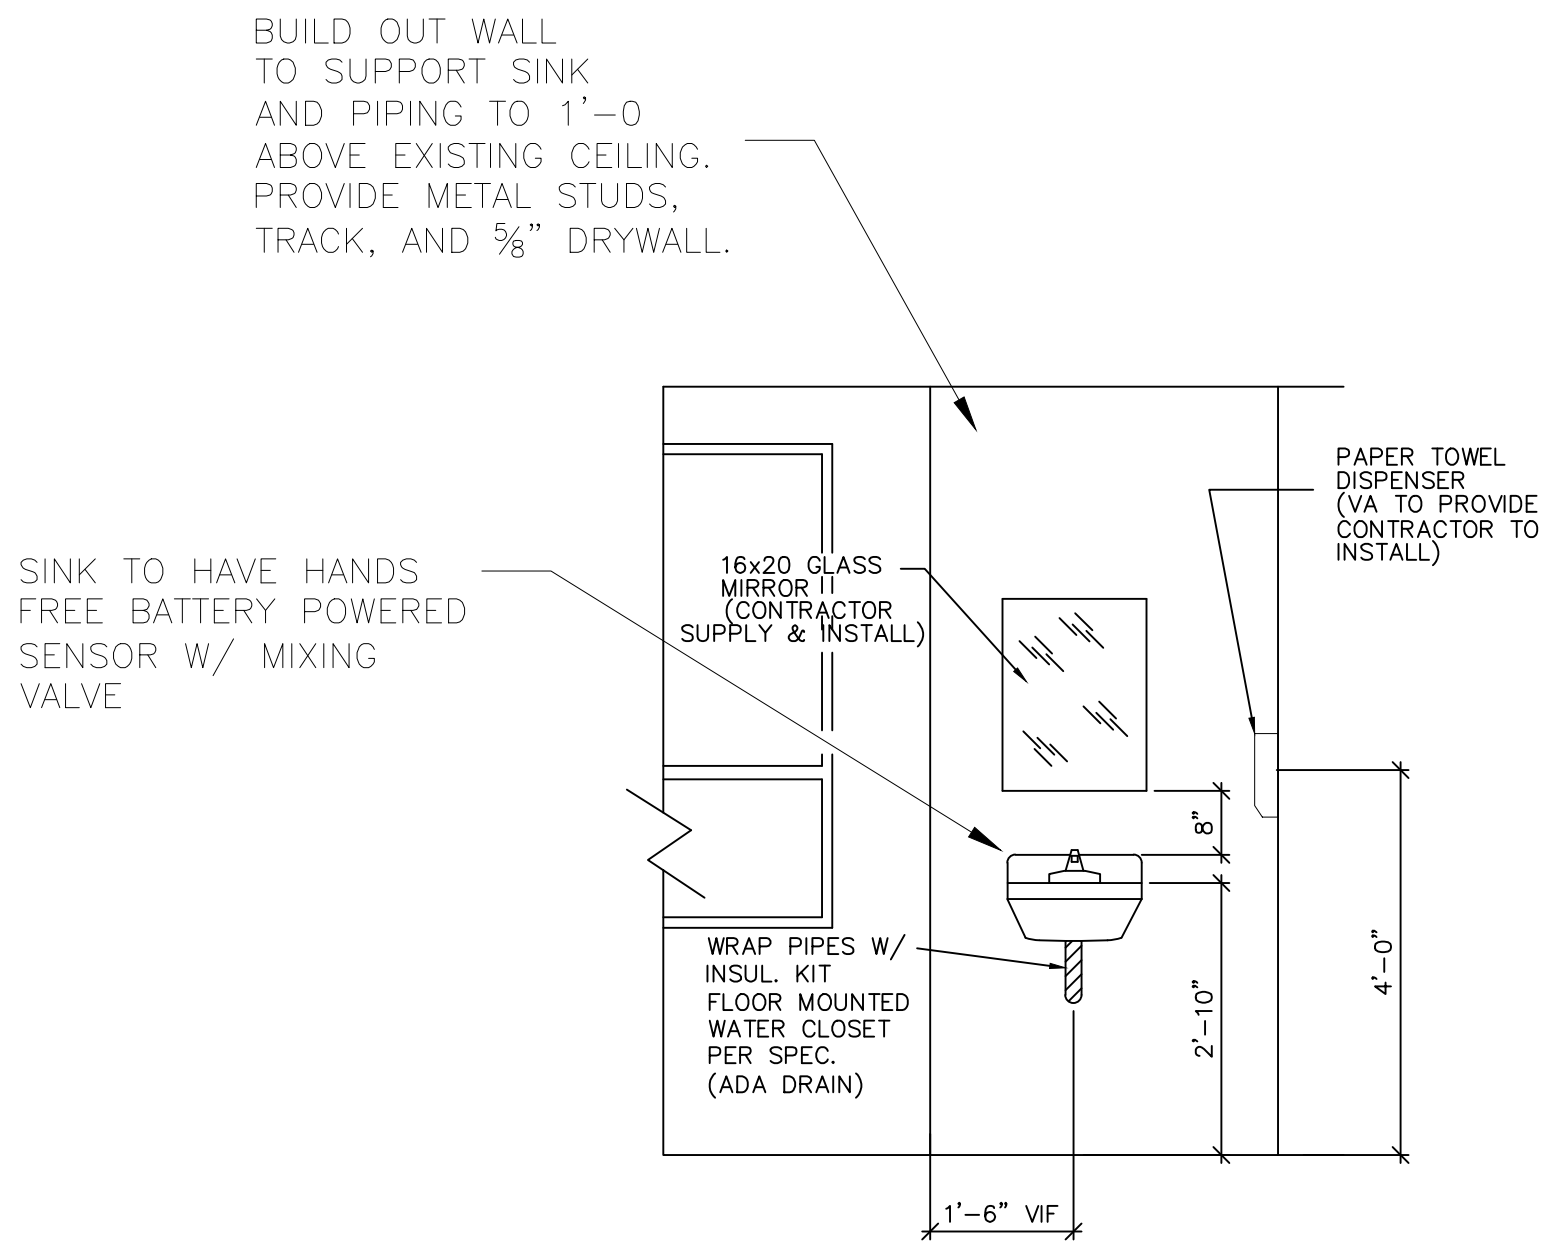


3 ELEVATION
A2 SCALE: NTS

- UTILITIES AND SANITARY CONNECTS FROM FLOOR BELOW.
- PROVIDE SHUTOFF VALVES BELOW DECK.

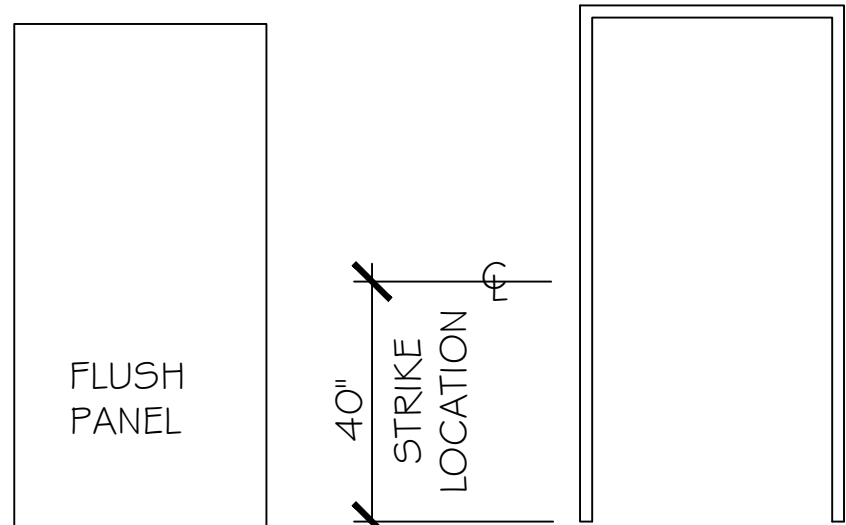

2 DOOR DETAIL
A2 SCALE: NTS

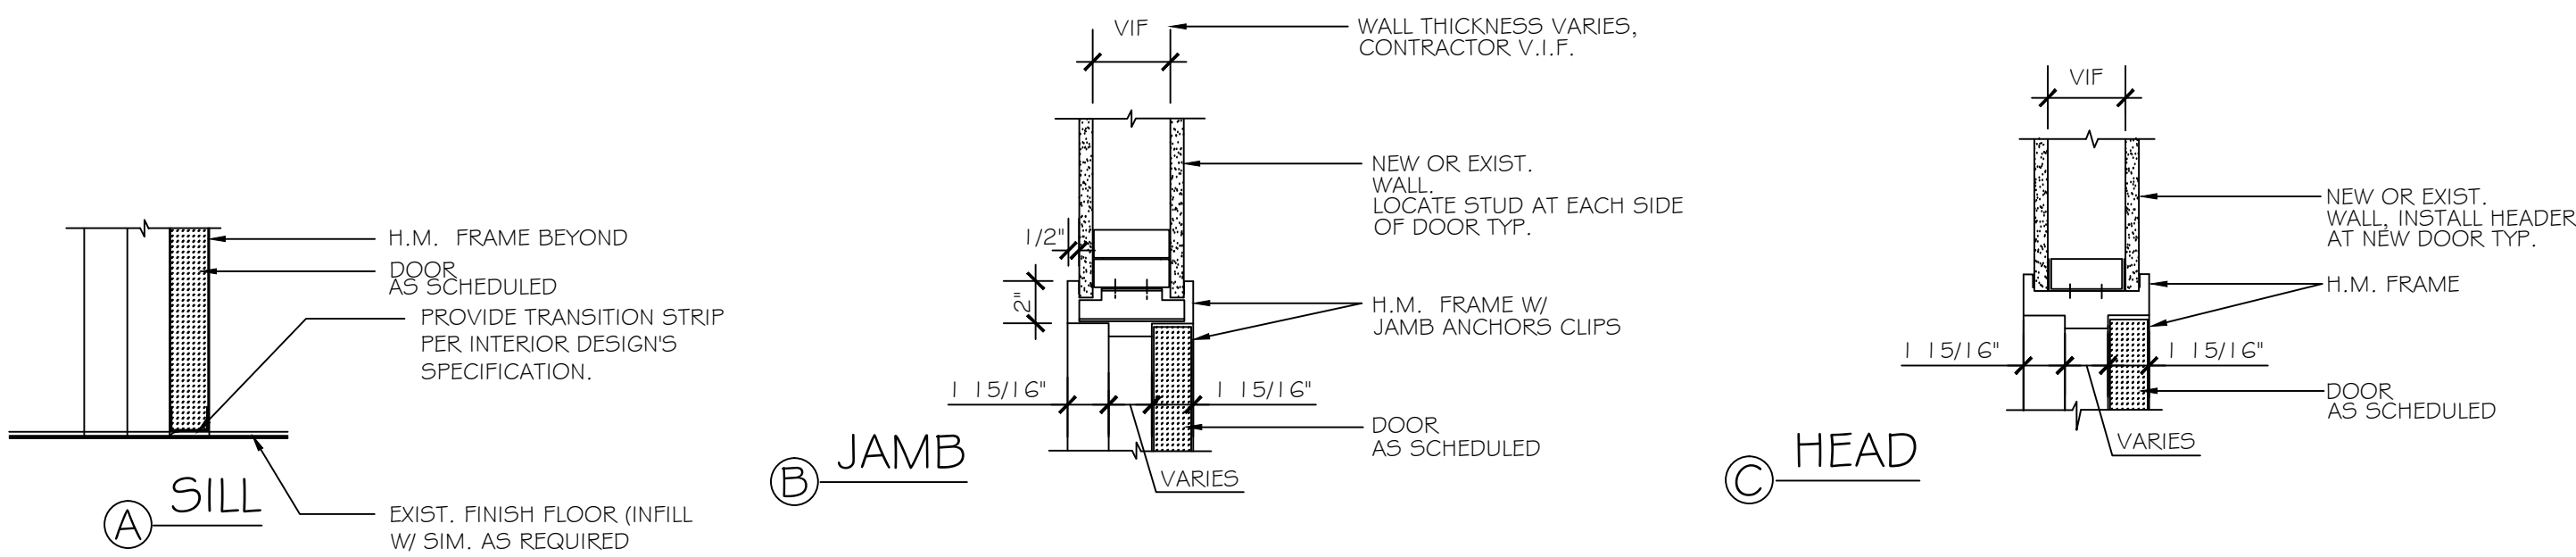

1 DOOR DETAILS
A2 SCALE: NTS

Revisions	Date

Drawing Title PARTIAL PLANS & DETAILS		Project Title RENOVATE 432 B & C, B-76 FOR EXAM ROOM		Date 2-14-12
Drawing File Number:		Project No. 528A6-12-619SL		
Approved: Engineering Project Manager	Date	Building No. 76	Checked JAY	Drawn SDP
Approved: Medical Center Director	Date	Location BATH, NEW YORK		Drawing No. A-2 Dwg. 3 Of 3

