

LIGHTING SYMBOLS

- RECESSED LED LIGHT FIXTURE; T = FIXTURE TYPE
LED DOWNLIGHT FIXTURE
SINGLE POLE LIGHT SWITCH; MOUNT AT 3'-6" AFF UNO
CEILING MOUNTED OCCUPANCY SENSOR (DUAL TECHNOLOGY)

POWER SYMBOLS

- DUPLEX CONVENIENCE RECEPTACLE (NEMA 5-20R); MOUNT AT 1'-6" AFF UNO
GROUND FAULT CIRCUIT INTERRUPTER TYPE RECEPTACLE; MOUNT AT 1'-6" AFF UNO
ELECTRIC JUNCTION BOX
NURSE CALL PULL CORD; CONNECT TO EXISTING SYSTEM; COORDINATE LOCATIONS AND REQUIREMENTS WITH THE VA
FIRE ALARM AUDIO/VISUAL NOTIFICATION APPLIANCE; MOUNT 84" AFF UNO
MAGNETIC DOOR HOLD OPEN
ADA PUSH BUTTON FOR DOOR OPENER
MOTOR; REFER TO CORRESPONDING ITEM NUMBER ON EQUIPMENT AND CONTROL SCHEDULE
NURSE CALL DOME LIGHT; CEILING MOUNTED
HVAC DIFFUSER
HVAC CEILING RADIANT PANEL
SPRINKLER
COMMUNICATION OUTLET
TEMPERATURE CONTROL SENSOR

LEGEND


- ITEMS TO BE REMOVED
EXISTING ITEMS TO REMAIN
NEW WORK

ABBREVIATIONS


- AC - ABOVE COUNTER
AFF - ABOVE FINISH FLOOR
EX - EXISTING
GFCI - GROUND FAULT CIRCUIT INTERRUPTER
RR - REMOVE AND RELOCATE
UNO - UNLESS NOTED OTHERWISE
WP - WEATHER PROOF

DEMOLITION KEYED NOTES

- 1 REMOVE ABANDONED COMMUNICATION OUTLET.



OUTDOOR LIVING SPACE
DEMOLITION PLAN
SCALE: 1/4" = 1'-0"

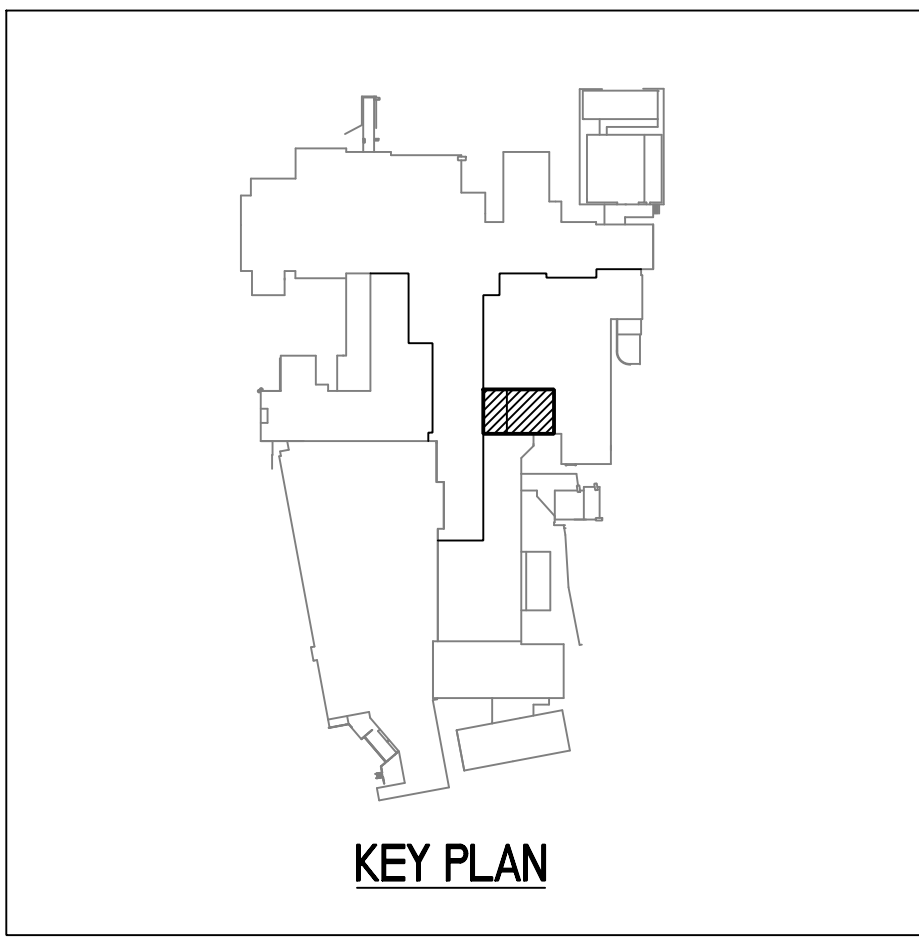

65% SUBMISSION - NOT FOR CONSTRUCTION

Revisions		Date		CONSULTANTS:				ARCHITECT/ENGINEERS:		Drawing Title		Project Title		Project Number		Office of Construction and Facilities Management Department of Veterans Affairs	
								TOLMAN ENGINEERING, PLLC		PARTIAL 8TH FLOOR ELECTRICAL DEMOLITION PLAN		CLC OUTDOOR LIVING SPACE		528A7-14-710			
								3610 LAWSON ROAD JAMESTOWN, NEW YORK 14701 PHONE: (716) 484 - 1366 FAX: (716) 484 - 1519		Approved Project Director		Location		Building Number			
												SYRACUSE VAMC		1			
												Date		Checked		Drawing Number	
												05-22-2015		DGM		ED-101	
																Dwg. SHT of -	