


NOTES

1. CONTRACTOR SHALL BE RESPONSIBLE FOR DISCONNECTING, MOVING, STORING AND RE-INSTALLING FURNITURE, EQUIPMENT, PLUMBING AND ELECTRICAL FIXTURES ETC. IN AREA OF WORK. CONTRACTOR SHALL MAKE NOTE OF CURRENT CONFIGURATION FOR USE DURING RE-INSTALLATION. IF FURNITURE, FIXTURES, AND EQUIPMENT CANNOT BE STORED IN THE CURRENT CONSTRUCTION PHASE AREA, CONTRACTOR SHALL PROVIDE TEMPORARY ON-SITE SECURE STORAGE SPACE. CONTRACTOR SHALL REPLACE ANY DAMAGED FURNITURE, FIXTURES, AND EQUIPMENT IN KIND AT HIS OWN EXPENSE.
2. ALL TOILET ACCESSORIES, SIGNAGE, TACK BOARDS, WALL MOUNTED/CEILING MOUNTED ACESORIES/EQUIPMENT, ETC. SHALL BE REMOVED PRIOR TO DEMOLITION AND REINSTALLED IN SAME LOCATIONS AT COMPLETION OF EACH PHASE OF CONSTRUCTION. ALL REMOVED ITEMS SHALL BE CLEANED UPON RE-INSTALLATION. IF EQUIPMENT IS DAMAGED OR UNABLE TO BE REINSTALLED IN GOOD CONDITION, CONTRACTOR IS RESPONSIBLE FOR REPLACING THE ITEM WITH EQUIPMENT OF EQUAL CONSTRUCTION AND APPEARANCE, AND INSTALLING AS PART OF THE SCOPE OF THEIR WORK.
3. REFRESH ALL DOORS WITH IN PROJECT LIMITS LINE, PROTECT EXISTING DOORS FROM DAMAGE DURING CONSTRUCTION.
4. ALL DOORS WITHIN PROJECT SCOPE SHALL RECEIVE PTES KICKPLATES.
5. COORDINATE WITH OTHER TRADES.
6. PERFORM DAILY CLEAN UP.
7. PAINT ALL WALLS WITHIN SCOPE OF WORK.
8. INSTALL NEW CEILING TILE WITH IN SCOPE OF WORK, REFER TO 1.AE401 FOR MORE INFORMATION.
9. PAINT ALL GWB CEILINGS.
10. ALL FLOORS TO RECEIVE SELF LEVELING COMPOUND.
11. CAULK AND PROTECT ALL WINDOWS AND UNDER SILL. CLEAN AND PROTECT INTEGRAL MINI-BLINDS.
12. REFER TO 1.A1101 FOR FINISHES DETAILS.
13. REFER TO 1.A1103 FOR WALL PROTECTION PLAN.

LEGEND

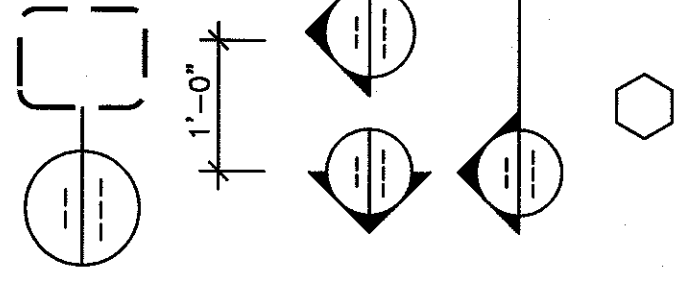


DETAIL INDICATOR

DIMENSION LINE

ELEVATION INDICATOR, EXTERIOR

BUILDING SECTION INDICATOR

KEYNOTE

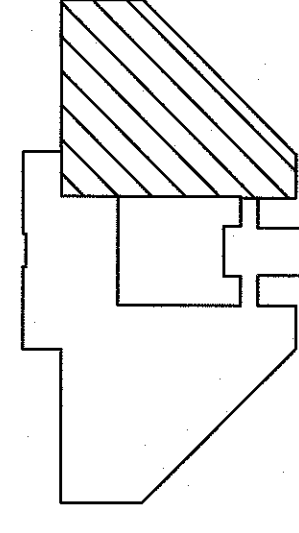

KEYPLAN - NOT TO SCALE


**FULLY SPRINKLERED BUILDING
FINAL CONSTRUCTION DOCUMENTS**

[illegible]

ARCHITECT/ENGINEERS:



9 Oak Drive - Ocala, FL 34472 - PH: 502.339.8511 - www.paradigmusa.com

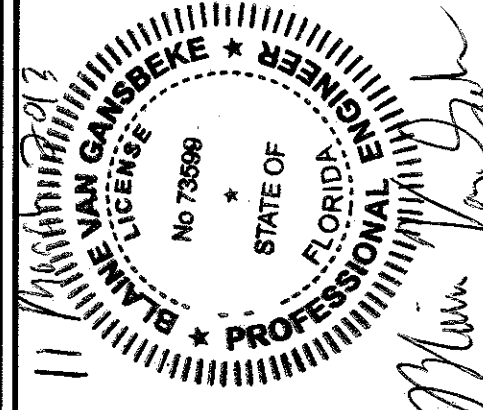

Drawing Title:
ARCHITECTURAL NEW WORK PLAN

Approved: Project Director

Project Title:
A/E DESIGN RENOVATE 6B

Location: WEST BAYM DEACON VANG

Date:	Checked:	Drawn:
-------	----------	--------

Drawn:

Drawn:

Project Number:
504-12-605

Building Number:

Drawing Number:

1 AE101

Office of

Construction

Metastatic

1000

1000000