


- NOTES**
1. ALL DOORS WITH IN PROJECT LIMITS LINE SHALL RECEIVE NEW PTG KICKPLATE, REFER TO DETAIL F5/1.A1501.
 2. COORDINATE WITH OTHER TRADES.
 3. PERFORM DAILY CLEAN UP.
 4. REFER TO 1.A1601 FOR FINISHES SCHEDULE AND LEGEND.
 5. REFER TO 1.A1501 FOR WALL PROTECTION DETAILS.

- KEYED NOTES**
1. INSTALL HANDRAIL AND BUMPER GUARD; REFER TO DETAILS A1 & D5/1.A1501.
 2. INSTALL COW CHARGING STATION WALL PROTECTION W/ SURFACE MOUNTED RACEWAY; REFER TO DETAIL D3/1.A1501.
 3. (NOT USED).
 4. INSTALL DAY ROOM WALL PROTECTION; REFER TO DETAIL C1/1.AE201.
 5. INSTALL WALL PROTECTION WAINSCOT UP TO 4'-0" A.F.F.; REFER TO 1.A1601 FOR MORE INFORMATION.

- LEGEND**
- KEYNOTE
 - CORNER GUARD; REFER TO F3/1.A1501 FOR DETAILS.

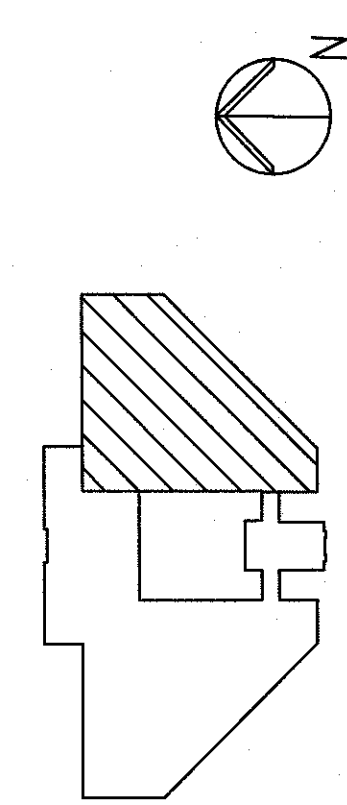

KEYPLAN - NOT TO SCALE
FULLY SPRINKLERED BUILDING
FINAL CONSTRUCTION DOCUMENTS

ARCHITECT/ENGINEERS:		ARCHITECTURAL WALL PROTECTION PLAN		Project Title A/E DESIGN RENOVATE 6B		Project Number 594-12-605		Office of Construction and Facilities Management	
PARADIGM ENGINEERS AND CONSTRUCTORS 9 Oak Drive - Oak, FL 34472 - PH: 502.339.8511 - www.paradigmusa.com		Approved Project Director		Location WEST PALM BEACH VAMC 725 NORTH MILITARY AVE. 3RD FLOOR		Building Number 1		Drawing Number 1A103	
Date		Checked		Drawn		Date 03-11-2018		JCM	