

BID ALTERNATE

LUMINAIRE SCHEDULE			
TYPE	MANUFACTURER/CATALOG NUMBER	LAMP	REMARKS
A	DAYBRIGHT AH 232-MT-2/1-EB	2-F032/841/ECO	2 LAMP, PATIENT BEDLIGHT, RIGHT SIDE PULL CORD
A1	DAYBRIGHT AH 232-MT-2/1-EB	2-F032/841/ECO	2 LAMP, PATIENT BEDLIGHT, LEFT SIDE PULL CORD
B	COLUMBIA LSR22-35LWG-C-EDU	LED	2'X2' LED RECESSED INDIRECT TROFFER
C	PRESCOLITE D4LED3-409LED35K7FL35WT	LED	4" LED LENSED OPTIC DOWNLIGHT WITH 35' WIDE DISTRIBUTION
D	COLUMBIA WPM2-217-EU	2-F017/841/ECO	2 LAMP, 2'X2' FLUORESCENT TROFFER WITH PRECISION OPTICAL SYSTEM, LINEAR PRISMATIC DIFFUSER; PROGRAMMED-START BALLAST
E	LIGHTQUER COL35WHU	LED	10" LED DECORATIVE WALL SCONCE MOUNTED AT 7' AFF

NOTES:
1. MANUFACTURERS LISTED REPRESENT BASIS OF DESIGN. PROVIDE EQUIVALENT APPROVED PRODUCTS.

NOTES


1. REFER TO SHEET 1.E-001 FOR LEGEND, ABBREVIATIONS, AND GENERAL NOTES.
2. CONNECT NEW WALL SCONCES TO EXISTING LIGHTING CIRCUIT SERVING AREA (EXTEND CIRCUIT FROM REMOVED SCONCE).
3. ALL NEW LIGHTING IS A BID ALTERNATE.
4. DEMOLITION NOTATIONS:

BID ALTERNATE

4. DEMOLITION NOTATIONS:
- (R) LOCATION OF RELOCATED DEVICE OR EQUIPMENT
 - (RR) REMOVE AND RELOCATE EXISTING DEVICE OR EQUIPMENT
 - (RX) REMOVE EXISTING DEVICE OR EQUIPMENT
 - (X) EXISTING DEVICE OR EQUIPMENT TO REMAIN
 - (XR) EXISTING DEVICE OR EQUIPMENT TO BE REMOVED AND REPLACED AT SAME LOCATION

KEYED NOTES

- ① LIGHTING CONTROLS TO REMAIN.
- ② CONNECT TO EXISTING NORMAL POWER CIRCUIT.
- ③ CONNECT TO EXISTING CRITICAL POWER CIRCUIT.

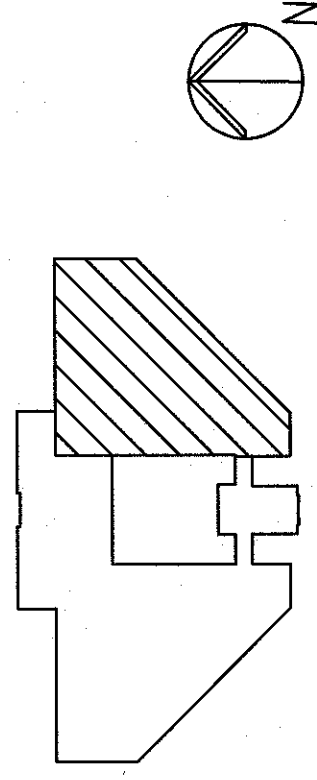

KEYPLAN - NOT TO SCALE
FULLY SPRINKLERED BUILDING
FINAL CONSTRUCTION DOCUMENTS

[illegible]