

E2
1/4" = 1'-0"

E6
1/4" = 1'-0"

GENERAL NOTES:

- THESE PLANS ARE GENERAL IN NATURE. CONTRACTOR IS RESPONSIBLE FOR REMOVING ALL ITEMS NECESSARY TO ACCOMPLISH WORK. SEE MECHANICAL, ELECTRICAL & PLUMBING DRAWINGS FOR ADDITIONAL WORK.
- ALL ABANDONED SERVICES TO BE CAPPED AT SOURCE; PENETRATIONS IN WALLS/FLOORS/CEILINGS TO BE SEALED. ANY AND ALL RATED ASSEMBLIES SHALL BE MAINTAINED.
- FIELD VERIFY ALL WALLS AND SERVICES TO BE REMOVED. NOTIFY THE A/E OF ANY SYSTEM OR STRUCTURE THAT HAS NOT BEEN IDENTIFIED ON THE DRAWINGS OR SPECIFICATIONS.
- COORDINATE WITH MECHANICAL, PLUMBING, LIFE SAFETY AND ELECTRICAL DRAWINGS AND SPECIFICATIONS FOR FULL SCOPE OF DEMOLITION.
- PROTECT AND STORE ALL ITEMS TO BE RELOCATED. REINSTALL RELOCATED ITEMS AS INDICATED AND RESTORE TO "LIKE NEW" CONDITION.
- ALL EXISTING WORK TO REMAIN SHALL BE PROTECTED FROM DUST, MOISTURE AND DAMAGE RESULTING FROM DEMOLITION ACTIVITIES. ALL EXISTING TO REMAIN WORK SHALL BE RETURNED TO "LIKE NEW" CONDITION. COORDINATE EXISTING WORK WITH NEW FINISHES.
- CONTRACTOR TO REMOVE AND REINSTALL ALL CORNER GUARDS, WALL RAILING AND BUMPER GUARDS AT EXTENT OF DAMAGE TO REINSTALLED ITEMS OCCURS. REFER TO AF101.
- CONTRACTOR TO VERIFY LOCATIONS, QUANTITIES AND OPERATION OF SPRINKLER HEADS.

SHEET NOTES:

- DEMOLISH EXISTING FLOORING.
- DEMOLISH EXISTING CEILING.
- REMOVE EXISTING CEILING LIGHT FIXTURES. REFER TO ENG. DWGS. FOR RELOCATED MEP SERVICES.
- REMOVE EXISTING WASHER TO BE REINSTALLED. CONTRACTOR SHALL PROTECT EQUIPMENT AND REINSTALL IN SAME CONDITION. SERVICES TO BE CAPPED.
- DEMOLISH EXISTING FLOOR DRAIN.
- REMOVE EXISTING DOOR AND FRAME / SEE AS101 AND AS102.
- EXISTING WALL TO BE DEMOLISHED.
- EXISTING WALL AND DOOR TO BE DEMOLISHED / RE-USE EXISTING SS. PANELS IN NEW LOCATION. SEE AS102.
- SEE AF101 FOR NEW FINISHES WITHIN THIS AREA.
- DEMOLISH EXISTING BULKHEAD AND ENCLOSED DUCTWORK. REFER TO MECHANICAL.
- CREATE AN OPENING FOR INSTALLATION OF NEW DOOR (4M) / FRAME. SEE AS502 FOR LINEL DETAIL.
- REMOVE AND RELOCATE EXISTING ACCESS PANEL. SEE AS102 FOR NEW LOCATION.
- CORE EXISTING FLOOR FOR DRAIN INSTALLATION. DO NOT CORE.
- EXISTING STRUCTURAL MEMBERS.
- LIMIT AREAS OF DEMOLITION AT AREAS TO REMAIN. MATCH FINISHES AS REQUIRED AND REINSTALL LIGHT. REFER TO MECHANICAL.
- EXISTING TO REMAIN. MINIMIZE AFFECTED AREAS ADJACENT TO NEW WORK.
- SALVAGE DOOR AND FRAME IF POSSIBLE AND MIRROR SWING.
- PROVIDE NEW DOOR AND FRAME IF REQUIRED.
- REMOVE ABANDONED TRASH CHUTE TO UNDERSIDE OF FLOOR STRUCTURE ABOVE.
- DEMOLISH EXISTING SINK AND FLOOR DRAIN.
- ABANDONED TRASH CHUTE TO BE USED FOR FIRE SEPARATION MECHANICAL DRAWING. REFER TO GC101 FOR FIRE SEPARATION NOTES.
- RELOCATE EXISTING WALL MOUNTED FIRE EXTINGUISHER ON SAME WALL TO AVOID INTERFERE WITH NEW DOOR. SEE AS102.
- REMOVE AND RELOCATE. SEE AS102 FOR NEW LOCATION.

LEGEND:

- DEMOWALL
- OW INFILL
- NEW GYP. WALL
- TEMPORARY CONSTRUCTION BARRIER
- SUPPLY DIFFUSERS
- EXHAUST DIFFUSERS
- ACCESS PANEL
- SPRINKLER HEAD (CEILING MOUNTED)
- SMOKE DETECTOR (CEILING MOUNTED)
- FLOOR DRAIN
- PARTITION TYPE

100% ISSUED FOR CONSTRUCTION
COMPLETION ITEM NO. 3
FULLY SPRINKLERED

one eighth inch = one foot
one quarter inch = one foot
three eighths inch = one foot
one half inch = one foot
three quarters inch = one foot
one inch = one foot
one and one half inches = one foot
three inches = one foot

VA FORM 08-6231, OCT 1978

Revision


Date

Dept. of Veterans Affairs

Medical Center

1670 Clairmont Road

Decatur, Georgia 30033

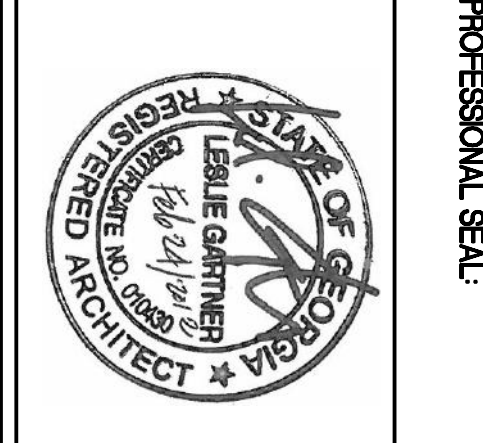

ARCHITECT/ENGINEERS:

VETERAN ENGINEERING GROUP, INC.

4411 Suwanee Dam, Ste 230 Suwanee, GA 30024

ARCHITECTURE ENGINEERING PLANNING

1123 Zonolite Road, Suite 25, Atlanta, GA 30306

Drawing Title

DEMOLITION FLOOR AND CEILING PLAN

Approved Project Director

Project Title

RENOVATION OF EXISTING STERILE PROCESSING SERVICE (SPS)

Location

VAMC, DECATUR, GA

Date

Feb 24, 2012

Checked

RH

Drawn

LK

Project Number

509-10-113

Building Number

1

Dwg. Number

4 of 27

AD101

Office of Facilities Management

Department of Veterans Affairs