


Culpeper National Cemetery Conduit Project

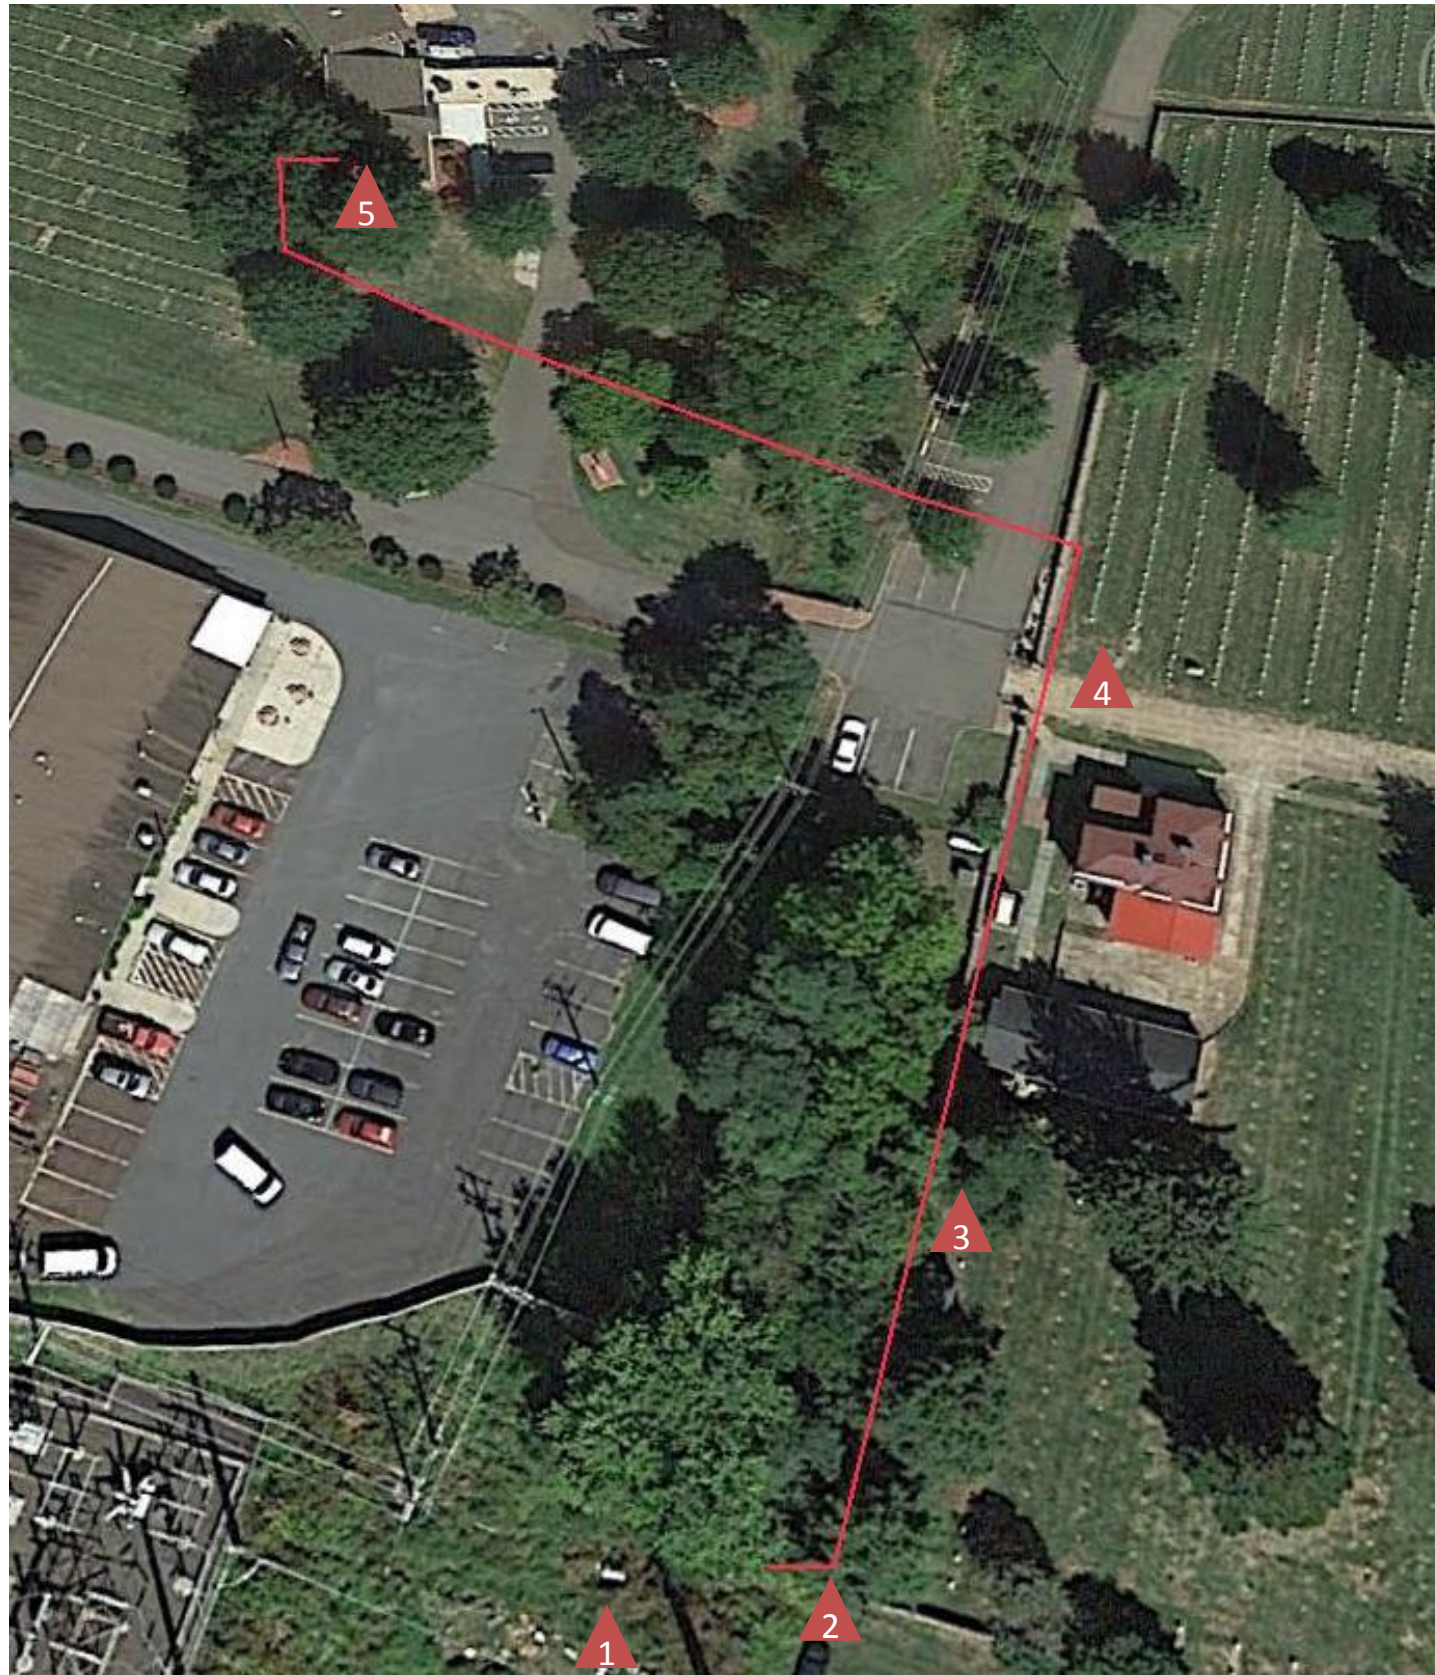

Notes:

- 1** Verizon Communications Pedestal outside National Cemetery property.
- 2** Contractor to provide a 6 foot length of capped 4 inch conduit from pull box under the historic wall toward Verizon pedestal. Verizon will remove cap and pull fiber optic wire from their box approximately 650 feet to the administrative facility utility/data closet at a later date.
- 3** Conduit to be installed within a 12 inch wide path along the east side of the wall for approximately 300 feet. The path is shared by at least one other conduit and potential other direct buried wire. Trenching in this area will have to be carefully hand excavated to avoid damaging conduit and adjacent property features(not limited to walls, headstones, sidewalks, and buried drainage pipes).
- 4** Concrete sidewalk and driveway to be saw cut along trench path, removed, and replaced with an asphalt patch. The asphalt patch will be replaced with concrete by others in a future contract.
- 5** Conduit to be run up the exterior wall of the administrative building to a height just above the building interior drop ceiling, through the exterior wall, east along an interior wall and terminate just inside the Administrative building utility/data closet. Contractor to install a 3 x 2 foot ¾ inch fire rated back board on the north wall for future Verizon Fiber Optic Panel.