




Δ B.6-1 NORTH ELEVATION




Δ B.6-2 EAST ELEVATION




Δ B.6-3 SOUTH ELEVATION

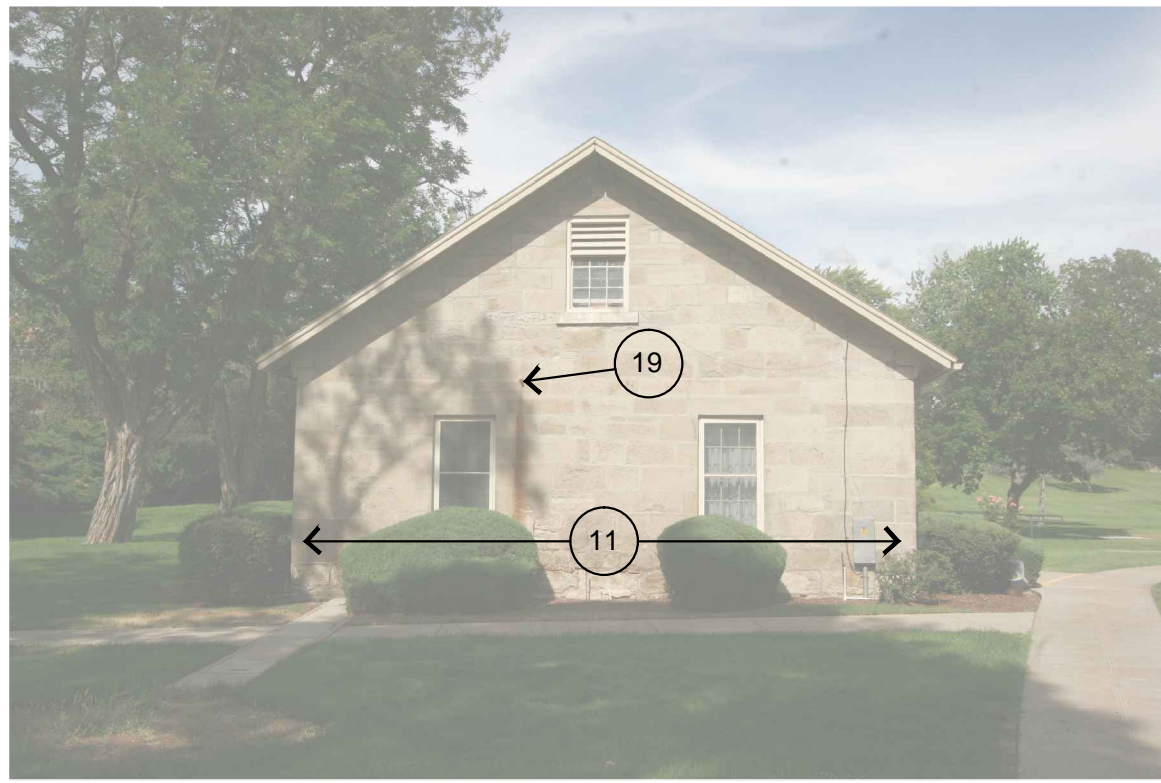


Δ B.6-4 WEST ELEVATION

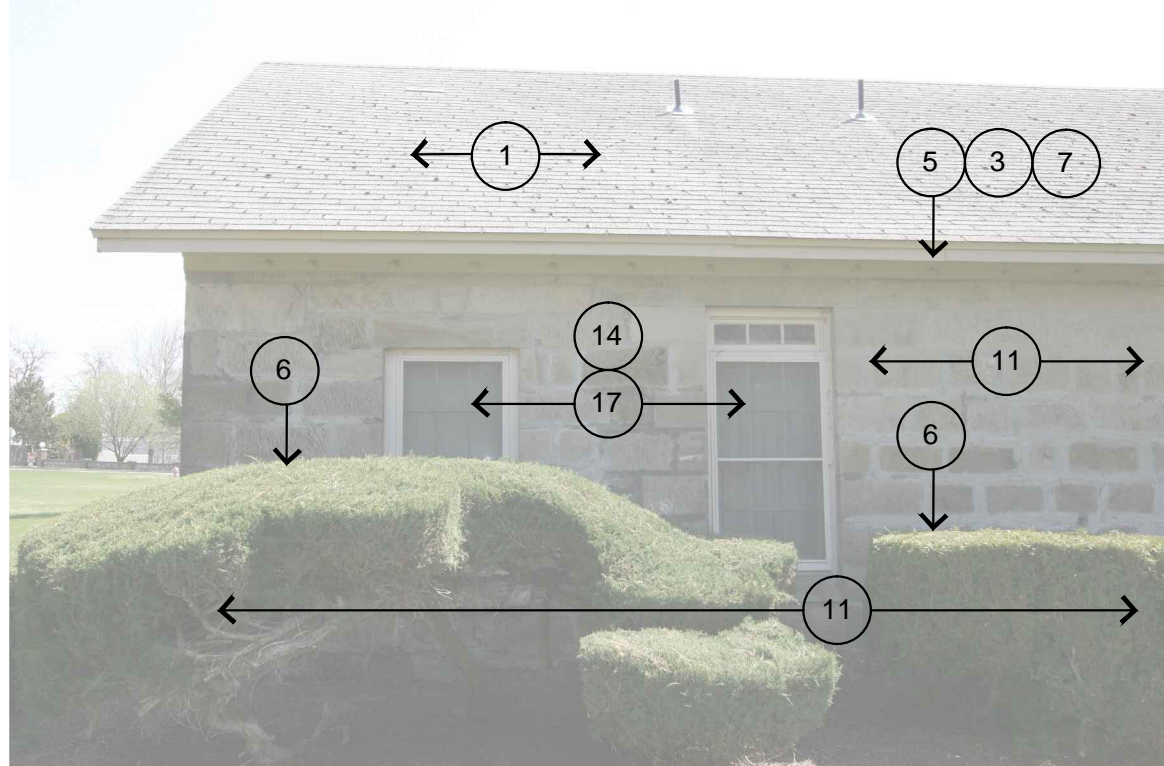


Δ B6-1A

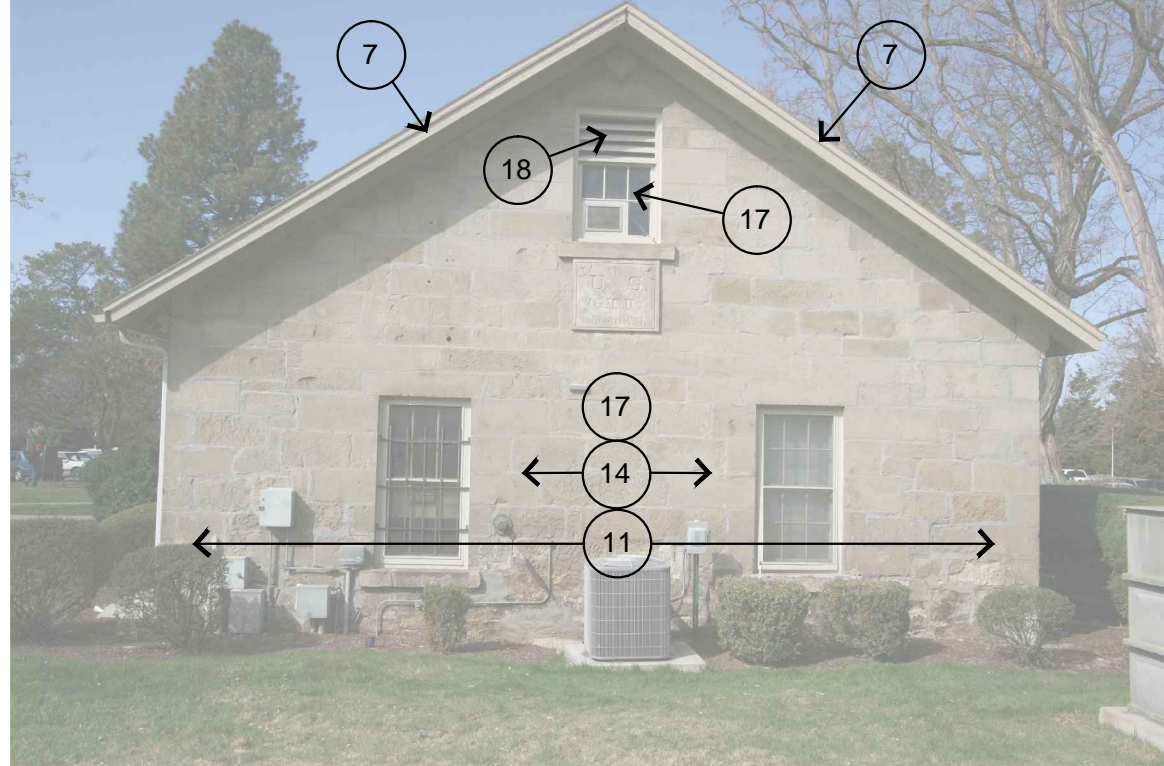


Δ B6-2A

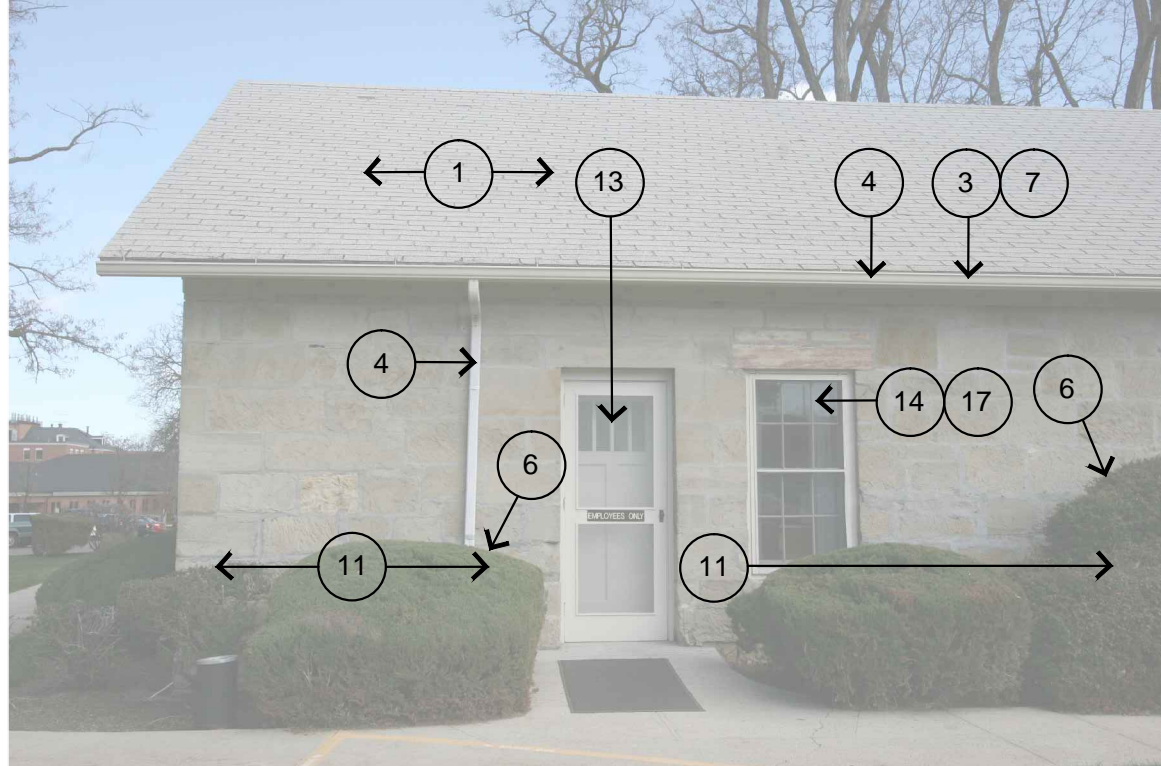

Δ B6-3A

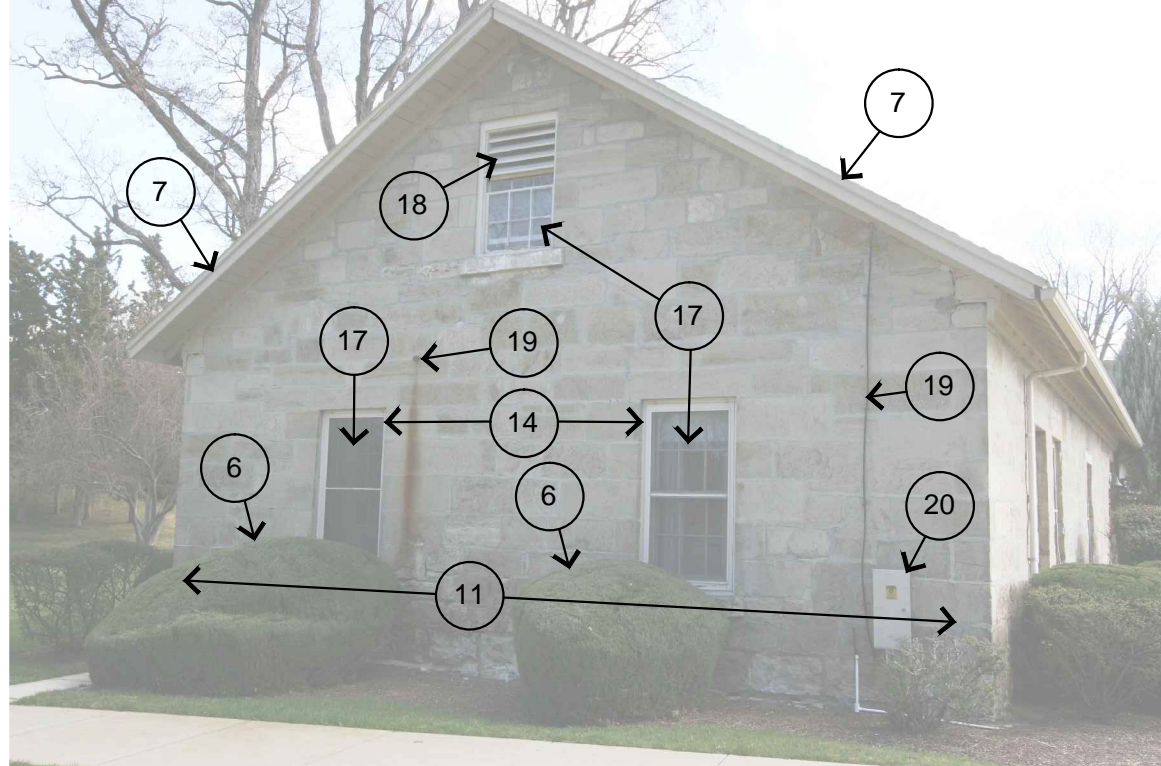


Δ B6-4A

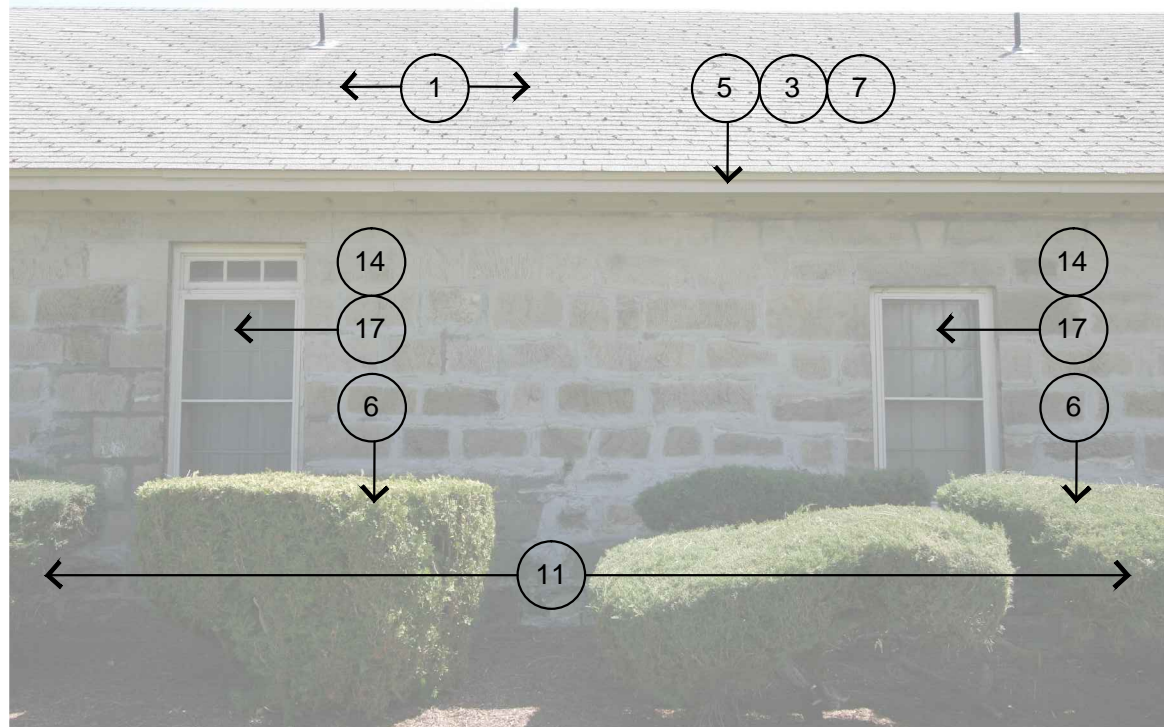

Δ B6-1B




Δ B6-2A

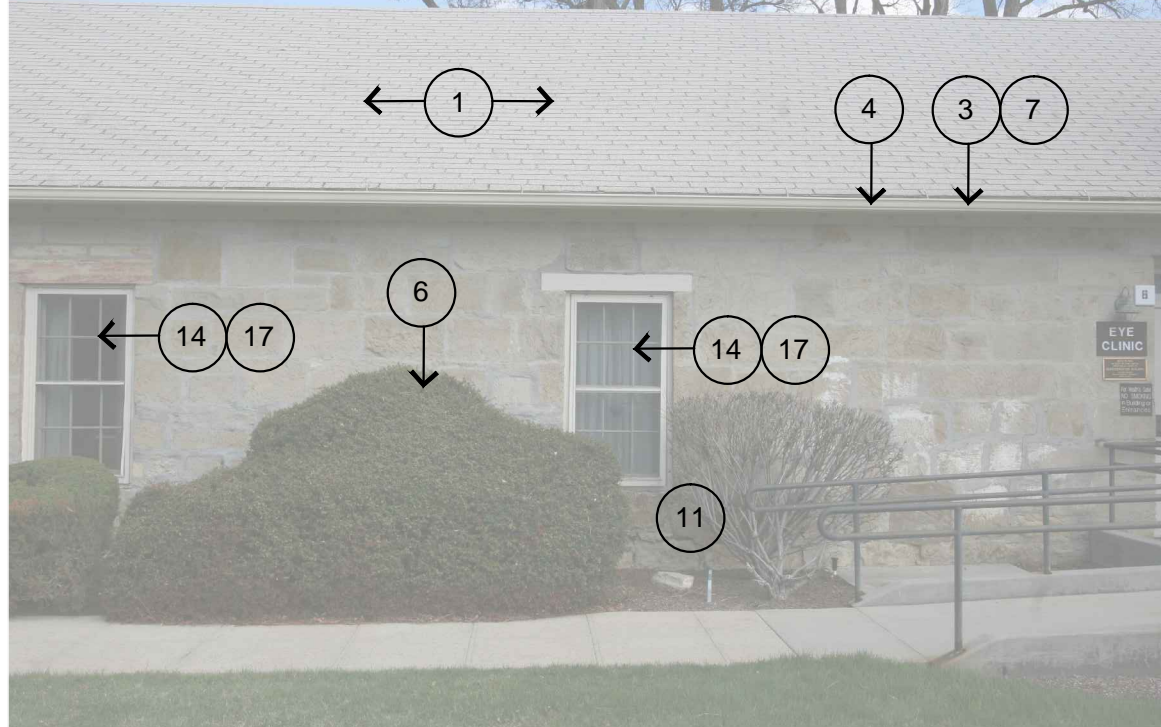

Δ B6-3B




Δ B6-4B

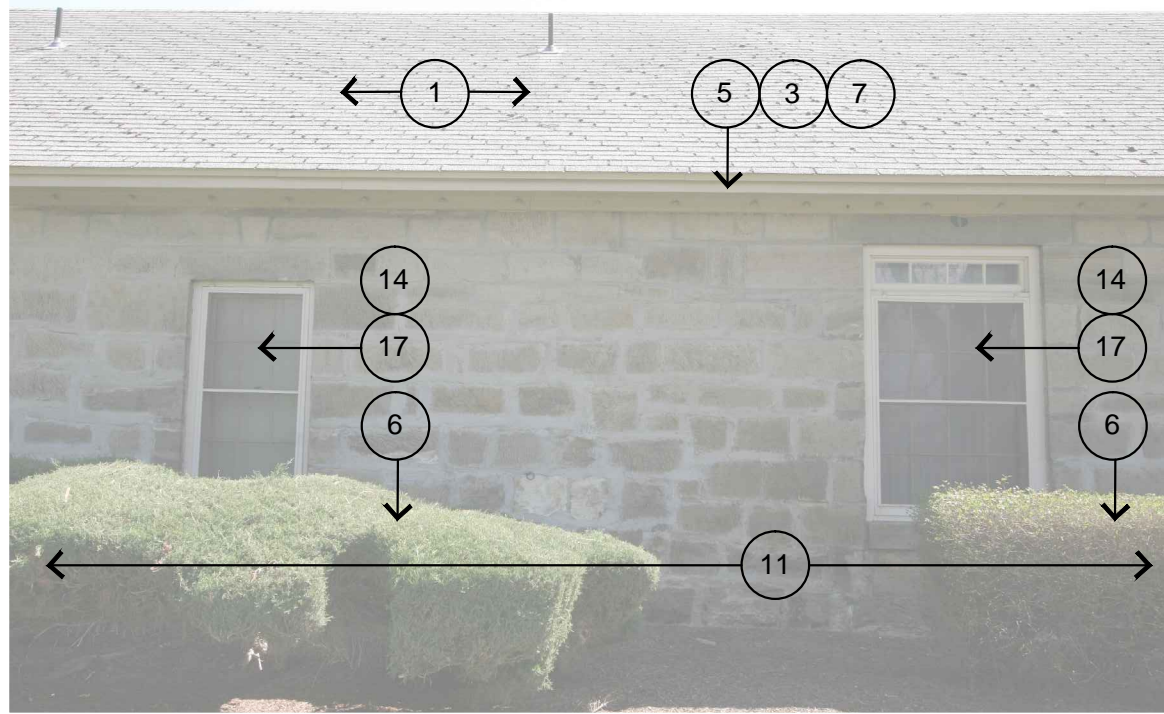

Δ B6-1C




Δ B6-2A

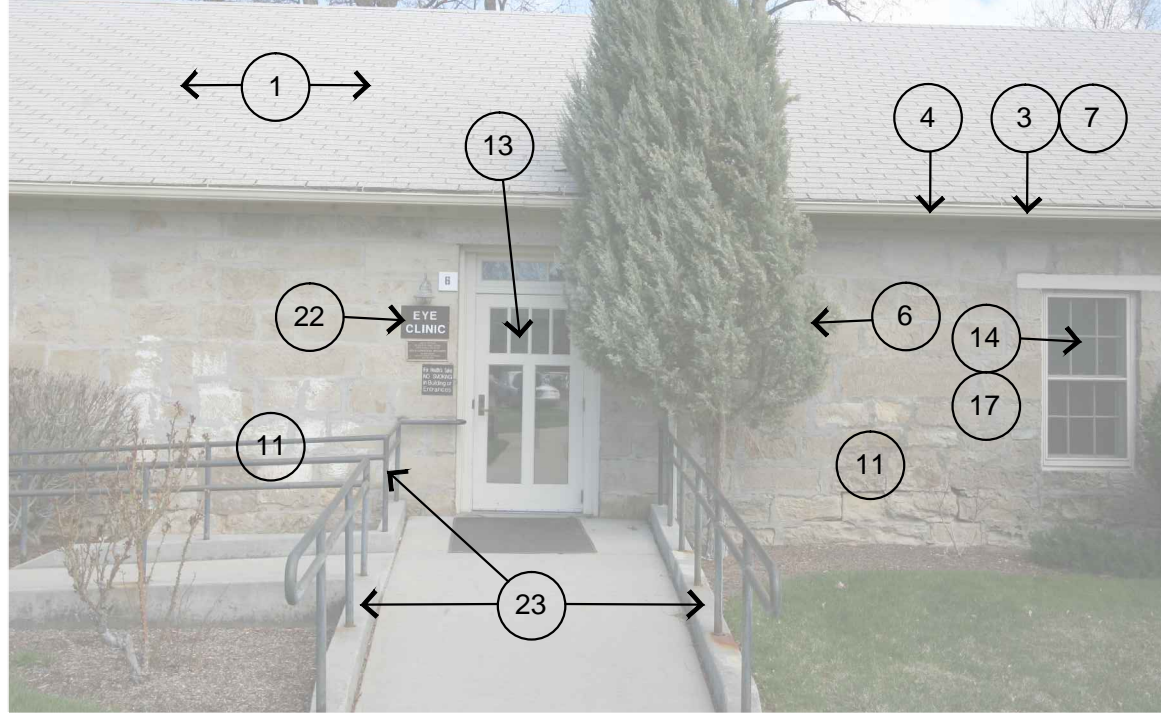

Δ B6-3C




Δ B6-4B

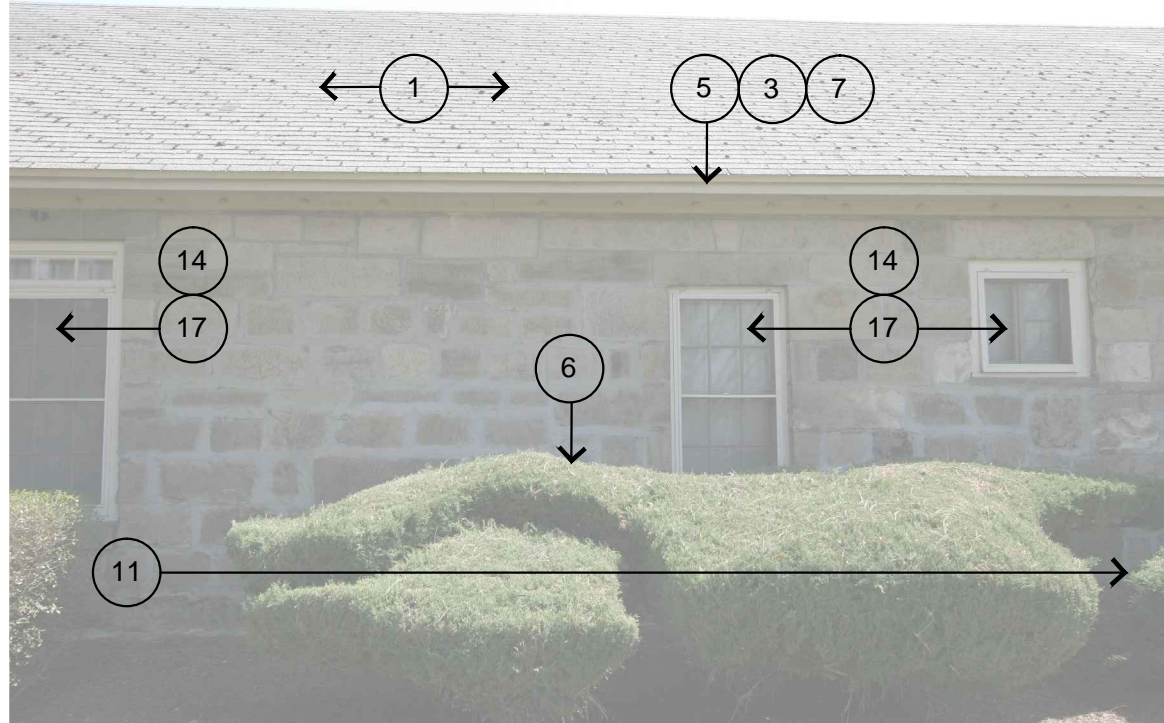


Δ B6-1D




Δ B6-2A

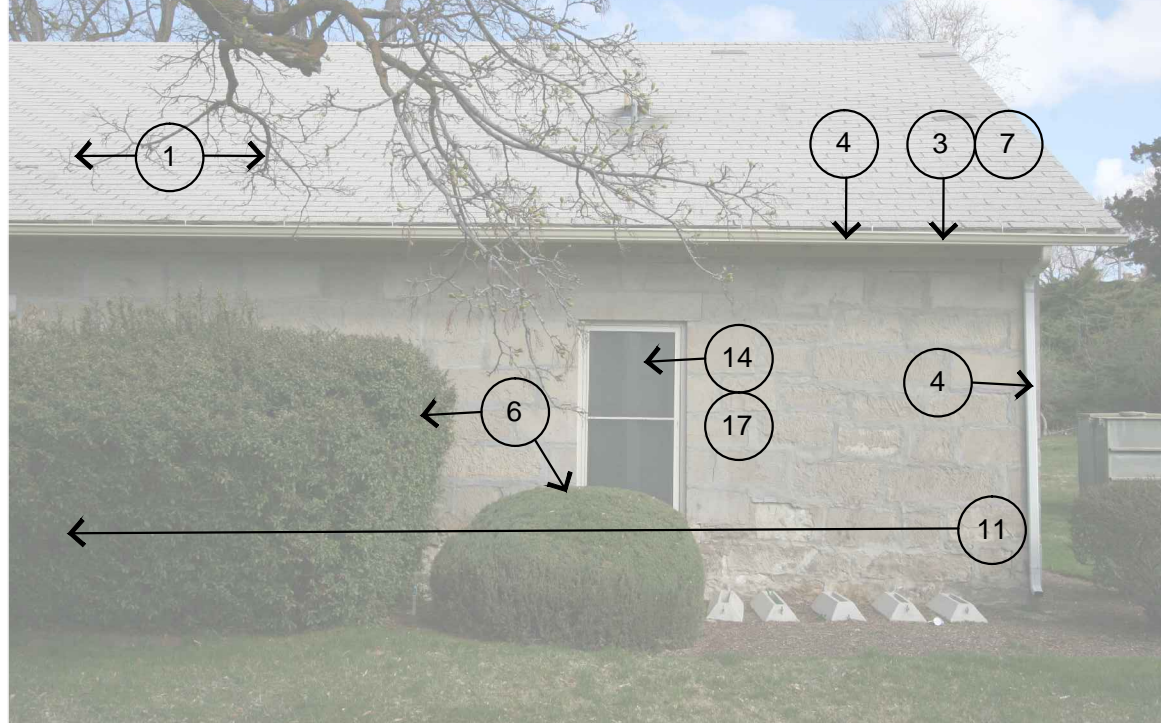

Δ B6-3D



Δ B6-4B

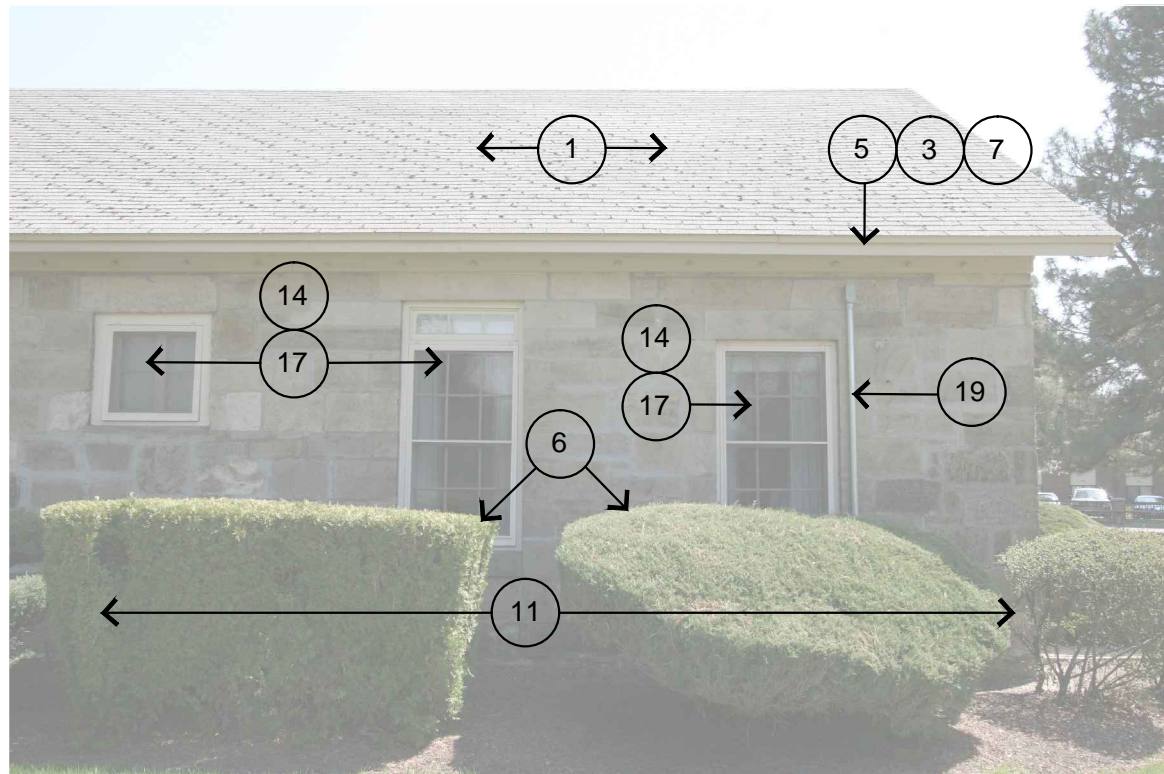

Δ B6-1E



Δ B6-2A



Δ B6-3D



Δ B6-4B

KEYED SHEETNOTES

1. REMOVE ENTIRE EXIST'G ASPHALT SHINGLE, FELT UNDERLAYMENT AND METAL FLASHING SYSTEMS AT THIS ROOF – INSTALL NEW ASPHALT SHINGLES, ICE DAM MEMBRANE FROM EAVE BACK TO 24" BEHIND OUTSIDE FACE OF EXTERIOR WALL, AND 30# FELT UNDERLAYMENT

2. EXIST'G. ROOF VENTS TO REMAIN – PROTECT AS REQ'D.

3. REMOVE LOOSE PAINT AT EXIST'G. EXPOSED WOOD + JOIST OVERHANG – PREP + PRIME WOOD SUBSTRATE AS REQ'D. + PAINT AS SPECIFIED

4. REMOVE EXIST'G GUTTERS + DOWNSPOUTS – REPLACE W/NEW PREFINISHED METAL GUTTERS OF LIKE SIZE, SHAPE, AND PROFILE – PROVIDE NEW PRECAST CONC. SPLASH BLOCK @ EA. DOWNSPOUT

5. PROVIDE + INSTALL NEW PREFINISHED METAL GUTTERS + DOWNSPOUTS AT THIS ENTIRE EAVE – MATCH DOWNSPOUT LOCATIONS AT SOUTH ELEV. – PROVIDE NEW PRE-CAST CONC. SPLASHBLOCK @ EA. DOWNSPOUT

6. TRIM BACK ALL EXIST'G. SHRUBS TO 18" CLEAR OF BLDG. FACE AT THIS WALL

7. REPLACE EXIST'G. EAVE BOARD W/NEW HEM-FIT BOARD OF MATCHING PROFILE – PREP, PRIME + PAINT AS SPECIFIED

8. NOT USED

9. NOT USED

10. NOT USED

11. STONE REPAIR: PATCH + REPAIR EXIST'G STONEWORK PER SHT. TS-4.3 + TS-4.4 REQUIREMENTS

12. STONE CLEANING: CLEAN STONEWORK AT THIS ENTIRE BLDG FACADE PER SHT. TS-4.3 + TS-4.4 REQUIREMENTS

13. REPAIR DOORS/SCREENS: PREP, PRIME + PAINT AS SPECIFIED – WHERE DOORS CONTAIN GLASS LITES INSTALLED W/PUTTY + GLAZING POINTS PATCH AND REPAIR GLAZING PUTTY + POINTS AS REQ'D. – REMOVE (E) SCREEN CLOTH + INSTALL (N) SCREENING AS SPECIFIED

14. REPAIR OR REPLACE EXT. WINDOW TRIM/REPLACE SCREEN – REMOVE LOOSE LEAD BEARING PAINT AT EXT. WINDOW TRIM – REMEDIATE REMAINDER OF FIRMLY BONDED LEAD BEARING PAINT PER SHEET TS-2 REQMT'S. + OBTAIN A SMOOTH OVERALL PAINTABLE SURFACE – REPLACE MISSING SCREEN FRAMES W/NEW SCREEN FRAMES OF SIM. MATERIAL, PROFILE + DESIGN. RE-USE EXIST'G. HARDWARE TO MAX. EXTENT POSSIBLE – PROVIDE + INSTALL NEW SCREEN FABRIC AS SPEC'D. FOR ALL SCREENS – PREP, PRIME + PAINT TRIM + SCREENS AS SPEC'D. INCLUDE LATCH HARDWARE.

15. NOT USED

16. NOT USED

17. REPLACE WINDOWS: REMOVE EXIST'G. LEAD BEARING PAINTED WINDOW SASH + REPLACE W/NEW WOOD INSERT SASH TO MATCH EXISTING IN DIMENSION, FUNCTION AND DESIGN – REUSE + REINSTALL EXISTING WOOD INTERIOR + EXTERIOR TRIM, OR PROVIDE NEW WOOD TRIM MATCHING EXISTING WOOD TRIM WHERE EXISTING TRIM IS DAMAGED DURING SASH/FRAME REMOVAL – PROVIDE NEW MANUFACTURERS STANDARD CLOSURE AS REQ'D. – PREP, PRIME + PAINT AS SPECIFIED. WINDOWS WITH AC UNITS TO RECEIVE ANGLE BRACKETS AND ADDITIONAL WEATHER STRIP TO SECURE AND SEAL.

18. REPAIR EXIST'G PAINTED WOOD WALL LOUVER. FINISH – PREP + PAINT AS SPECIFIED

19. MAINTAIN EXIST'G WALL MOUNTED UTILITY LINES IN WORKING ORDER – REMOVE LOOSE LEAD BEARING PAINT + REMEDIATE REMAINDER OF FIRMLY BONDED LEAD BEARING PAINT PER SHT. TS-2 REQMT'S. – SCHEDULE ALL UTILITY LINE SHUT W/RESIDENT ENGINEER




20. MAINTAIN EXIST'G WALL/WINDOW MOUNTED EQUIPMENT IN WORKING ORDER – PROVIDE PROTECTIVE COVERS AS REQUIRED. REMOVE ALL NON-WORKING UTILITIES LINES ON ALL ELEVATIONS.

21. REMOVE 18" WIDE STRIP OF BARK, LAWN + SOILS IN CONTACT W/STONE WALL BASE DOWN TO 4" BELOW BOT. OF SIDING – REMOVE AN ADDITIONAL 18" WIDE BY 3" DEEP SECTION OF SOILS + REPLACE W/NEW 18"WIDE BY 6" DEEP WASHED, 3/4" MINUS, GRAVEL

22. EXIST'G. BLDG. SIGNAGE + FIXTURES – REMOVE + REINSTALL IN SAME LOCATION AS REQ'D. FOR RENOVATION WORK

23. PREP AND PAINT METAL RAILINGS

NOTE: PATCH, CAULK, PREP + PAINT TRIM AT INTERIOR SIDE OF REMOVED OR REPAIRED DOORS + WINDOWS WHERE DISTURBED OR DAMAGED BY THE OPERATIONS OF THIS CONTRACT – WHERE WALL SURFACES ADJACENT TO DOOR OR WINDOW TRIM IS DAMAGED BY THE WORK OF THIS CONTRACT PAINT ENTIRE WALL FROM FLOOR TO CEILING AND CORNER TO CORNER IN WHICH OPENING OCCURS

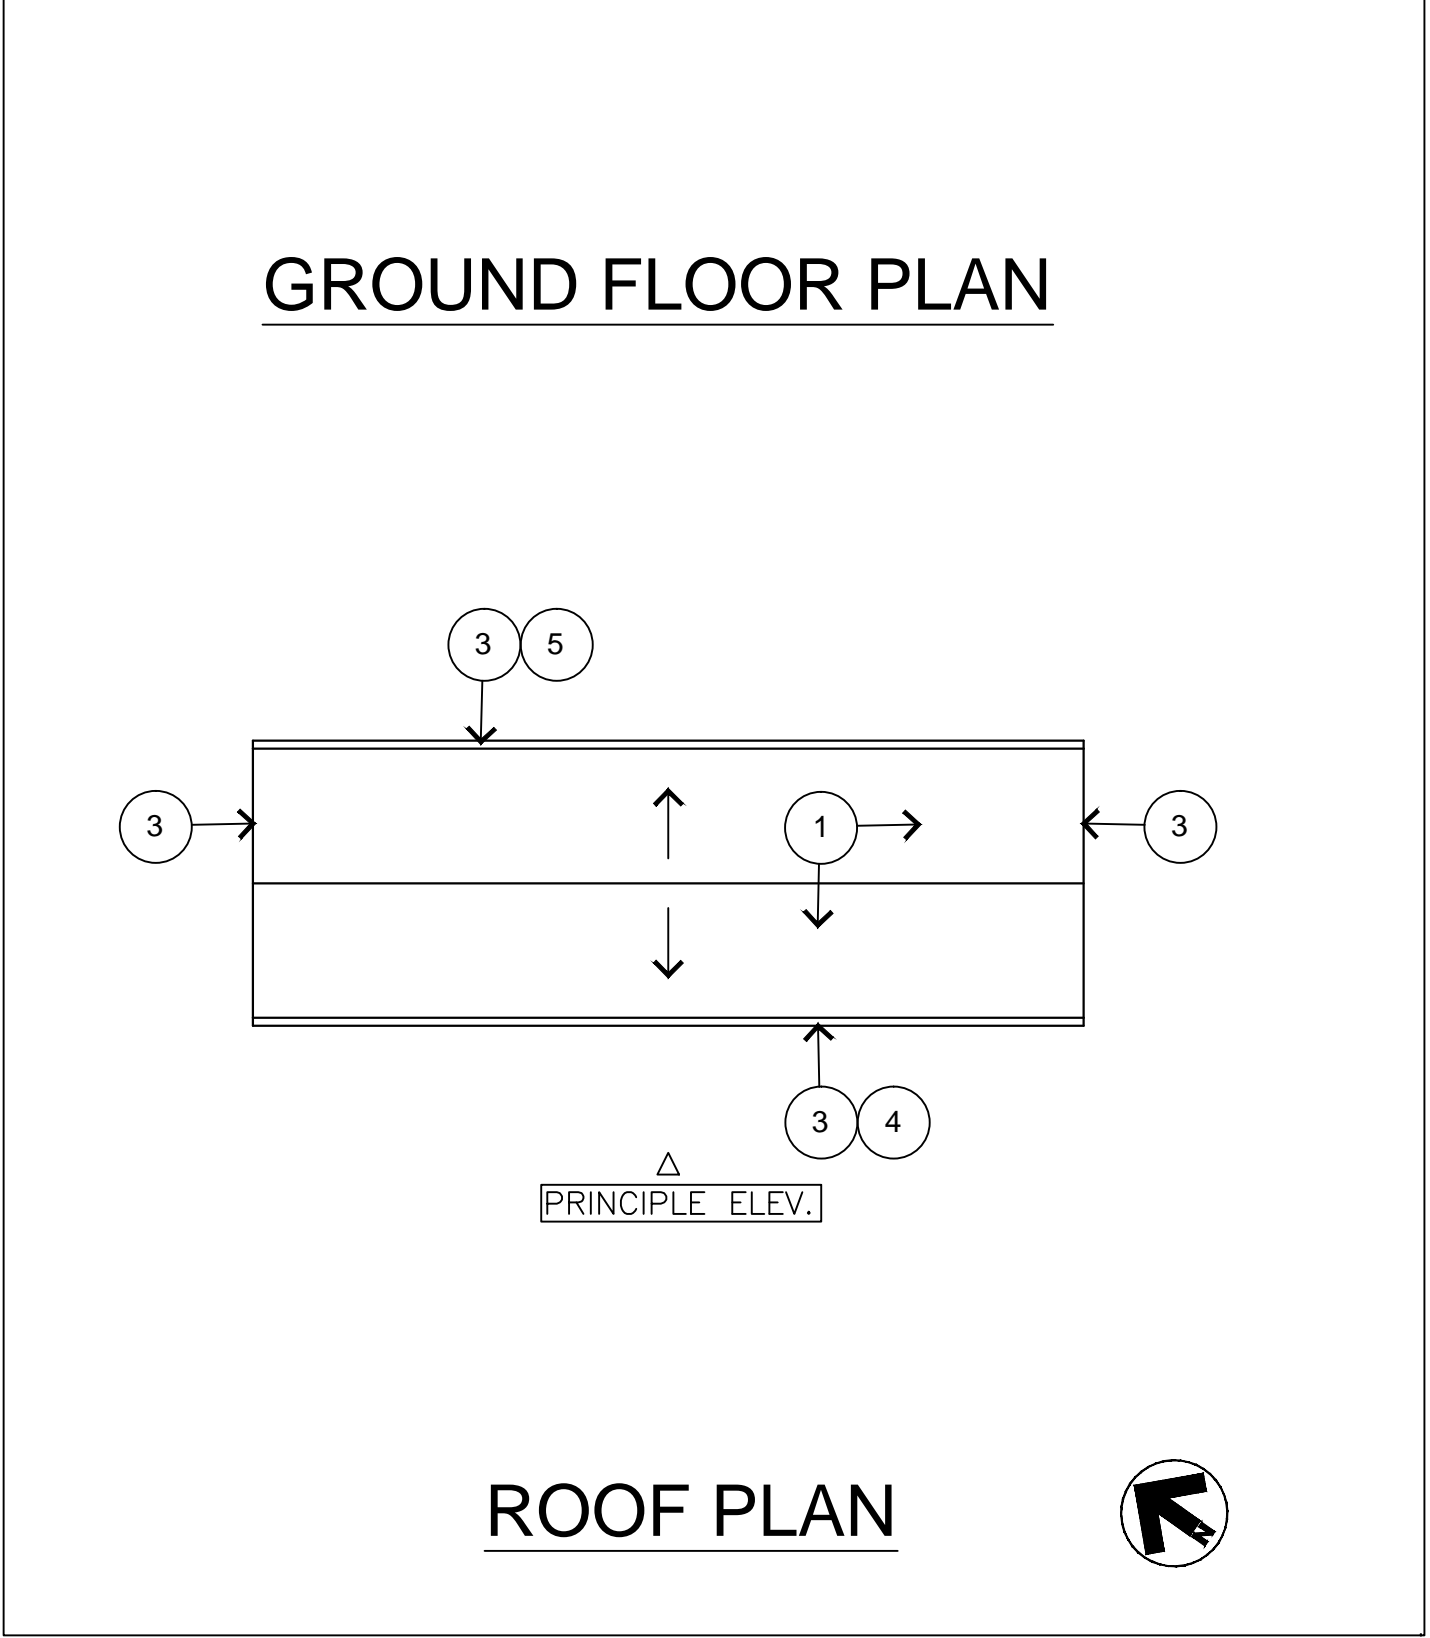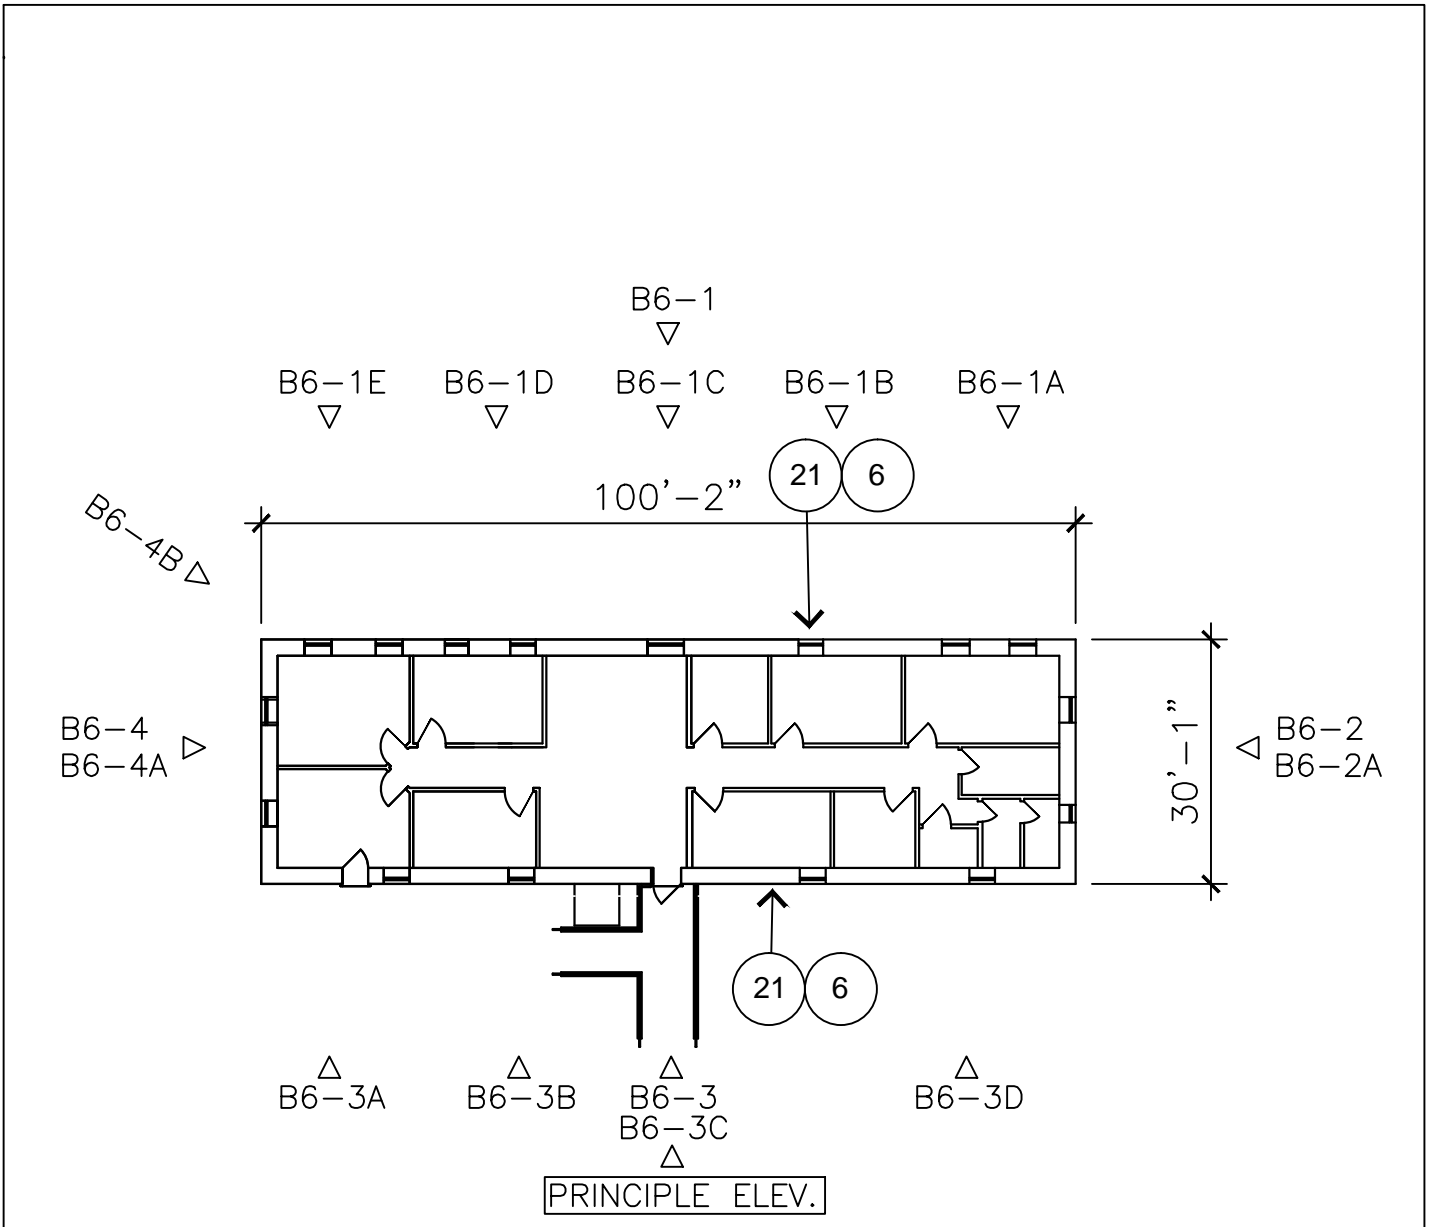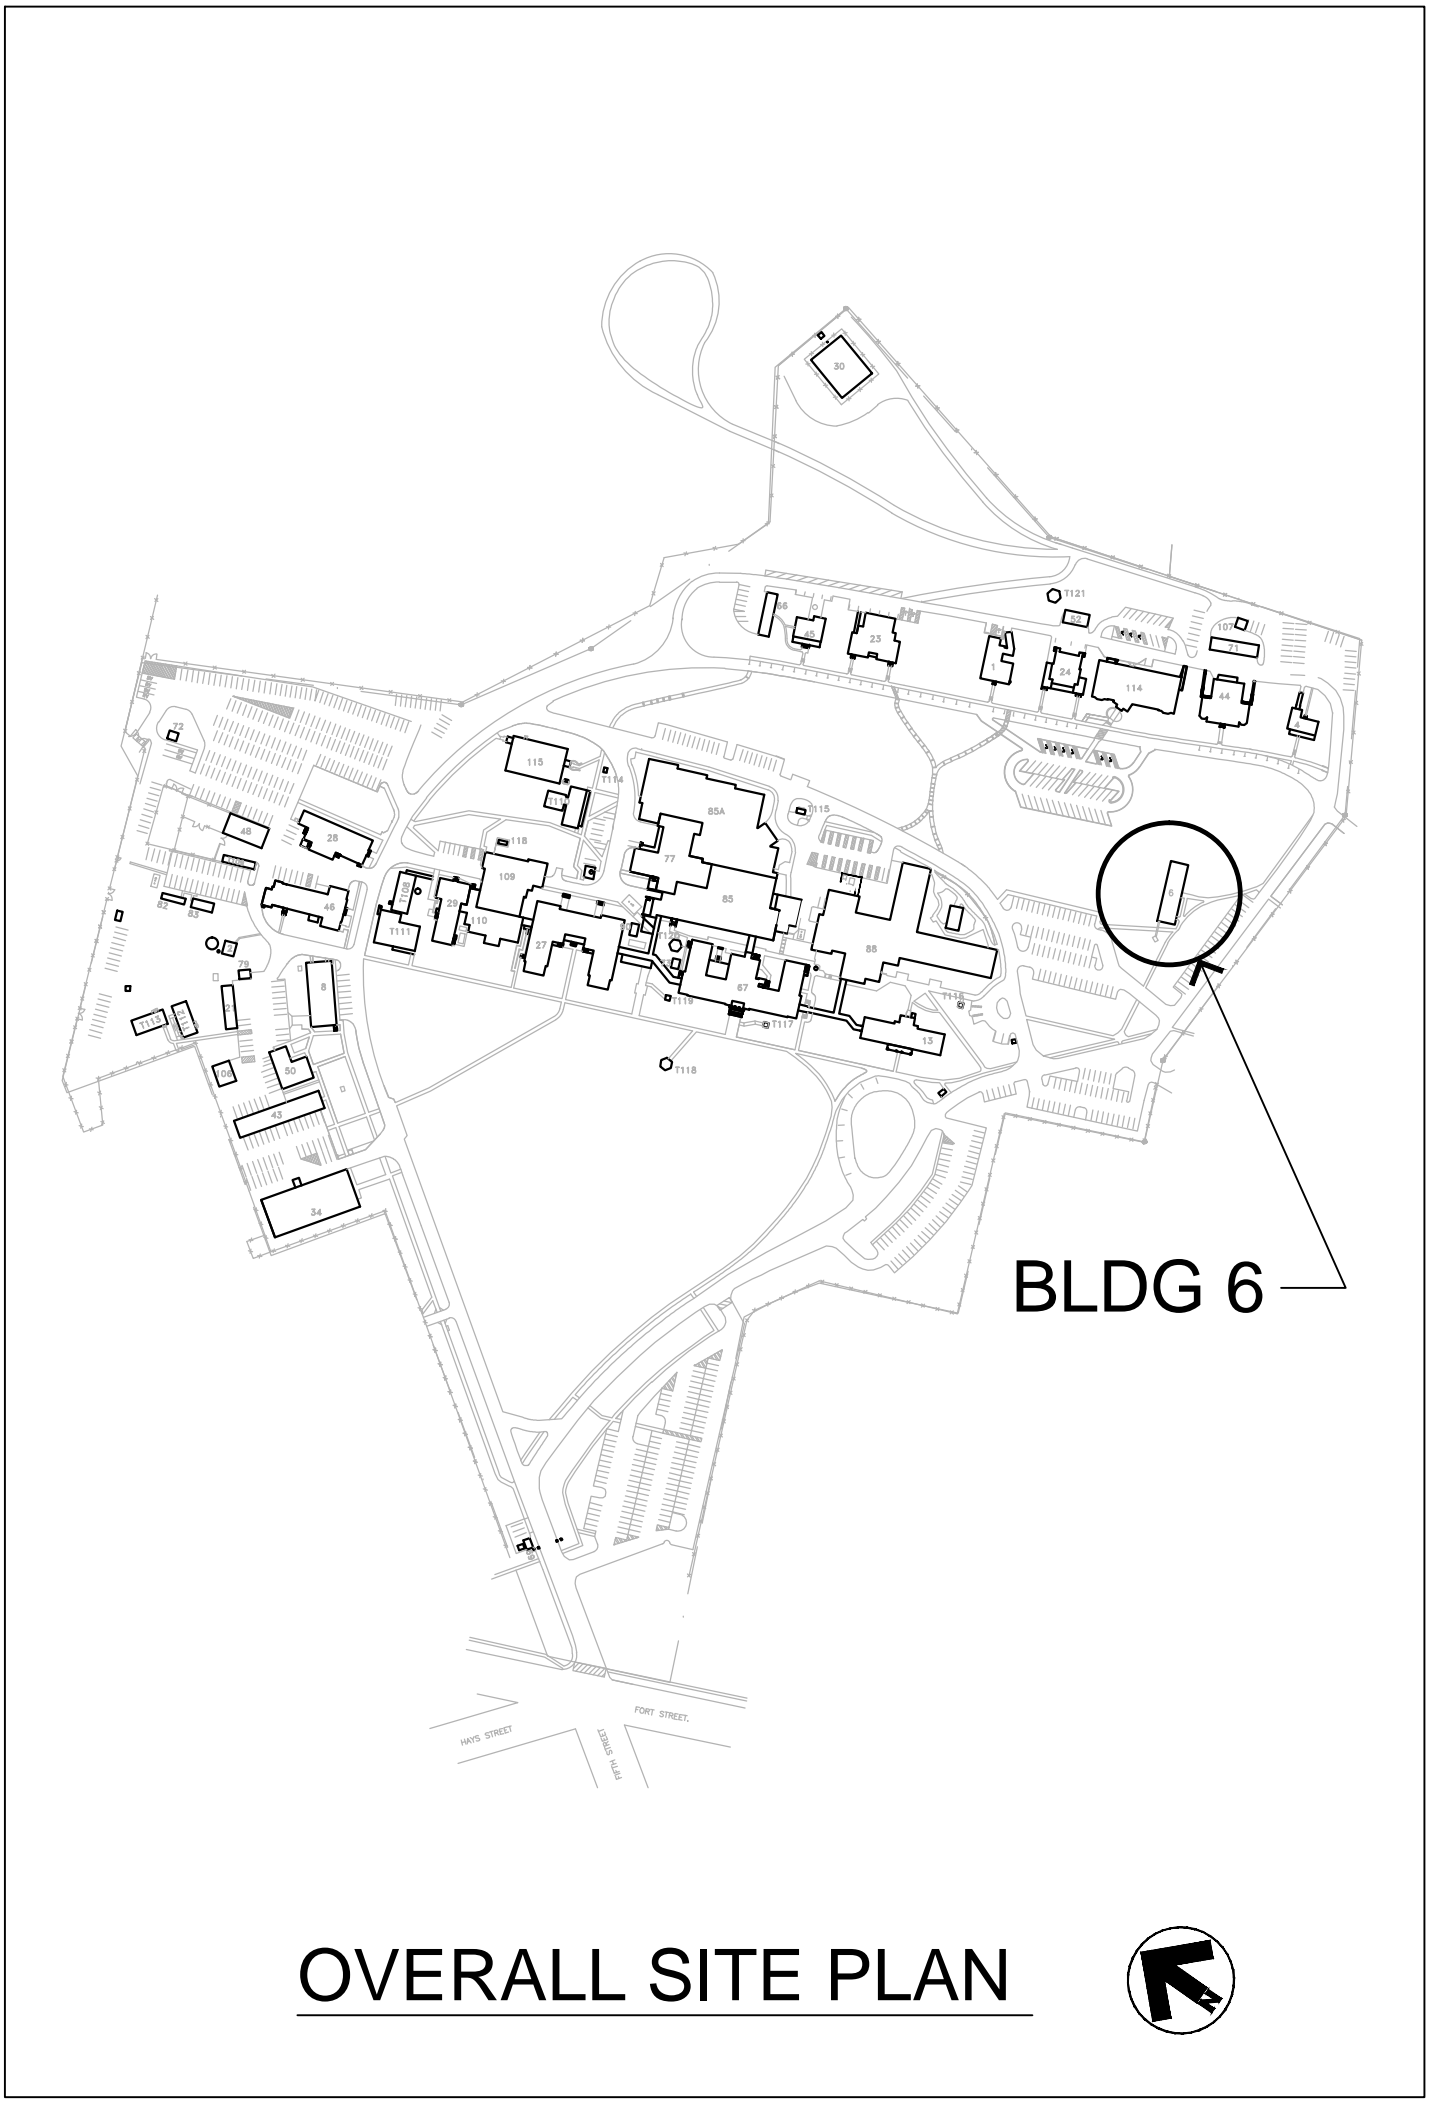

REVISIONS	DATE

CAD FILE NAME:
XREF FILE NAME:

DRAWING TITLE
BUILDING NO. 6
SITE SURVEY DATA
APPROVED: DIVISION CHIEF
APPROVED: SERVICE DIRECTOR

PROJECT TITLE
PAINT AND REPAIR
PHASE III
BUILDING NUMBER
6
CHECKED
DRAWN
LOCATION
VAMC BOISE, IDAHO

DATE
02/01/2012
PROJECT NO.
531-09-104
DRAWING NO.
B6-1
DWG. 2 OF 29

