


VA FORM 66-6231

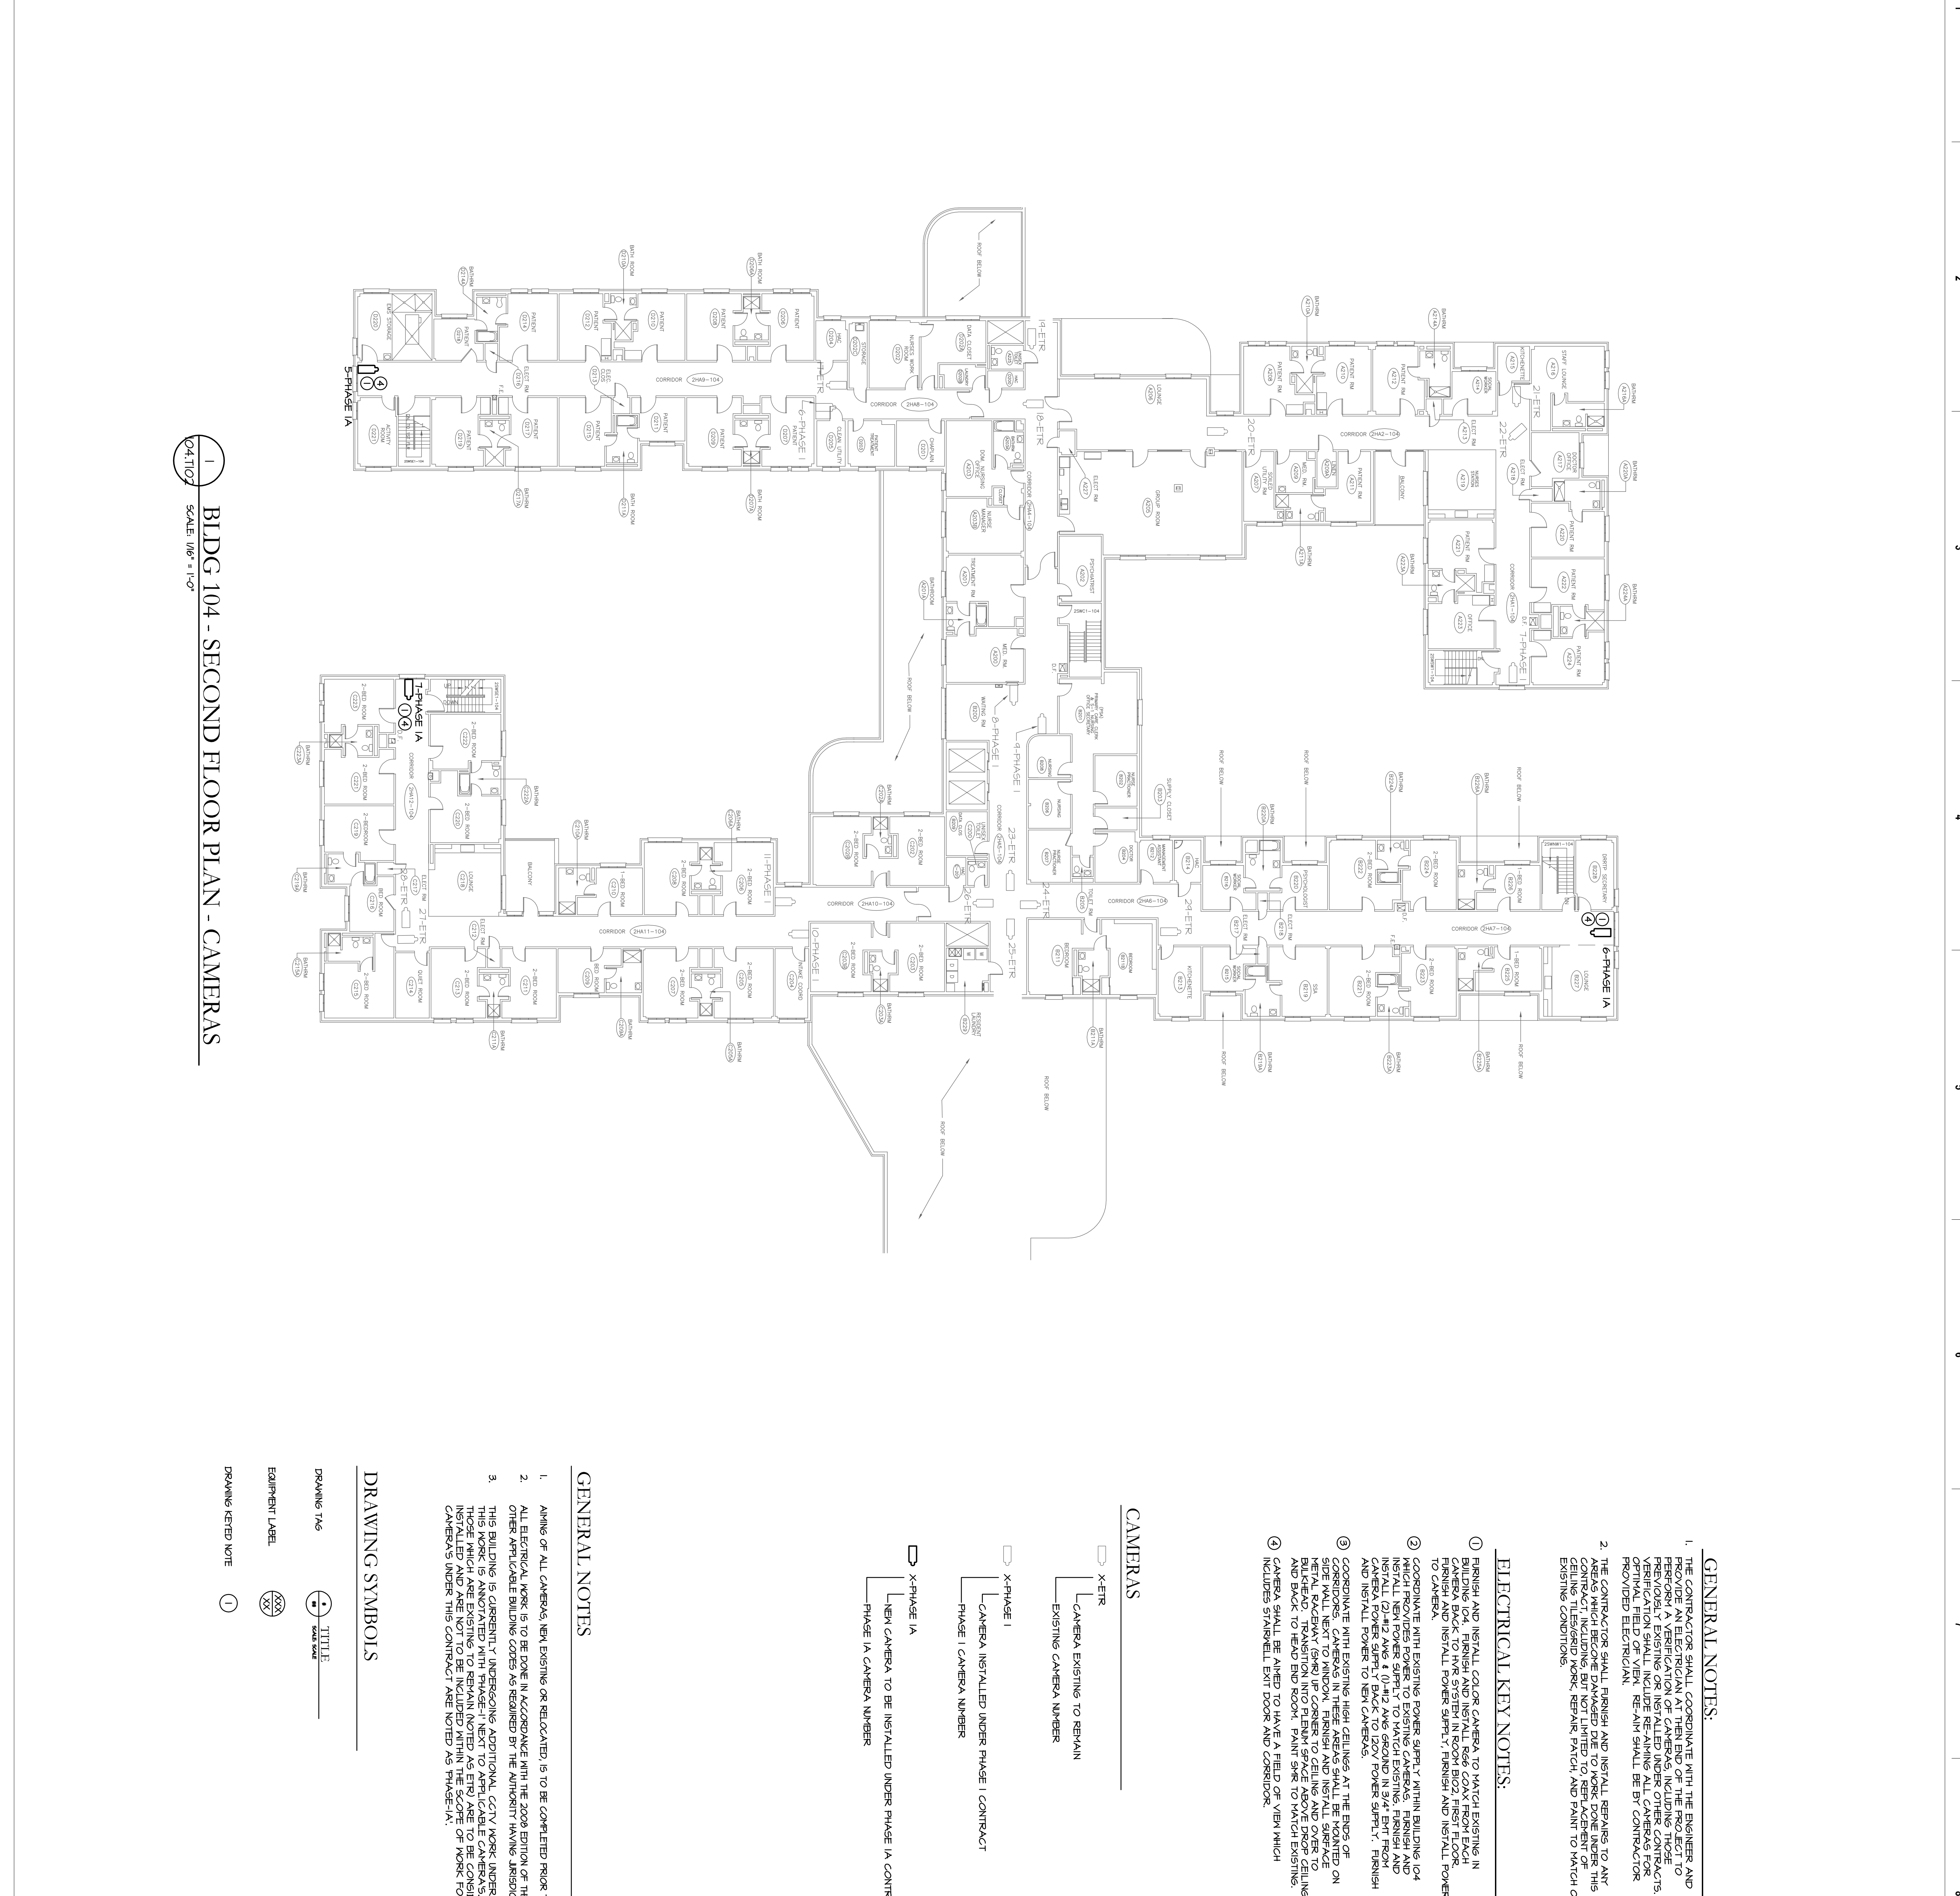

1 BLDG 104 - SECOND FLOOR PLAN - CAMERAS
SCALE: 1/8" = 1'-0"

- DRAWING SYMBOLS**
- DRAWING TAG
- EQUIPMENT LABEL
- DRAWING REVISION NOTE
- 1

GENERAL NOTES

1. ALL CAMERAS, NEW, EXISTING OR RELOCATED, IS TO BE COMPLETED PRIOR TO COMPLETION OF WORK.
2. ALL ELECTRICAL WORK IS TO BE DONE IN ACCORDANCE WITH THE 2008 EDITION OF THE NATIONAL ELECTRICAL CODE AND OTHER APPLICABLE BUILDING CODES AS REQUIRED BY THE AUTHORITY HAVING JURISDICTION.
3. THIS BUILDING IS CURRENTLY UNDERGOING ADDITIONAL CCTV WORK UNDER A SEPARATE CONTRACT. THOSE WHICH ARE EXISTING TO REMAIN (NOTED AS EX) ARE TO BE CONSIDERED PREVIOUSLY PROVIDED ELECTRICIAN. RE-AM SHALL BE BY CONTRACTOR.
4. THE CONTRACTOR SHALL FINISH AND INSTALL REPAIRS TO ANY CEILING, WALL, FLOOR, OR OTHER SURFACE DAMAGED BY THIS CONTRACT, INCLUDING BUT NOT LIMITED TO REPAIRS OF CEILING, TILES, GROUT, REPAIR PATCH, AND PAINT TO MATCH OF EXISTING CONDITIONS.

CAMERAS

- X-ETR
CAMERA EXISTING TO REMAIN
EXISTING CAMERA NUMBER
- X-PHASE I
CAMERA INSTALLED UNDER PHASE I CONTRACT
PHASE I CAMERA NUMBER
- X-PHASE 1A
CAMERA TO BE INSTALLED UNDER PHASE 1A CONTRACT
PHASE 1A CAMERA NUMBER

ELECTRICAL KEY NOTES:

1. FINISH AND INSTALL COLOR CAMERA TO MATCH EXISTING IN BUILDING 104. FINISH AND INSTALL RGB COAX FROM EACH CAMERA TO THE BUILDING 104. FINISH AND INSTALL POWER SUPPLY, FINISH AND INSTALL POWER TO CAMERA.
2. COORDINATE WITH EXISTING POWER SUPPLY WITHIN BUILDING 104 WHICH PROVIDES POWER TO EXISTING CAMERAS. FINISH AND INSTALL (2) 1/2" AVG. 1 (1) 1/2" AVG. GROUND IN 3/4" BMT FROM CAMERA POWER SUPPLY BACK TO 120V POWER SUPPLY. FINISH AND INSTALL POWER TO NEW CAMERAS.
3. COORDINATE WITH EXISTING POWER SUPPLY AT THE BAYS OF SIDE WALL NEXT TO WINDOW. FINISH AND INSTALL SURFACE RACEWAY FROM WINDOW TO CEILING AND OVER CEILING AND BACK TO HEAD END ROOM. PAINT SWR TO MATCH EXISTING.
4. CAMERA SHALL BE ARMED TO HAVE A FIELD OF VIEW WHICH INCLUDES STAIRWELL EXIT DOOR AND CORRIDOR.

Drawing Title BLDG 104 - SECOND FLOOR PLAN - CAMERA LOCATIONS		Project Title Bath VA Medical Center Phase 1A Campus Wide Security		Building Number Checked SK		Drawn MW		Location Bath, NY	
100% CONSTRUCTION DOCUMENTS		Tolman Engineering 3610 Lawson Road Jamestown, NY 14701 PH: 716.484.1366 FAX: 716.484.1519		A/E works 101 W. STATION SQUARE DRIVE, FOURTH FLOOR PITTSBURGH, PENNSYLVANIA 15219 PH: 412.287.7333 FAX: 412.287.7334 www.ae-works.com		Department of Veterans Affairs 528A6-12-618 FEBRUARY 29, 2012		Drawing Number 104.T102 Dwg. 4 of 4	