


three inches = one foot
one and one half inches = one foot
one inch = one foot
three quarters inch = one foot
one half inch = one foot
three eighths inch = one foot
one quarter inch = one foot
one eighth inch = one foot

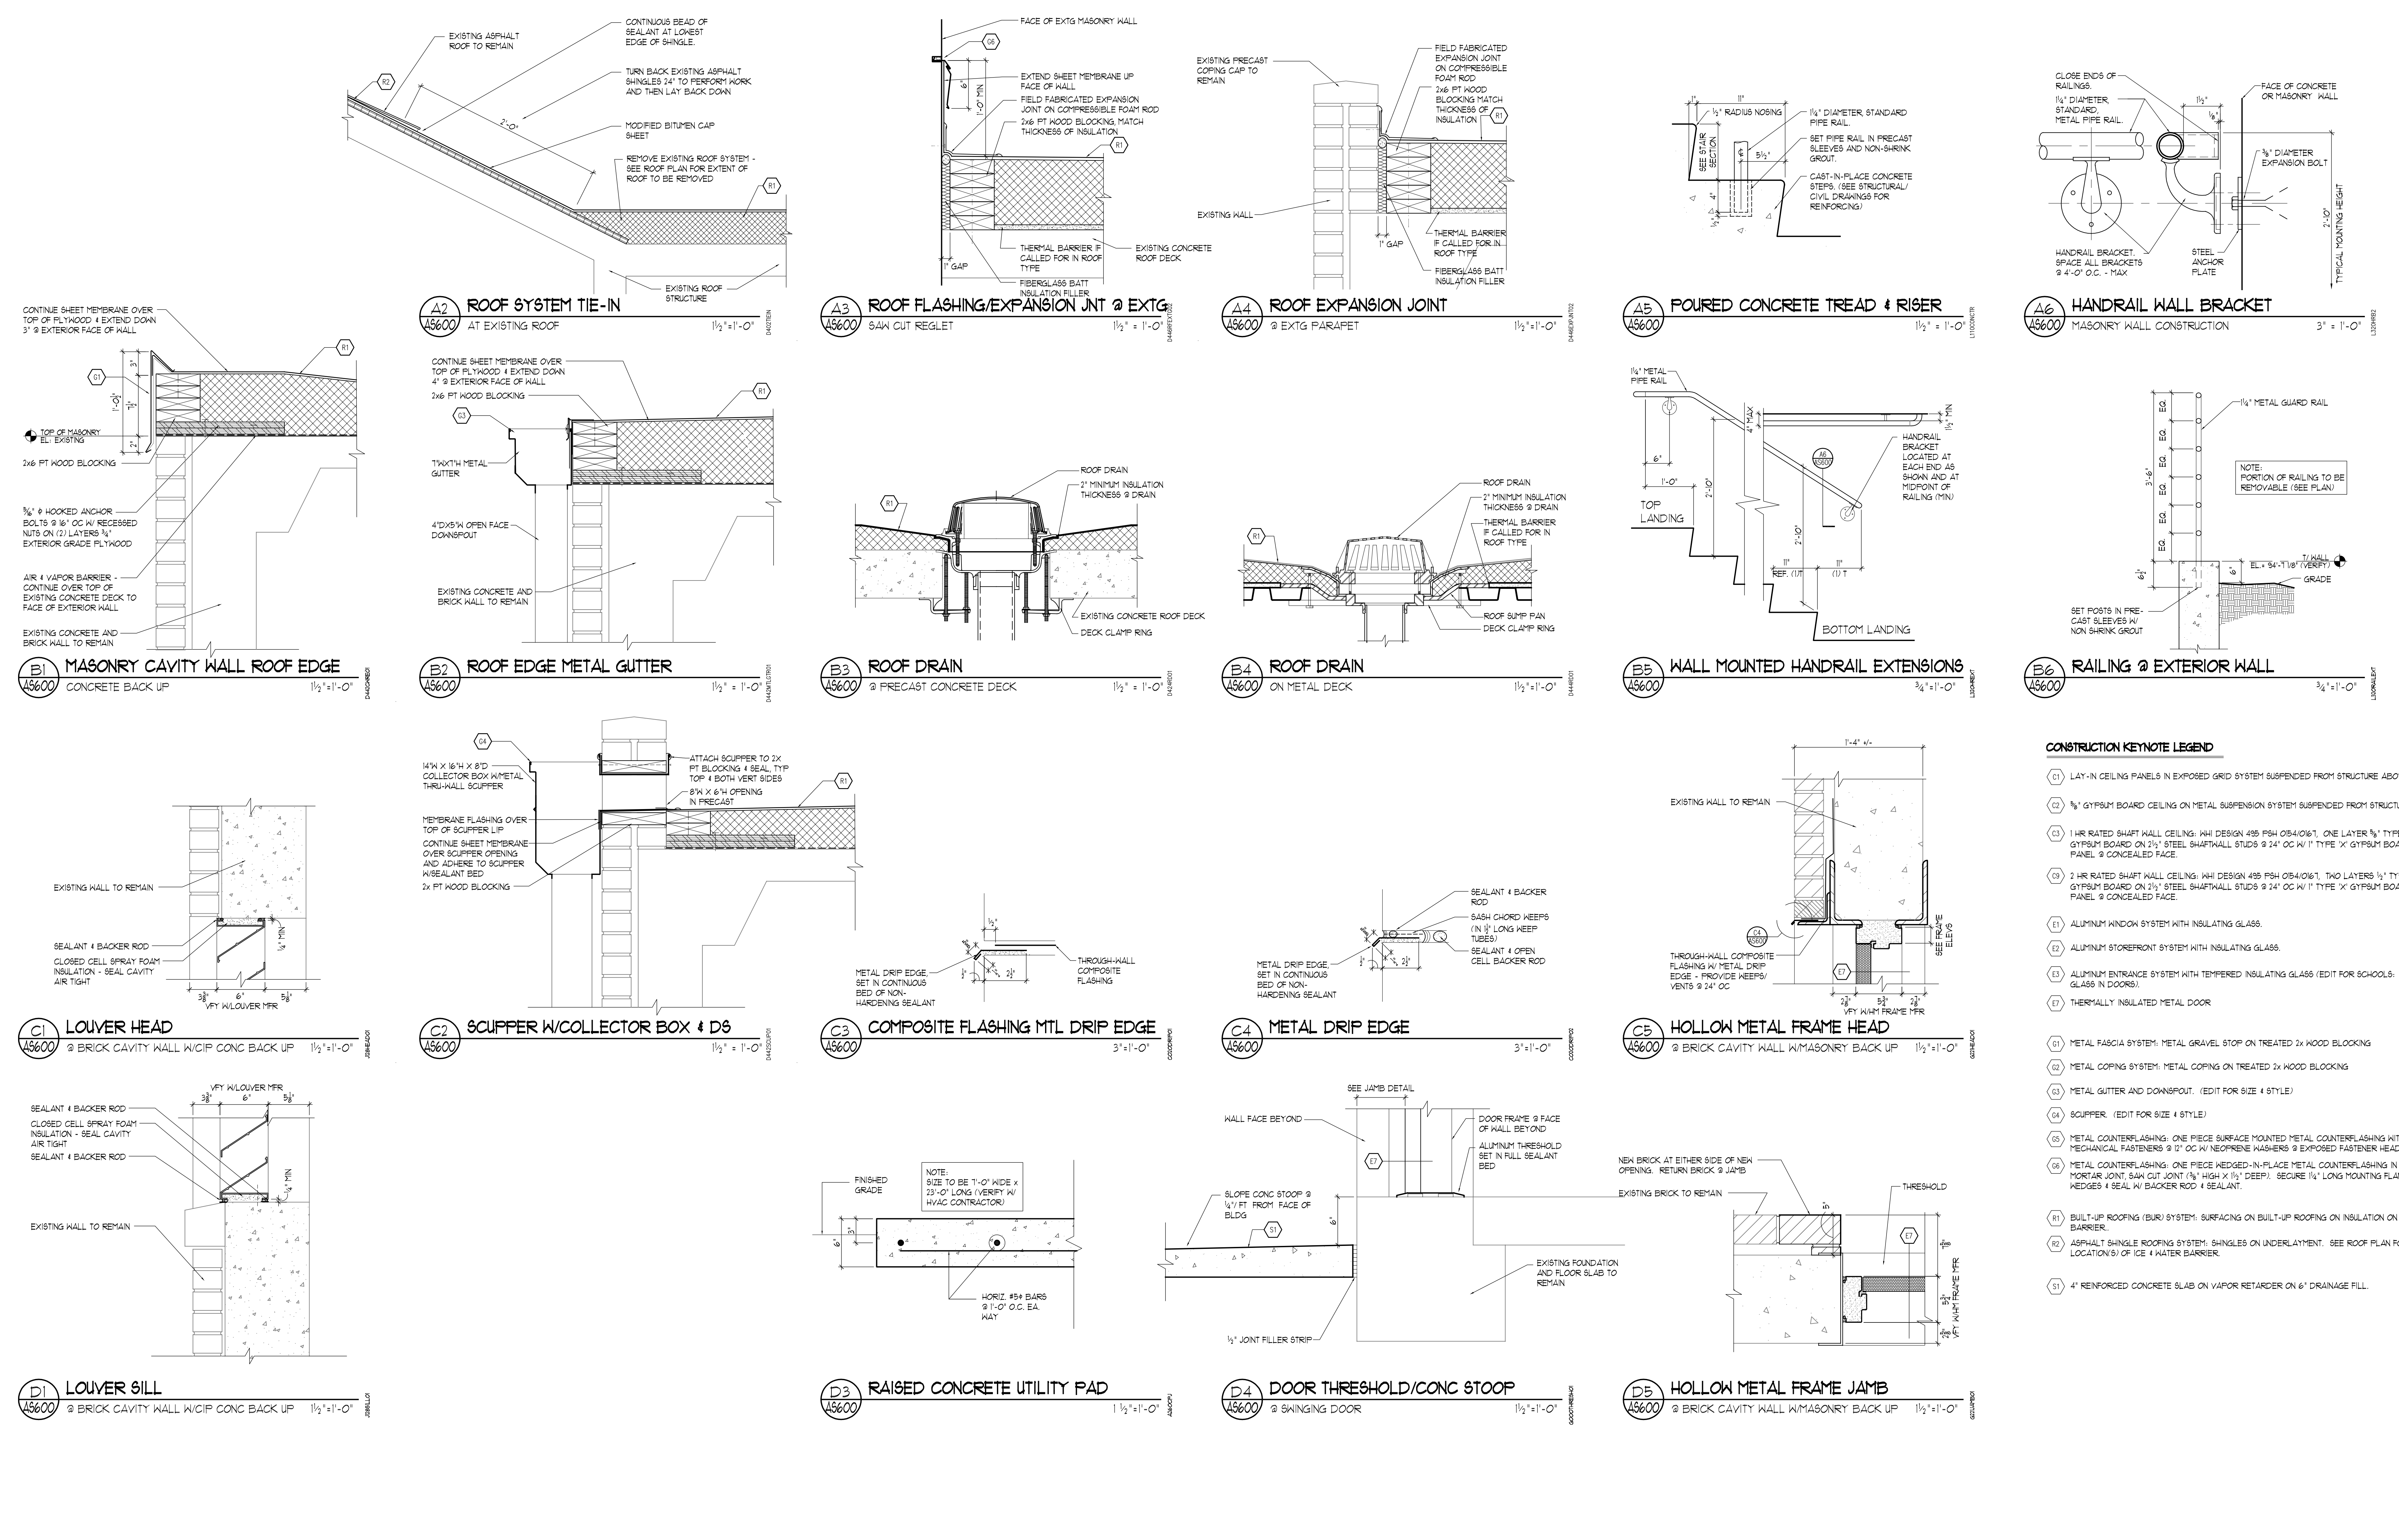

- CONSTRUCTION KEYNOTE LEGEND**
- (C1) LAY-IN CEILING PANELS IN EXPOSED GRID SYSTEM SUSPENDED FROM STRUCTURE ABOVE.
 - (C2) 5/8" GYPSUM BOARD CEILING ON METAL SUSPENSION SYSTEM SUSPENDED FROM STRUCTURE ABOVE.
 - (C3) 1 HR RATED SHAFT WALL CEILING: KHI DESIGN 488 PSH 054/067, ONE LAYER 1/2" TYPE 'X' GYPSUM BOARD ON 2 1/2" STEEL SHAFTWALL STUDS @ 24" OC W/ 1" TYPE 'X' GYPSUM BOARD LINER PANEL @ CONCEALED FACE.
 - (C4) 2 HR RATED SHAFT WALL CEILING: KHI DESIGN 488 PSH 054/067, TWO LAYERS 1/2" TYPE 'X' GYPSUM BOARD ON 2 1/2" STEEL SHAFTWALL STUDS @ 24" OC W/ 1" TYPE 'X' GYPSUM BOARD LINER PANEL @ CONCEALED FACE.
 - (E1) ALUMINUM WINDOW SYSTEM WITH INSULATING GLASS.
 - (E2) ALUMINUM STOREFRONT SYSTEM WITH INSULATING GLASS.
 - (E3) ALUMINUM ENTRANCE SYSTEM WITH TEMPERED INSULATING GLASS (EDIT FOR SCHOOLS: 1/4" TEMPERED GLASS IN DOORS).
 - (E4) THERMALLY INSULATED METAL DOOR.
 - (E5) METAL FASCIA SYSTEM: METAL GRAVEL STOP ON TREATED 2x WOOD BLOCKING.
 - (E6) METAL COPING SYSTEM: METAL COPING ON TREATED 2x WOOD BLOCKING.
 - (E7) METAL GUTTER AND DOWNSPOUT. (EDIT FOR SIZE & STYLE).
 - (E8) SCUPPER. (EDIT FOR SIZE & STYLE).
 - (E9) METAL COUNTERFLASHING: ONE PIECE SURFACE MOUNTED METAL COUNTERFLASHING WITH MECHANICAL FASTENERS @ 12" OC W/ NEOPRENE WASHERS @ EXPOSED FASTENER HEADS.
 - (E10) METAL COUNTERFLASHING: ONE PIECE WEDGED-IN-PLACE METAL COUNTERFLASHING IN OPEN MORTAR JOINT, SAW CUT JOINT (3/8" HIGH X 1/2" DEEP). SECURE 1/4" LONG MOUNTING FLANGE W/ METAL WEDGES & SEAL W/ BACKER ROD & SEALANT.
 - (R1) BUILT-UP ROOFING (BUR) SYSTEM: SURFACING ON BUILT-UP ROOFING ON INSULATION ON THERMAL BARRIER.
 - (R2) ASPHALT SHINGLE ROOFING SYSTEM: SHINGLES ON UNDERLAYMENT. SEE ROOF PLAN FOR LOCATION(S) OF ICE & WATER BARRIER.
 - (S1) 4" REINFORCED CONCRETE SLAB ON VAPOR RETARDER ON 6" DRAINAGE FILL.