

Install two 36 inch wide solid core wooden doors (with push hardware and locks) and metal frame.  
 Cap old floor drains provide clean out at those non-used floor drains. Make floor smooth apply epoxy floor covering.

Supply and install an exhaust fan for each restroom and duct into existing duct work as necessary (see drawing).

Install one two bulb (4 foot) incandescent light fixture in each restroom. Tie into existing electrical power to replace existing light fixtures  
 Paint interior of restrooms walls (off-white) and floor (gray) with epoxy paint (apply on weekend).

Install grab bars on wall adjacent to toilets and along rear wall and adjacent to sinks in BOTH restrooms (see details). Use stainless steel bars with knurled grip area.



relocate new fire sprinkler head in each restroom using existing supply lines as applicable.

Use lever type (handle) faucets for sinks


Insulate and/or cover, piping under sink to protect user from piping. See dotted line in Fig 31.

Toilet & Grab Bar dimensions (note typical length of bar)


# BATHROOM DETAIL

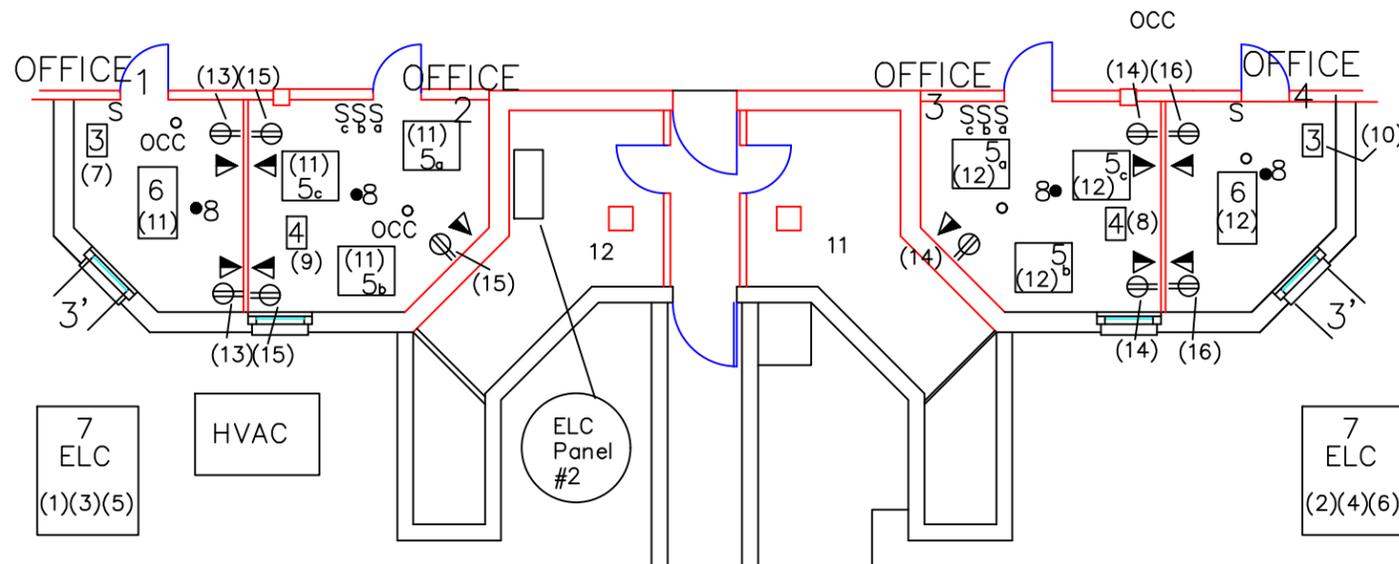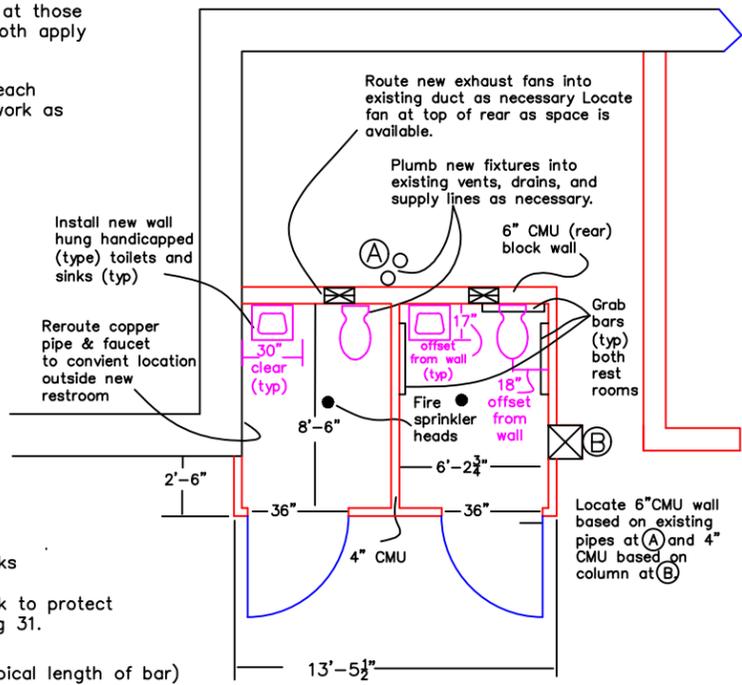

Location of bathroom detail. gray circle is 5' DIA handicapped ICON. Clear opening for doors is 3'

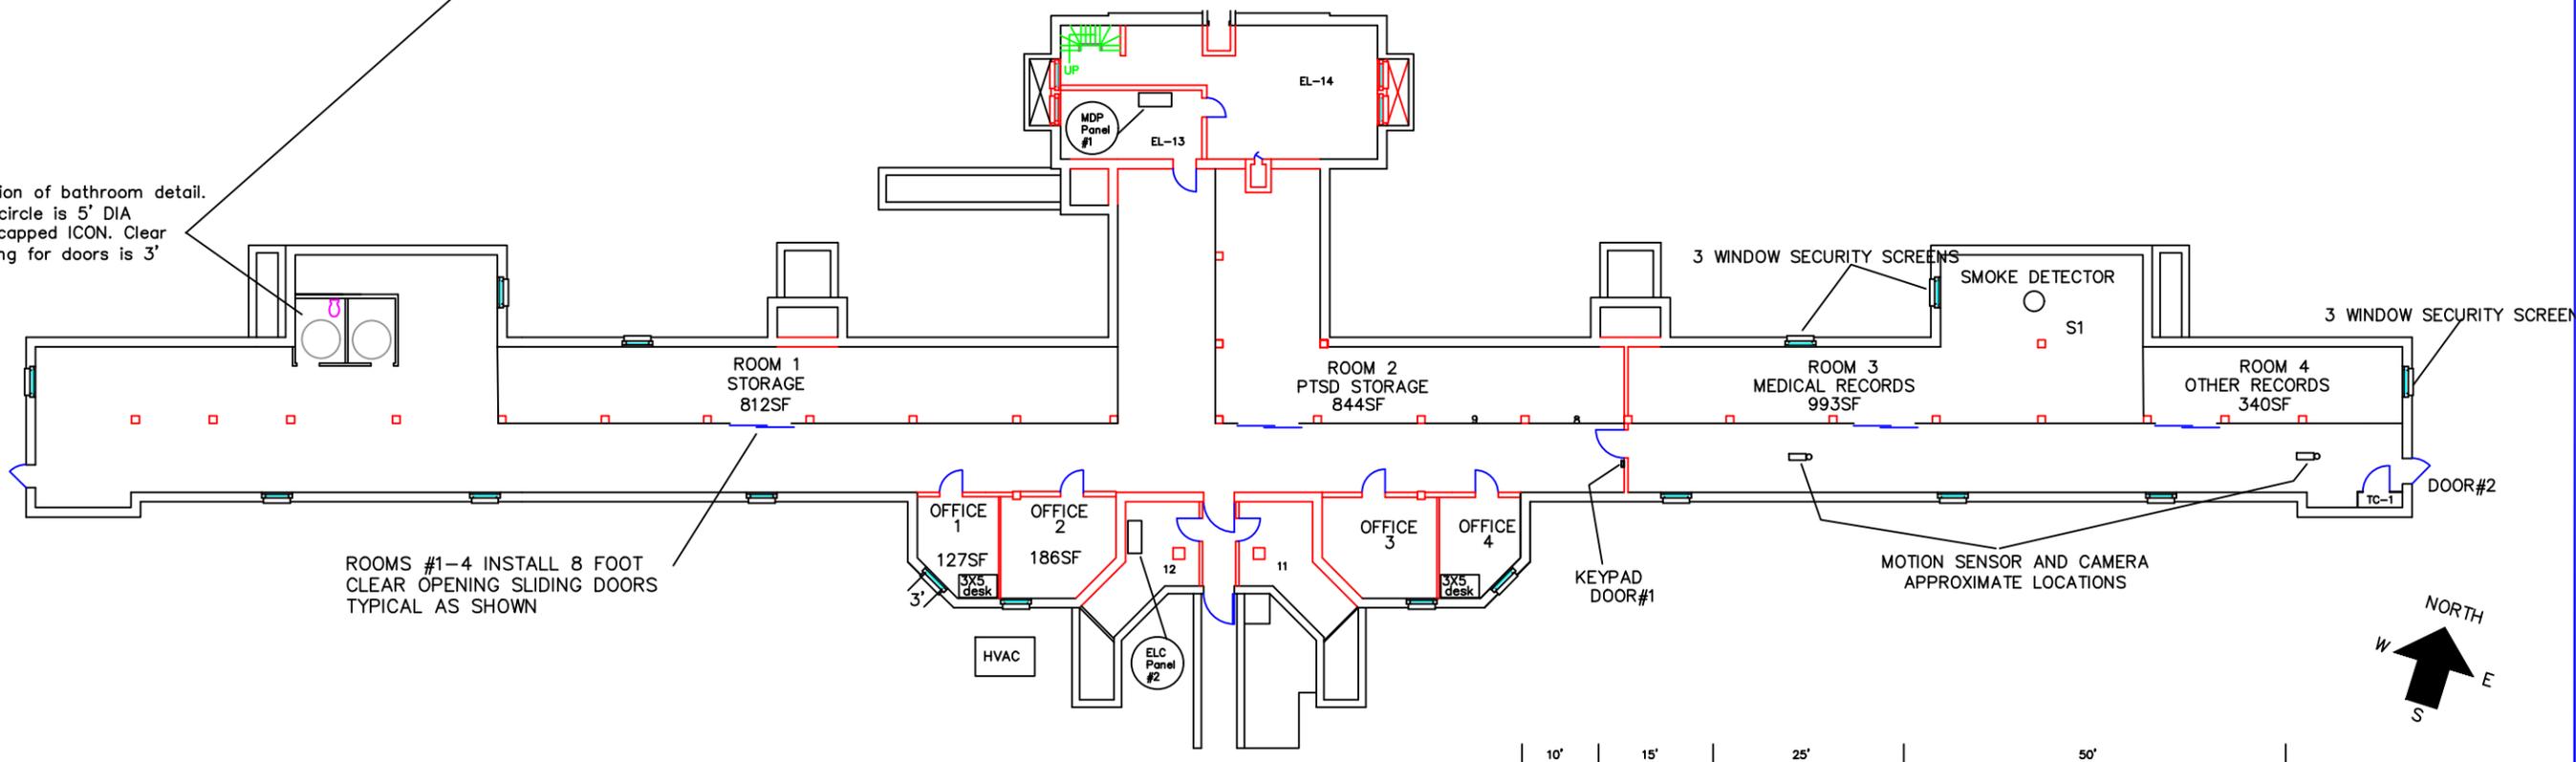

ROOMS #1-4 INSTALL 8 FOOT CLEAR OPENING SLIDING DOORS TYPICAL AS SHOWN



Revisions Date	Professional Seal	Drawing Title <b>BASEMENT FLOOR</b>		Project Title <b>WARD</b>		Date 01/2018	
		Approved: Project Manager		Drawing No. 2		Checked Drawn	Project No.
		Approved: Service Chief		Location VAMC, NORTHAMPTON MASS.		Building Number 9	
		ROOM CHANGES TO BASEMENT FLOOR		VAMC, NORTHAMPTON			