


**NEW WORK PLAN
HISTOLOGY LABORATORY**
SCALE: 1/4" = 1'-0"



**NEW CEILING PLAN
HISTOLOGY LABORATORY**
SCALE: 1/4" = 1'-0"

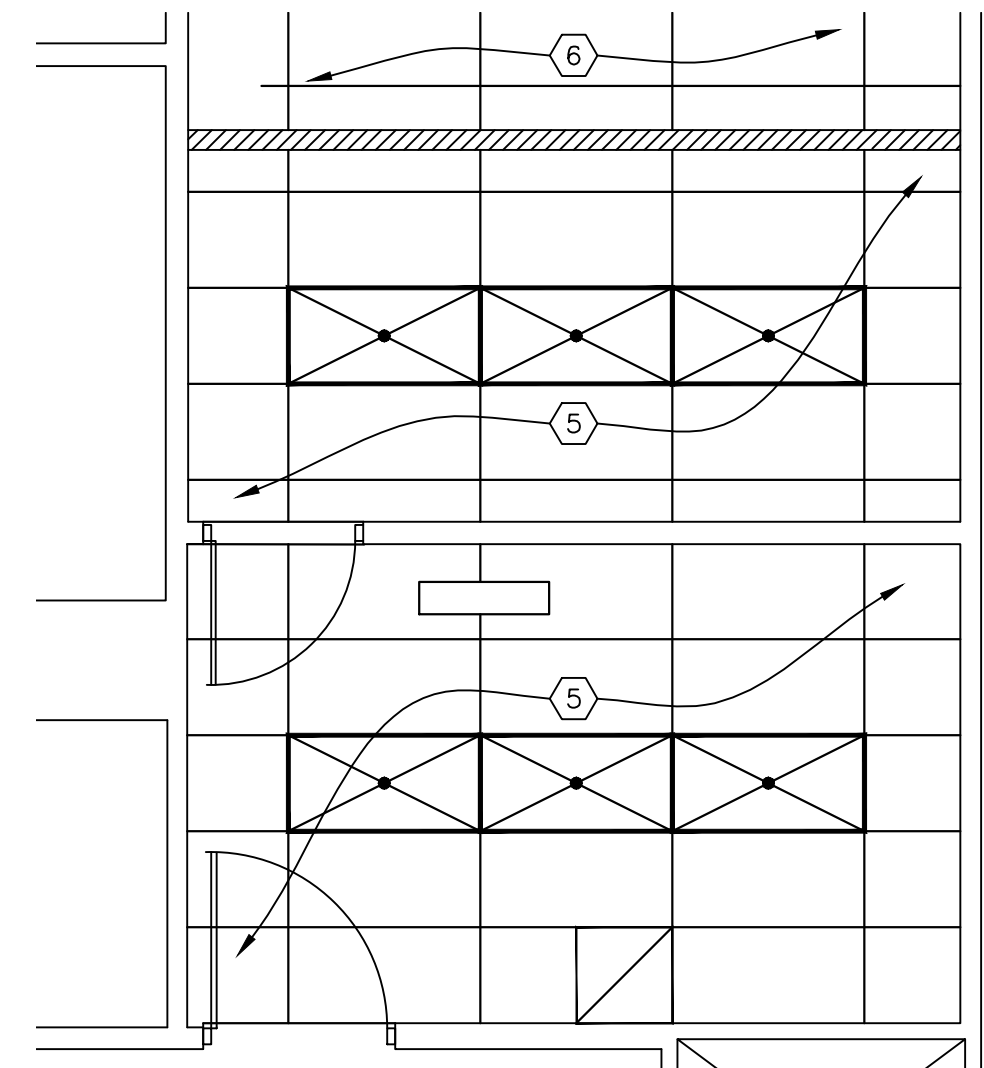

CONSTRUCTION NOTES

- 1 NEW DRYWALL PARTITION - 5/8" DRYWALL ON BOTH SIDES OF 4" 20 GAUGE METAL STUDS @ 16" O.C. TO 4" (MIN.) ABOVE HIGHEST ADJACENT FINISHED CEILING. INSULATE WALL FOR SOUND. INSTALL BLOCKING TO SUPPORT WALL HUNG CABINETS. PAINT ENTIRE WALL FROM CORNER TO CORNER BOTH SIDES.
- 2 ENTIRE ROOM TO RECEIVE NEW FINISHES. SEE ROOM FINISH SCHEDULE.
- 3 NEW 2'x2' ACCESS PANEL & EXHAUST GRILL TO BE INSTALLED IN DRYWALL CEILING - LOCATION T.B.D. FOR MECHANICAL WORK.
- 4 PATCH AND PAINT ALL INTERIOR WALLS IN ROOM 1B108. REMOVE WALL HUNG ITEMS AND STORE APPROPRIATELY AS DIRECTED BY COR FOR RE-INSTALLATION AS REQUIRED FOR NEW FINISH. SEE ROOM FINISH SCHEDULE.
- 5 NEW CEILING TILE, GRID & LIGHTING. SEE FINISH SCHEDULE & LIGHTING PLAN.
- 6 EXISTING CEILING TILE PANELS AND GRID TO BE REINSTALLED, REPLACE DAMAGED WITH NEW MATCHING MATERIALS.



UNITED STATES DEPARTMENT OF VETERANS AFFAIRS
VA MEDICAL CENTER - 1540 SPRING VALLEY DRIVE - HUNTINGTON WV 25704

| | | | |
|---|--|---|---------------------------|
| DRAWING TITLE: PROPOSED NEW WORK | | PROJECT TITLE: RENOVATE HISTOLOGY LAB | |
| APPROVED: CHRIS ECKLES ASST. CHIEF, ENGINEERING | | BUILDING: 1S | PROJECT NUMBER: 12-104 |
| APPROVED: JOHN KLIM CHIEF, ENGINEERING | | DRAWN: STEVE ELROD | DATE: FEB '12 |
| | | DRAWING NUMBER: A2 | |