

SUBMITTAL: AMBASSADOR STEEL FIRE EXTINGUISHER CABINETS

PAGE 1 OF 2

The Ambassador Series is a Durable, Attractive Steel Cabinet with Powder-coat Finish that Stands up to Conditions in Commercial Buildings.

Door & Trim Construction: Cold rolled steel with white powder-coated finish standard. Flush cabinet doors with a 5/8" door stop are attached by a continuous hinge and equipped with zinc-plated handle and roller catch. All models have 1-3/4" trim on face and door.

Trim Style & Depth: Recessed 3/8" flat trim, Recessed Trimless (install before drywall), Semi Recessed - 1-1/4", 1-1/2" Square Edge or 2-1/2", 3", 4", 4-1/2" Rolled Edge (4" has recessed ADAC pull). Surface-mount models have a square edge or optional rolled edge upon request.

Tub: The tub is constructed of cold rolled steel with white powder-coat finish standard.

Fire-Rated Option Available: Yes -

STEP 1: SELECT MODEL NUMBER AND QUANTITY ON CHART (refer to chart on pg 2)

A. Determine Trim Style according to wall depth.

B. Determine Tub I.D. according to size most suited for extinguisher and wall opening.

STEP 2: SELECT DOOR STYLE WITH HANDLE

Check one box below Examples on Page 2

- | | |
|---|--|
| <input checked="" type="checkbox"/> F Full Glazing | <input type="checkbox"/> L22 Solid with SAF-T-LOK™ |
| <input type="checkbox"/> G Full Glazing with SAF-T-LOK™ | <input type="checkbox"/> L24 Solid with Cylinder Lock - No Handle |
| <input type="checkbox"/> D Horizontal Duo Panel | <input type="checkbox"/> V Vertical Duo |
| <input type="checkbox"/> E Horizontal Dual Panel with SAF-T-LOK™ | <input type="checkbox"/> W Vertical Duo with SAF-T-LOK™ |
| <input type="checkbox"/> S21 Solid Door | <input type="checkbox"/> B Solid with Small View Window & Safety Lock |

STEP 3: SELECT DOOR GLAZING

(Check one box below)

- | | | |
|---|---|---|
| <input checked="" type="checkbox"/> 10 Clear Acrylic | <input type="checkbox"/> 15 Bronze Acrylic | <input type="checkbox"/> 17 Clear Tempered Glass |
| <input type="checkbox"/> 13 Clear Wire Glass | <input type="checkbox"/> 16 Gray Acrylic | <input type="checkbox"/> 18 Laminated Safety Glass |

STEP 4: OPTIONAL FEATURES AT ADDED COST (SELECT ANY)

- | | | | |
|--|---|---|--|
| <input type="checkbox"/> Optional Tub Color: ____ Black ____ Red | <input type="checkbox"/> Black Vertical FE Letters LDCVBFE | <input type="checkbox"/> Black Vertical Decal LDVBFE | <input type="checkbox"/> (CA) Commander Alarm |
| <input type="checkbox"/> Futura "Fire" Pull ____ Mill Alum ____ Red ____ White | <input type="checkbox"/> Red Vertical FE Letters LDCVRFE | <input type="checkbox"/> Red Vertical Decal LDVRFE | <input type="checkbox"/> (BA) Brigadier Alarm |
| <input type="checkbox"/> ADAC Flush Pull Handle | <input type="checkbox"/> White Vertical FE Letters LDCVWFE | <input type="checkbox"/> White Vertical Decal LDVWFE | <input type="checkbox"/> (SA) Strobe Alarm (Surface Mount Models) |
| <input type="checkbox"/> Polished Chrome Lever Handle (P6) | <input type="checkbox"/> Black Horizontal FE Letters LDCHBFE | <input type="checkbox"/> Black Horizontal Decal LDHBFE | <input type="checkbox"/> Etched or Engraved Lettering in Glass or Metal |
| <input type="checkbox"/> <u>Optional Colors:</u> ____ Red ____ Black ____ Flat Black | <input type="checkbox"/> Red Horizontal FE Letters LDCHRFE | <input type="checkbox"/> Red Horizontal Decal LDHRFE | <input type="checkbox"/> Rolled Edge Surface Mount |
| ____ Sand ____ AMS Beige ____ SC Flat Beige | <input type="checkbox"/> White Horizontal FE Letters LDCHWFE | <input type="checkbox"/> White Horizontal Decal LDHWFE | |
| ____ Gray Primer ____ Bronze ____ Silver | | | |

For More Information on Options See Other Submittals: [Decals/Die Cuts](#) & Wall Signs, [Handles & Levers](#).






1012V10
4" Rolled Trim with
Standard ADA Pull



1017V10
3" Rolled Trim
Semi-Recessed





1816F10
1-1/2" Square Trim
Semi-Recessed



 <p>JL INDUSTRIES</p>	 <p>Distributed by www.AmeraProducts.com Phone: (800) 608-6568 Fax: (409) 840-5545 info@ameraproducts.com</p>	Distributor:	Quantity:
		Contractor:	Approved By:
		Model #:	Architect:
		Project:	Date:
 <p>ACTIVAR INC. Construction Products Group</p>			

SUBMITTAL: AMBASSADOR STEEL FIRE EXTINGUISHER CABINETS

TRIM & DOOR SERIES #			Tub I.D.			Frame O.D.		Wall Opening			Extinguisher
QTY	Model	Trim Style	A	B	C	E	F	W	H	D	
	8114	Trimless	9	18	5 1/2	9 1/4	18 1/4	9 1/2	18 1/2	5 3/4	Cosmic & Galaxy 2 1/2-6, Mercury 2 1/2- 5
	8115	Flat trim	9	18	5 1/2	12 3/8	21 3/8	10	19	5 1/2	
	8116	1 1/2 Square	9	18	5 1/2	12 3/8	21 3/8	10	19	4	
	8117	2 1/2 Rolled	9	18	5 1/2	12 3/8	21 3/8	10	19	3 1/8	
	8113	Surf. Mtd Sq	12 3/16	21 3/16	6	12 3/8	21 3/8	--	--	--	
	1710	2-1/4 Square	10 1/2	24	5	13 7/8	27 3/8	11 1/2	25	2 3/4	Cosmic & Galaxy 2 1/2-10. (10 lb must be mounted to back of tub) Mercury 2 1/2-5
	1815	Flat trim	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	5 3/4	
	1816	1 1/2 Square	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	4	
	1817	3 Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	2 5/8	
	1812	4 Rolled/ADA Pull	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	1 5/8	
	1818	4 1/2 Rolled	10 1/2	24	5 1/2	13 7/8	27 3/8	11 1/2	25	1 1/8	Cosmic & Galaxy 2 1/2-10 Mercury 2 1/2-5, Sentinel 5
	1014	Trimless	10 1/2	24	6	10 3/4	24 1/4	11	24 1/2	6 1/4	
	1015	Flat trim	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	6 1/4	
	1016	1 1/2 Square	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	4 5/8	
2	1017	3 Rolled	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	3 1/8	
	1012	4 Rolled/ADA Pull	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	2 1/8	Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5 & 10
	1018	4 1/2 Rolled	10 1/2	24	6	13 7/8	27 3/8	11 1/2	25	1 5/8	
	1013	Surf Mtd. Sq	13 11/16	27 3/16	6 1/2	13 7/8	27 3/8	--	--	--	
	2014	Trimless	12	27	7 3/4	12 1/4	27 1/4	12 1/2	27 1/2	8	
	2015	Flat trim	12	27	7 3/4	15 3/8	30 3/8	13	28	8	
	2016	1 1/4 Square	12	27	7 3/4	15 3/8	30 3/8	13	28	6 3/4	Any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5-15, 272
	2017	2 1/2 Rolled	12	27	7 3/4	15 3/8	30 3/8	13	28	5 1/2	
	2012	4 Rolled/ADA Pull	12	27	7 3/4	15 3/8	30 3/8	13	28	4	
	2018	4 1/2 Rolled	12	27	7 3/4	15 3/8	30 3/8	13	28	3 1/2	
	2013	Surf Mtd. Sq	15 3/16	30 3/16	8 1/4	15 3/8	30 3/8	--	--	--	
	3015	Flat trim	16	32	7 3/4	19 3/8	35 3/8	17	33	8	Two each of: any Cosmic**, Galaxy**, Mercury, Saturn or Grenadier P, Sentinel 5
	3016	1 1/4 Square	16	32	7 3/4	19 3/8	35 3/8	17	33	6 3/4	
	3017	2 1/2 Rolled	16	32	7 3/4	19 3/8	35 3/8	17	33	5 1/2	
	3012	4 Rolled/ADA Pull	16	32	7 3/4	19 3/8	35 3/8	17	33	4	
	3018	4 1/2 Rolled	16	32	7 3/4	19 3/8	35 3/8	17	33	3 1/2	
	4015	Flat trim	20	27	7 3/4	23 3/8	30 3/8	21	28	8	
	4016	1 1/4 Square	20	27	7 3/4	23 3/8	30 3/8	21	28	6 3/4	
	4017	2 1/2 Rolled	20	27	7 3/4	23 3/8	30 3/8	21	28	5 1/2	
	4012	4 Rolled/ADA Pull	20	27	7 3/4	23 3/8	30 3/8	21	28	4	
	4018	4 1/2 Rolled	20	27	7 3/4	23 3/8	30 3/8	21	28	3 1/2	
	4013	Surf Mtd. Sq	23 3/16	30 3/16	8 1/4	23 3/8	30 3/8	--	--	--	

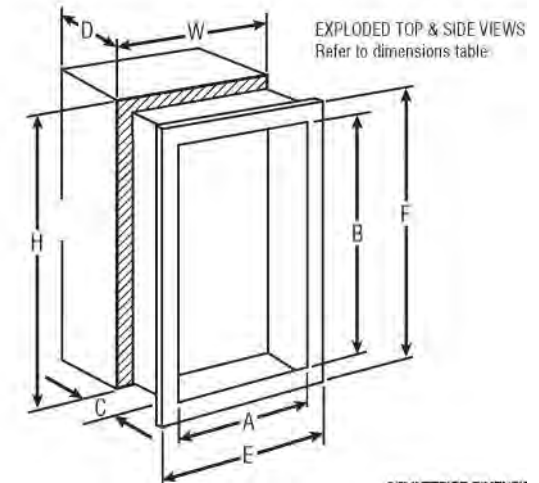

TRIMLESS

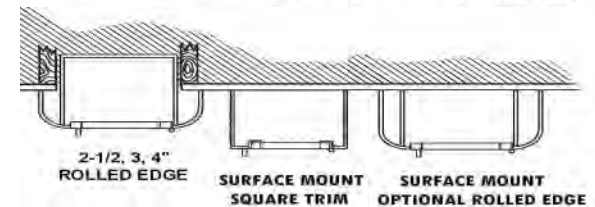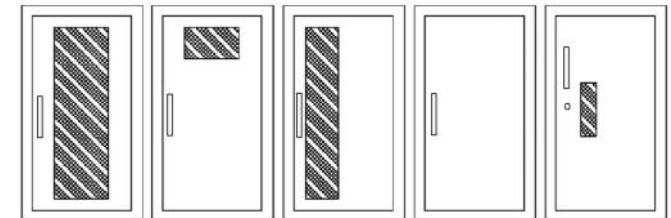3/8" (.9cm)
FLAT TRIM1-1/2" (3.8cm)
SQUARE TRIM2-1/2, 3, 4"
ROLLED EDGESURFACE MOUNT
SQUARE TRIMSURFACE MOUNT
OPTIONAL ROLLED EDGEF - Full glass
with pull handle
G - Full glass
with pull handle
and Saf-T-LokD - Horizontal duo
panel with pull
handle
E - Horizontal duo
panel with pull
handle and Saf-T-
LokV - Vertical duo
panel with pull
handle
W - Vertical duo
panel with pull
handle and Saf-
T-LokS21 - Solid with
pull handle
L22 - Solid with
pull handle and
Saf-T-Lok
L24 - Solid with
cylinder key lock
and no handleB - Solid with pull
handle, view
window and Saf-
T-LokModels shown in **Large Bold** above are available in several door styles for Quick Shipment.

** Cosmic 20 & Galaxy 20 Extinguisher must be mounted on the back of the cabinet tub

Distributed by
www.Ameraproducts.com
Phone: (800) 608-6568
Fax: (409) 840-5545
info@ameraproducts.com