



A three inches = one foot
B one and one half inches = one foot
C one inch = one foot
D three quarters inch = one foot
E one half inch = one foot
F three eighths inch = one foot
G one quarter inch = one foot
H one eighth inch = one foot


REFERENCE SYMBOLS

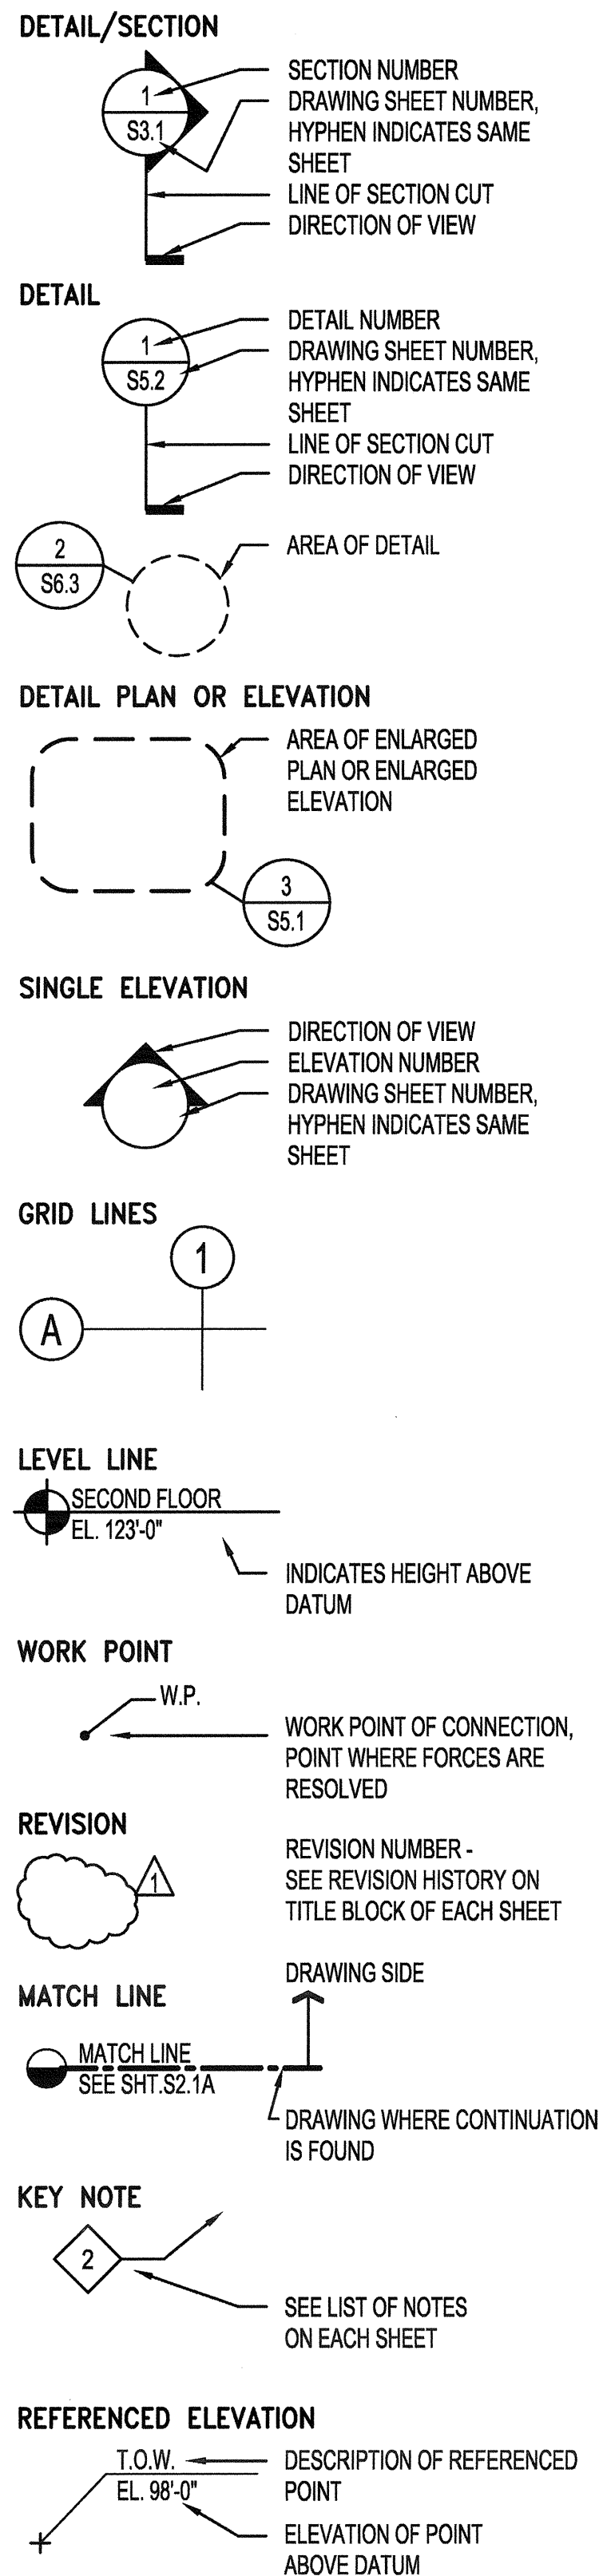

PLAN SYMBOLS, CONT'D

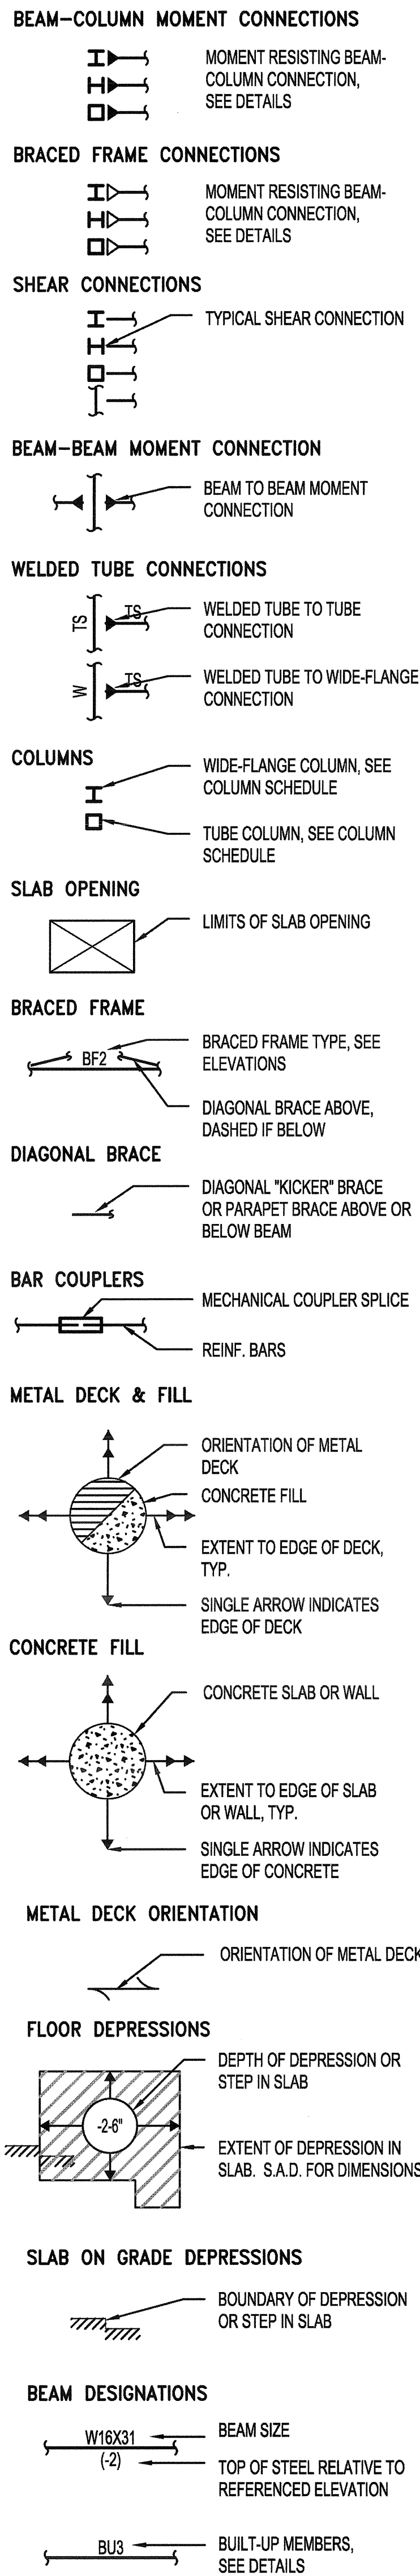


MATERIAL SYMBOLS

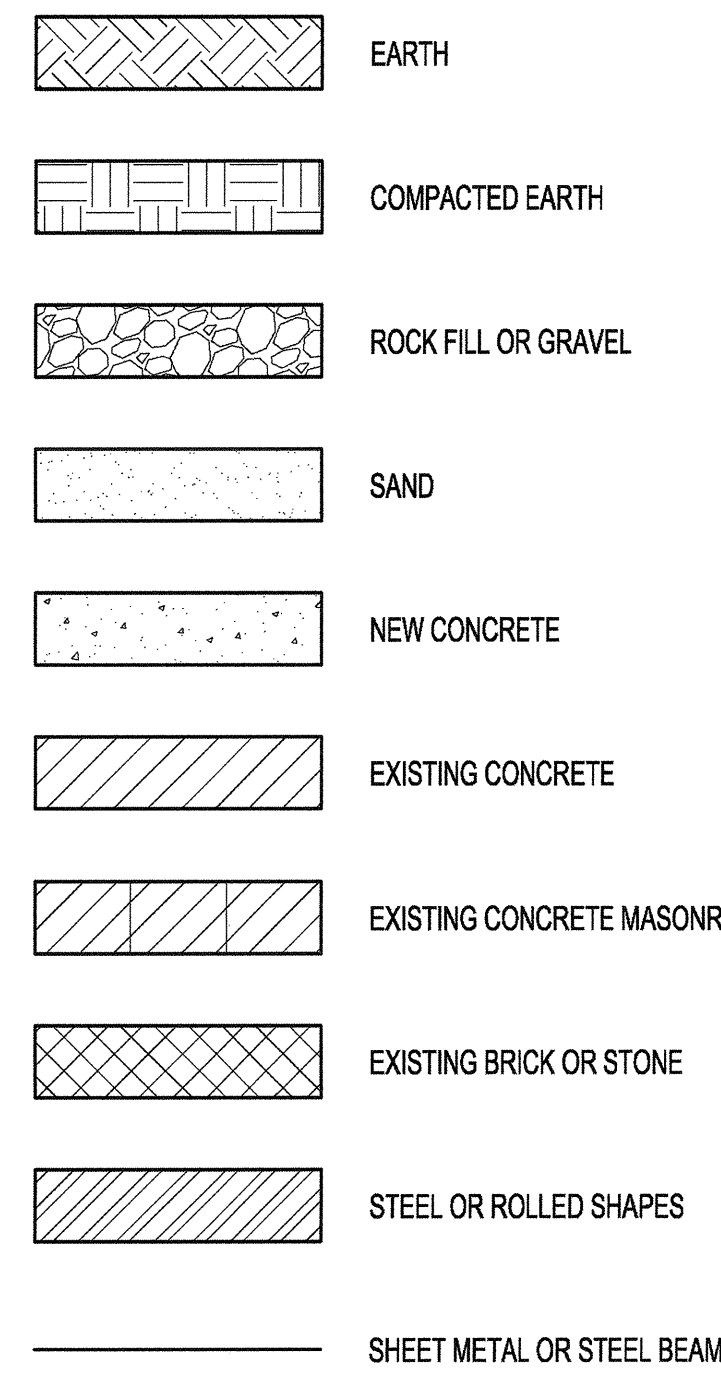

ABBREVIATIONS

(E)	EXISTING	JT	JOINT
(N)	NEW	K.O.	KNOCK-OUT
&	AND	L	LENGTH
@	AT	dl	DEVELOPMENT LENGTH
A.A.	ADHESIVE ANCHOR	db	HOOK DEVELOPMENT LENGTH
A.B.	ANCHOR BOLT	LEV.	LEVEL
ABV	ABOVE	LLBB	LONG LEG BACK TO BACK
ADDL	ADDITIONAL	LLH	LONG LEG HORIZONTAL
ADJ.	ADJACENT	LLV	LONG LEG VERTICAL
AGGR.	AGGREGATE	LOC.	LOCATION
AL	ALUMINUM	LONGIT.	LONGITUDINAL
ALT.	ALTERNATE	L.P.	LOW POINT
ANSI	AMERICAN NATIONAL STANDARDS INSTITUTE	s1	LAP SPlice LENGTH
APPROX.	APPROXIMATE	LT	LIGHT
ARCH.	ARCHITECTURAL	LWC	LIGHTWEIGHT CONCRETE
ASTM	AMERICAN SOCIETY for TESTING and MATERIALS	MAX.	MAXIMUM
A.C.	ASPHALT CONCRETE	M.B.	MACHINE BOLT
AWG	AMERICAN WIRE GAUGE	MEZZ.	MEZZANINE
BET	BETWEEN	MECH.	MECHANICAL
BLDG	BUILDING	M.E.P.	MECHANICAL, ELECTRICAL, PLUMBING DOCUMENTS
BLKG	BLOCKING	MTL	METAL
BM, BMS	BEAM, BEAMS	MFR	MANUFACTURER
B.N.	BOUNDARY NAILING	MIN.	MINIMUM
B.O.F.	BOTTOM OF FOOTING	MISC.	MISCELLANEOUS
BOT.	BOTTOM	MTD.	MOUNTED
BRG	BEARING	N	NORTH
BSMT	BASEMENT	N.F.	NEAR FACE
B.S.	BOTH SIDES	N.I.C.	NOT IN CONTRACT
C	CHANNEL	N.S.	NEAR SIDE
CL	CENTERLINE	N.T.S.	NOT TO SCALE
C.I.P.	CAST IN PLACE	NO. or #	NUMBER
C.J.	CONTROL JOINT	NOM.	NOMINAL (DIAMETER)
CLG	CEILING	NWC	NORMAL WEIGHT CONCRETE
CLR	CLEAR	O.C.	ON CENTER
CMU	CONCRETE MASONRY UNIT	O.D.	OUTSIDE DIAMETER (DIM)
COL.	COLUMN	O.H.	OPPOSITE HAND
CONC.	CONCRETE	OPNG	OPENING
CONN.	CONNECTION	OPP	OPPOSITE
CONSTR.	CONSTRUCTION	PL	PLATE
CONT.	CONTINUOUS	PC, PCS.	PIECE, PIECES
CSK	COUNTERSINK	PERP.	PERPENDICULAR
CP	COMPLETE PENETRATION	PLYWD	PLYWOOD
CTR	CENTER	PP	PARTIAL PENETRATION
d	PENNY (NAIL SIZE)	PR	PAIR
DBL	DOUBLE	PT	POINT
DK, DKG	DECK or DECKING	PTN	PARTITION
DEMO.	DEMOLITION	R.O.	ROUGH OPENING
DET., DETS	DETAIL, DETAILS	R or RAD.	RADIUS
DIAG.	DIAGONAL	REBAR	REINFORCING BAR
DIA. or Ø	DIAMETER	REF.	REFERENCE
DIM., DIMS	DIMENSION, DIMENSIONS	REINF.	REINFORCED or REINFORCING
DIST.	DISTANCE	REQD	REQUIRED
DN	DOWN	REV	REVISE or REVISION
DO	DITTO	RFQ	ROOFING
DWL, DWLS	DOWEL, DOWELS	RSJ	ROLLED STEEL JOIST
DWGS, DWGS	DRAWING, DRAWINGS	S.A.D.	SEE ARCH. DOCUMENTS
EA	EACH	SCHED.	SCHEDULE
E.A.	EXPANSION ANCHOR	SECT.	SECTION
E.F.	EACH FACE	SHT	SHEET
E.S.	EACH SIDE	SHTG	SHEATHING
E.W.	EACH WAY	SIM.	SIMILAR
ELEC.	ELECTRICAL	SL.	SLOPE
EL.	ELEVATION	SMS	SHEET METAL SCREW
ELEV.	ELEVATOR	S.O.G.	SLAB ON GRADE
EMBED.	EMBEDMENT	SPEC., SPECS	SPECIFICATION, SPECIFICATIONS
E.N.	EDGE NAILING	SQ.	SQUARE
E.O.S.	EDGE OF SLAB	SS	STAINLESS STEEL
EQ.	EQUAL	STAGG.	STAGGER or STAGGERED
EQUIP.	EQUIPMENT	STD	STANDARD
E.V.	EVERY	STIFF.	STIFFENER
EXCAV.	EXCAVATION	STIR.	STIRRUP or STIRRUPS
EXP.	EXPANSION	STL	STEEL
EXT.	EXTERIOR	STRUC.	STRUCTURAL
F.F.	FAR FACE	SUBST.	SUBSTITUTE
FDN	FOUNDATION	SUSP.	SUSPENDED
FIN.	FINISH	SYM.	SYMMETRICAL
FLR, FLRS	FLOOR, FLOORS	T&B	TOP AND BOTTOM
F.N.	FIELD NAILING	T&G	TONGUE AND GROOVE
F.O.	FACE OF	THK	THICK
F.O.C.	FACE OF CONCRETE	THRD	THREADED
F.O.S.	FACE OF STUDS	THRU	THROUGH
FP	FIREPROOFING	T.O.	TOP OF
F.S.	FAR SIDE	T.O. CONC.	TOP OF CONCRETE
FT	FOOT or FEET	T.O. STL.	TOP OF STEEL
FTG, FTGS	FOOTING, FOOTINGS	T.O. SLAB	TOP OF STRUCTURAL SLAB
GA.	GAUGE	TR.	TREAD
GALV.	GALVANIZED	TS	TUBE STEEL
GL.	GLASS or GLAZING	TYP.	TYPICAL
GLB	GLULAM BEAM	U.O.N.	UNLESS OTHERWISE NOTED
GRND	GROUND	URM	UNREINFORCED MASONRY
GR.	GRADE	VERT., (V)	VERTICAL
GYP. BD.	GYPSUM BOARD	V.I.F.	VERIFY IN FIELD
H.D.G.	HOT DIPPED GALVANIZED	W or WF	WIDE FLANGE
HDR	HEADER	W	WITH
H.P.	HIGH POINT	W/O	WITHOUT
HSS	HIGH STRENGTH BOLTS	WO	WOOD
HT	HEIGHT	W.P.	WORK POINT
H.D.	HOLD-DOWN	WT	WEIGHT
HSS	HOLLOW STRUCTURAL STEEL	WWM	WELDED WIRE MESH
HK, HKS	HOOK, HOOKS	X HVY.	EXTRA HEAVY
HORIZ., (H)	HORIZONTAL	XX HVY.	DOUBLE EXTRA HVY.
I.D.	INSIDE DIAMETER	X STR.	EXTRA STRONG
INFO.	INFORMATION	XX STR.	DOUBLE EXTRA STRONG
JST, JSTS	JOIST, JOISTS		

CONSULTANTS:

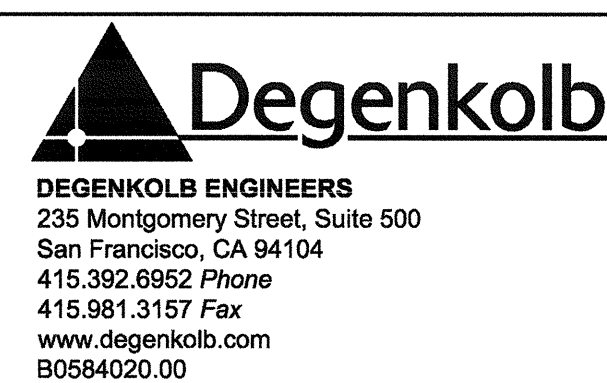

ARCHITECT/ENGINEERS:



Drawing Title
GENERAL NOTES, ABBREVIATIONS, AND SYMBOLS

Approved Project Director

Project Title
BUILDING 24
SEISMIC CORRECTION
AND ADDITION

Location
VAMC FRESNO, CA

Date
January 31, 2012

Checked
WG

Drawn
MAW/KM

Project Number
570-215
Building Number
24

Drawing Number
SS002
Dwg. 8 of 10

Office of
Construction
and Facilities
Management

