
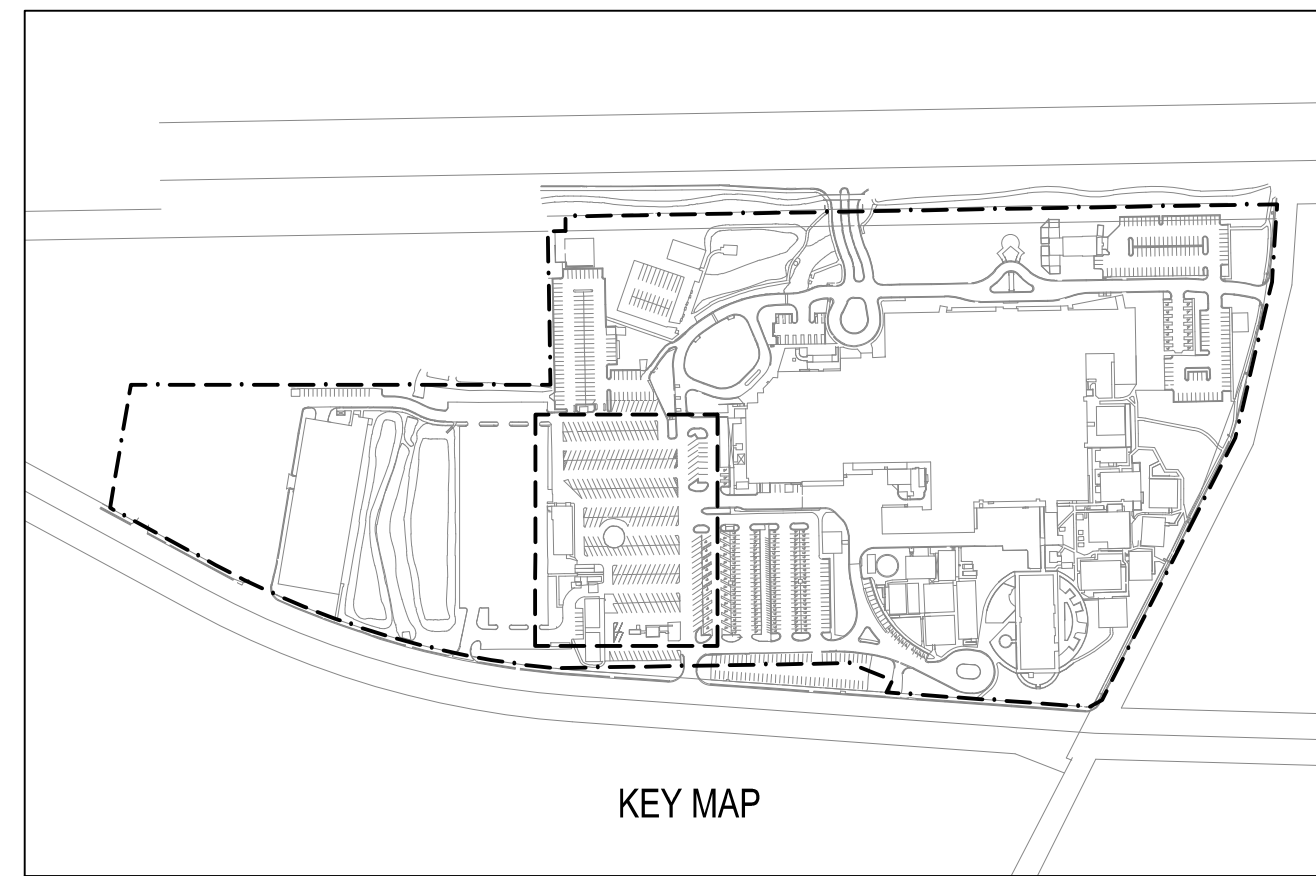
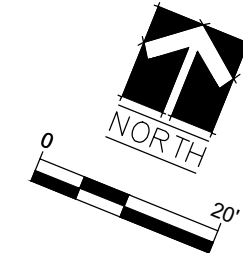


W:\1 1425-13 Malcom Randall VAMC ADA Construction Plans\1425-13 DWG6 CD.01-CD.09 DEMOLITION PLAN.dwg 3-17-17 08:56:56 AM jmueller

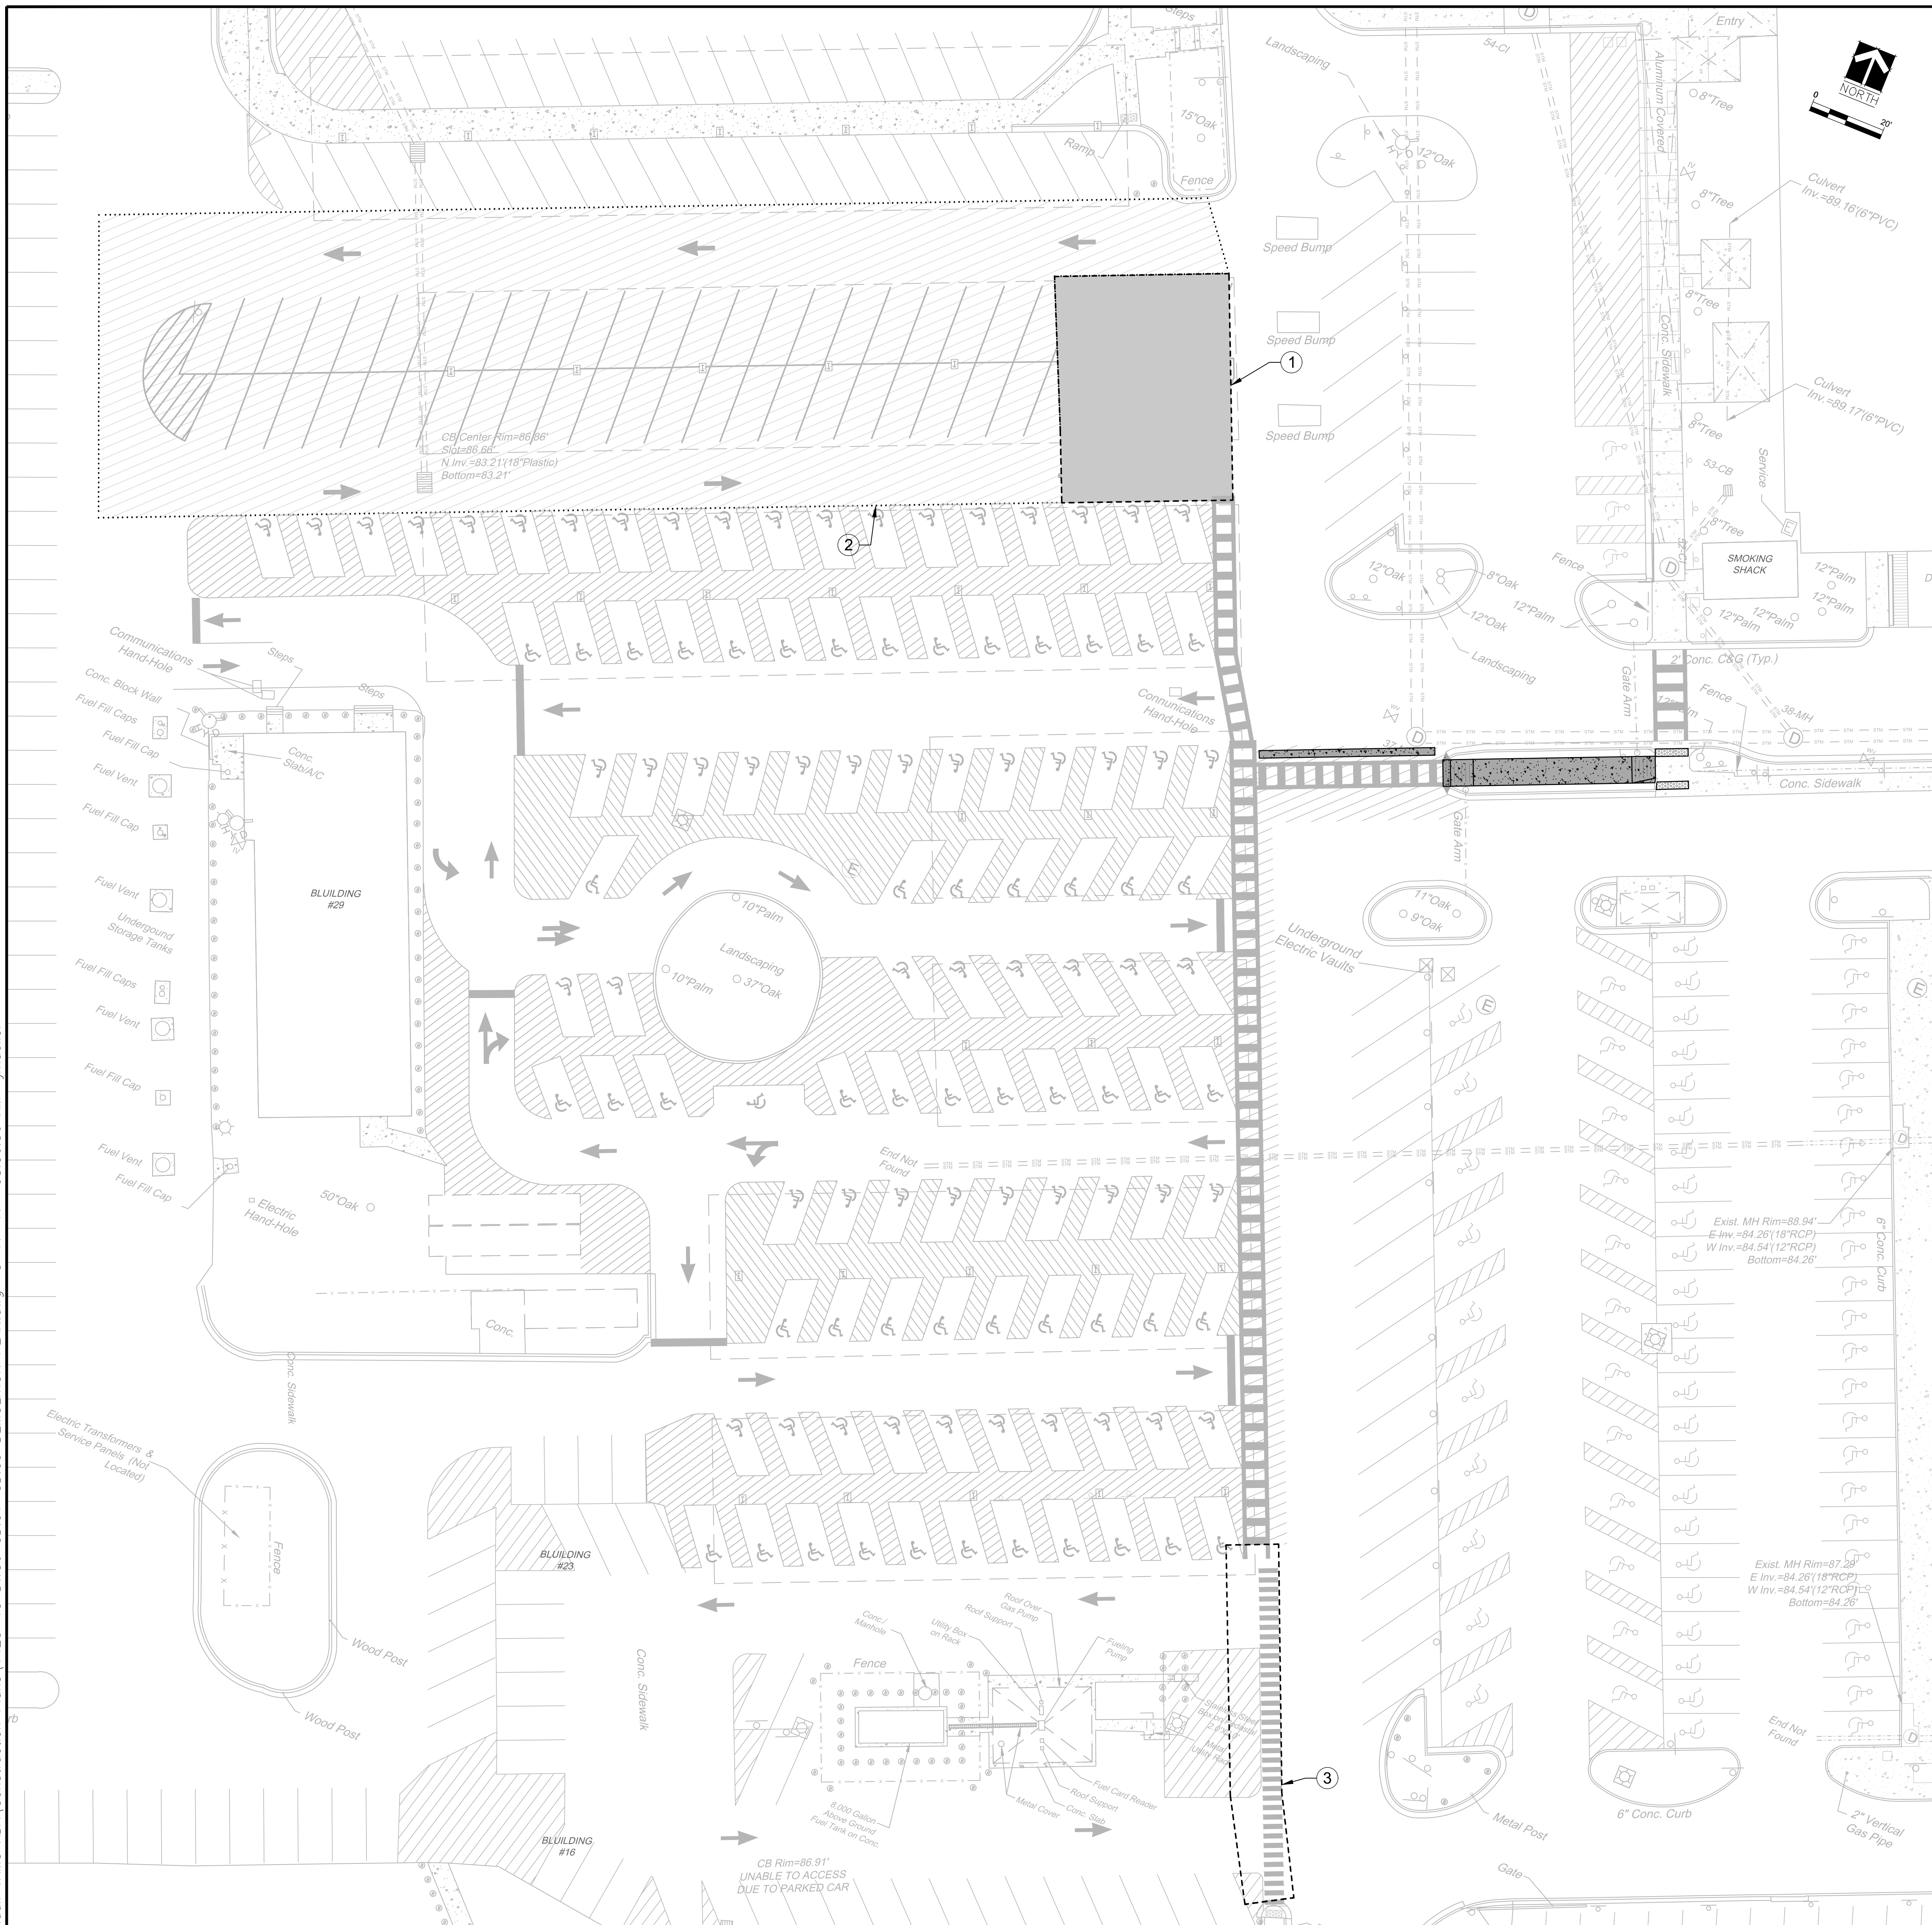

- KEYED NOTES:**
- 1 SAW CUT PAVEMENT AND LIMITS OF PAVEMENT REMOVAL
 - 2 MILL ASPHALT TO 1" DEPTH (OMIT FOR BID DEDUCTION)
 - 3 REMOVE EXISTING CROSSWALK STRIPING IN THIS AREA

- NOTES:**
1. ASPHALT AREA INDICATED SHALL BE SEAL COATED BLACK TO REMOVE EXISTING STRIPING FOR BID DEDUCTION.

CONSTRUCTION QUANTITIES:		
SEAL COAT	21,018	SF
PAVEMENT REMOVAL	2,713	SF
SAWCUT PAVEMENT	211	LF

Number	Description	Date
1	REVISED 100% CONSTRUCTION DRAWINGS	6/15/2016

MECHANICAL / ELECTRICAL ENGINEERS:

MES GROUP
MES GROUP
550 NORTH REO STREET, SUITE 203
TAMPA, FL 33609
PHONE: (813) 289-4700
FAX: (813) 289-1041
WWW.MESGROUPINC.COM

CIVIL ENGINEERS:

Sprinkle Consulting
Planners + Engineers
18115 U.S. HWY. 41 NORTH SUITE 600
LUTZ, FL 33549
PHONE: (813) 949-7449 FAX: (813) 909-9840
WWW.SPRINKLECONSULTING.COM
BOARD OF ENGINEERS CERTIFICATE OF AUTHORIZATION #4548

J. DALLAS EVANS, P.E.
FLORIDA LICENSE # 72691

Drawing Title
AREA 1C - DEMOLITION PLAN

Approved Project Director

Project Status: REVISED 100% CONSTRUCTION DRAWINGS

Project Title
UPDATE SITE FOR COMPLIANCE WITH VA BARRIER FREE GUIDE

Location
GAINESVILLE, FL
PROJECT #573-13-601

Date
06/15/2016

Checked

Drawn

Project Number
573-13-601

Building Number
N/A

Drawing Number
CD.03
Dwg. 14 of 50

Office of Construction and Facilities Management

Department of Veterans Affairs